




24BYJ48/28BYJ48/30BYJ46

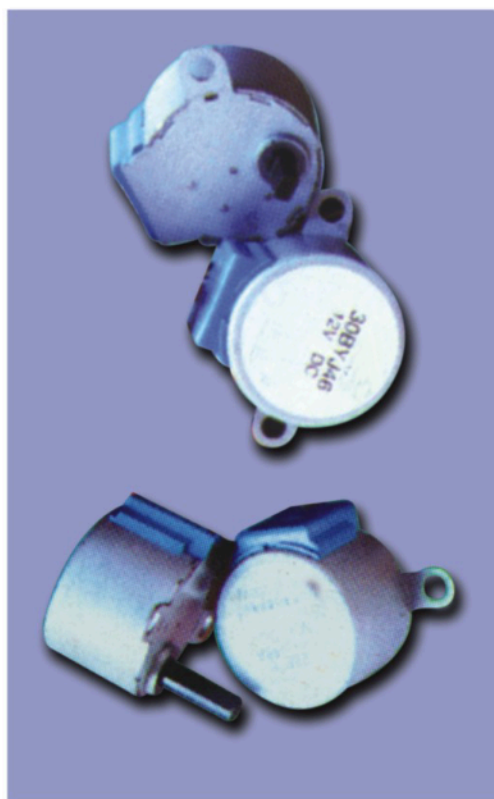


Applicatim:  
mainly used  
for air-conditioners...

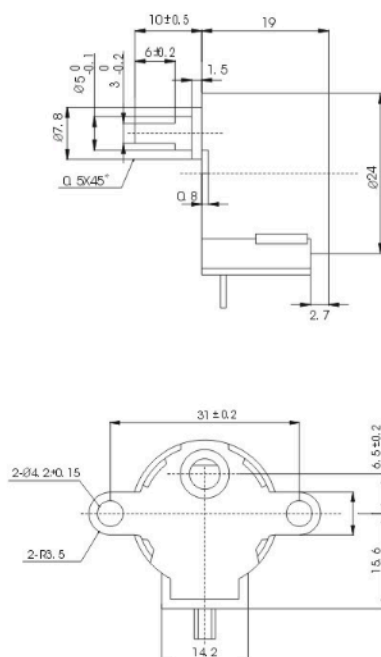

24BYJ48

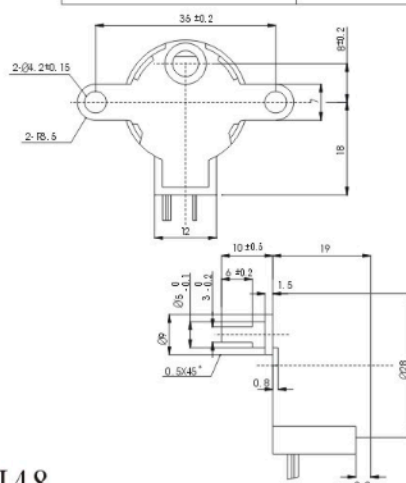

28BYJ48

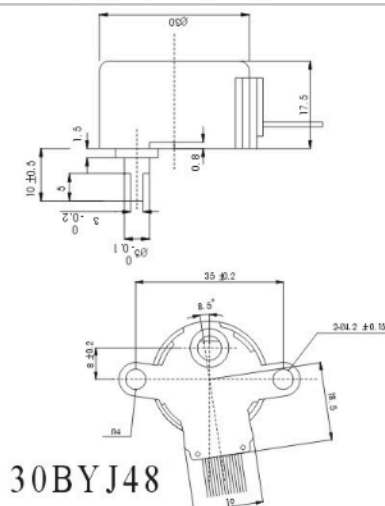

30BYJ48

24BYJ48 Motor Specification

No.of phases	4	Voltage	12VDC
Current	40mA	Resistance	300 Ω
Step angle	5.625	Reduction Ratio	1:64
No-load pull-out frequency	1000pps	No-load pull-in frequency	500pps
Pull-in torque	$\geq 29.4 \text{ mN} \cdot \text{m}$		
Wiring indications	A (orange), B (yellow), C (blue) D (grey), E (red,min-point)		

28BYJ48 Motor Specification

No.f phases	4	Voltage	12VDC
Current	40mA	Resistance	300 Ω
Step angle	5.625	Reduction Ratio	1:64
No-load pull-out frequency	1000pps	No-load pull-in frequency	500pps
Pull-in torque	$\geq 29.4 \text{ mN} \cdot \text{m}$		
Wiring indications	A (orange), B (yellow), C (blue) D (grey), E (red,min-point)		

30BYJ46 Motor Specification

No.f phases	4	Voltage	12VDC
Current	40mA	Resistance	300 Ω
Step angle	5.625	Reduction Ratio	1:85.25
No-load pull-out frequency	800pps	No-load pull-in frequency	500pps
Pull-in torque	$\geq 34.3 \text{ mN} \cdot \text{m}$		
Wiring indications	A (orange), B (black), C (white) D (yellow), E (red,mid-point)		

