

**THÈSE DE DOCTORAT DE L'ÉTABLISSEMENT UNIVERSITÉ BOURGOGNE
FRANCHE-COMTÉ**

PRÉPARÉE À L'UNIVERSITÉ DE BOURGOGNE

École doctorale n°37

Sciences Pour l'Ingénieur et Microtechniques

Doctorat d'Informatique

par

RICHARD CANDELL

**Performance Estimation, Testing, and Control of Cyber-Physical
Systems Employing Non-Ideal Communications Networks**

Thèse présentée et soutenue à Dijon, le 9 July 2020

Composition du Jury :

HULK INCROYABLE	Professeur à l'Université de Gotham City	Président
	Commentaire secondaire	
AMERICA CAPTAIN	Professeur à l'Université USA	Rapporteur
MAN SUPER	Professeur à l'Université de Gotham City	Examinateur
MAN BAT	Professeur à l'Université de Gotham City	Directeur de thèse
VOLWERINE THE	Professeur à l'Université de Gotham City	Codirecteur de thèse
MAN PAC	Professeur quelque part	Invité

Title: Performance Estimation, Testing, and Control of Cyber-Physical Systems Employing Non-Ideal Communications Networks

Keywords: industrial wireless, factory communications, networked control, manufacturing

Abstract:

Lorem ipsum dolor sit amet, saepe quodsi dolores an usu. An sed fugit dissentiunt, ex tota soleat duo. Omnes deserunt adversarium qui ad, periculis pertinacia has id. Ea tibique antiopam eos. Usu illud cetero voluptatum ne, ea odio soluta labores sit. Pri modus erudit definiebas an. Dicat latine inermis no quo, eos tollit delicata interesset cu. Placerat vituperatoribus pro ne, cu verear tritani deterruisset usu. Quaeque recusabo maluisset te pri, mutat maiorum accusamus at his. Pro ad nihil deleniti senserit, mundi feugiat indoctum an sea. In consulatu efficiendi qui, eu duo dicta deserunt definitiones, te atqui sapientem adolescens sit. Id pro consulatu splendide evertitur, vis eu perpetua molestiae, an melius virtute efficiantur vis. Animal aeterno mei ei.

Titre : Performance Estimation, Testing, and Control of Cyber-Physical Systems Employing Non-Ideal Communications Networks

Mots-clés : sans fil industriel, communications d'usine, contrôle en réseau, fabrication2

Résumé :

Lorem ipsum dolor sit amet, saepe quodsi dolores an usu. An sed fugit dissentiunt, ex tota soleat duo. Omnes deserunt adversarium qui ad, periculis pertinacia has id. Ea tibique antiopam eos. Usu illud cetero voluptatum ne, ea odio soluta labores sit. Pri modus erudit definiebas an. Dicat latine inermis no quo, eos tollit delicata interesset cu. Placerat vituperatoribus pro ne, cu verear tritani deterruisset usu. Quaeque recusabo maluisset te pri, mutat maiorum accusamus at his. Pro ad nihil deleniti senserit, mundi feugiat indoctum an sea. In consulatu efficiendi qui, eu duo dicta deserunt definitiones, te atqui sapientem adolescens sit. Id pro consulatu splendide evertitur, vis eu perpetua molestiae, an melius virtute efficiantur vis. Animal aeterno mei ei.

DEDICATION

The author would like dedicate my thesis to my beautiful daughter, Erin, for her kind heart and her countless hours as a child accompanying me in my laboratory. I hope that she remembers fondly those weekends listening to her Avengers movies and helping me out while I ran wireless simulations and troubleshooted robots.

ACKNOWLEDGMENTS

Erin Mohammed, Yongkang, Karl Sebti God

CONTENTS

I Context and Problem Statement	1
1 Introduction	3
1.1 Industrial Revolutions	4
1.2 Industry 4.0 and Smart Manufacturing	6
1.3 The Importance of Wireless in Smart Manufacturing	7
1.4 Challenges in Industrial Wireless Networks	8
1.5 Wireless Key Performance Indicators	13
1.6 Performance Evaluation	17
1.7 Thesis Organization	18
II State of the Art	19
2 Requirements Space	21
2.1 Literature Review	22
2.2 Industry Requirements Perspectives	23
2.2.1 ISA Requirements Perspective	24
2.2.2 ETSI Requirements Perspective	24
2.3 An Industry Requirements Perspective	26
2.3.1 NIST Validated Requirements Perspective	27
3 Systems Modeling	29

3.1 Modeling Languages	29
3.2 Systems Modeling Using SysML	32
4 Use of Databases for Performance Analysis	35
5 Machine Learning in Performance Estimation	37
III Technical Contributions	41
6 Survey: Industrial Wireless Technology	43
6.1 Introduction	44
6.1.1 Purpose	44
6.1.2 Paper Organization	44
6.2 Problem Space	45
6.2.1 Introduction and Success Considerations	45
6.2.2 Use Cases	46
6.3 Technical Considerations	50
6.3.1 Radio Frequency (RF) Environment	50
6.3.2 Device Characteristics	51
6.3.3 Network Characteristics	51
6.4 Wireless Technology Applicability	53
6.5 Subsequent Work of Note	54
6.6 Conclusions	54
7 Workcell Architectural Decomposition	59
7.1 Introduction	59
7.2 Conceptual Representation	61

7.2.1 Packages	62
7.2.2 Conceptual Architecture	64
7.3 Detailed Model Decomposition	64
7.3.1 General Package	65
7.3.2 Application	68
7.3.3 Industrial Wireless Network	69
7.3.4 Devices	69
7.3.5 Robotics	71
7.3.6 PLC	72
7.3.7 Safety	72
7.3.8 Vision	73
7.3.9 Spectrum Monitoring System	74
7.3.10 Human	75
7.4 Results of a Work-cell Case Study	75
7.5 Discussion and Conclusions	77
8 Application of Graph Databases	91
8.1 Introduction	91
8.2 Graph Databases	93
8.3 Case Study: Robotic Machine-tending	93
8.3.1 Workcell Design	93
8.3.2 Database Schema	95
8.3.3 Information Workflow	99
8.3.4 Sample of a Resulting Graph	100
8.3.5 Calculation of Metrics	103

8.4 Future Direction	104
8.5 Conclusions	105
9 Machine Learning Application: Force Seeking System	107
9.1 Introduction	108
9.2 Robot Arm Force-Seeking Application	109
9.2.1 General Construction and Operation	109
9.2.2 Components	111
9.2.3 Robot Arm Motion Control	112
9.2.4 RF Emulation Scenario	113
9.3 Initial Investigations	114
9.3.1 Data Analysis	114
9.3.2 Feature Extraction	115
9.3.3 Results	118
9.3.4 Conclusion	121
9.4 Subsequent Investigations	122
9.4.1 Data Analysis	122
9.4.2 Results	125
9.4.3 Conclusion	133
10 Conclusions	135
10.1 Future Work	135
10.2 Conclusions	135

I

CONTEXT AND PROBLEM STATEMENT

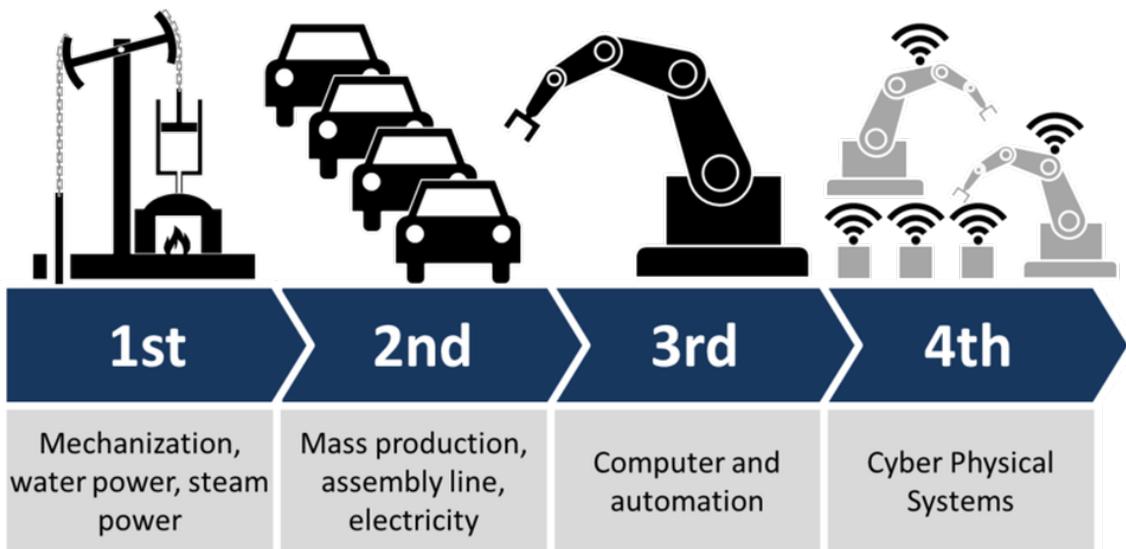


Figure 1.1: Industry 4.0: Wireless is a key enabler in the 4th industrial revolution.

1

INTRODUCTION

This chapter provides the reader with a background in the industrial revolutions of the past up until the present. It provides a context by which the reader may understand more fully the impacts of the contributions presented within this thesis. The chapter begins with a brief historical perspective followed by an introduction of smart manufacturing. This introduction is necessary of the reader to understand the challenges of employing wireless technology in a factory and why the contributions of the thesis matter are important.

1.1/ INDUSTRIAL REVOLUTIONS

Major advances in manufacturing of goods for the betterment of humanity have occurred many times in the last two hundred and fifty years in the history of humanity. These advancements occurred of science and technology occurred as revolutionary events at different times. The first revolution occurred at the edge of the eighteenth century primarily in England but also in France, Germany, and the United States with the applicant of automatic mechanization of large machines using coal powered steam engines. These machines were mainly used for the processing of cotton, wool, and silks in the production of textiles for export throughout the world. Advancements during this period included uses of coal to produce steam power, the production of iron, steel, and other rudimentary alloys, and, very importantly, the engineering advancements of tool making. The advancements of the first industrial revolution paved the way for the centralization and mass production of goods.

The next century was marked by the development of scientific and engineering advancements in chemistry, physics, and engineering. Experimentation with electricity and the production thereof led to the eventual explosion of industrial machinery, tooling, electrification, chemical manufacture, petroleum refinement, rail and marine transportation, the automobile, agriculture, and telecommunications by wire over long distances. This period of discovery culminated with rapid expansion of industrialization through the world, especially in North America and Japan up until the beginning of World War I.

The third industrial revolution began in the tears immediately following the second world war with the rapid advancement of pure and applied sciences. These advancements were driven primarily by the cold war and the space race between the United States and the USSR. This period of advancement was marked by many discoveries and scientific applications such as the development of telecommunications theories (Claude Shannon), advancement of radio and wired communications, the discovery of the transistor, and the rapid expansion of computers and information technology in business and defense. Also during these years, arrived the application of computing within manufacturing and process control settings. Computers slowly began to replace the basic relay circuit in control systems. By utilizing the programmable logic controller (PLC), manufacturers gained the ability to develop control their processes more easily and develop control strategies that were once more difficult to implement in the past with dedicated, specialized equipment. PLCs offered both the ability to more easily adapt processes to information gathered

directly from the factory operation as well as slowly collect and store information electronically. However, electronic storage of this information was still both difficult and expensive as telecommunications technology was yet relatively slow and storage expensive. Over the years following through the 1980's until today, computers have followed closely Moore's "Law" which states according to the perception of Intel Corporation founder, Gordon E. Moore, that the number of transistors on a microchip doubles every two years. This paradigm of exponential growth in digital computing technology in terms of computing speed, storage, and efficiency has created a world in which computers and computing devices have become ubiquitous, surrounding practically every aspect of human endeavors and leading to the latest installment of industrial advancement, the 4th Industrial Revolution, also known as the Information Revolution which is currently ongoing.

The Information Revolution is defined by a culture that is highly interconnected and data depended. Clearly, the modern world is dominated by the Internet, high-performance computers, and personal mobile communications devices such as cell phones developed over the last several decades. Within the hands of each individual one may find a smartphone capable of performing computing and communications tasks not even imaginable fifty years ago. Indeed, within each of these devices resides a powerful microprocessor capable of clocking speeds in the gigahertz, offline storage spanning gigabytes, at-least one high-resolution camera, and communication components enabling high-speed connectivity capable. These personal devices are smart and easily re-programmable by downloading of new applications, i.e., apps enabling users to produce and consume information rapidly. Users enjoy the ability to speak at any moment, send brief messages using apps such as WhatsApp™, download videos, play games, store documents, music, photographs, and videos within "the cloud." Within office and business enterprises, a personal computer is within reach of every employee and is the tool used for information production. The data produced is stored within the cloud and usually produced and maintained locally, although the services of data production are quickly shifting to the cloud as well depending on the needs the end user.

These capabilities have also been permeating industrial environments although at a slower rate given the inherent conservatism of industrial establishments. Industrial environments include aerospace and automotive manufacturing, electrical power production, food processing, petroleum and chemical production. That is not to say that industrial establishments are not open to technological change, but that established production system can be difficult or risky to modify once they are

operational. While industrial operations have distinctly different requirements than office businesses; analogues may be made between the computing constructs found within the personal/business computing domains and those constructs found within the industrial computing domains. For example, within a factory production enterprise, the Internet itself exists as an outside entity providing global connectivity, hosting, storage, computing resource, and analysis tools. These services are often replicated within the business enterprise of the factory operation and extended into the factory environment to some degree from the factory management system to the factory floor.

In addition, with the explosiveness of ubiquitous, low-cost computing devices, the modern factory operation is changing to include more intelligence and adaptability at the factory edge. This includes discrete devices such as sensors and actuators, collaborative robots, autonomous gantry systems, intelligent vehicular systems, tracking and inventory systems, and the like. These systems coupled with the plethora of computing resources have the potential to create an enormous amount of information as well as the opportunities for greater control over the factory enterprise. It is just a matter of tapping the information within the factory and bringing that information to a useful purpose. Where the third industrial revolution brought computing and automation to the factory, the fourth industrial revolution will improve upon the automation found within the factory by adding intelligence, autonomy, and machine learning powered by data. This datacentricity defines Industry 4.0.

1.2/ INDUSTRY 4.0 AND SMART MANUFACTURING

Industry 4.0 also known as "smart manufacturing" was officially launched by President Barack Obama of the United States and Chancellor Angela Merkel of Germany at the Hannover Messe industry show on April 24, 2016 [3, 86]. Smart manufacturing is a term used to describe the ongoing efforts within academia, government, and private industry to improve upon existing and future factory operations by incorporating the latest advances and design principals in computing, storage, and communication such as interoperability, virtualization, decentralization, distributed control, real-time processing and communication, service oriented architecture, easy use and maintenance, cost savings, and modularity of design. With I4.0, the industrial internet of things (IIoT) and industrial cyber-physical systems are expected to make large sweeping changes in efficiency, reliability, and capability of the future



Figure 1.2: Industry 4.0: Incorporating the benefits of machine learning, massive data, mobility, and autonomy within the modern factory.

factory [152].

<https://www.forbes.com/sites/bernardmarr/2018/09/02/what-is-industry-4.0/>

Propelled by economic pressure toward greater efficiency, factory agility, and product customization, future factories will have the technological ability to adapt to customer demands quickly, modify manufacturing processes automatically based on quality feedback, and fabricate products with a reduced environmental impact. Technological advances required for smart manufacturing to be truly successful include a collaborative and mobile robotics, distributed machine autonomy based on artificial intelligence, and a high degree of interconnectivity of among the automation resources. Robots will work together and with people to accomplish complex tasks. Robots will have the ability to roam between work-cells within a factory, learn its role quickly, become aware of edge devices, and communicate with other actors within the work-cell to accomplish its goals. Current manufacturing architectures use wired connectivity through field bus and industrialized Ethernet for sensing and real-time control.

1.3/ THE IMPORTANCE OF WIRELESS IN SMART MANUFACTURING

The concept of Industry 4.0 is centered around the smart factory in which autonomous actors permeate the factory. Wireless technology is an essential require-

ment for all interconnected things that are wireless. Cyberphysical systems (CPS), i.e., systems in which the networking, computation, and the physical world are tightly integrated will dominate the factory. Whereas as the factory of the past was predicated on centralize design making based on limited data and knowledge of the past, present, ad future state of the business enterprise, decision making within the smart factory will be highly decentralized. Information will likely be stored in the cloud; however, the actors making decisions will be located in throughout the factory itself at the edge. Wireless technology will be used fore two main categories within the smart manufacturing enterprise and are described as follows:

- **Cable Elimination:** Substitution of a wireless technology where once a wire existed in an existing industrial system. This often occurs when the cost of installing a cable is either infeasible or prohibitively expensive but the cost of not replacing the wire would cost more. This type of system could be envisioned where once a cabinet existed as a nexus point for fieldbus input-output (I/O) end-points. If a legacy product fails thus rendering the nexus in-operational, wireless could be used to replace the connections between a computing device and the various I/O endpoints. This scenario is often cited in industry as a high-lielihood scenario for both sensing applications and sensing with control applications where the I/O end-points are stationary. Wireless will be used to circumvent future failure or will be used as a rapid replacement measure for a failed system.
- **Mobility Enabling:** Support of one or more untethered actors such as a robotic arm or heavy lift machine to assist in the movement of materials or the tending of other processes. In these applications, the untethered actors require, at a minimum, instructions to perform their tasks. More than likely, the mobile actor will need to remain aware of itself and its surroundings, communicate to a supervisor or other mobile actors. Interconnection with the factory safety systems will likely be a necessity.

1.4/ CHALLENGES IN INDUSTRIAL WIRELESS NETWORKS

Since the development of wireless sensor networks (WSN) beginning in the early 2000's much excitement has been generated by its promises [57]. Development of IEEE 802.15.4 [153] brought about such standards as WirelessHART [21], ISA100.11a [28], and Zigbee as low-power mesh networking options for industry.

Other similar wireless networking technologies include LoRAWAN, Sigfox, 6TiSCH, and WiFi to name a few. These WSNs technologies were all designed primarily with the main goal of collecting information or transmitting large amounts of data rapidly in the special case of WiFi. They were not really intended to command or control devices, although they have been at times adapted to do so. For example, WirelessHART and ISA100.11a have the primitives (i.e., the "hooks" to do so) and some valve control and other applications have been realized using these protocols. These types of WSN technologies were designed to support sensing with some supervisory or human-in-the-loop control with command decisions rarely occurring and without demanding reliability or latency requirements placed on the communication system. Indeed, the wireless sensor networks typically operate with 75% link-to-link packet success rates at the physical layer. With the advent of 5G communications which in this context includes both cellular and wireless local area networks (WLAN) such as Wi-Fi (e.g., IEEE 802.11ax), much work has been done to characterize the wireless requirements landscape for industry as summarized in [151]. The requirements landscape for industrial wireless can be organized into two main categories: 1) sensing and data gathering, and 2) control. For the first category, many technologies already exist to support these applications, and rarely is reliability or latency a major concern for these applications. The second category, control has garnered interest within the academic and industrial communities because of the promises of eliminating cables and enabling mobility, and hence, autonomy.

However, adoption of wireless for control applications has been rare to date [150]. The primary reasons for its evident failure is most likely reluctance on the part of control designers to use a mode of communication that on the surface appears brittle and unreliable regardless of the truthfulness behind these assumptions. Wireless technology in general has the following perceived shortcomings that need to be addressed by the research and development community before its widespread adoption comes to fruition. These shortcomings include the following:

- ChoiceS, Obsolescence, Interoperability: Many wireless alternatives exist, and the market is ever changing. The number of choices can be confusing for factory operators trying to implement a solution that will last 10 years or more. In comparison, wired networks are typically built on the same Ethernet or fieldbus backbones that have existed for decades. When factory control engineers select networking equipment for a factory installation, they intend for those devices to last for at least 10 years or more. With a plethora of selections in the wireless market, the marketing hype surrounding those devices, and the rapidity by

which technology changes, the reluctance to adopt wireless becomes clear.

- Reliability (Link Performance): Information flow between actors within a factory operation. Since wireless communication is by definition communication without wires across a shared physical medium, it is perceived (correctly) that wireless is not reliable. This perception of a difference in reliability fuels the reluctance of wireless adoption within factories although the strong desire exists to do so.
- Security: Factory operators want their networks to have the same level of security as their wired networks. The very nature of wireless is open in terms of access of the physical communication media. Essentially, this leaves wireless open for eavesdropping attacks assuming that the underlying encryption can be hacked. If strong encryption is used, the wireless network can still be compromised by jamming or interference. Security of the wireless network includes immunity from interference, fitness of data, and privacy. Indeed, the concept of security can be extended to include all aspects of reliability, data integrity, privacy, safety, and stability of the factory operation touched by the wireless network.

The use of wires precludes mobility and makes deployment of edge devices more expensive as each device requires power, wires, and conduit for communication. By adopting wireless for both sensing and control of machines within the work-cell, a lower-cost, untethered operation becomes achievable. Once wireless is adopted as the primary mode of communication, questions arise as to the required latency, reliability, scale, and security of the wireless network especially when the network is used for the control of machines and the assurance of safety.

In a factory operation where wireless is used as a primary mode of communication, performance of the wireless network becomes paramount and the ability to assess that performance becomes equally important. Performance of the wireless network depends on many factors that are impossible to define here within this thesis; however, an introduction on industrial wireless deployments which includes an excellent primer on radio communication can be found in [132] for which the author of this thesis was the primary contributor. Nevertheless, the main categories of factors that impact an industrial wireless network are provided as follows.

Wireless Protocols Used Each wireless protocol has been designed with its own target application and ambient environment for performance. Each protocol is designed with a method for accessing the radio media, organizing data for transmission, methods for receiving transmissions, and recovering from interruptions. For example, IEEE 802.11 also known as Wi-Fi was designed primarily for home and office use for the transfer of large amounts of data rapidly. Wi-Fi typically uses 20 to 40 MHz of bandwidth and employs high order modulation and coding schemes. Wi-Fi works well to transfer files and stream video, and serves well where traditional Ethernet is used; however, Wi-Fi operates within public radio bands and is prone to interference, contention, and non-determinism of response times. In contrast, other protocols such as WirelessHART and ISA100.11a are designed specifically for industrial wireless sensor networks. These protocols use low-order modulation schemes with frequency hopping and are by design more resilient to interference. They are also offer substantially better determinism but are limited in data throughput.

Propagation Loss Wireless communication as compared to wired modes of communication is considered "lossy". The probability of error for any wireless communication is governed by the amount of power detected by a receiving radio and the competing noise and interference observed by the receiver. It is essentially a matter of maintaining an acceptable signal-to-noise ratio (SNR). The amount of loss between a transmitter and receiver is governed by the general equation $L = 10 \log_{10} \left(\left(\frac{4\pi d f}{c} \right)^2 \right)$ where d is the distance between transmitter and receiver and f is the frequency transmission. Thus, the SNR drops with distance for a given frequency. Whereas cables typically experience very little loss, wireless modes of communication experience loss very rapidly depending on the frequency of transmission as shown in Fig. 1.3 as negative path gain. The figure shows the typical loss curve for a particular factory at 2245 MHz near the common 2400-2500 MHz Industrial, Scientific, and Medical (ISM) band used by WiFi, Zigbee, and WirelessHART, and ISA100.11a.

Multi-path Objects within the surrounding environment determine the behavior of the waves as they propagate through the environment. Shown in Fig. 1.4 is a simplified model of a radio channel. When RF energy is transmitted, it will travel in the direction determined by the antenna gain pattern. Objects in the environment may obstruct, attenuate, or reflect RF energy. Reflections contribute to a phenomenon known as multi-path. Edges of objects may also result in diffraction even if a line-of-sight (LOS) path exists. At the receiver end, direct path and reflected energy is

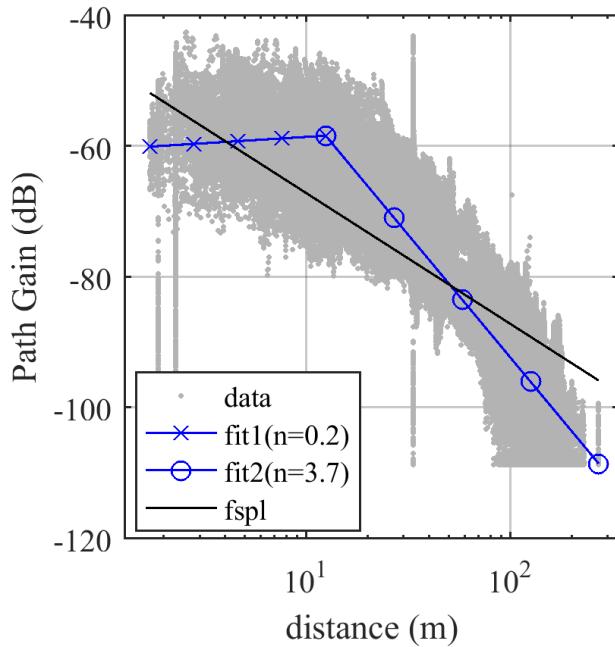


Figure 1.3: Example of radio propagation path loss for 2245 MHz transmissions within a factory environment. Reproduced from NIST Technical Note 1951 [109]

detected and decoded into useful information if the signal energy was high enough to overcome naturally and artificially occurring noise and interference. Multi-path reflections may result in significant information loss even if signal power is high. Multi-path is severe within factories due to the large highly-metallic structures that exists in those environments [9, 20, 109]; therefore, industrial wireless system must anticipate and accommodate these effects.

Interference Electromagnetic interference (EMI) is always present to some degree in a wireless network. EMI when in the radio frequency spectrum creates a disturbance that disrupts intended communications. The disturbance can degrade performance by introducing RF energy into the circuits of wireless devices. When the disturbance is strong enough to overcome the intended signal, communication loss will result. Sources of EMI include both man-made and natural sources. Natural radio sources typically will not interfere with network operation as the devices or deployment locations are designed to accommodate some natural interference. Man-made interference can include other competing radio devices that operate in the same frequency band or nearby in frequency. Noise from rotating electrical motors can also occur and typically affects radio bands below 400 MHz. Common interference sources include personal devices such as cell-phones in which the Wi-Fi hotspot is

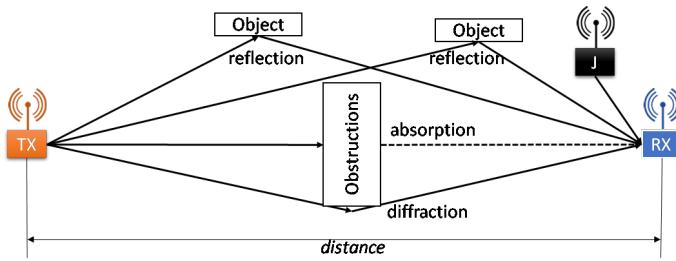


Figure 1.4: Wireless range, obstructions, absorption, reflection, diffraction, and jamming

enabled. It can also include non-communication devices such as micro-wave ovens. EMI can also emanate from intentional radio jammers designed to disrupt communications, and this can be classified as a security issue.

1.5/ WIRELESS KEY PERFORMANCE INDICATORS

Given the challenges described in the previous section, assessing the performance of the wireless system becomes a matter of defining and then measuring key performance indicators (KPI) relevant to the success of a given wireless deployment. A KPI can be considered a requirement of an industrial system if that KPI is used to specify a condition or capability needed by a stakeholder to solve a problem or achieve an objective within the factory enterprise. Requirements considerations for designing or implementing a wireless communication system in a factory workcell include latency, reliability, scalability, range, payload size, update rate, operation and implementation cost, security, and system resiliency. These requirements are important aspects of a wireless network [108]. These requirements have particularly influential roles in implementing a wireless communications system in a factory environment and then assess the success of a wireless deployment. The following paragraphs define the key performance indicators (which may be considered as requirements) for an industrial wireless system.

Latency Latency is defined as the period of time between information transmission and reception between two actors. Most non-industrial wireless systems are designed for higher data rates without regard for latency. However, for industrial applications, low latency is an important factor in control-based tasks as transmissions that occur outside of the latency threshold are considered failed transmissions. Industrial applications use smaller packet sizes with precise timings, signifying the criticality of latency.

Definition 1: Latency

The time between transmission of the first bit of information to the time in which that information is received by its intended recipient.

Reliability Industrial functions such as safety transmissions or critical control processes are examples of functions that require an extremely high degree of reliability because a “missing” transmission could have serious consequences to safety, production, and/or equipment integrity. High-reliability in industrial communication is crucial for numerous mission-critical applications.

Definition 2: Reliability

The probability of loss of information due to any source of noise or exceeded latency.

Scalability Scale, in an industrial wireless point-of-view, is the number of devices that can be deployed on the network while retaining reliability, speed, and data-rate at set requirements. Scalability is important for dynamic networks where devices come-in and go-out of use. One distinct advantage of wireless communications is the ease with which nodes can be added to the network without the need for laying wire or cable.

Definition 3: Scale

The number of participating devices within a network.

Range Range is the maximum distance to which a wireless link can extend while maintaining all other requirements. In general, as the distance of the wireless link increases, the channel losses increase and the signal power between nodes decreases. Excess range affects the reliability and latency of transmission. Specifically, in an industrial environment, meeting a required range specification is more challenging than an outdoor scenario due to increased path loss.

Definition 4: Range

Range is the maximum distance to which a wireless link can extend while maintaining all other requirements

Payload Size Payload size is the size, in bytes, of the information portion of a transmission; however, the payload excludes header, framing, and error-correction information. Differentiating the payload size from the overall individual packet size allows the designer to ascertain the size of the information portion of the transmission. Many industrial applications, such as safety and control applications, the payload size is small.

Definition 5: Payload Size

The informational length of information to be transmitted not including all overhead associated with the protocol used for transmission.

Update Rate Certain manufacturing applications require higher update rates to achieve desired workcell performance. A wireless network must be capable of supporting required update rates needed by all the applications on that wireless network. For example, a force feedback control application that utilizes a wireless force-torque sensor may require 125 Hz sample rate. An example of such an application may be found in reference [144]. Update rate is an important factor that impacts the deployment and configuration of wireless networks and it dictates the effectiveness of frequency planning [132].

Definition 6: Update Rate

Rate of transmission for a particular process variable.

Operation and Implementation Costs A consideration for implementing industrial wireless communications is the cost savings. For a wireless communications system, there is no need to install and, later, replace cabling due to degradation and wear. In wireless communications, redundancy can be achieved without cables. Wireless communications require lower labor costs as remote monitoring and control extend the ability to monitor and manage remote sites; onsite personnel is unnecessary. Electricity cost is lower for wireless installations, due to the relatively low power draw of wireless communications.

Security Security in wireless communications is not equivalent to security in wired communications in that wireless networks offer a different potential for exploitation; wireless uses air for communication which provides easier access to remote foreign

actors. Along with the threat of remote jamming, there exists the possibility, absent adequate security protection, that wireless networks could be accessed if the keys to the public-key cryptography are discovered and encrypted transmissions are revealed. Wireless for industrial applications must be reliant to security related threats as the loss of communication can be costly and may damage equipment or personnel. Detailed requirements for wireless security are not discussed further in this report but more information can be found in [82].

System Resiliency Overall system resiliency in a factory environment must be considered as issues with networking may lead to unnecessary inefficiency. For example, if power is disrupted a network must be able to reestablish connectivity within seconds. Intelligent applications may also be required to overcome network communication issues. Achieving a resilient network is not trivial as current wireless device may require long periods of time to reestablish connections within the network. For example, mesh networks based on low-data-rate protocols can often take minutes to reestablish an operational network after an intermittent loss of power. System resiliency is outside the scope of this report; however, system resiliency issues such as recovery time after power loss must be considered in the design of wireless technology for use in factory workcells.

Power and Battery Life Often overlooked is the power efficiency of wireless devices. In factories in which power is readily available such as in a workcell or on a mobile cart platform, power efficiency is not often considered. In scenarios where devices are deployed over large distances such as in a oil refinery or water purification plant, battery life becomes important. Battery life can also be important for large scale deployments in factories with thousands of devices. In those scenarios, the frequency of battery change or failure can drive costs substantially. Therefore, power efficiency and the impact of design factors on battery life can be equally as important as reliability in a deployment.

These requirements vary greatly depending on the class of industrial application and much work has been done to try to make sense of the classes of applications and there subsequent requirements. An illustrative perspective of these is given in Fig. 1.5 showing both typical and worst case specifications.

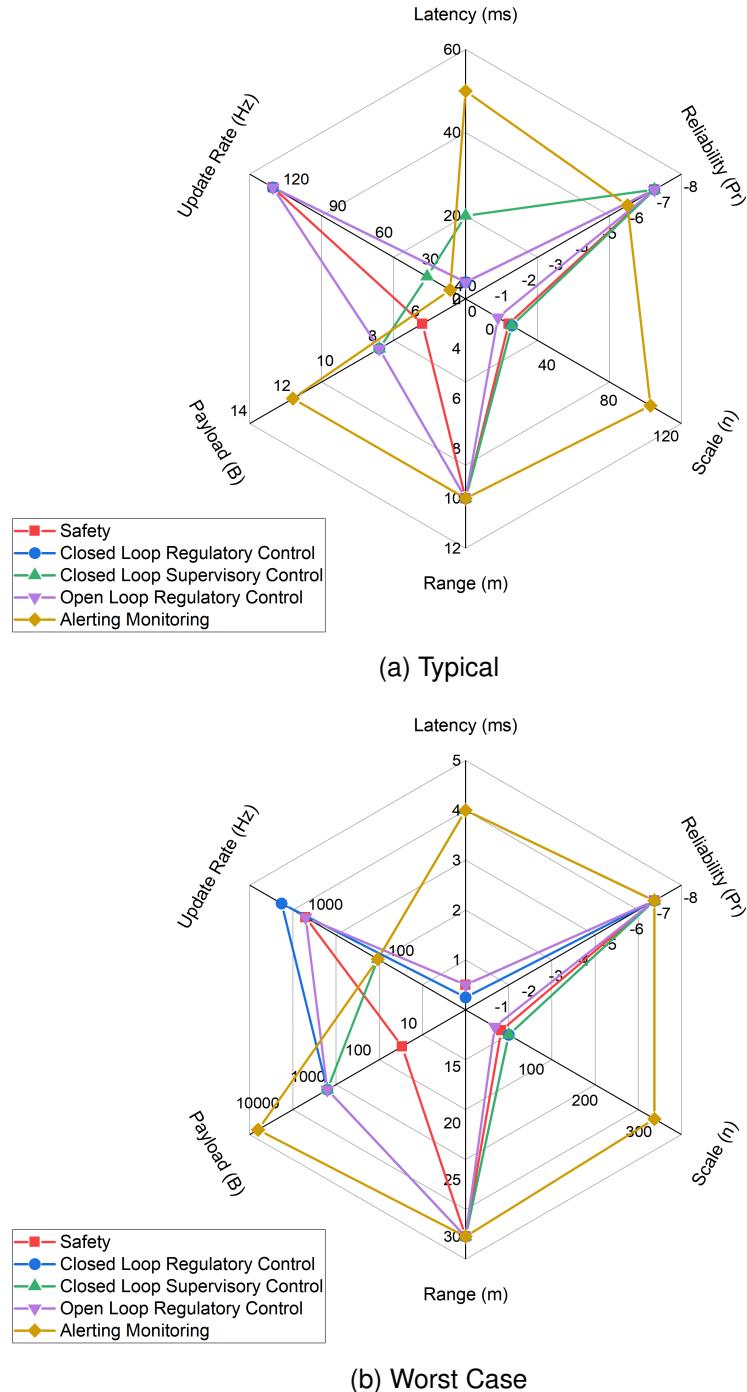


Figure 1.5: Typical (a) and Worst Case (b) key performance indicators for industrial wireless use cases presented in [151].

1.6/ PERFORMANCE EVALUATION

The focus of the research presented in this body of work is the estimation of performance of cyberphysical systems....

Present the TESTBED!!!

A clearer concept of the requirements will not only allow for the development of realistic wireless systems, but it is also essential in the construction of more accurate models, the conduct of more effective testing, and better analysis the performance measurement data that results.

First understanding the technical landscape: components, interfaces, and constraints

Next setting up a framework for performance evaluation: use case definition, testbed abd data capture, organization of data captured,

Analysis methods for the captured data: data cleaning, curation, and application of the graph database

Application of machine learning as an example and how different algorithms performance to inferring an important metric in industrial wireless, i.e., signal to interference level

Performance is often done as a before and after; however some effort has been made to standardize test methods [68, 106]

1.7/ THESIS ORGANIZATION

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

||

STATE OF THE ART

2

REQUIREMENTS SPACE

The use of industrial wireless networks has been studied in many works in the literature and industry. However, no comprehensive survey of the whole problem space of industrial communications has been performed. The following chapter provides some background into the evolving landscape of industrial wireless requirements. It should be noted that the requirements perspective is often influenced by hype of the marketplace, and often the requirements that are stated are unrealistic or impossible to meet within reasonable price points. First, and literature review is provided which was the result of the work presented by the thesis candidate in [108]. This literature review will be followed by another distilled perspective provide in NIST 300-8 [151] of which the candidate took a lead role in producing and leading. Within that work, a picture of the wireless requirements landscape is provided based on inputs from the International Society of Automation (ISA) and the European Telecommunications Standards Institute (ETSI). The work then provides a more distilled view of the requirements perspective with rationale. This distilled perspective serves as both a state of the art of industrial user requirements viewed by ETSI and ISA, but it also serves as a major contribution by the candidate in that it provides validated requirements that are usable to build realistic and functional wireless systems. This is ultimately the goal of performing a rigorous review of the requirements landscape and producing saner perspective. A clearer concept of the requirements will not only allow for the development of realistic wireless systems, but it is also essential in the construction of more accurate models, the conduct of more effective testing, and better analysis the performance measurement data that results.

2.1/ LITERATURE REVIEW

This section provides an overview of the literature review conducted for the work performed in [108] in which the broad landscape of industrial wireless use cases were considered and then matched with potentially applicable wireless technologies that existed or were in the process of standardization or development.

In [45], the authors have introduced a comparison between the commercial and industrial communications networks where an industrial network has been divided to five different levels. These levels include field equipment, controller level, application, supervisory, and external networks. The differences in requirements between different levels are discussed.

Three types of information are considered which are control, diagnostic, and safety information as described in [18]. Within this paper, the authors categorize the types of industrial control network their applications within a reconfigurable factory testbed developed at the University of Michigan. However all these levels of industrial networks are mentioned in [45], the article focuses only on the manufacturing and instrumentation communications and does not consider other types of communications networks that exist in industrial environments.

In [6], an online tutorial describing industrial protocol, three levels of communications are considered which are device, control, and information levels. The current wired industrial technologies for these levels are discussed briefly.

In [60], provides a survey on real-time communication using Ethernet technologies in industrial automation environments. In this work, the communication between field devices was studied where the requirements for a large number of nodes may not be achieved. The use of fieldbus solutions limit the scalability and resilience and hence industrial Ethernet capabilities are introduced in this article. While limited insight into wireless solutions is provided, the article provides insight into the key performance criteria for real-time protocols in general.

Moreover, in [2], the communication for monitoring and control operations is discussed and an introductory discussion for wireless adoption for these use case classes is provided. A comparison between fieldbus technologies, industrial Ethernet, and wireless solutions is performed. The author discusses the use of Wi-Fi, Bluetooth, ZigBee, and WirelessHART technologies in industrial applications.

In [26] the authors considered the industrial communications networks requirements in process automation specifically at field devices level. The authors provide a survey of opportunities, requirements, concerns and challenges of wireless in process automation, the relative standings of existing short-range wireless network technologies, and their perceived shortcomings. The authors also provide an examination of emerging industrial wireless standards which are designed to address the harsh performance requirements of the process industry given the ambient environment of those factories.

Finally, in [124], the authors perform and expansive survey on wireless sensor networks and provide a systemic mapping of research in this area. The authors show trends within the research community and demonstrate the importance of developing new protocols that are resilient to the harsh transmission media found in factories. The authors also indicate that a star topology of industrial wireless networks may be the more appropriate selection for most latency and reliability constraints.

2.2/ INDUSTRY REQUIREMENTS PERSPECTIVES

In the following discussions, a presentation of different perspectives of various user requirements provided by industry is given based on industry reports from two noteworthy organizations. This perspective differs from the perspectives provided by the academia in Section 2.1 in that contributors of these reports were individuals working directly within factory organizations or suppliers of products and services used by factory control engineers. The first discussion in Section 2.2.1 focuses on the requirements work performed by the standards organization, the International Society of Automation. The second discussion given in Section 2.2.2 focuses on work performed by the European Telecommunications Standards Institute regarding high-reliability, low-latency communications requirements for industrial applications, and in particular for the 5th generation wireless evolution known as 5G. The third discussion provided in Section 2.3 while an academic article was the result of research performed by engineers developing wireless products for high-performance wireless networks used to control industrial operations by latency constraints within the microsecond range. Finally, a consolidated and actionable perspective is provided in Section 2.3.1 which serves as both background material and contribution by the thesis candidate. The consolidated perspective of the requirements were useful in the development of the SysML model presented in Chapter 7.

2.2.1/ ISA REQUIREMENTS PERSPECTIVE

The International Society of Automation (ISA) is a non-profit standardization body that produced Wireless User Requirements for Factory Automation [10]. ISA provided classes that categorized industrial applications and use cases, and assigned wireless user requirements for latency, jitter, and block error rate (BLER). Table 2.1, adapted from [30], provides usage classes with their respective descriptions; these classes are grouped by domain, in factory automation use cases. It is important to note that the “Factory Automation Use Cases” column references “Clauses” which describe applications in the usage classes in detail and are not discussed in this report. The Clauses discuss various industrial applications and such applications apply to different classes. For example, robot end-effectors for Class 1, track-mounted equipment and rotary equipment for Class 2, track-mounted equipment and rotary equipment, but with a human in the loop for Class 3; torque and gauge tools, mobile material containers, mobile high value assets (molds, dies, etc.), and mobile test and calibration fixtures for Class 4. Note that the report references similar applications for Class 4 as for Class 5, except with the purpose of logging, downloading, and uploading; also note that Class 0, was not discussed. The ISA requirements, adapted in Table 2.2, define BLER as the probability of an erroneous block received at the application layer. It should be noted that all usage classes have a requirement of 10^{-9} BLER, an assumed requirement, without justification, in the ISA’s report.

2.2.2/ ETSI REQUIREMENTS PERSPECTIVE

The European Telecommunications Standards Institute (ETSI) produced a requirements report titled Reconfigurable Radio Systems (RRS); Feasibility study on temporary spectrum access for local high-quality wireless networks [11]. The ETSI report included a detailed table, reproduced here in Table 3, which categorized specific industrial scenarios and listed certain requirement metrics such as latency, reliability, data rate, packet size, communication range, device mobility, device density, and energy efficiency. The ETSI report appears to be very detailed; however, justification of specific values and their derivations are not disclosed.

ETSI’s industrial wireless communications requirements are separated into different sections, depending on the application. Under Monitoring and Diagnostics, the application is focused on remote sensors that do not have strict latency or reliability requirements, compared to other applications. The column, Condition Mon-

Table 2.1: ISA Descriptions of Wireless Requirements Classes

Domain	Usage Class	Description	Factory Automation Use Cases
Safety	Class 0: Emergency action	Always critical	
Control	Class 1: Closed loop regulatory control	Often critical	Clause 5.3
	Class 2: Closed loop supervisory control	Usually non-critical	Clause 5.4 Clause 5.5
	Class 3: Open loop control	Human in the loop	Clause 5.4 Clause 5.5
Monitoring	Class 4: Alerting	Short-term operational consequence (e.g., event-based maintenance)	Clause 5.6 Clause 5.7 Clause 5.8 Clause 5.9
	Class 5: Logging, Downloading, and Uploading	No immediate operational consequence (e.g., history collection, sequence of events, preventive maintenance)	Clause 5.6 Clause 5.7 Clause 5.8 Clause 5.9

Table 2.2: ISA Wireless Requirements Perspective

Use Case Class	Latency (ms)	Jitter (%)	BLER
Class 0	ND	ND	ND
Class 1	10	± 10	10^{-9}
Class 2 and 3	10 to 100	< 10	10^{-9}
Class 4 and 5	100 avg.	± 10	10^{-9}

itoring, includes applications that report physical parameters, such as temperature, humidity, vibration, acceleration, etc., and the column has similar wireless network requirements to Process Automation. In discrete manufacturing, a countable number of items are produced which may take many steps to complete. In discrete manufacturing, machine tools, robots, sensors, and programmable logic controllers (PLCs) exchange small packets with short intervals, which requires low-latency communications. Motion Control has more strict latency requirements than general discrete manufacturing. Examples for Motion Control include a controller for an electric motor in an assembly line or a hydraulic cylinder controller for a press [133].

The Logistics and Warehouse category is separated into mobile vehicles,

Table 2.3: ETSI Industrial Wireless Requirements Perspective

	Monitoring & Diagnostics		Discrete Manufacturing		Logistics and Warehouse			Process Automation	Augmented Reality	Functional Safety
Key Performance Indicator	General	Condition Monitoring	General	Motion Control	General	AGV	Cranes			
Latency/Cycle Time (ms)	> 20	100	1 – 12	250 us – 1 ms	> 50	15 – 20	15 – 20	50 – X s	10	10
Reliability (PER)	10^{-4}	10^{-5}	10^{-9}	10^{-9}	$>10^{-2}$	$>10^{-6}$	$>10^{-6}$	10^{-5}	10^{-5}	10^{-9}
Data Rate (bits/sec, bps)	Kbps-Mbps	Kbps	Kbps- mbps	Kbps-Mbps	Kbps-Mbps	Kbps-Mbps	Kbps	Mbps-Gbps	Kbps	
Packet Size (bytes, B)	> 200 B	1-50 B	20-50 B	20-50 B	< 300 B	< 300 B	< 300 B	< 80 B	> 200 B	< 8 B
Communication Range (m)	< 100	100 m – 1 km	< 100	< 50	< 200	~2	< 100	100 m -1 km	< 100	< 10
Device Mobility (m/s)	0	< 10	< 10	< 10	< 40	< 10	< 5	< 10	< 3	< 10
Device Density (m^{-2})	0.33 – 3	10 – 20	0.33-3	< 5	~ 0.1	~ 0.1	~ 0.1	10000/Factory	> 0.33 – 0.02	> 0.33 – 0.02
Energy Efficiency	n/a	10 years	n/a	n/a	n/a	< 8 hours	n/a	10 years	1 day	n/a

automated guided vehicles (AGV) and static systems such as cranes. AGVs can be mobile robots, transport vehicles, and mobile working platforms. It is stated that a latency of 15 ms – 20 ms and a reliability requirement of 10^{-6} should be ensured. The General subcategory for “Logistics and Warehouse” is not discussed or justified within the ETSI report. Process Automation typically involves chemical processes engineering, for example, oil and gas production or the generation of electricity. In the Process Automation category, steps are sequential, continuous, and irreversible. Process Automation applications need deterministic delivery of transmissions, thus, the relaxed latency requirements and reliability of 10^{-5} . The Augmented Reality category includes computer-assisted extension of reality. The Functional Safety category requires high reliability (10^{-9}) and low latency of 10 ms. Safety is critical to protect people, machines, and production environments, hence the stricter performance requirements.

2.3/ AN INDUSTRY REQUIREMENTS PERSPECTIVE

Another industry perspective presented in [119], targeted ultra-high-performance wireless for various scenarios ranging from building automation to the switching of power electronics equipment. An example of system-level requirements for different industrial communication scenarios is captured in Table 2.4. The scenario Building Automation consists of all control operations performed within buildings, such as

Table 2.4: An Industry Requirements Perspective of Different Industrial Communication Scenarios

Scenario	# of nodes	Update rate, Hz	Goodput, bps	System range, m
Building Automation	$10^2 - 10^3$	10^{-1}	$10^3 - 10^4$	10-100
Process Automation	$10^2 - 10^3$	10	$10^5 - 10^6$	10-100
Factory Automation	$10^2 - 10^3$	10^3	$10^7 - 10^8$	10-100
Power Systems Automation	$10^1 - 10^2$	10^4	$10^7 - 10^8$	$10^2 - 10^3$
Power Electronics Control	$10^2 - 10^3$	10^5	$10^9 - 10^{10}$	10-100

lighting, heating, surveillance, energy management, etc. Process Automation is involved in chemical, mining, oil, and metallurgic processes. Factory Automation is a general term referring to the factory production line, such as assembly and packaging. More demanding scenarios include Power Systems Automation in which control for power distribution is performed. Power Electronics Control focuses on the synchronized control of power electronic devices. All these scenarios have distinct requirements. Luvisotto states that for a wireless high performance (HP) system, a packet error rate (PER) of 10^{-9} is perceived as tolerable [119]. It is important to clarify this PER is at the application layer and it is possible to have a PER of 10^{-1} at the physical layer and still achieve 10^{-8} at the application layer with transmission and information redundancy. It was proposed in the paper that a latency requirement of $10\mu s$ is targeted for Wireless-HP. It is stated that Factory Automation, Power Systems Automation, and Power Electronics Control are the scenarios where their particular technology is applicable. The power electronics industry is very distinctive in the difficulty in meeting their challenges requirements; however, these requirements are not typical of all industry scenarios.

2.3.1/ NIST VALIDATED REQUIREMENTS PERSPECTIVE

Using requirements from standardization bodies such as ISA [30], ETSI [133], and industry, a distilled and validated set of requirements is produced in Table 2.5. The same ISA class-labeling scheme from Table 1 has been adopted to categorize applications. The ISA classification scheme groups applications according to mission-

Table 2.5: NIST Validated Wireless Requirements Perspective

User Requirement		Class 0:	Class 1:	Class 2:	Class 3:	Class 4:
Latency (ms)	Typical	4	4	20	4	50
	Minimum	0.5	0.25	4	0.5	4
Reliability (Pr. Loss)	Typical	10^{-7}	10^{-7}	10^{-7}	10^{-7}	10^{-6}
	Minimum	10^{-7}	10^{-7}	10^{-7}	10^{-7}	10^{-7}
Scale (# of links)	Typical	8	10	10	1	100
	Maximum	16	30	30	4	300
Range (m)	Typical	10	10	10	10	10
	Maximum	30	30	30	30	30
Payload (B)	Minimum	6	8	8	8	12
	Maximum	24	1024	1024	1024	33000
Update Rate (Hz)	Typical	125	125	25	125	10
	Maximum	1000	2000	125	1000	125

criticality. Class 5 is not included in Table 6 because the requirements were not adequately supported by existing wireless standards. It is believed that existing wireless standards do not jointly meet the requirements for all the industrial use case classes presented; however, the design of new wireless technology that applies to industry can be accomplished using the requirements in Table 6. The authors based the user requirements, shown in Table 2.5, on what is believed to be necessary for effective and realizable communications within factory workcells. Latency and reliability are fundamental requirements for time-sensitive applications. Latency and reliability can often be considered jointly as information that is delayed beyond a time threshold may be considered as lost information. Scale is important to enable large enough capacity for a network, while maintaining latency and reliability targets. Range provides a minimum expected distance between linked nodes. These requirements were developed based on the philosophy of avoiding excessive and unreasonable performance expectations on the wireless systems. For instance, requiring a range of 100 meters for a workcell device that only needs to operate within 10 meters would be unreasonably strict and would be considered overkill for many applications where shorter range would be sufficient and more practical. Justification for requirements is provided in [151].

3

SYSTEMS MODELING

Systems modeling is the process of developing abstract representations of a system to analyze its features, strengths, and weaknesses, or to document or communicate its design. Systems models are uniquely useful when a system is large or complex, and the interactions of among components within the system are unknown or difficult to understand. With cyberphysical system in which the behavior of a physical system is strongly tied to the behavior of a computing or communication system, systems modeling is useful in identifying components and understanding cyberphysical links and data flows. This chapter provides a background to the reader in the state of the art in systems modeling. Particular attention is given on the research done to how modeling tools and techniques are applied to the problem of the wireless smart manufacturing workcell, the components of such a workcell, or the data flows within the workcell. The SysML model was developed to formalize and identify key components, interfaces, and constraints of the factory workcell. The model developed is intended to include elements of both the physical system and network controlling behavior. Therefore, the state of the art explored focuses on research performed to model both domains simultaneously capturing architecture and behavior. The exploration of the literature is divided into two components: 1) modeling languages in general, and 2) the use of SysML in modeling systems.

3.1/ MODELING LANGUAGES

Current modeling work on factory work-cells is mainly aimed at defining and characterizing the subsystems, such as human staff, robots, and machine tools, in individual applications. By following blueprints (schematics) of production tasks, the work flow can be divided into separate assignments which are distributed by a task

dispatch system to individual machines [49]. Analytical models are thus obtained for performance analysis in work-cells. As an example, a mathematical model for real-time performance analysis of a gantry work-cell with robots is established with the timing and the randomness of tasks and disruptions are captured in [136]. In [?], the same model is used to investigate the system natural properties such the system cycle and waiting times and to identify bottlenecks through studying the sensitivity of each machine. Similarly, the steady state analysis for production lines with uncertainties is performed through various decomposition methods [17, 44, 55]. In [44], a decomposition method is presented for the analysis of continuous flow lines. The presented model is used to analyze flow lines with single and multiple failure mode machines and machines subject to aging and having up and down times. This paper in particular was useful in the application of models to process control applications. In [55], a model to evaluate the performance of transfer lines with unreliable machines and finite transfer-delay buffers is presented. A decomposition method is introduced to model the transfer line, using the general-exponential distributions instead of the exponential distributions to approximate the repair time distributions of the fictitious machines. In [17], the authors present a model for evaluating the production rate and distribution of inventory of a closed-loop manufacturing system with unreliable machines and finite buffers. The model accounts for the different sets of machines that could cause blockage or starvation to other machines. In [24, 38], the performance analysis modeling for serial production lines with disruptions is explored by studying the impact of each individual downtime event in terms of permanent production loss and financial cost. These analytical models generally work well for simple systems with small number of components or few interactions between various equipment. Also, the analytical models can be used to abstract industrial systems to understand various performance trends without studying various details. As a result, a comprehensive model that include network and production impacts on the industrial work-cell is introduced.

Furthermore, the reconfigurable work-cell architecture is widely considered for automated manufacturing. The main advantage of reconfigurable work-cells lies in the flexibility of reconfiguration of work-cell components to adapt to varying production requirements where the assembly of the work cell is optimized for each specific task [?]. In the work-cell that hosts robots, robots are installed therein to allow for autonomous configuration within their workspace [?, ?, 32]. Approaches and performance criteria for reconfigurable robotic systems have recent developments in control architectures to achieve various levels of reconfigurability [74]. The National Institute of Standards and Technology (NIST) has defined a Network of Things

(NoT) model which can depict the structure of work-cells by a group of NoT building blocks and model the behaviors of individual components in a work-cell [98]. The NIST NoT model is focused primarily on sensor networks and the collection of data rather than the collection and then subsequent action on data. Actuation is cursorily noted, and, as such, cross-domain interactions between the physical system and the network are not addressed. Several other robotic work-cell architectures are discussed in the literature. In [27], a reference model for a control system functional architecture applied to open architecture robot controllers is presented. In [?], a methodology to develop self-adaptive factory automation solutions is illustrated, using a novel modular simulation-based method. With the increase in complexity and reconfigurability of work-cells, studying various production criteria and network impacts requires introducing new models to capture these interactions and requires sufficient abstraction to model different configurations and scenarios of industrial work-cells.

In a workcell model, data flows are used to capture the trajectory of system information exchange between work-cell components and identify their roles in specific operations [27]. For example, safety-related operations may employ vision systems and various proximity sensors that generate proximity data and transmit them to the safety manager to define safety zones in an automotive assembly work-cell [81]. In another example, data flows are enabled in a work-cell to capture human operator gestures from embedded cameras in human-robot collaborations [23]. These gestures can be later regenerated in simulators based on the transmitted position data from the field to optimize work-cell safety operations [?]. Currently, most of the work-cell information in these scenarios are transmitted by wired networks. Wireless networks have gained increasing attention to enable data flows in the highly connected work-cells. Wireless standard bodies have proposed their network reference models in factory environments which include the work-cell cases in the data-centric architecture [29, 129]. In these models, individual work-cells are treated as a sub-network of field instruments attached with data aggregations that manage network connections and transfer data traffic to edge and cloud servers in various applications. Wireless connections are featured with flexible network topology to agree with a variety of transmission needs, especially in reconfigurable work-cells. Meanwhile, data traffic flows are characterized by select performance metrics, such as transmission latency and link reliability, to categorize industrial use cases [129].

Current modeling efforts set the boundaries of their systems of study at the edge devices without further discussions on the impact of wireless performance on the

operations of industrial systems. For example, the abstracted disruptions in [24,38] that cause plant down-times may include wireless network impacts which are not yet distinguishable with specific characteristics of wireless networks. As indicated by the earlier empirical studies [95], such physical systems may have different responses to network performance which will vary with the operational configuration such as the served application and the deployed control algorithms.

Therefore, much research has been done in the area of modeling of complex systems; however, an opportunity exists for exploring applying systems modeling to the industrial workcell. In particular, those workcells that have strong network interactions have been left unstudied. It is also necessary to incorporate the features of wireless communications networks into the modeling architecture of physical work-cells such that cross-domain interactions between the physical system and the network may be studied.

3.2/ SYSTEMS MODELING USING SYSML

The primary goal of modeling a system is to capture knowledge of a process in a simplified way [14]. A secondary goal of a system model is to provide a level of abstraction that may allow for the discovery of new knowledge such as how two systems will interact. There are multiple ways of designing and presenting system models. Well-behaved systems can be represented by a system of equations using mathematical tools [11]. Such models provide excellent constraint definition, but equations alone lack the semantics to describe architecture and detailed information flow of a realizable system.

Moreover, by deploying functional block diagrams, major functional components and flow of information or material are captured. As shown in Fig. 3.1, a physical process interacts with a control system through a wireless network. Measured values, Y , from sensors flow to the controller through a wireless network and arrive at the controller delayed and modified, \bar{Y} . Similarly, commands, U , flows from the controller to the actuators through the wireless network. Such diagrams may be used to model feedback control systems in which the origination and routing of information are immaterial for study. However, the architecture and interfaces remain at a very high level of abstraction making analysis difficult. In such cases, delay and loss using such tools are often modeled stochastically. Using architectural diagrams helps identify components, interfaces, and information flow. For factory

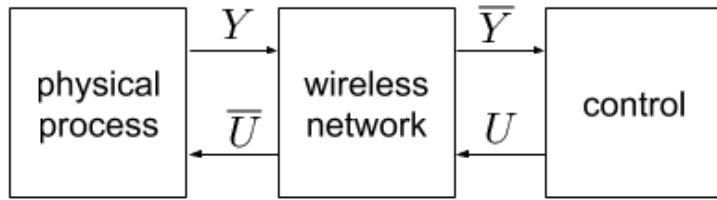


Figure 3.1: Functional block diagram of a cyber-physical system in which a physical process and an automation system interact through a wireless network.

systems, architectural block diagrams are often manifested as schematics. However, such diagrams have their own limits in industrial practices. On one hand, they lack the semantics necessary to describe the constraints that formal equations and functional block diagrams offer. Meanwhile, they also lack the capability of capturing behaviors or complex interactions between the physical system and the information infrastructure such as a wireless network.

An alternative to schematic diagrams is SysML [122]. SysML is a general purpose modeling language that is often used for model-based systems engineering (MBSE) practice within industrial systems [75]. SysML provides structural, behavioral, and parametric semantics for the analysis of complex systems. For examples, systems analysis using SysML enables capturing and communicating system requirements and design which include hardware, software, firmware, information flows, and processes with graphical notations. Within the factory automation industry, engineers are adopting SysML in the form of MBSE to develop realizable operational models of the factory and data flow processes. MBSE models address verification of design through executable simulations depending on the modeling tool. The SysML specification is defined in [122]. In SysML, the basic semantic constructs of the language are Packages, Blocks, Ports, Interfaces, and Constraints, in addition to the constructs provided by the Unified Modeling Language (UML). Packages are logical grouping of model elements. Package relationships are captured using the package diagram (PKG). Relationships of these constructs are captured in the block definition diagram (BDD). The internal composition and connectivity of parts are captured in the internal block diagram (IBD). SysML includes other types of diagrams and semantic constructs that are not required for this analysis and are not explained here. The SysML model is comprehensive; however, the size and number of diagrams within the model are too extensive to include within this paper. Therefore, the reader is encouraged to explore the SysML model defined in [131]. A useful primer on SysML may be found in [73].

Examples of the use cases and methodologies of using different graphical models for the analysis of manufacturing systems are explored in [33, 42, 47, 80]. In [125], SysML is used to capture both composition and behavior of an additive manufacturing work-cell. A survey of applying graphical modeling languages in capturing information flows within a product service system which may be applied to manufacturing enterprises [31]. Our approach compliments these previous examples by combining the operational and wireless information transport systems together in a single model, thereby facilitating a single model that may be used for simulation and other systems engineering analyses. While various architectures for the work-cell exist as exemplified in the literature, a common language and framework for communicating architecture and information flow has not been established for cross-domain interactions between the manufacturing system and its supporting communication networks.

SysML contains the semantics for such engineering capture and provides an industry accepted language for communicating composition, interfaces, and information flow. Moreover, SysML provides the semantics for assigning properties to any model element such that those properties are made available for analysis using other tools such as Protégé [161] and the Web Ontology Language (OWL) [40]. It is important to understand that while SysML provides semantics for a formal capture of architecture, information flow, and parametric constraints, it may also be used for a higher-degree of abstraction provided by the functional block diagrams.

4

USE OF DATABASES FOR PERFORMANCE ANALYSIS

Graph databases (GDBs) were employed within this thesis to better organize the copious amounts of experimental data resulting from experiments run within the industrial wireless laboratory at NIST. Therefore, an investigation into the application of data management approaches was conducted. This investigation included the application of graph databases for the problem of data curation and organization of large amounts of network and physical systems performance data that had correlation between events occurring in time.

The graph database is a class of the NoSQL database. The NoSQL database is a non-relational database in which the structure data is not predetermined and cannot be enforced by the database. Due to its advantages including scalability, efficiency, and flexibility, NoSQL databases are a popular alternative to relational databases in the case of large amounts of data in various applications [52]. The GDB is a kind of NoSQL database approaches that additionally handles complex relationships [128]. GDBs are widely adopted in various industry-related applications and use cases such as network operations, fraud detection, and asset and data management [84]. Relationships in social networks have been modeled using a GDB for structural information mining and marketing [37]. On the other hand, business solutions for scenarios with multiple large data sources require distributed processing in decision making for various problems such as fraud detection, trend prediction, and product recommendation [54].

Multiple surveys regarding GDBs have been presented to describe the associated models, tools, and their features in [19, 78, 83]. In [19] the graph database was introduced as a technology that experienced as many technologies do, some hype,

and early death, and then a later resurrection. Graph databases have recently regained some interest in industrial and cyberphysical research because of the amount of data resulting from big-data and IoT/IIoT. Data in which graph-like qualities exist are presented as candidates for use by the database technology. In [83], a performance study was performed to make the case for using graph databases to enhance query speed for interconnected data. The study showed a strong preference for using graph databases in place of the relational database. The performance of different GDB tools and methodologies is analyzed and compared in [50, 76]. Multiple comparisons in these articles have shown improved performance of Neo4j in the general features for data storing and querying, and data modeling features such as data structures, query languages and integrity constraints.

Examples of applications and implementations of GDBs are presented in [65] to show their use on enterprise data, social networks, and determining security and access rights. It was found that GDBs provide the much needed structure for storing data and incorporating a dynamic schema. On the other hand, query languages are used to extract data including traversing the database, comparing nodes properties, and subgraph matching [41]. While graph databases are of particular interest in traversing and querying interconnected dataset found within social networks, it is proposed that data resulting from cyberphysical systems is not entirely similar, and therefore, use of the graph database for analyzing performance measurement data from the factory work-cell is explored.

5

MACHINE LEARNING IN PERFORMANCE ESTIMATION

In the literature, two types of interference signals are considered, namely, intentional or unintentional interference. Methods to estimate, avoid, or mitigate interference are required for the deployment of reliable and deterministic IWSs. Machine learning has been widely used to detect and estimate interference information to enhance the performance of interference management algorithms. Machine was investigated and applied to the problem of inferring wireless link quality from observations of the physical system without expensive, highly complex spectrum analysis tools. Furthermore, factory technicians are typically not trained in wireless interference estimation or radio engineering. A need to assess performance of the wireless network within factories is needed; however the cost of radio equipment stationed within the factory workcell can be cost-prohibitive and detrimental to the adoption of wireless technology within the factory. Therefore, machine learning, i.e., artificial intelligence, can be a valuable tool. In this chapter, the state of machine learning application to wireless performance estimation is presented.

The interference analysis in cyber-physical systems (CPSs) has been considered in multiple works for various scenarios. In [141], in-network interference mitigation techniques are discussed for ultra reliable low-latency wireless communications systems. The paper focused on mutual interference mitigation in an industrial automation setting, where multiple transmissions from controllers to actuators interfere with each other. In [148], an interference mitigating receiver architecture is proposed. The application scenarios are smart homes and modern factories where dense wireless communications devices exist. Moreover, in [58], interference cancellation of transmissions from neighboring cells in a 5G cellular network is presented. In [115], a method using a dedicated node for link quality estimation (LQE) obtained

through received data packets to identify interference and multi-path without introducing additional traffic is presented. In [36], a taxonomy of channel link quality techniques is presented providing a valuable survey on LQE algorithms and asserting the importance of link quality estimation in IWSs. In [127], failure analysis and wireless network troubleshooting are performed whenever the CPS is not functioning properly. Interference analysis is one major part of the troubleshooting procedure which is performed through traffic patterns and wireless spectrum analysis. Also, in [77], the use of spectrum analysis for interference detection and estimation is proposed for IWSs.

On the other hand, intended interference (i.e., jamming) can lead to service denial or poor performance in wireless networks. In [130], a literature review was presented which includes an overview of recent research efforts on networked control systems under denial-of-service attacks such as jamming attacks in wireless channels. One of the discussed challenges is how to achieve ultra-reliable low-latency "signalling" within industrial applications. In [146], a discussion is also provided on the recent developments concerning the design of attack-resilient control and communication protocols. Generally, a jamming attacker can block transmission of packets by emitting strong interference signals to a wireless channel [15, 35]. Jamming attacks can target various wireless technologies and hence can become a major concern for control systems, since they are easy to launch [35]. It was shown in [62] that off-the-shelf hardware can be used for generating jamming attacks on wireless networks. In cases of physical-layer attacks, the jamming attacker targets a frequency band and is not required to follow the wireless protocol where it can cause a decrease in the SIR thus preventing the receiver from successfully detecting transmitted packets [62]. In the case of MAC-layer attacks, both the packet sender and the jamming attacker operate on the same channel; the jamming attacker's goal is to cause packet collisions. In [140], the authors evaluated the CPSs resilience to jamming attacks that disrupt wireless communications. They considered three jamming strategies which are the constant, random, and protocol-aware jamming. They showed through experimental results that various CPS control schemes are susceptible to constant and random jamming while the time-triggered control schemes are susceptible to protocol-aware jamming. Moreover, resilience of CPSs is also considered in [39, 64, 71, 112] where periodic jamming is considered in [39] while the jamming strategy in [64, 71, 112] is unknown.

Machine learning has been used for detection and estimation of jamming attacks. In [147], an unsupervised machine learning algorithm based on a multi-layer

autoencoder is used to extract the interference source spectrum features. These features are then used to distinguish interference sources type and location without labeling measured data. In [114], an unsupervised approach using a recurrent neural network to detect anomalies in the CPS performance and identify attacked sensors. In [93], a behavior based machine learning intrusion detection approach is proposed to detect attacks at the physical process layer. The results are validated through experimental study of a real modern water treatment facility. In [43], the viability of machine learning methods in detecting the new threat scenarios of command and data injection is assessed. In that work, command and control communications in a critical infrastructure setting are monitored and vetted against examples of benign and malicious command traffic to identify potential attack events. In [59], the authors assessed discriminating types of power system disturbances through machine learning by detecting jamming attacks. They evaluated various machine learning methods as disturbance discriminators and discuss the practical implications for deploying machine learning systems as an enhancement to existing power system architectures.

Therefore, in the literature, it was shown that link quality estimation (LQE) through direct observation is one important but insufficient aspect of assessing the impact of link quality on a CPS. It is asserted that by jointly observing the performance of the physical and wireless components of a CPS, the complete perspective of the quality of the wireless link and its impact on physical performance can be obtained. Since interference is such an important topic in the wireless CPS, a novel method is proposed in [144, 154] presented in Chapter 9 in which an LQE simultaneously (1) makes observations of the physical system using ground truth measurements, and (2) infers the quality of the wireless communication system in terms of SIR using an experimental model of a relevant use case found in industry.



TECHNICAL CONTRIBUTIONS

6

SURVEY: INDUSTRIAL WIRELESS TECHNOLOGY

The use of wireless technologies within factories demands a comprehensive understanding of the problems and potential solutions associated with the rigors of the manufacturing environment. A clearly defined problem space would significantly ease the selection and deployment of appropriate wireless solutions to connected factory systems. A mapping of potential technologies to classes of use cases within the problem space will be useful to factory operators, system integrators, and wireless systems manufacturers. Identification of use cases, not addressed by existing technologies, may be used to spur targeted innovation where reliability, resilience, latency, and scalability are joint concerns. Motivated by the industry need for independent practical guidelines and solutions to difficult wireless control problems, this paper provides a classification of the problem categories where networking technologies may be deployed. It then maps specific technologies that may serve as interim or terminal solutions for those use cases identified within the problem space taxonomy. This chapter is intended to provide a detailed exposition of the requirements directed towards industrial wireless. It draws on various sources of requirements captured by academic literature, industry organizations, and standards institutes. The work therefore presents a picture of the requirements landscape at the beginning of this research. Further work in this area can be found in [151] and [152].

6.1/ INTRODUCTION

6.1.1/ PURPOSE

Industrial wireless is a key enabling technology for the Industrial Internet of Things (IIoT). The IIoT promises lower costs of deployment, increased mobility of factory assets, massive interconnectivity, improved situational awareness, increased efficiency of the operation, and improved operations analytics. IIoT and advanced manufacturing technology seek to improve competitiveness, productivity, and responsiveness to customer needs. However, it is often stated that where wireless is deployed, factory enhancements fail to meet expectations typically in areas of reliability, resilience, and scalability. Moreover, transmission security is often cited as an area of concern. Risk averse organizations will establish policies that preclude wireless to be deployed for specific types of applications such as feedback control or safety. Yet, factory operators are increasingly demanding that wireless be deployed for critical and sometimes perceivably dangerous applications. For this reason, the National Institute of Standards and Technology (NIST) is developing best practice guidelines to help factory operators select appropriate wireless systems for their particular use case and then deploy that solution effectively. Such a mission requires participation by factory operators, system integrators, and device manufacturers. A comprehensive taxonomy of the existing problem space within industry and a survey of existing and missing technologies are necessary to the success of such a mission. This paper provides our classification of industrial wireless cases and links current technologies to those use cases if applicable.

6.1.2/ PAPER ORGANIZATION

The rest of the paper is organized as follows. The problem space for employing wireless networks is presented in Section II. Then, the technical considerations while designing industrial wireless networks are discussed briefly in Section III. In Section IV, a mapping between the problem space and the current technology space is provided. Finally in Section V, future directions and conclusions are presented.

6.2/ PROBLEM SPACE

6.2.1/ INTRODUCTION AND SUCCESS CONSIDERATIONS

Implementing a factory enhancement program requires economic and technical planning, and justification. Wireless technologies by themselves are interesting and can provide value; however, it is incumbent upon plant leadership to fully assess the potential risks and benefits of the enhancement before proceeding with deployment. Wireless technologies are often deployed as a means to monitor or control factory process. They have the potential to unlock improved observability and control. By understanding the problem space and the risks and benefits of potential wireless solutions, factory operators can assess if the rewards outweigh the risks. In navigating the risk/reward question, we assert that any wireless program must address one or more of the following success criteria before embarking on an enhancement involving wireless communications.

Reliability Wireless systems can be deployed to add redundancy or replace faulty wired solutions with a more reliable wireless solution for particularly harsh industrial environments where temperature, pressure, vibration, radiation, and chemistry may make wired communication unreliable.

Safety Wireless systems may be used to detect or prevent injury to humans. They may be used as backup to wired systems or serve as the primary communication system.

Production Cost Wireless systems can increase observability and the resulting data may be used for precise optimization of the factory operations, machine scheduling, and maintenance.

Quality Various measurements are possible to improve quality of the factory output. Using wireless solutions may make deployment of sensors and inspection equipment more practical.

Environment Wireless sensors and control mechanisms may be used to detect toxic conditions and prevent environmental accidents from occurring. Wireless actuation

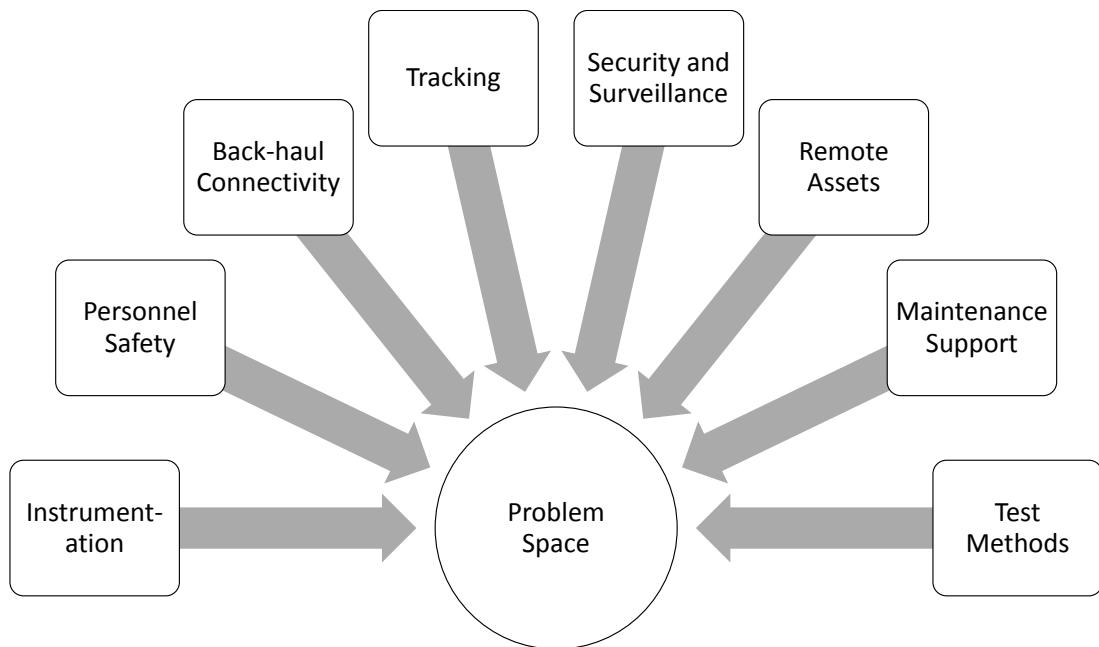


Figure 6.1: Industrial wireless technologies are applicable across most aspects of an industrial operation.

devices may serve to improve reliability and address environmental mitigation control.

Regulations In some scenarios, government regulations may require specific sensor instrumentation to be deployed for certain scenarios. Wireless solutions could make regulatory compliance practical or cost effective in some cases.

6.2.2/ USE CASES

Once a plant upgrade enhancement program is initiated, and some type of wireless technology is anticipated, the first step in realizing the program is defining and understanding the problem space where wireless technologies will be used. To support this assessment, we provide a taxonomy of industrial use cases to which wireless communication may be employed. The industrial wireless landscape is diverse, and a classification of those technologies can be helpful in mapping particular technologies to an application. Our classification is shown in Fig. 6.1 and includes instrumentation, safety, and back-haul connectivity, among others. Each class of the problem space is explained in the following subsections.

6.2.2.1/ MANUFACTURING INSTRUMENTATION

Manufacturing instrumentation includes devices commonly known as sensors and actuators. Sensors transmit measured variables from the physical process. Actuators receive manipulation variables from a controller and apply changes to the physical process. This class of application demands typically a very low latency and high reliability communication channel.

6.2.2.2/ PERSONNEL SAFETY

Industrial settings can be hazardous to both humans and machines. For humans, conditions may arise that pose a substantial risk for injury or death. For machines, conditions may develop that cause substantial damage requiring extensive repair or replacement. Prevention of industrial accidents is therefore of paramount importance within factories [126]. Slips, trips, and falls on the same level are commonly cited as lead causes of injury [87]. Falls from higher levels are of great concern to the aerospace industry [106] as inspection teams must work on elevated levels where falls prove fatal. Within the oil and gas industry, safety concerns include air toxicity and combustibility in both open and confined spaces where reliable monitoring and reporting save lives. Wireless gas leak detection and leak localization provide important and effective safety enhancements to such systems [89]. Within smart manufacturing systems where humans and robots work closely and even within traditional robot environments, safety systems provide an added layer of protection to prevent human injury [117], [101]. Within these human-robot environments, it is clear that reliable, low-latency communication is an important aspect of safety implementation, and, as mobility of robots within the factory increases, reliable low-latency wireless networks will become increasingly important to safety implementation.

6.2.2.3/ BACK-HAUL CONNECTIVITY

The back-haul is generally defined as the network that connects a lower level network to a higher level network [92]. Back-haul connectivity is usually characterized by large amounts of transferred data. In industrial environments, various types of back-haul scenarios are needed to be deployed for the operation of industrial communication networks. We can divide the back-haul problem space into three partitions

which are i) nearby or indoor back-hauls, ii) distant back-hauls, and iii) geographically remote back-hauls. This categorization is based on the distance over which data is transferred.

First, the indoor back-haul networks are used in factory floors or process plants for data transfer between the control level networks to data centers, and higher level application layer networks. Second, the distant back-hauls are used for information transfer between various buildings in a plant where the two ends may have a line of sight (LOS) or need a non-LOS (NLOS) technology [7]. Finally, the geographically remote back-hauls are used for information transfer between sites in different cities or even countries such as data transfer to headquarters. Various technologies which are currently used for back-haul networks are discussed in [7].

6.2.2.4/ TRACKING

Tracking in industrial environments is employed to follow the states of inventory, personnel, and tools which help in process control and factory management [94]. The focus of this class of the problem space is the set of transmissions related to the tracking process itself and not the recovered data transmissions back to higher levels. We categorize the tracking wireless systems to the following divisions based on various requirements: i) materials tracking, ii) personnel tracking, iii) tools tracking, iv) inventory management, v) localization, and vi) identification.

Materials, personnel, and tools tracking is focused on following the state and the location of the tracked item. The selection of the used technology will depend on the tracked item characteristics including its speed, required accuracy level, and scalability [1]. Inventory management includes the decisions related to the change of inventory status over time. Identification and localization are required for the determination of the position and identity of a person or an item at a specific situation or time. It can be important in safety and security related applications.

The characteristics and applications of various tracking, localization, and identification technologies are discussed in [94]. These technologies include the use of specific wireless communications technologies like the global positioning system (GPS), and the radio-frequency identification (RFID) or deploying the general-purpose technologies like Wi-Fi, Bluetooth, and the cellular-based technologies. Moreover, examples of the existing products for assets tracking and their performance are compared in [1].

6.2.2.5/ SECURITY AND SURVEILLANCE

Industrial installations require protection of the physical grounds, the operation, and the data produced from the installation. This protection requires surveillance of the property and implementation of network security controls. Guidance on selecting which controls are applicable to a specific risk level may be found in [82]. Assessment of the security robustness of specific wireless technologies is outside the scope of this paper; however, the implementation of physical security controls such as personnel authorization and grounds protection requires transmission of varying amounts of data. Transmission of such data includes voice traffic, video, and status information. In some installations, security and surveillance transmissions will coexist with factory instrumentation. This is sometimes the case with IEEE 802.11 mesh networks carrying voice, video, and instrumentation traffic.

6.2.2.6/ REMOTE ASSETS

Remote monitoring and control extend the range of the management to remote sites, especially in the process industry. Industrial remote communications provide access to widely distributed assets such as well head and pipeline monitoring [4]. The main goals of employing remote monitoring and control are minimizing labor cost, improved operations of remote sites, and prevention of unplanned failures [160].

The use of wireless networks in remote monitoring and control reduces the installation and maintenance cost significantly. However, the main challenge for industrial wireless remote monitoring and control is security and hence encryption and authentication protocols are deployed. Examples of remote assets communications are discussed in [4].

6.2.2.7/ MAINTENANCE SUPPORT

Factories require maintenance teams to keep machinery operating efficiently. Machines may be instrumented with sensors that measure machine health data such as vibration levels or current calibration values. Using this information, machines can be scheduled for maintenance prior to failure thereby allowing the factory to operate without unexpected interruption. Maintenance of the factory may also include automation of the building and infrastructure for climate control. Heating, ventilation, and air conditioning (HVAC) systems can be automated such that the

ambient conditions are controlled. Augmented reality is an emerging technology that promises to bring knowledge to the factory floor allowing maintenance personnel to gain access to information during uncertain situations [63]. Augmented reality is a high-bandwidth application that requires high-reliability, high-throughput wireless connectivity within the factory.

6.2.2.8/ TEST METHODS

Industrial control systems are often intolerant of communication faults and network latency, and often require very high transmission reliability [56]. Depending on the purpose of the wireless network (monitoring, supervisory control, feedback control, or safety monitoring), understanding the system performance of the network may be critical. For feedback control and safety monitoring systems, understanding the performance of the network from the perspective of the industrial controller or safety alarm system is essential. Factory operators, system integrators, and control systems designers are rarely experts in wireless communications systems. Considerations such as electromagnetic propagation, antenna efficiency, path loss exponents, packet error rates, and medium access are often foreign concepts to factory engineers. If factory engineers are expert in wireless theory and design practice, the information that they need to make educated decisions are usually unavailable. When available, link quality metrics such as packet loss ratios are informative but can be difficult to understand with complex mesh architectures and routing algorithms.

Moreover, it is generally difficult to measure these quantities for operational networks. The control system designer will only need to know the statistical distribution of latency and reliability of information through the network to design a controller that is robust. Therefore, practical methods for characterizing the performance of the wireless network that do not require an in-depth understanding of wireless communications or electromagnetic wave propagation are needed.

6.3/ TECHNICAL CONSIDERATIONS

6.3.1/ RADIO FREQUENCY (RF) ENVIRONMENT

Using wireless communications in industrial environments requires the knowledge of the RF environment characteristics and their behavior under the added wireless

networks. The first step is obtaining and modeling field data in industrial environments. In [110], the RF environments of multiple examples of industrial scenarios were studied where models and characterization parameters have been derived. Moreover, theoretical models are proposed to model the RF channel such as the IEEE802.15.4a model including its channel impulse response [13]. In characterizing the RF environments, various parameters should be included, such as the multi-path, the interference sources, the mobility, and shadowing effects. Moreover, the operating frequency band can play an important role based on the required performance and the nature of RF activity in a certain environment.

6.3.2/ DEVICE CHARACTERISTICS

Another important aspect while deploying wireless networks in industrial environments is the used devices characteristics. Typically, the harsh industrial environments in many applications require higher ratings of the used devices. The considered device characteristics include size, weight, power, cost, safety, and ingress protection (IP) ratings. Based on the application requirements and the physical environments, these device requirements are determined.

6.3.3/ NETWORK CHARACTERISTICS

Table 6.1 lists requirements typically expected of a network based on its intended purpose and problem domain. Industrial networks will have three basic characteristics: reliability, latency, and scale. These characteristics are described in the following subsections. The numbers listed in the table are based on existing applications. It is difficult to provide a standard metric for all use cases as each will impose different requirements on the network. In some cases, the control algorithm can be designed to adapt to information loss and delay, thereby improving the performance of the physical system.

6.3.3.1/ LATENCY

is a measure of the delay that information takes to arrive at its destination. We define latency, l , as the measured delay from the time of an event to the time in which knowledge of that event is made available to an application. Using the Open Systems Interconnection (OSI) model as a guide, latency would be measured at the

application layer. In a packaging system, an example of measured latency would be the time between a proximity event and the time knowledge of that event is received by a programmable logic controller.

6.3.3.2/ RELIABILITY

is a measure of the likelihood of data loss within the industrial network. We define reliability, r , as the probability that a block of transmitted data is delayed long enough to become obsolete or lost due to noise. Similar to latency, we measure reliability at the application layer thereby ignoring technology-specific issues such as data segmentation and retries similar to the approach taken in the developing 5G cellular networks for machine-to-machine communications [91].

6.3.3.3/ SCALE

is a measure of the number of devices that may be deployed within a network without sacrificing reliability or latency. The network size will often dictate the maximum bandwidth allotted to any one node. The larger the network, the less bandwidth is allotted for transmissions between nodes. The complexity of a fully interconnect mesh will theoretically exhibit factorial growth in network interconnections. In practice, signal-to-noise ratios between nodes, programming within the governing network controller, and provisioned constraints will limit the number of interconnections. Most wireless sensor network specifications such as WirelessHART, ISA100.11a, and Zigbee provide support for large scale deployments; however, in such deployments, the network infrastructure must support the throughput load of the network and the scan rate requirements of the factory application [99]. The ISA100.11a standard provides support for distributed access points, prescribed routing, and a partitioned architecture to allow for large-scale deployments.

6.3.3.4/ INTEROPERABILITY

In a factory application, easy integration of devices is essential to the flow of data through a network. While many wireless standards exist, making physical layer integration of devices within the wireless domain easier, most industrial networks fail to address the application layer well. WirelessHART describes an application layer interface, while ISA100.11a provides the constructs for such an interface. ZigBee and

Table 6.1: Industrial control latency, error rate, and scalability considerations for wireless deployments.

	Latency, l ms	Pr. Loss, r	Scale, s
Monitoring	$l < 1000$	$r < 10^{-5}$	$s < 10,000$
Supervisory Control			
Flow-based	$l < 1000$	$r < 10^{-6}$	$s < 30$
Job-based	$l < 100$	$r < 10^{-7}$	$s < 10$
Feedback Control			
Flow-based	$l < 1000$	$r < 10^{-6}$	$s < 100$
Job-based	$l < 10$	$r < 10^{-7}$	$s < 10$
Safety	$l < 10$	$r < 10^{-7}$	$s < 10$

Wi-Fi provide neither the interface nor the constructs for an application layer protocol. On the back-haul side of wireless networks which usually begins at a wireless gateway and ends at an automation server, many protocols such as Open Platform Communications (OPC) and Modbus make integration easier; however, again, they fail to specify the interface but instead provide the constructs. The authors assert that a standardization of the automation interface (gateway to automation server) is needed to provide such interoperability.

6.3.3.5/ SECURITY

Prescribing security controls within an automation system requires understanding of the risk of not implementing these controls and the impacts of them on the physical process. Work is being undertaken to measure the impacts of cybersecurity controls on the physical process as explained in [70] and [69]. In addition, the work is being undertaken to assess the impacts of stealthy attacks as described in [97]. NIST Special Publication 800-82 and IEC-62443 provide best practice guidelines for the implementation of a cybersecurity program in an automation system.

6.4/ WIRELESS TECHNOLOGY APPLICABILITY

Many existing wireless technologies could be applied to the use cases in Section II. Others may be applicable with limitations, and others are not applicable entirely. Table 6.2 captures mapping of technologies to applicable use cases. This table represents assertions by the authors of applicability of wireless technologies to industrial

control systems problem domains based on industry practice and original intent of the technology. The authors assert that the problem domains and wireless technologies included within this table represent the majority of problems found within industry and the existing technologies that may be applied. Technologies were evaluated based on original design intent, latency, reliability, energy, and practicality. Modifications may be made to the listed technologies resulting in applicability to a specified problem; however, possible modifications were not considered. Very low bit rate (VLBR) wide area networks (WAN) are assumed to have an infrastructure-based topology and support a bit rate of under 600bps.

6.5/ SUBSEQUENT WORK OF NOTE

Since the investigation conducted regarding industrial wireless requirements as presented here in this thesis, the author and other expanded on the research and published their findings in [151]. The requirements presented therein are reproduced in 6.3, and justifications for the requirements presented are explained within the reference. However, while the technical requirements have been updated in the new work, the classes of use cases and mappings of use cases to technologies remained relatively unchanged. In fact, the work in [108] served as a research source for the subsequent finding in [151]. Therefore, the architectural modeling work presented in the following chapter was unaffected.

6.6/ CONCLUSIONS

This work represents a step toward employing wireless technologies in industrial environments where all classes of problems which wireless technologies can be used to solve have been comprehensively and collectively discussed. The success criteria and the technical aspects for employing wireless technologies in various scenarios have been considered briefly. More work is needed where success criteria are to be quantified and prioritized for various industrial scenarios. More detailed discussion is needed regarding technical considerations while employing wireless networking, including the physical environmental aspects such as the factory floor parameters, obstructions, data models, and interaction between various items within the factory floor. Finally, we have introduced a mapping between technologies and the discussed problem classes to highlight various industrial problems which can be solved

or need more work while employing wireless technologies. Multiple comparisons between the current technologies exist in the literature. However, this work initiates consideration of the problem space where wireless technologies are employed. NIST has introduced this work while continuing to develop its capabilities as described in [69] to explore applicability of wireless technologies to specific industrial scenarios capable of replication within a laboratory space. An RF channel emulator is used to simulate the RF environment to include fading and multipath. A technical working group was created to directly address the needs of the wireless users employing wireless within their factories.

Table 6.2: Asserted applicability of wireless technologies.

Legend: ●: Technology fully supports problem domain, ○: Supports problem domain with practicality, throughput, latency, reliability, or energy limitations, ↳: Energy requirements of assumed battery-powered devices prevent applicability, ⊕: Latency prevent applicability, ▼: Throughput prevents applicability, ✽: Emerging technology or evolution may support problem domain, ○: Not recommended, -: Not considered by authors.

Table 6.3: Enhanced Wireless User Requirements for the Factory Workcell.

User Requirement ^{1,2}		Class 0:	Class 1:	Class 2:	Class 3:	Class 4:
Latency (ms)	Typical	4	4	20	4	50
	Minimum	0.5	0.25	4	0.5	4
(Pr. Loss) ³	Typical	-7	-7	-7	-7	-6
	Minimum	-7	-7	-7	-7	-7
Scale (# of links)	Typical	8	10	10	1	100
	Maximum	16	30	30	4	300
Range (m)	Typical	10	10	10	10	10
	Maximum	30	30	30	30	30
Payload (B)	Minimum	6	8	8	8	12
	Maximum	24	1024	1024	1024	33000
Update Rate (Hz)	Typical	125	125	25	125	10
	Maximum	1000	2000	125	1000	125

¹ This table has been adapted from [151].

² The use case classes are defined as follows: Class 0: Safety, Class 1: Closed Loop Regulatory Control, Class 2: Closed Loop Supervisory Control, Class 3: Open Loop Regulatory Control ,and Class 4: Alerting Monitoring.

³ The reliability specifications presented indicate a probability of information loss (not packet loss) where the probability is 10^X where X is the number indicated.

7

WORKCELL ARCHITECTURAL DECOMPOSITION

Smart Manufacturing provides a vision of future manufacturing systems that incorporate highly dynamic physical systems, robust and responsive communications systems, and computing paradigms to maximize efficiency, enable mobility, and realize the promises of the digital factory. Wireless technology is a key enabler of that vision. A comprehensive graphical model is developed for a generic wireless factory work-cell which employs the Systems Modeling Language (SysML), a standardized and semantically rich modeling language, to link the physical and network domains in such a cyber-physical system (CPS). Our model identifies the structural primitives, interfaces, and behaviors of the highly-connected factory work-cell in which wireless technology is used for significant data flows involved in control algorithms. The model presented here includes parametric definitions to encapsulate information loss, delay, and mutation associated with the wireless network, and it identifies pertinent wireless information flows. Use of this model is helpful in communicating architecture, interfaces, limitations, and sources of information within a workcell. The model was developed to provide a perspective of the smart manufacturing work-cell which did not yet exist.

7.1/ INTRODUCTION

The fourth industrial revolution promises unparalleled productivity and capability advances in manufacturing. To support the manufacturing industry in this conversion, various programs have been established in several countries such as Smart Manufacturing in the U.S. [102] and Industry 4.0 in Europe [48, 79]. Propelled

by economic pressure toward greater efficiency, factory agility, and product customization, future factories will have the technological ability to adapt to customer demands quickly, modify manufacturing processes automatically based on quality feedback, and fabricate products with a reduced environmental impact. Technological advances required for smart manufacturing to be successful include collaborative and mobile robotics [116], distributed machine autonomy based on artificial intelligence [22], improved process observability [138], and a high degree of interconnectivity among automation resources [135]. Work-cells are self-contained units of operation within a factory [?, 32, 121]. These work-cells are composed of various machines, conveyors, motors, edge devices, and robots. Robots will work together and with people to accomplish complex tasks or to tending to other machines within the work-cell. Robots will have the ability to roam between work-cells within a factory, learn their roles quickly, become aware of edge devices, and communicate with other actors within the work-cell to accomplish their goals. Efficient communications between robots and the other players in the work-cell are essential to the fulfillment of the robot-related tasks.

Current manufacturing architectures use wired connections through field-bus and industrial Ethernet protocols for sensing and real-time control [51, 66]. Indeed, through advances in time-sensitive networking, many of the promises of smart manufacturing are being realized; however, the true goals of smart manufacturing require a large deployment of sensing and actuation devices and mobile, perhaps autonomous, robotics actors [135]. The use of wires precludes mobility and makes deployment of edge devices more expensive as each requires power, cables, and conduit for communication. By adopting wireless for both sensing and control of machines within the work-cell, a lower-cost, untethered operation is achievable¹. Once wireless is adopted as the primary mode of communication, questions arise as to the required latency, reliability, and scale of the wireless network especially when the network is used for the control of machines and the assurance of safety [135].

The work presented here addresses the present need for a comprehensive architectural model of the factory work-cell in which wireless is a preferred mechanism for carrying information within the work-cell. It begins with an architectural analysis of the future collaborative work-cell that includes edge devices, robots, vision systems, and supervisory controllers. The architectural analysis includes structural components, information flows, and parametric elements of the work-cell. Factors

¹The power for untethered operation can be achieved through the use of rechargeable batteries to power the untethered machine or robot for enough operating period.

that limit reliability, latency, and scalability of the wireless network are identified concluding with a discussion of significant information flows. Significant information flows are defined as operationally critical or safety-related. The contributions of this part of the thesis are as follows:

- ▷ First, a comprehensive and extensible architectural model using the Systems Modeling Language (SysML) that provides primitives for describing the physical and networking components of a work-cell with parametric constraints is developed²;
- ▷ Second, a framework for analyzing cross-domain interactions of complex wireless work-cell deployments is provided; and
- ▷ Third, significant information flows are identified, annotated with rate constraints.

The remainder of this paper is organized as follows: In Section ??, previous related work is discussed and our motivation for constructing a model is presented. A brief introduction to systems modeling is presented in Section 3.2 and provides a primer on the SysML language. The conceptual architecture of the model providing a concept-of-use is proposed in Section 7.2, followed by a detailed exposition of each package in Section 7.3. Then, in Section 7.4, significant information flows are discussed through introducing a case study. Section 7.5 concludes the paper and identifies opportunities for future research.

7.2/ CONCEPTUAL REPRESENTATION

The remainder of this work describes a reusable model for representing a comprehensive wireless factory work-cell using the semantic constructs of SysML. An exposition of the model beginning with the conceptual model followed by a detailed description of each component within the model is given. When discussing the model, the SysML term, block, is omitted for the sake of brevity where the meaning is clear.

²the model is made publicly available for download. A valid license of MagicDraw 18.5 is required to use the model. A web-based report of the model is provided for read-only access.

7.2.1/ PACKAGES

The factory work-cell is decomposed into one general and nine major structural packages as shown in Fig. 7.1. Packages include major logical groupings of structure within the model. These packages are enumerated in the following paragraphs.

7.2.1.1/ GENERAL

A set of reusable structural elements that is used for conceptual modeling or extended to produce more complex model elements. Each of the sub-packages within the General package extends basic features. The sub-packages within General include time and constraints for data, electro-magnetics, and motion.

7.2.1.2/ NETWORK

Describes the components, blocks, interfaces, and limiting factors of the industrial wireless network (IWN). The IWN is modeled as the radio channel and the services provided by the network. Limiting factors are modeled as parametric equations associated with the radio channel and the services.

7.2.1.3/ APPLICATION

This package contains the model elements describing a component of behavioral functionality typically implemented within software or firmware but could be implemented in hardware. It describes the features and constraints of factory operation such as the logic of a supervisory controller or the feedback controller of a robot arm. The Application sets the performance requirements of the wireless network, i.e., the factory network performance requirements are derived from the requirements of the applications deployed to a work-cell.

7.2.1.4/ DEVICES

Describes the types of devices found within the factory work-cell to include any device that interacts with the environment such as wired and wireless input-output (IO) devices including sensors and actuators.

7.2.1.5/ ROBOTICS

Describes the computational and communicative components of robot control including sensing, actuation, and command. Description of the robot itself is inconsequential to communication and therefore not included in the model.

7.2.1.6/ PLC

Describes the supervisory control components commonly handled by one or more programmable logic controller (PLC) components. This package includes the elements responsible for coordination of actors and handling of most input-output.

7.2.1.7/ SAFETY

Describes the allocation of safety qualities typically included in the supervisory controller. The Safety package includes devices, monitoring, and actuation of the safety behaviors within the factory work-cell.

7.2.1.8/ VISION

Describes the allocation of features to optical monitoring and tracking which are typical to the collaborative robotic work-cell.

7.2.1.9/ SPECTRUM MONITORING SYSTEM (SMS)

Describes the qualities and interfaces of a factory spectrum monitoring system projected into the factory work-cell. The SMS includes monitoring nodes and agents localized to the work-cell and connected to the automation system for real-time adaptation to changing multi-path and interference.

7.2.1.10/ HUMAN

Describes the features associated with human beings such as human motion, tasks, and carried equipment such as portable computing and communication devices.

Several examples of how to use the model are provided within the model [131]. Examples include: a robotic force-torque leader-follower, a robotic force-torque limiter, a collision avoidance, and a robotic pick and place work-cell. The parametric constraints are provided as examples and are intended to be used for communication to project stakeholders or replaced with executable computer code such as MATLAB or Python scripts, thereby making the model useful for simulation depending on the modeling tool selected.

7.2.2/ CONCEPTUAL ARCHITECTURE

The conceptual architecture of the wireless work-cell model is depicted in Fig. 7.2. All the packages are included in this architecture, and the connections and relations between blocks are defined using the SysML semantics. This figure serves to orient the reader during the presentation of detailed model decomposition in Section 7.3. The work-cell model is composed of at least one Industrial Wireless Network (IWN) block and at least one Device block. More IWN blocks are used when multiple wireless networks coexist within the industrial work-cell. Applications are associated with Devices and performance constraints are applied to Applications. In this model, the Wireless Device is a subclass of Device, and the Controller is a further derivation of the wireless device. Moreover, the Controller is an abstract specialization of a wireless device that represents all types of devices intended to control other processes. The behaviour of a PLC or Robot is represented through two packages in the model. The production related behaviour is represented through the corresponding packages and the connectivity behaviour is represented through Devices such as the Robot Controller and the PLC which are special classes of Wireless Device containing all of the structure and behavior of the wireless device. Finally, an often overlooked component of any industrial wireless deployment is the spectrum monitoring system represented by the SMS Agent. Blocks in the model communicate through ports such as the ant port which represents the antenna or waveguide interface. Composition is further implied by the parts, constraints, and parameters associated with each block. These are listed within the compartments of each block.

7.3/ DETAILED MODEL DECOMPOSITION

In this section, the decomposition of the model packages is described in detail. The decomposition of each package includes the properties and the components of

the package where the relation between the package and physical industrial work-cells is illustrated. Moreover, some of the packages may have various types with different properties and hence sub-packages are defined for these packages. This section also includes a general explanation of the packages rules in the work-cell and the behavioral interactions between the packages.

7.3.1/ GENERAL PACKAGE

The General package contains the reusable elements of the model. In particular, the General package contains elements that are not particular to any one work-cell component but can be reused or applied across several. The concepts of time, clocks, and synchronization are included within General. Moreover, several types of constraints are defined.

7.3.1.1/ TIME

Time is an important construct within communication systems as well as industrial control systems. Time is realized as a set of one or more clocks. A work-cell will contain one to several clocks typically embedded within each device to allow those devices to synchronize to a common clock. The local clocks within the work-cell devices will synchronize to a master reference clock and usually one with a high degree of precision, accuracy, and stability. The degree to which the local clocks synchronize to the master will depend on the requirements of the applications that the local clocks serve. Clock synchronization can be costly in power, size, and monetary cost of the devices, but it may be necessary depending on the applications using a clock. Clock performance is a key driver of size and power consumption, and synchronization of clocks across a wireless network can be a challenge and is a highly studied field [113, 120]. Moreover, the Time package includes a constraint, Clock Performance, to represent the production of time and synchronization with a master clock.

7.3.1.2/ CONSTRAINTS

Constraints provide limitations on the performance of an element within the model. Within General, several constraints are defined which may be applied to any block

within the model. These constraints include motion constraints, radio channel constraints, and networking constraints as shown in Fig. 7.3a through 7.3c.

Motion Constraints When applied, these constraints provide the bounds of dynamical performance. For example, motion constraints determine the positions, velocities, and accelerations on a rigid body. The force vector equations (7.1) are the general governing dynamic laws of motion as forces on a vector of joints as exerted by the end-effector or set of end-effectors on the environment. The equations constrain the robot to operate according to the laws of physics, where the joint-space inertia matrix, H , is an $n \times n$ symmetric, positive-definite matrix, and q , \dot{q} , and \ddot{q} are vectors of position, velocity, and acceleration, respectively. The variable f_{ext} is the six degrees of freedom (DOF) force acting on the end-effector, and c is the joint-space bias force required to produce a zero sum force on the end-effector [16].

$$\Gamma = H(q)\ddot{q} + c(q, \dot{q}, f_{ext}) \quad (7.1)$$

where Γ is the vector of forces exerted by the end-effectors.

This system of equations is controlled using a combination of digital feed-forward and feedback compensation in which the communication mechanism of the robot states directly impacts the controller's effectiveness. Joint control via a wireless network connection is typically avoided; however, monitoring of the linear and angular forces represented by f_{ext} as sensed by a 6-DOF force-torque (FT) wireless sensor can be advantageous for many industrial applications. As such, the performance of the wireless connection between a FT sensor and the controller can be a limiting factor in the performance of force-sensitive applications. Such a constraint may be applied to robot manipulators as defined in Section 7.3.5.

Radio Channel Constraint The radio channel constraint limits wireless information flow to the laws of propagation which includes path loss, reflection, diffraction, and interference. By applying this constraint to Wireless Devices described in Section 7.3.4.2, such devices experience the effects of a lossy communication medium. The radio channel when applied to a wireless communication link within the workcell manifests itself in accordance of the illustration of Fig. 7.4. The parametric equations for the radio channel include path loss, multi-path, and interference. Path loss is generically modeled as the input signal divided by the bulk power loss in the channel. Path loss is often characterized as a two-piece linear function of distance [109].

Multi-path is modeled as convolution of the transmitted radio signal with a linear time-varying impulse response characterizing the electromagnetic propagation between transmitter and receiver antenna systems. Interference is then modeled as an additive component with power, bandwidth, and probability of excitation.

Data Constraints Delay, mutation, and loss of information within the industrial wireless network are encapsulated by the Network constraints block. The Network constraint is applied to wireless devices within the network and represents the impacts of the radio channel and network components and protocols. These constraints are illustrated in a parametric diagram of Fig. 7.5 in which the rules for delay, mutation, and loss are applied to a service of an industrial wireless network within a work-cell. As with any constraint, the rules for data loss may be modeled as equations, psuedocode, or executable computer code such as MATLAB script or C. These rules decide if information is lost due to delay or mutation. While it is easy to understand how mutation leads to loss through a mechanism such as a checksum, unacceptable delay can also lead to loss of data.

Delay is simply a function of time, the physical environment of the factory work-cell, and state of the network at time, t . Many features of the network and the physical environment will have an impact on the output of the delay equation and will include data transmission duration, radio wave propagation delay, signal-to-noise, protocol for reliability, routing, internal queuing, and processing. A generalized equation for information delay by the wireless network is given as the sum of processing delay, queuing delay, transmission delay, and propagation delay. Subsequently, information loss is modeled as a set of rules governed by the attributes of the network infrastructure, transport medium, and protocols shown in ^(7.2). These rules may include thresholds for unacceptable delay and the ability of the network to correct for data mutation or loss in the physical channel (i.e. the air interface).

$$\mathcal{Y}(t, \mathcal{X}, \mathcal{N}) = \begin{cases} \mathcal{X} & \text{if } \mathcal{X} \vdash \mathcal{L}(t, \mathcal{X}, \mathcal{N}) \\ \emptyset & \text{otherwise} \end{cases} \quad (7.2)$$

where \mathcal{X} and \mathcal{Y} are blocks of data traversing the network and \mathcal{N} is the state of the network at time, t . The loss constraints are modeled as a general set of rules, \mathcal{L} , taking into account that each network system will have a different set of configuration attributes and protocols. The rules will therefore change for each operational system and the networks used. When the rules for loss are applied, the output of the

Table 7.1: Constraints Pertaining to a Collision Detector

Constraint Property	Typical Value
Input Payload Size	1 KB
Subscription rate	125 Hz
Maximum Delay Tolerance	47 μ s
Maximum Loss Duration	275 ms

network, \mathcal{Y} , becomes the input to the network, \mathcal{X} , when \mathcal{X} satisfies $\mathcal{L}(t, \mathcal{X}, \mathcal{N})$.

7.3.2/ APPLICATION

Applications, commonly implemented as software and firm-ware, represent the intelligence of devices. The application defines the behavior and the information flow requirements of the work-cell [10, 12, 34]. As defined in the model, without Applications implemented in software, firmware, or hardware, the work-cell devices would not function. The definition of the Application block is shown in Fig. 7.6. The Application block is constrained by the Program constraint which defines the logic of the program, its expected data flow input rates, and its tolerances to delay and information loss. Devices host multiple applications each with a unique set of constraint properties. It is essential when constructing a work-cell model that each application is identified and modeled appropriately. An example of an Application is a collision detection system within a robot controller. Table 7.1 illustrates sample parameters used in the collision detector Application.

Specification of Application constraints provides a clear picture of the requirements of the factory automation system which can be projected on the wireless network. Through this process, it is possible to determine such requirements as scalability, throughput, reliability, and latency of the supporting network services modeled as radio and data constraints in Section 7.3.1.2. Indeed, as the manufacturing system becomes more complex and wireless becomes essential to communication, the projection of manufacturing requirements onto the wireless communication system becomes less clear. Frequency planning, transmission scheduling, and error correction schemes become less obvious, and considerations of power, reliability, latency, and scale become optimization trade-offs. Such analyses are not within the scope of this paper but are important considerations for future research of manufacturing systems. As such, the architectural elements and information flows exposed by an abstract model are a necessary first step.

7.3.3/ INDUSTRIAL WIRELESS NETWORK

Central to the automation system is connectivity among devices and controllers [25]. More specifically, modern automation systems often employ networks to conduct inter-device communication [103]. The term inter-device is appropriate as the Device block serves as the basis for all other components that communicate through the network. Our model of the IWN is composed simply as a radio channel, a set of services, and a set of clocks as shown in Fig. 7.7a. This simplification of the model is necessary to allow the users of the model to provide as much or as little detail of the implementations of the radio channel and underlying services as required for their implementations.

Connectivity of a constructed IWN is shown in Fig. 7.7b. An IWN is internally modeled such that information flows as radio frequency (RF) energy through the ant port. A radio channel is applied, theoretically for each pairwise link, and the modified signal is passed to the services for processing. Network processing is modeled by the properties of network constraints as defined in Section 7.3.1.2. Once processed by network services, information is routed back through the radio channel through the ant port to other Devices connected to the IWN. Moreover, the Service block includes a parametric model as shown in Fig. 7.7. This IBD with exposed parametrics exemplifies the inclusion parameters such as information delay and loss caused by the IWN, but it also exemplifies the impact of protocols and infrastructure (throughput, memory, etc.) within the network. These effects are modeled as rules of loss shown in ^(7.2).

7.3.4/ DEVICES

7.3.4.1/ DEVICE

A Device, defined in Fig. 7.8, is generic construct representing an element within the work-cell with processing, memory, and storage capability. Devices have the capability to run applications as defined in Section 7.3.2. Devices are sub-classed into Sensor and Actuator devices which generically refer to any type of sensor or actuator, and, in particular, the wired variety. The Device is further sub-classed to the Wireless Device which is the central theme of our analysis. Derived from the Wired Device are the Wireless Sensor and Wireless Actuator as well as the Controller. The Controller represents the base class for deriving work-cell devices

such as the PLC and the Robot Controller, sections 7.3.6 and 7.3.5, respectively, and provides support for external input-output (IO).

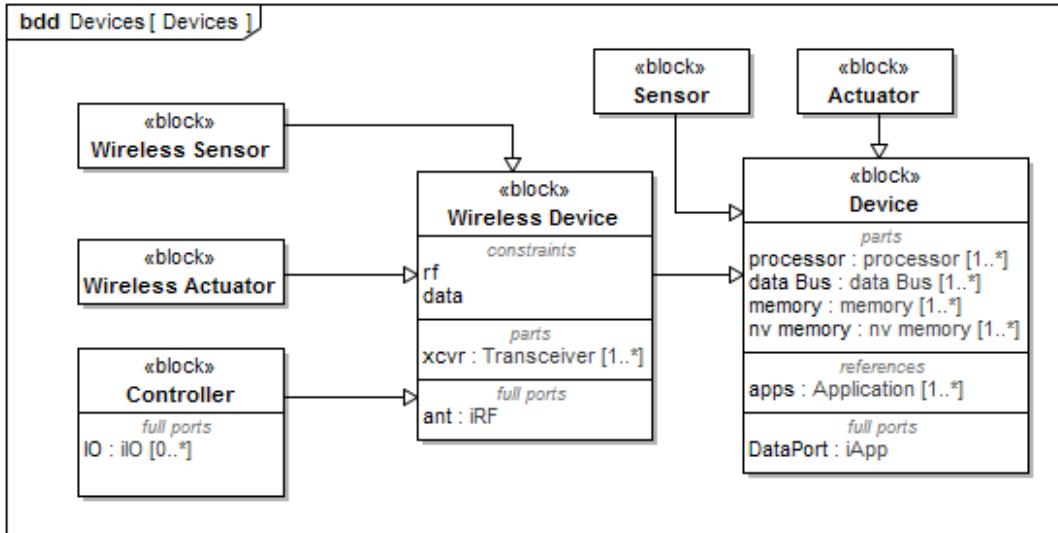


Figure 7.8: SysML block definition diagram of wireless devices within the factory work-cell.

7.3.4.2/ WIRELESS DEVICES

A Wireless Device is a subclass of Device that contains the various components necessary for untethered communication. These devices then communicate with each other through one or more industrial wireless networks (IWNs) which contains antenna systems, transceivers, protocols, and network services. The relationships and composition of the Wireless Device are illustrated in Fig. 7.9. As shown, the wireless device is composed of at least one transceiver and each transceiver is composed of at least one antenna system which is composed of at least one antenna element. The antenna system is constrained by its gain profile.

7.3.4.3/ TEST DEVICE

The Test Device is a subclass of Device that represents devices used for calibration or ground truth testing of properties of a work-cell. The block definition and internal configuration are illustrated in Fig. 7.10. A Test Device is constrained by its accuracy and precision as well as the algorithm for controlling measurement. An example of a test device is a calibrated force sensor that may be used as comparison to a 6-DOF wireless sensor mounted on the wrist of a robot arm as shown in the top left

of Fig. 7.14. Test devices are useful and necessary elements of the wireless testbed to establish accurate and repeatable ground truth measurements. For example, a stationary precision force sensor may be used to establish a ground truth force value, and a high-accuracy vision tracking system is used for truth in position. Test devices are modeled such that measurements may traverse the operational wireless network or a stand-alone wired interface.

7.3.5/ ROBOTICS

The robotics package contains elements specific to robot systems. Robot systems are composed of at least one robot controller associated with one or more robots, as shown in Fig. 7.11a. In manufacturing, robots interact with their surrounding to accomplish assigned tasks such as tending machinery, moving materials, welding, and inspecting. Robot controllers provide support for external IO devices. In addition, modern robot controllers will support a variety of open and proprietary network protocols allowing for interaction with other actors in the work-cell. The robot controller's main task is control of the rigid body dynamics of the robots which is usually conducted via real-time communication over a high-throughput serial field-bus. While joint control is conducted using wires, the robot controller is responsible for other tasks requiring reliable, low-latency communication in which wireless may serve a role. These tasks are captured in the model as applications (Fig. 7.11b) and explained as follows.

- Robot States Publisher: Transmission of robot states to external actors such as other robot controllers, supervisors, and safety systems.
- Arm Controller: Also known as manipulator control, serves to accept position commands as Cartesian or joint space trajectories and waypoints from other actors within the work-cell.
- End Effector Control: Command and control of the robot end-effector such as a gripper or sensor. The end-effector may be equipped with a high-throughput wireless sensor necessitating reliable communication.
- Inverse Kinematics: Converts Cartesian coordinates of the end-effector into joint positions.
- Path Planner: Determines the optimal geometrical trajectory to achieve a final pose given knowledge of self-collision and real-time knowledge of the surround

environment. Path planning is a sophisticated part of a robot system and may be allocated to an external system depending on throughput and latency requirements.

- Collision Detector: This application monitors the states of other actors and obstructions within the work-cell. If possibility of collision is detected, the collision detector takes action.

These applications within the robotic work-cell define many information flows requiring careful analysis to achieve reliability and latency necessary for the safety and control of the manufacturing process. Information flows are identified in Section 7.4.

7.3.6/ PLC

The PLC is a specialized class of Controller. PLCs were originally developed to mirror relay circuits in software; however, the modern PLC is much more advanced and is usually equipped with multiple processors, a real-time operating system (OS), and capabilities to support various types of industrial IO devices. In addition, modern PLCs (also called automation servers) include both a general purpose OS with a real-time kernel and multiple network interfaces. Many network-routable protocols are also supported. With the addition of wireless protocols, PLCs now have the ability to support IO devices connected remotely without wires. Supervision of untethered robots is also possible using PLCs. The PLC is modeled as a Controller device with the work-cell model. Shown in Fig. 7.12, the PLC is modeled as a wireless device with transceiver, logic application, and safety applications. More sophisticated PLCs may be modeled by extending the PLC block. As applications, the logic and safety functions are constrained by application constraints. Finally, as Controller devices, PLCs are modeled with an IO port, thus IO can be connected to the PLC by wires or by wireless network connection.

7.3.7/ SAFETY

In a work-cell with interacting humans and robots, functional safety requirements are typically strict by specifying the rules related to four main safety criteria, namely, monitored stops, controlled speeds, separation distances, and power and force limits in order to prevent injury for humans and damage for equipment. The wireless

safety package is composed of a safety controller and safety devices. Traditionally, the safety requirements of the work-cell is fixed and managed by the safety controller which receives safety-related measurements and takes the corresponding actions. Alternatively, the safety controller may be connected to the PLC where the current work-cell activities are supervised. The PLC will determine the required safety rating and the safety controller behaves accordingly. The dedicated safety controller is needed to achieve the required high reliability and low latency safety requirements and it can be a general PLC with safety modules.

The safety devices include non-safety-rated devices such as the various work-cell sensors and actuators and safety-rated input and output devices. Safety control input devices include Emergency-stop and enabling buttons while output devices include relays and switches for various work-cell equipment. The use of wireless in safety control loops allows installing a larger number of sensing devices including vision systems to monitor the human and robots activities, velocity and proximity sensors, and machine status sensors. Moreover, wireless allows to have mobile control panels where workers can activate a safety device at any time and location within the work-cell.

7.3.8/ VISION

The vision system considered in this subsection is the one used for work-cell monitoring and general object detection. It does not cover the machine-embedded vision systems which can be used for inspection and characterization of objects such as the shape, color, texture, or size of processed materials. The data collected by the work-cell vision system can be used for parts and mobile robots tracking, collision avoidance, object detection, security identification systems, and augmented reality devices and systems. The vision system communicates with the supervisory control, robotic controller, and the safety system to provide the work-cell state which contains the positions of various equipment, robots, and humans.

The vision system is composed of optical devices, vision processing unit, and interfaces to various work-cell systems. The optical devices are the cameras for capturing images at high enough speed to track and detect various objects. These cameras have wireless network interfaces to be connected to the vision processing unit to allow collaborative processing of the captured images and obtaining precise work-cell state. The vision processing unit performs data acquisition from the distributed optical devices and feature extraction to detect and track the positions of

various entities in the work-cell.

The vision system communicates the corresponding data to the supervisory control, robotic control, and the safety system for decision making based on the captured work-cell state. The supervisory controller uses vision system data for robots and workers localization, parts detection and identification, and schedules tasks using this information. The robotics controller uses these data for motion control, path planning, and collision detection. Finally, the safety controller uses these data for safety requirements implementation such as enforcing safety stops, controlling the speeds of moving objects, and limiting power and forces of various work-cell components.

7.3.9/ SPECTRUM MONITORING SYSTEM

A spectrum monitoring system (SMS) is an often overlooked yet valuable part of the wireless factory work-cell with requirements specified in [107]. The SMS is modeled as an atomic agent within the work-cell. The SMS Agent is one component in a larger enterprise-level spectrum monitoring deployment. The SMS agent shown in Fig. 7.13 includes a transceiver, an event detector, and a reporting agent. The transceiver can be implemented as an RF-to-baseband converter. The detector application is responsible for detection and estimation of anomalous spectral events and may employ machine learning to accurately detect anomalies and report localized spectral events.

The reporter application collects, filters, and reports event information to a central management console. SMS reports support identification of long-term patterns such as growth trends in particular wireless bands. Since the SMS Agent is part of a larger network of spectrum monitoring, it is presumed that reports are wirelessly transmitted back to the enterprise management console. These reporting events use bandwidth otherwise used for the factory operation, thus reports must be made concise and infrequent. This implies substantial filtering and intelligence in the local SMS agents. This may provide opportunities for research.

Detection events may be routed to the local supervisor, robot controller, and safety system. By leveraging spectral awareness, work-cells can be made safer and more reliable. As SMS are not yet widespread in industrial applications; thus, standardized protocols are needed for reporting and integration with automation systems.

7.3.10/ HUMAN

Humans can exist in a modern work-cell for short or long periods of time depending on the required task. Two categories of human-related aspects are captured in the work-cell model. First, the human existence in the work-cell leads to detection and identification of the corresponding worker for both safety and security. Also, human motion within the work-cell requires position tracking for environment monitoring and spectrum monitoring due to radio frequency channel variations with human movements. The second category includes the human interfaces with the work-cell process that include portable control devices, wearable sensors, and workers communication devices to get task commands. Moreover, depending on the process constraint, personal devices of workers may interfere with the work-cell communications if allowed.

7.4/ RESULTS OF A WORK-CELL CASE STUDY

In this section, a case study is presented of a work-cell which includes a force-torque limiter robot application and a two-robot collaborative pick and place operation. The model for this system is depicted in Fig. 7.14. The number and type of wireless information flows will depend on the configuration of the work, the number of applications, and the places where wireless is applied. For this case study, the force limiter section is composed of a robot controller, a robot, and an FT sensor. A PLC is used for work-cell supervision, and a test device is deployed for ground truth measurement. An SMS agent monitors the electromagnetic spectrum. A Radio Emitter is included to model the transmission of interference. An IEEE 802.11n network is represented in the model by an IWN block. Properties of the radio channel and services of the communication system are therefore represented. Similarly, another example is implemented in [131] for a pick-and-place scenario where the model is composed of two robots, a PLC, an IWN, and an SMS Agent in addition to proximity sensors and an IEEE 802.11ax network.

Referring to these examples, typical information flows are easily identified as connections between Wireless Device blocks and the antenna port, ant, of the IWN. Recall that the IWN includes radio channel and services offered by the network itself. Therefore, all wireless information flows will traverse the IWN through the ant port. Applications are implied and produce and consume the information according to associated constraint properties. Information flows are generated by the interactions

between actors and include the following:

- Robot States: The geometry states of the robot such as position, velocity, and acceleration of each joint or end-effector. Robot states may include Cartesian or joint space readings depending on the need of other applications or the capabilities of publisher. Robot states are usually transmitted at 30 Hz or faster [121].
- Force Sensor Readings: The readings from a sensor mounted on the wrist of each robot arm. These readings are typically in the format of wrenches (linear and angular forces) and are transmitted at rates from 15 Hz for monitoring applications up to 500 Hz for force limiting and control applications [159]. Other sensors may produce data in the system such as proximity sensors which can generate data in the range of 1-50 Hz [158] and Tactile sensors which can have information flow rates faster than 1000 Hz [61].
- Machine Health Monitoring: Readings from sensors mounted within machinery such as mills, routers, and lathes used to sense and predict deviations of mechanical components from design tolerances. Readings for prognostics and health monitoring are often aggregated at the source with statistical metrics being communicated to a factory enterprise application; however, non-aggregated readings may also be transmitted to a remote signal analyzer. Health monitoring sensors measure temperature, vibration, acceleration, inclination, position, and rates of change of angles. Information flows from a single aggregation point may reach 200 kB/s on average for a 6-DOF sensor apparatus described in [137]. While the outputs of health monitoring sensors are usually wired into a local aggregation devices, it is desirable to transmit these readings to an on-line optimizer or PLC within the work-cell [100].
- IO States and Supervisory Messages: These contain both the boolean-valued readings and commands from sensors, and task orders in the form of short commands and lists of instructions which can originate from any supervisor within the network such as a PLC or other controller. Sensor readings (inputs) and actuation commands (outputs) are transmitted in periodically or pseudo-randomly at rates indicative of movements of machinery and materials through the manufacturing process. Typical analog and boolean IO states range from 10 Hz to 100 Hz depending on the manufacturing process [155].
- SMS Events: The SMS agent will communicate state information and directives to controllers within the work-cell. These messages allow the automation

system to react under anomalous spectrum conditions within the work-cell. These information flows may be necessary for safe operation of the work-cell. The data rate of reports from an SMS agent without processing or compression can be in the range of 1 to 10 megabits per second (Mbps) [?].

- **Vision Applications:** The vision system will communicate videos or images for processing and decision making. Typical Video flows can have the rates of 30 Hz for surveillance and 125 Hz for motion capturing [137, 157]. Information flow for Object tracking systems can have the rate of 10-200 Hz depending on the tracked objects and the required accuracy [134, 156].

7.5/ DISCUSSION AND CONCLUSIONS

A model was developed using SysML. The developed model is constructed of the elements necessary to construct useful representations of factory work-cells in which wireless networks are used to transport information necessary for automated control system operation. Reusable, derivable elements are developed and then extended to represent the constructs of the work-cell such as robot control, supervisory control, vision, safety, and spectrum monitoring. An industrial wireless network is then developed and constraints of the radio channel and network services are formalized. Using the architectural model, information flows are explored and incorporated within.

It is important to mention that this model includes an often overlooked component of any industrial wireless deployment which is the spectrum monitoring system and also considers the human-robot and robot-robot interactions in industrial environments. The current model includes various systems constraints including motion constraints, radio channel constraints, and networking constraints. The parametric constraints are provided as examples and can be replaced with executable computer code thereby making the model useful for simulation depending on the modeling tool selected. Furthermore, the applications within the robotic work-cell define many information flows requiring careful analysis to achieve reliability and latency necessary for the safety and control of the manufacturing process.

With increased dependency on wireless communications for more complex manufacturing systems, the projection of manufacturing requirements onto the wireless communication system becomes less obvious. Such analysis of this projection is essential for future research of manufacturing systems. As such, the architectural elements and information flows exposed by an abstract model are a necessary first

step. Our model in its current state of development is comprehensive enough to support architectural and ontological analyses of the factory work-cell. As such, information about the relationships between components of a work-cell and attributes related to the wireless network may be discovered. Therefore, our model serves as a foundation for future systems engineering analyses. Moreover, our model may be used as a tool for academic and industry exploration of wireless testbed development. The model is made openly available through GitHub at [131].

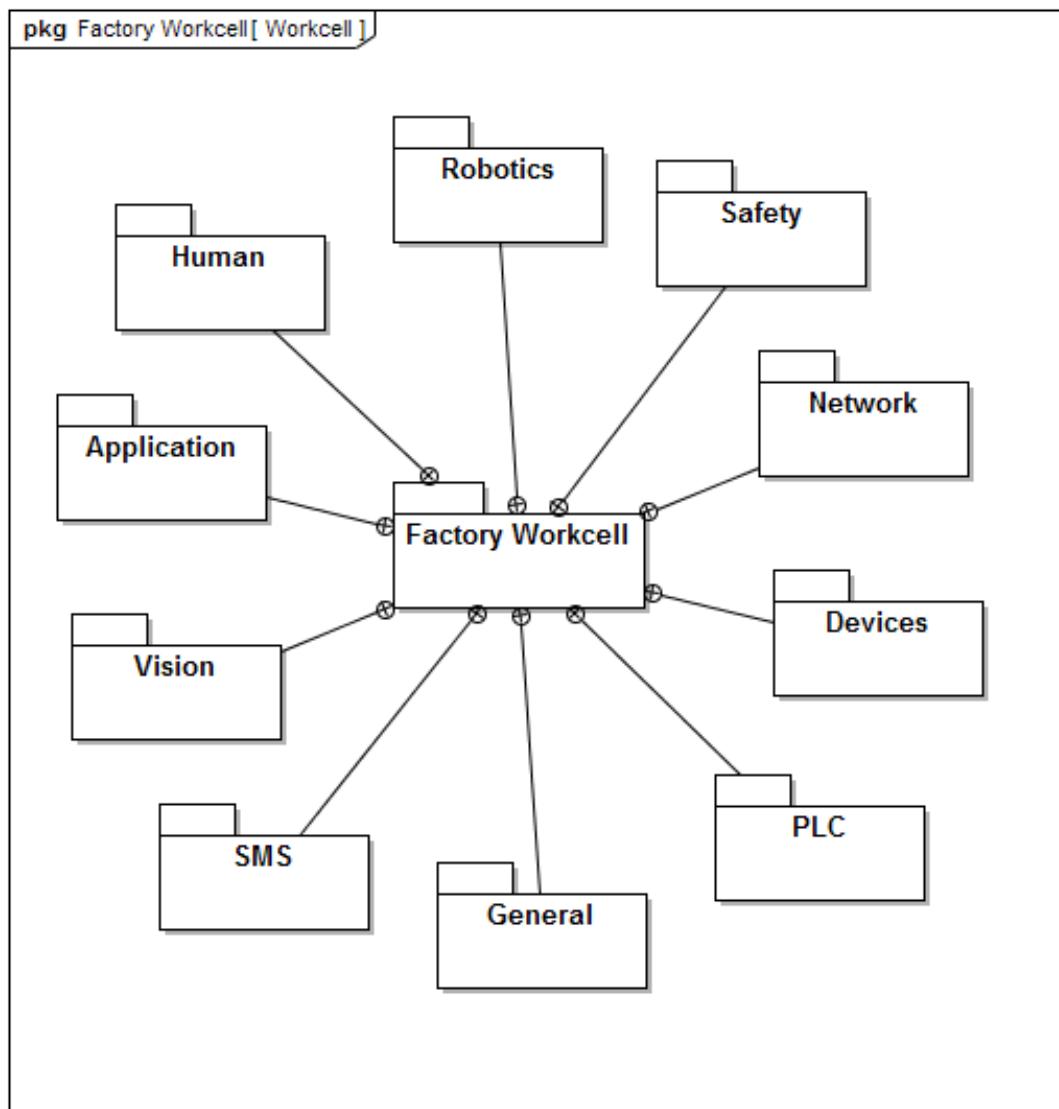


Figure 7.1: SysML package diagram showing the logical containment of the factory work-cell structural elements.

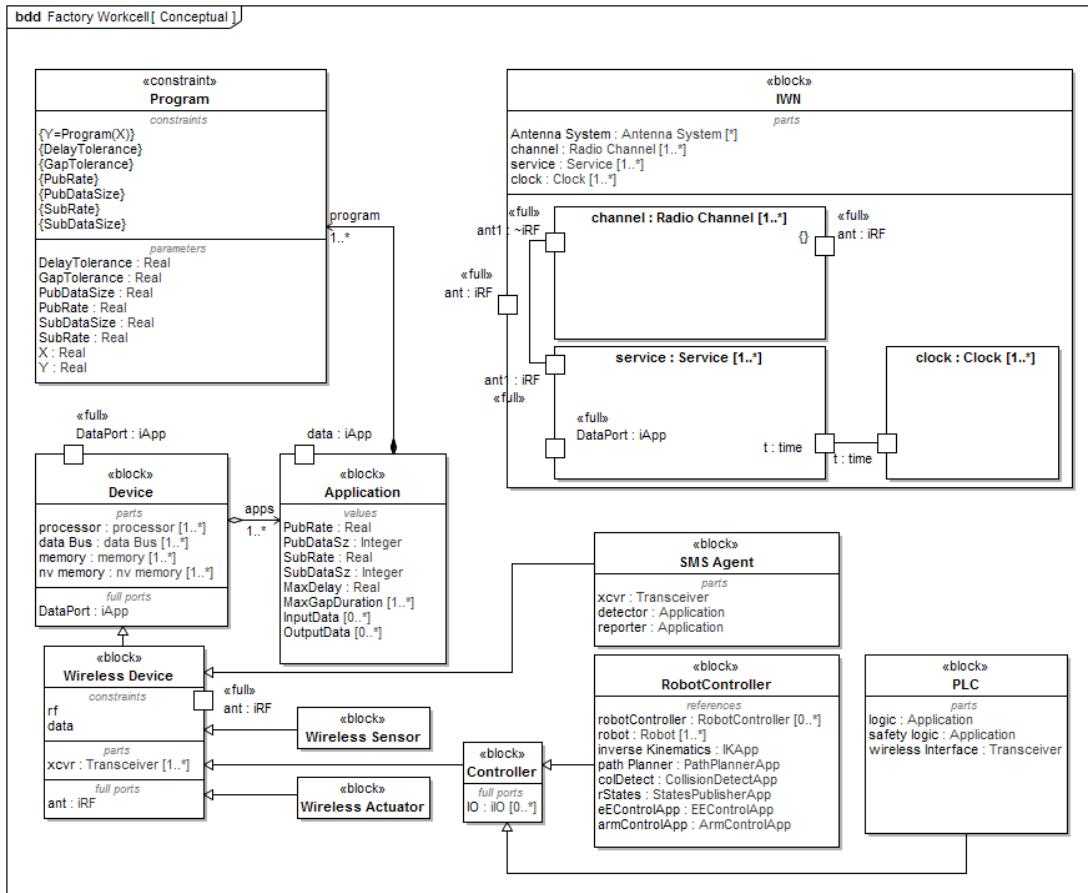


Figure 7.2: Architecture of the conceptual work-cell captured as a SysML block definition diagram. In this diagram, only the most generalized blocks necessary to construct a work-cell scenario are shown. More application-specific scenarios may be developed by deriving new blocks from the constructs shown here. The shapes and connectors used for expressing this model are defined in the SysML specification [122].

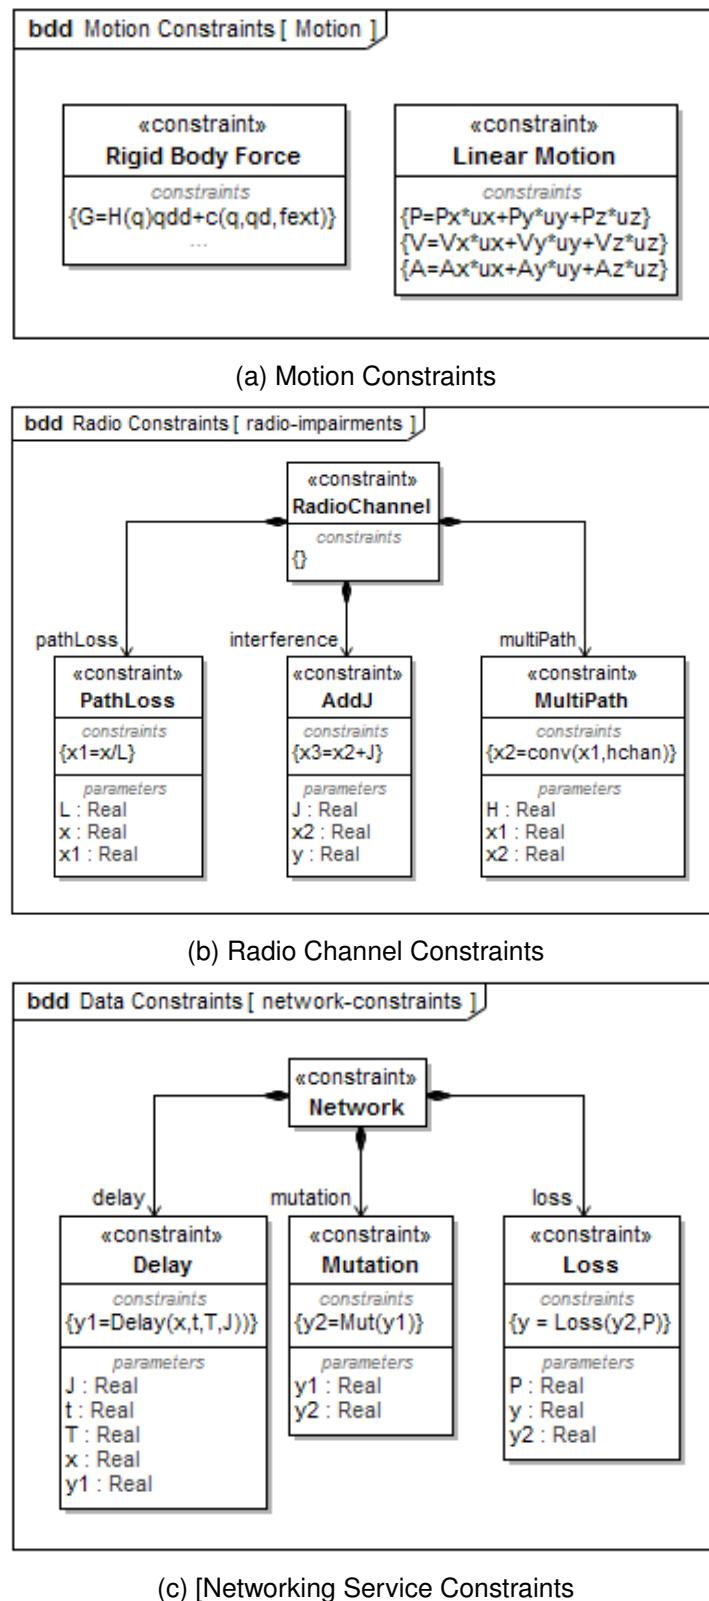


Figure 7.3: Generalized network constraints consisting of rigid body motion (a), the radio channel (b) and the network services (c).

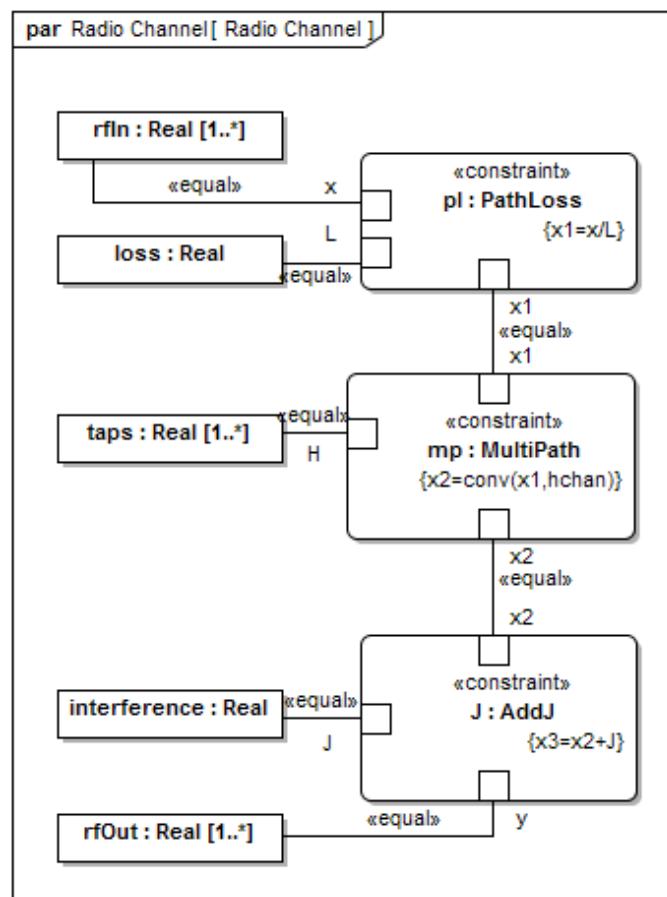


Figure 7.4: SysML parametric diagram of the radio channel constraints of the industrial wireless network.

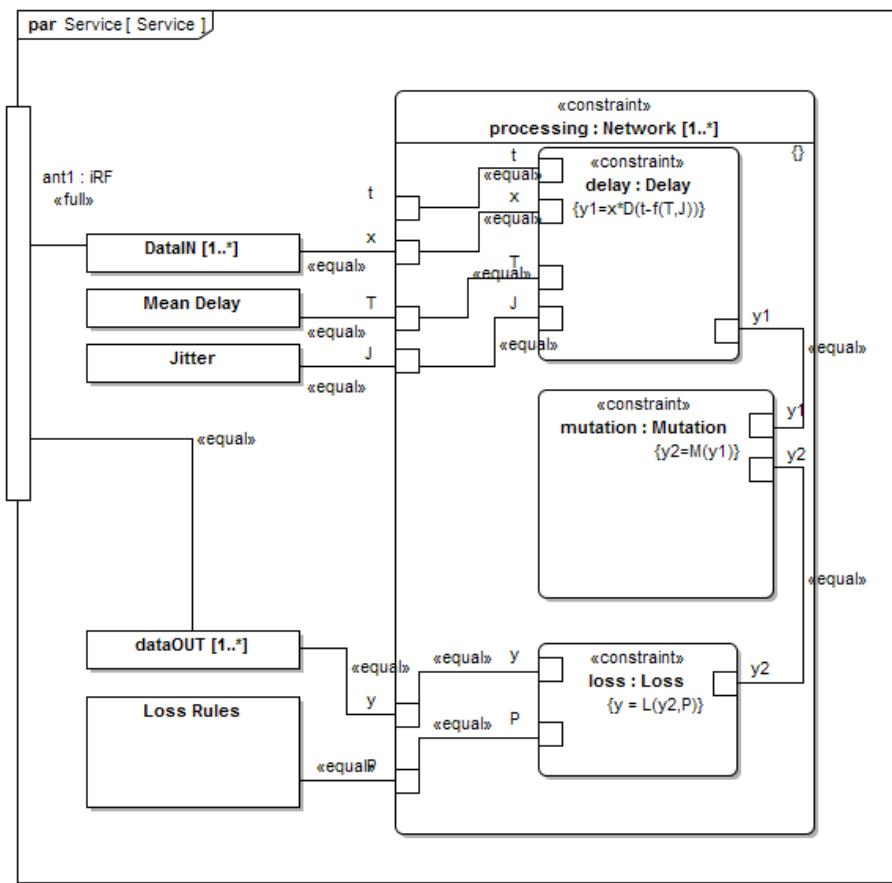


Figure 7.5: SysML parametric diagram of the data constraints applied to the industrial wireless network.



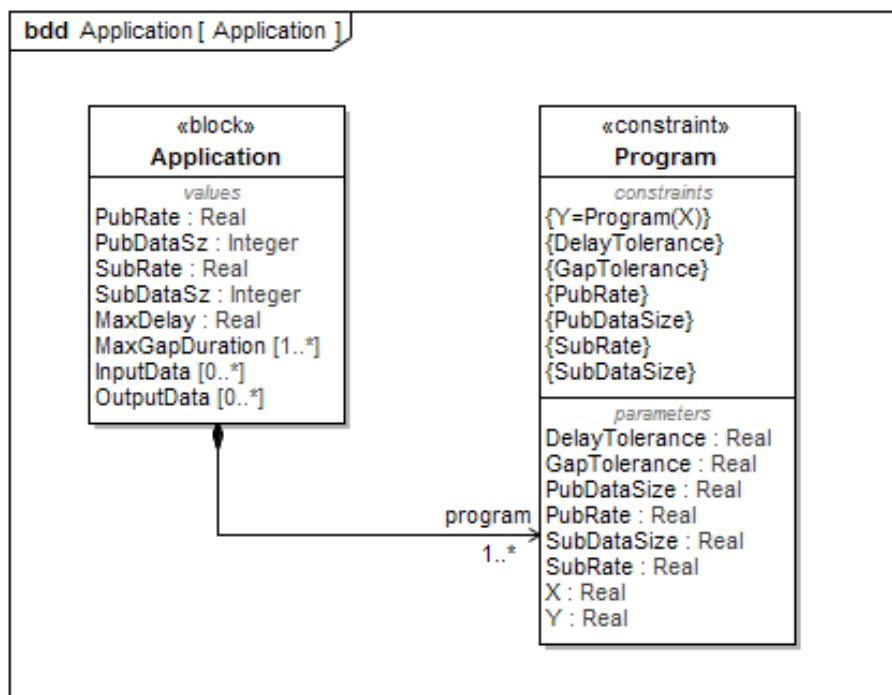



Figure 7.6: Block definition diagram of the Application.

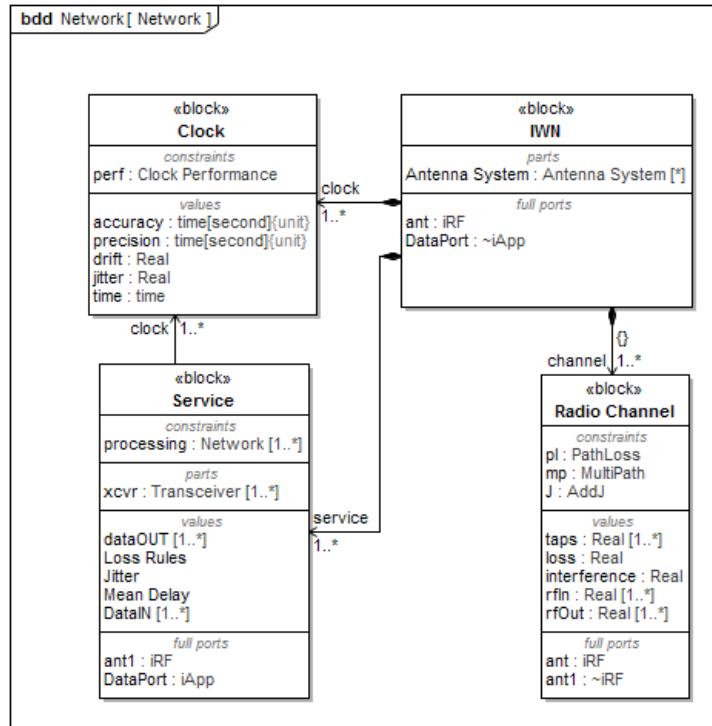

(a) Put your sub-caption here

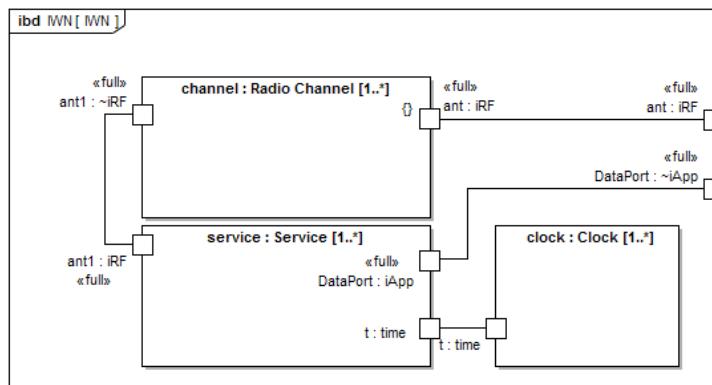


(b) Put your sub-caption here

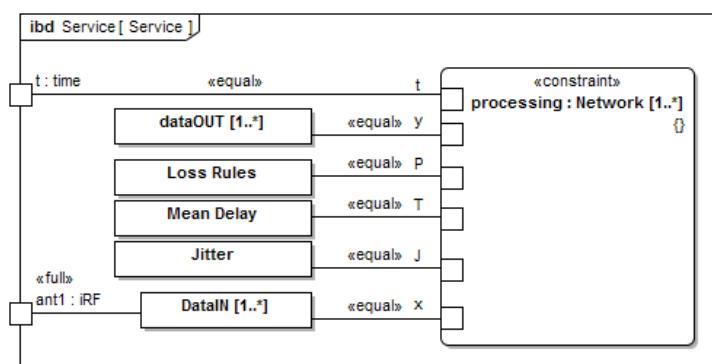


(c) Put your sub-caption here

Figure 7.7: The BDD (a) and IBD (b) of the industrial wireless network with parametric IBD (c) of the Services block.

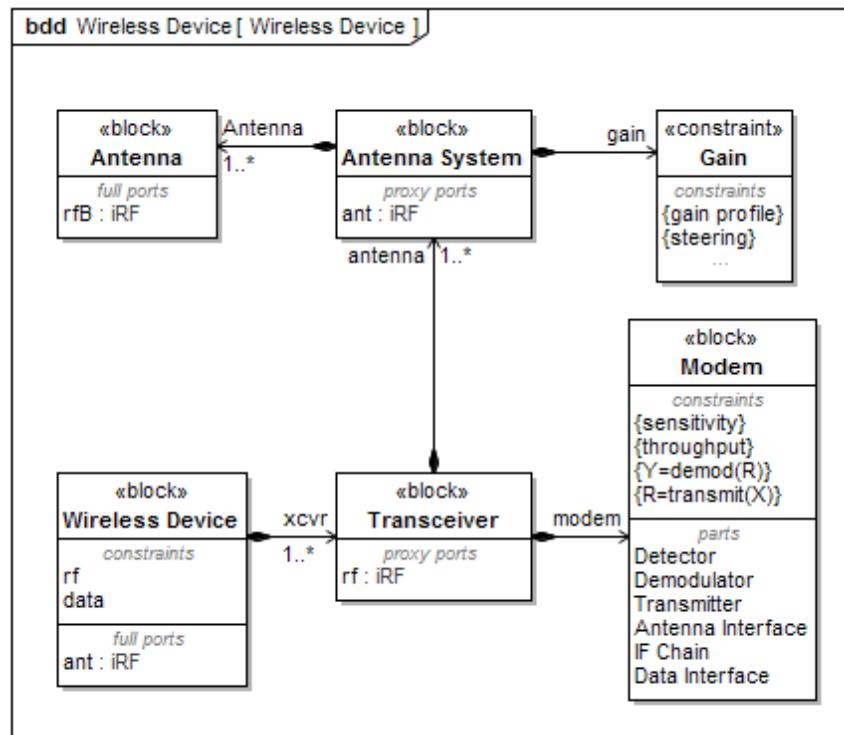


(a) Block definition diagram of the Wireless Device

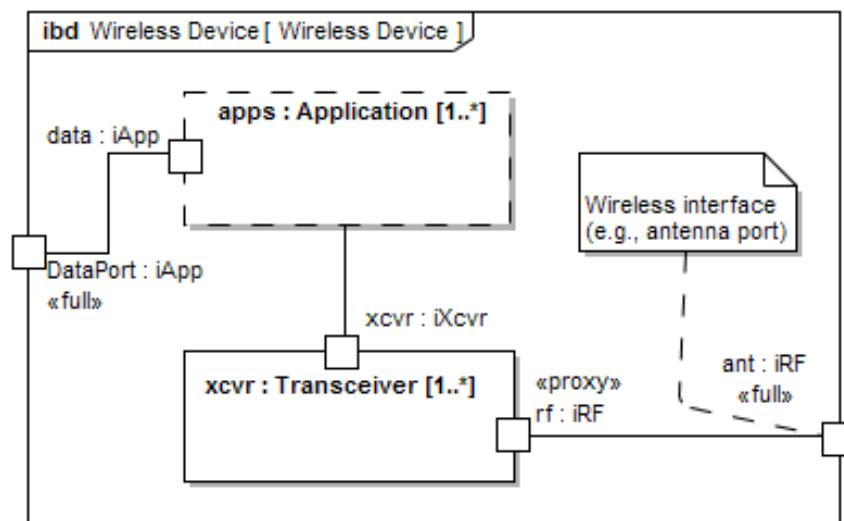


(b) Internal block diagram of the Wireless Device

Figure 7.9: Block definition diagram (a) and the internal block diagram (b) of Wireless Device.

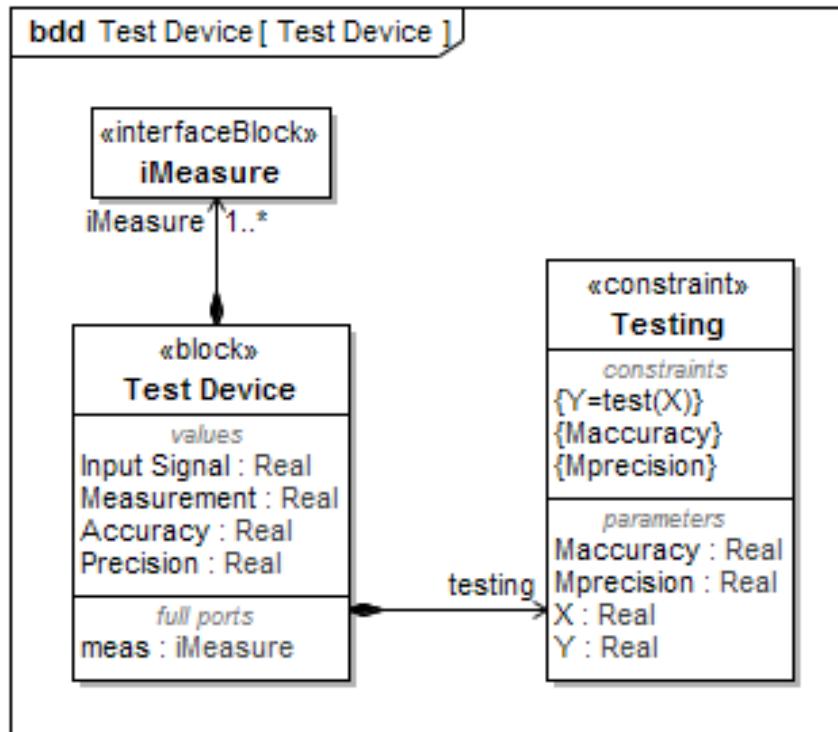


(a) Block definition diagram of the Test Device

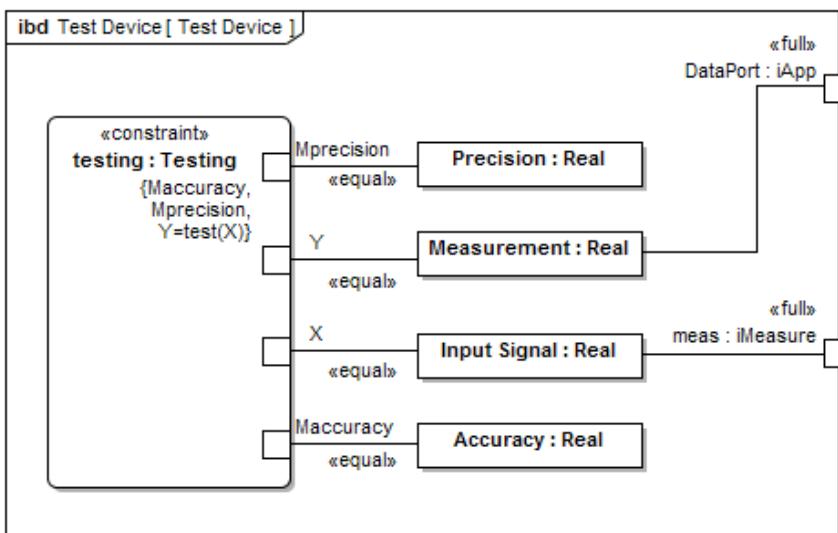


(b) Internal block diagram of the Test Device

Figure 7.10: PBlock definition diagram (a) and the internal block diagram (b) of Test Device.

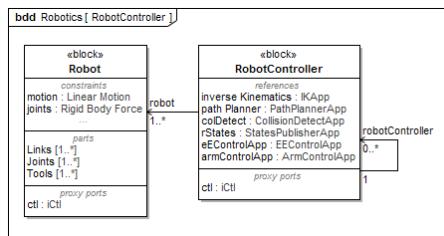

(a) Block definition diagram of the Robot Controller

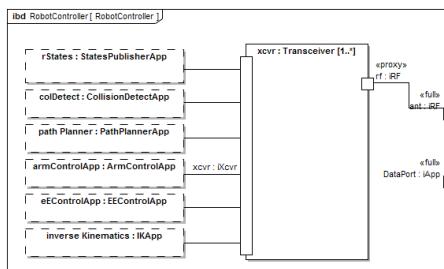

(b) Internal block diagram of the Robot Controller

Figure 7.11: The BDD (a), IBD (b) of the Robot Controller.

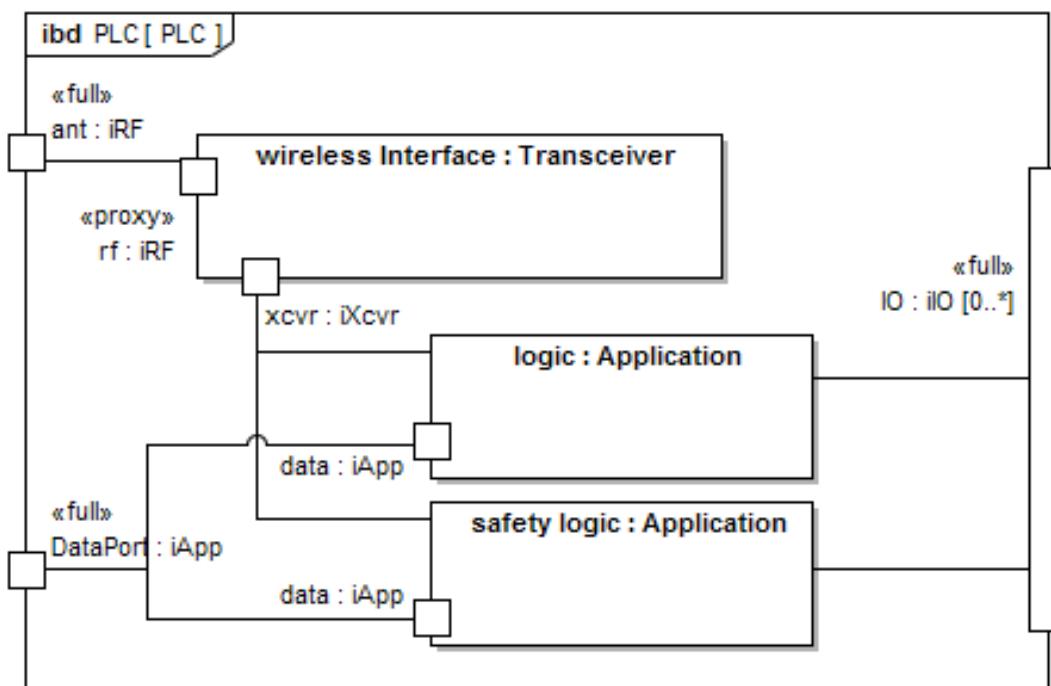


Figure 7.12: The IBD of the PLC showing composition and connectivity of the control logic and safety logic Application instantiations to the Transceiver interface.

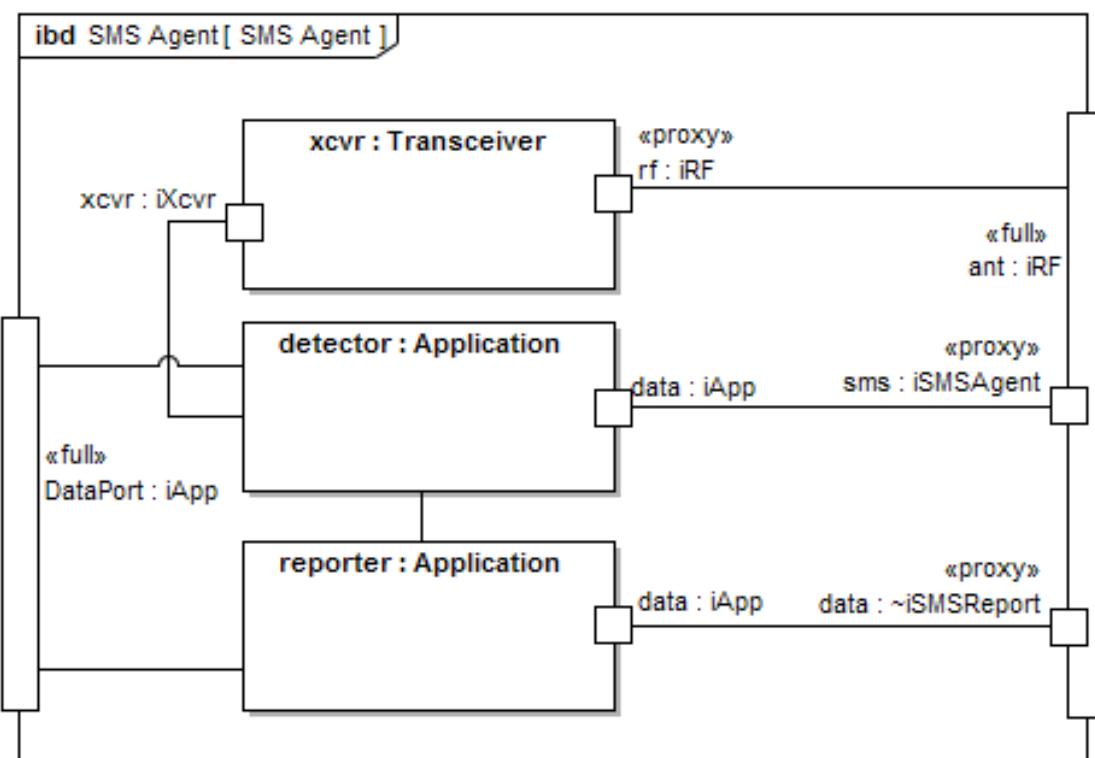


Figure 7.13: Spectrum monitoring agent composed of transceiver, detection application, and reporting application.

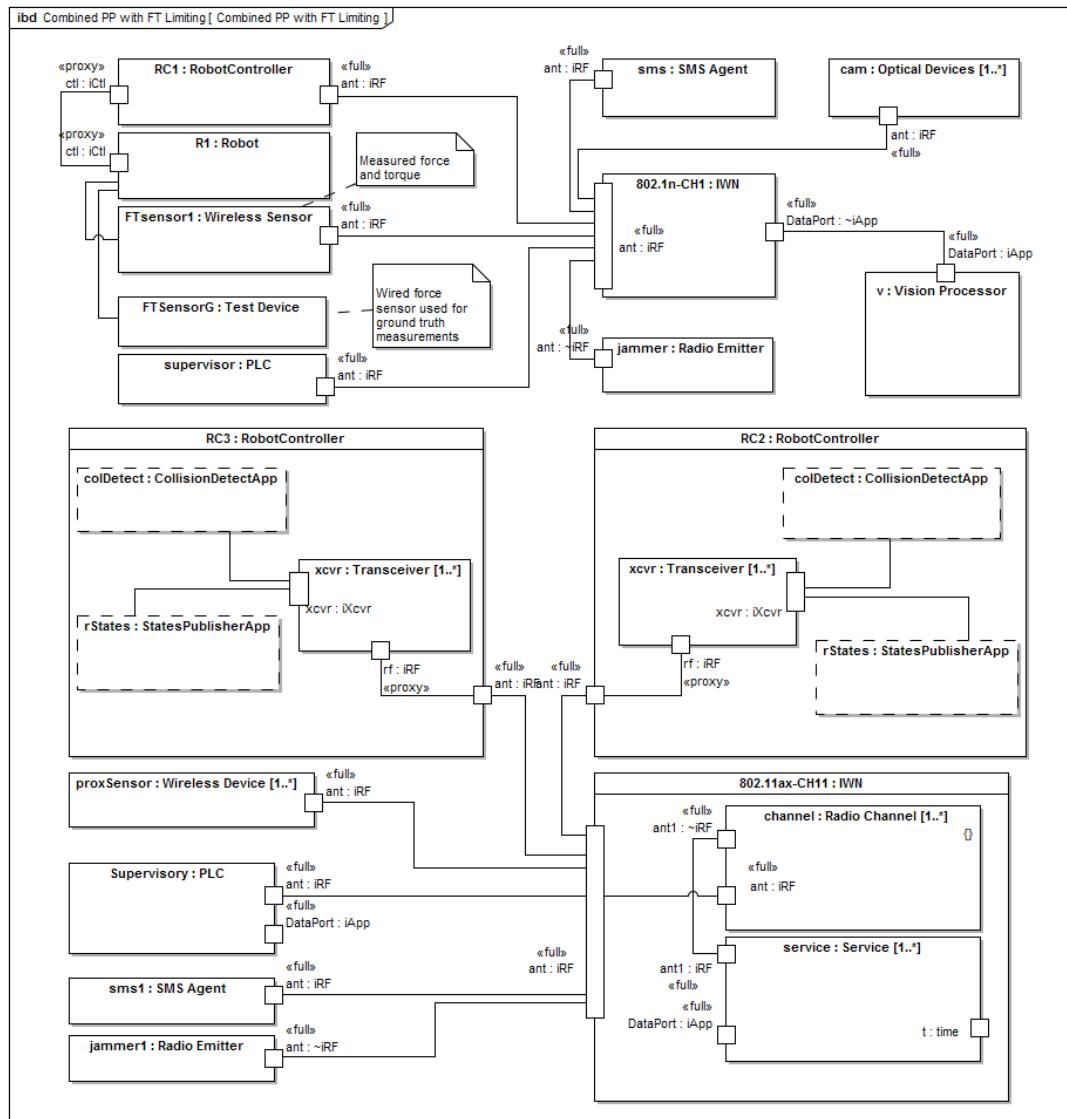


Figure 7.14: IBD of a work-cell employing multiple networks in collaborative robot operation coexisting with robot force limiting inspection station.

ed ut perspiciatis unde omnis iste natus error sit voluptatem accusantium dolorumque laudantium, totam rem aperiam, eaque ipsa quae ab illo inventore veritatis et quasi architecto beatae vitae dicta sunt explicabo. Nemo enim ipsam voluptatem quia voluptas sit aspernatur aut odit aut fugit, sed quia consequuntur magni dolores eos qui ratione voluptatem sequi nesciunt. Neque porro quisquam est, qui dolorem ipsum quia dolor sit amet, consectetur, adipisci velit, sed quia non numquam eius modi tempora incidunt ut labore et dolore magnam aliquam quaerat voluptatem. Ut enim ad minima veniam, quis nostrum exercitationem ullam corporis suscipit laboriosam, nisi ut aliquid ex ea commodi consequatur? Quis autem vel eum iure reprehenderit qui in ea voluptate velit esse quam nihil molestiae consequatur, vel illum qui dolorem eum fugiat quo voluptas nulla pariatur?

8

APPLICATION OF GRAPH DATABASES

The workcell is considered a main building block of various industrial settings. Hence, it is examined as a primary testing environment for studying wireless communication techniques in factory automation processes. A new testbed was recently designed and developed to facilitate such studies in workcells by replicating various data flows in an emulated production environment. In this paper, an approach to storing and analyzing network performance data from a manufacturing factory workcell is introduced. A robotic testbed was constructed using two collaborative grade robot arms, machine emulators, and wireless communication devices. A graph database approach was implemented to capture network and operational event data among the components within the testbed. A schema is proposed, developed, and elaborated; a database is then populated with events from the testbed, and the resulting graph is presented. Query commands are then presented as a means to examine and analyze network performance and relationships within the components of the network. Additionally, we demonstrate how to extract correlations between receive signal power and network delay within the testbed using the graph database query language. Finally, using the inherently interconnected nature of the graph database, we discuss applying the graph database approach toward examining more complex relationships between the wireless communications network and the operational system.

8.1/ INTRODUCTION

Wireless communication is a key enabling technology for the modernization of factory workcells. Modern factory workcells are highly-interconnected networked control systems in which various devices interact and collaborate to accomplish complex

and adaptive production orders. The workcell often contains mobile robots that collaborate with other robots or human beings. Requirements of the workcell include the incorporation of mobile collaborative robotics with real-time coordination of motion and tool actuation. As such, the communication of sensor and control information must be ultra-reliable and of low-latency to assure trustworthy operation [103]. Due to an increased demand for ease of installation, reduced costs of deployment and maintenance, and flexibility, wired networks are being gradually replaced with wireless networks. This presents a real challenge for networks and control systems. Compared with wired connections, wireless links have their unique advantages in connecting field sensors and actuators with reduced cabling costs and natural support of mobility [135]; however, most current communications systems lack the latency and reliability supports [133] mandated by factory owners [48, 102]. New wireless protocols are being designed to address reliability and latency concerns of real-time systems such as those in manufacturing automation. These new protocols include advancements, such as the Institute of Electrical and Electronics Engineers (IEEE) 802.11ax standard and 5G cellular evolution as defined by the International Mobile Telecommunications-2020 (IMT-2020) Standard. Both of these two standards employ improved diversity techniques for multiple access of devices as well as 1 ms latency and greatly improved reliability [162].

Evaluation of such systems used in manufacturing environments requires not only rigorously analyzing network performance, but also studying the impacts of networks on manufacturing systems. Additionally, industry lacks effective and easy-to-use strategies for test and evaluation of such systems in a way that correlates network performance with operational performance. Furthermore, since factory operators desire the ability to control operations within the workcell using wireless technology, we present a novel method to simultaneously capture network and operational event information using a graph database (GDB). The use of a GDB allows for more intuitive inferences to be made through the stored relationships and graph theoretic models [19]. In this paper, we present a GDB approach to the capture and analysis of factory workcell performance utilizing the Neo4j database platform. We present a proposed schema of the database, the process for capturing both network and operational events, and examples of querying the database for cyber-physical performance evaluation of the workcell for our collaborative two-robot machine-tending workcell [149].

8.2/ GRAPH DATABASES

A GDB is the type of databases that uses nodes, edges, and properties to store and present data. A GDB is a part of a family of databases known as NoSQL databases that are used often to represent complex interrelated structures of data and their relationships. This can be very difficult with traditional relational databases. The GDB places a high priority on the relationships (edges) between units of information. In addition, the GDB does not enforce any particular schema or structure, and, therefore, provides greater flexibility in storing and representing information in which the parts of information may vary among units. The relationships within a GDB are efficiently queried because they are persistently stored within the database. In a GDB, queries can be made based on relationships. This, in particular, presents an advantage when storing information regarding systems with correlations that are apparent but difficult to visualize or quantify. The GDB approach was chosen for this specific purpose—to quantify and visualize relationships between non-ideal communications within a workcell and their impact on the physical system.

8.3/ CASE STUDY: ROBOTIC MACHINE-TENDING

In this section, we present a two-robot machine tending workcell case study. We first present the design of the workcell followed by an elaboration of the database design called a schema. The information work-flow, i.e., the process for collecting, processing, and analyzing the network event data is presented. We then provide examples of the resulting graph and results of targeted queries that demonstrate the purpose of the database.

8.3.1/ WORKCELL DESIGN

To facilitate wireless network research and showcase the power of wireless technologies in industrial practices, a testbed shown in Fig. 8.1 has been developed at the National Institute of Standards and Technology (NIST) as described in [149]. The testbed is composed of two collaboration-grade robots, a supervisory programmable logic controller (PLC) used for the control of the workcell, four smaller PLCs serving as computer numerical control (CNC) machine emulators, and a human-machine interface (HMI). Each robot is equipped with a six-degrees-of-freedom (DOF) force-

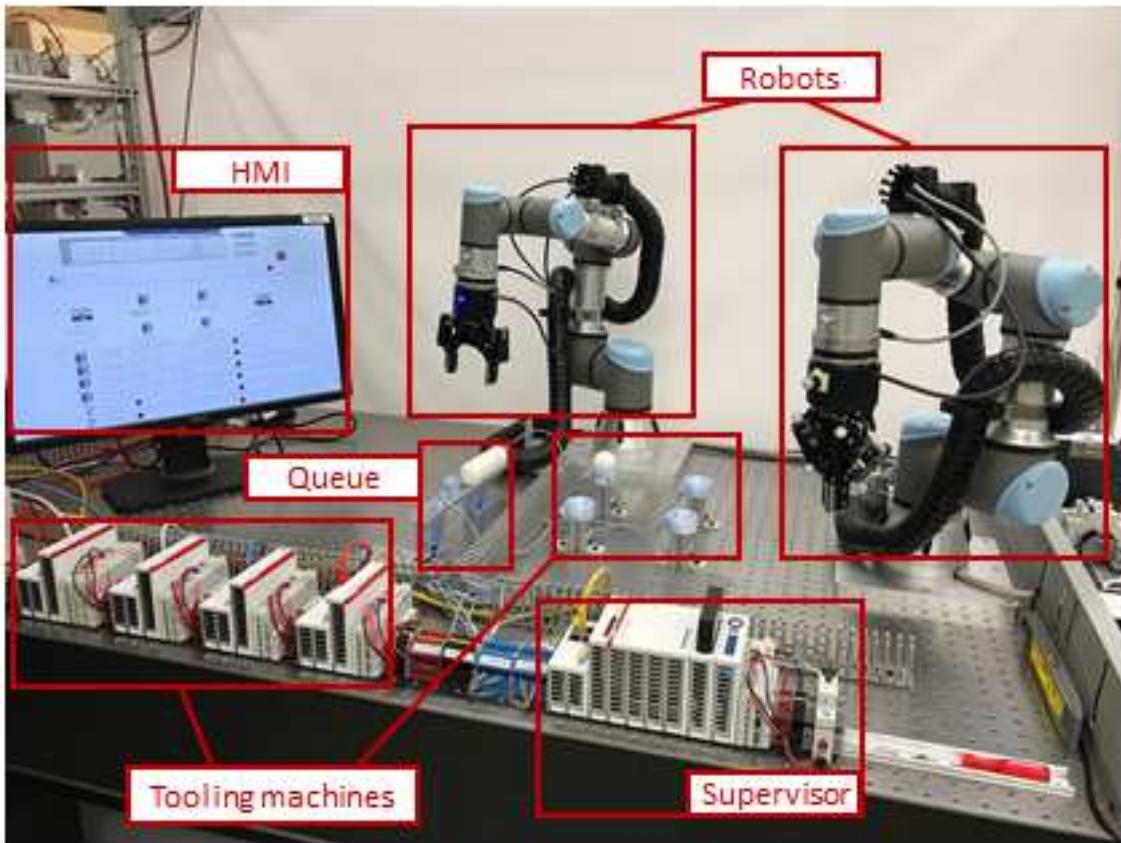


Figure 8.1: Collaborative work cell testbed

torque (FT) sensor and a two-finger gripper. A Modbus/TCP server is included within the supervisor PLC and is used for communication between the supervisor and the robots. The PLCs themselves communicate to each other using the Beckhoff Automation Device Specification (ADS) protocol. All elements within the workcell are synchronized to a stable and accurate grand-master clock. Therefore, as described in [149], the operational, network, and measurement elements are all synchronized to the grand-master clock through a precision time protocol (PTP)-capable switch.

Work-orders for the workcell are submitted through the supervisor. Each work-order consists of a work-plan for a part, and the work-plan determines how each part moves through the workcell until it is completed. The inspection of each part is conducted at each machining station, and after the final inspection, the part is placed back into the input queue. Under normal operating conditions, the work continues until all work-orders have been processed. This continuous form of operation provides ample opportunity to collect statistically significant metrics of both the network and the operation of the workcell.

8.3.2/ DATABASE SCHEMA

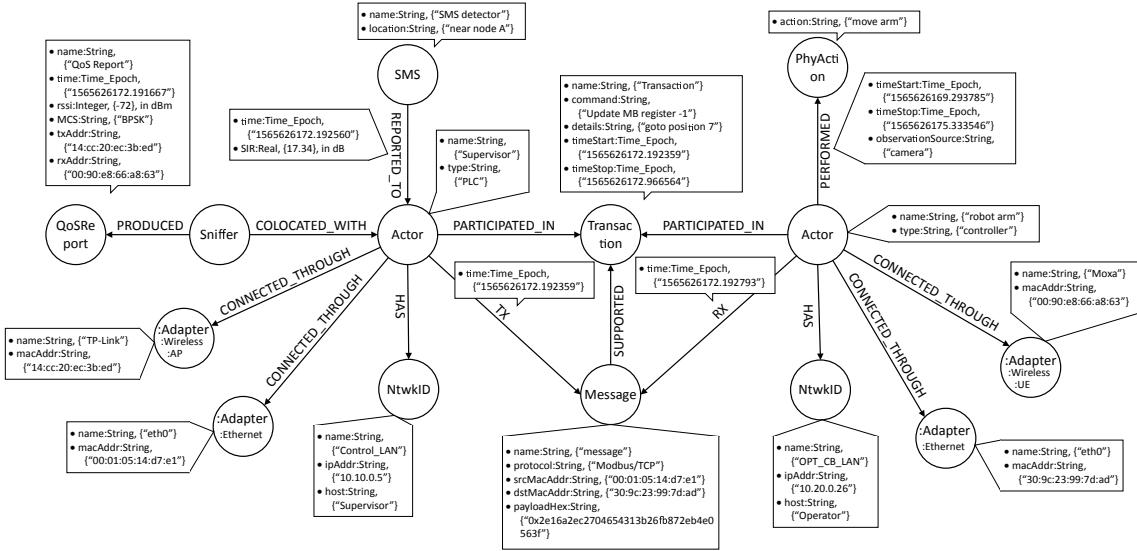


Figure 8.2: The intended schema (i.e., pseudo-schema) of the graph database used for each operational run of the NIST wireless factory testbed. The graph is organized into nodes and edges, where the edges signify relationships among network elements and physical operational elements.

GDBs are NoSQL databases such that the database does not contain any predefined structure or rules to enforce such structure. This is a major difference between relational databases and GDBs. Nevertheless, it was necessary to sketch a pseudo-schema to capture the intended nodes and relationships that would be stored within the database (the terms pseudo-schema and schema will be used interchangeably). Before describing the schema itself, it is necessary to first explain the requirements of the schema. Therefore, the requirements for our schema are as follows:

- **Time:** Any manufacturing automation system is indeed a time-varying control system with network and operational events. The database schema must necessarily support time-based queries and, specifically, time-windowed queries.
- **Operational Events:** The schema must represent operational events such as the movement of a robot arm or the movement of a part.
- **Network Events:** The schema must represent network events such as the transmission of packets.
- **Message Grouping:** The schema must support grouping of logically related events such that those events can be correlated to a specific occurrence within the testbed.

- Wireless Support: The schema must support the capture of both wired and wireless network traffic without special provisions within queries for either.
- QoS Support: The schema must allow for the capture of quality of service (QoS) data when available.
- Spectrum Monitoring: The schema must support the capture and association of network events with observations from a spectrum monitoring system (SMS) if that information is available.

8.3.2.1/ NODE DESIGN

Given the fore-mentioned requirements, a sample pseudo-schema is shown in Fig. 8.2, which represents the intended structure of the information within the GDB. It is important to remember that since GDB schemas are not really schemas, such as those found in relational databases, but representations of intent, the schema represented here should be considered a notional example of the final product. Within the graphs, nodes represent logical elements, and edges represent the relationships between those elements. Both nodes and edges may contain properties providing more description and labels that define categories or classes of the said nodes or edges. Our schema is designed such that the data within the graph is intuitive to understand and allows for time-based queries to occur. The facilitation of time-based queries was an essential requirement of our database design. Our schema is represented using the following node labels:

- Actor: A physical component within the factory workcell such as a robot, PLC, or other networked item.
- NtwkID: A network address item for an actor such as an Internet Protocol (IP) address.
- Transaction: A complete information exchange between two or more actors (multiple actors may participate in a transaction).
- Message: A network transmission event that occurs between two actors (messages are essentially packet transmissions captured at the transport layer; multiple messages support a transaction).
- Physical Action: A physical occurrence within a factory workcell associated with actors through multiple time based relationships.

- SMS: An SMS observes and records significant spectral events within the workcell and may report those events to actors within the workcell.
- Sniffer: A measurement device that records all transmissions conducted over the wireless medium and includes wireless header information for each wireless transmission detected.
- Adapter: A device that serves to connect an actor to a network (adapters are divided into sub-categories depending on the type of interface to a network).
- Adapter:Ethernet: A subcategory of adapter representing an Ethernet interface.
- Adapter:Wireless: A subcategory of adapter representing a wireless interface.
- Adapter:Wireless:AP: A subcategory of adapter representing a wireless access point interface.
- Adapter:Wireless:UE: A subcategory of adapter representing a wireless user equipment interface.
- QoS Report: A quality of service report of a message (not all messages will have a QoS report).

It is important to note that most network infrastructure components are not captured within the graph, but, instead, only basic interfaces between actors and the network are captured. Our intent when designing the graph was to make the graph network and protocol agnostic, such that the network is viewed as a black-box. Accordingly, the captured events of the physical system and the network are considered useful for the analysis of performance.

8.3.2.2/ RELATIONSHIPS (GRAPH EDGES)

Relationships are edges within the graph that capture the informational interactions between nodes. Relationships, like nodes, can contain labels and properties. As shown in Fig. 8.2, nodes are connected through defined relationships. A subset of the relationships are defined as follows:

- PARTICIPATED_IN: Actors will participate in transactions. A transaction exists for each logical set of messages between actors such as the setting of a

Modbus register or the sending of a command to a robot. Therefore, actors will participate in many transactions, and multiple actors may participate in a single transaction.

- **SUPPORTED:** Messages (i.e., packets between actors) are associated with transactions through the SUPPORTED relationship. Depending on the protocol and the quality of the channel, a single transaction could have one or many messages connected through this relationship.
- **TX/RX:** An actor may either transmit (TX) or receive (RX) a message. Both the TX and RX relationships contain a timestamp in the format of an epoch time which is a floating point number in seconds since January 1, 1970, with a resolution of microseconds.
- **PERFORMED:** When an actor performs a physical action, a relationship is created between the actor and the physical action node. This relationship contains start and stop time properties as well as the source of the observation such as a networked camera.
- **REPORTED_TO:** An SMS may be a passive or active listener within a work-cell. When an SMS operates as an active listener, spectral reports from the SMS may be sent to an actor such that the actor can respond intelligently to the spectral event. Reports from an SMS to an actor are captured within this relationship.

Other relationships shown in the schema of Fig. 8.2 but not explained above are considered self-explanatory.

8.3.2.3/ CLOSER EXAMINATION

Examining the sample schema more closely, two actor nodes are represented. In this case, Actor A is the supervisory controller, and Actor B is a robot arm. Both nodes participate in a transaction, which, in this example, is a Modbus/TCP exchange. The transaction itself is associated with one or more messages (i.e., packets). Each message associated with a transaction manifests itself as a node in the graph. Multiple message nodes will exist for each transaction. Additionally, QoS reports may be associated with each actor node through a collocated sniffer node. By keeping QoS reports separate, we have the flexibility of supporting different wired and wireless protocols within the same graph. Recall, that a graph database has no enforceable

structure and thus affords this type of flexibility. Each actor node may have network identities associated with it through the use of network identifier nodes. Each network identifier node may contain address information such as a hardware address or a network address; however, this is dependent on the protocols and addressing schemes being used, and a node could have many different identification nodes.

8.3.2.4/ PHYSICAL ACTIONS

Finally, each actor in the graph may associate with physical actions. These actions exist in the database as automatons such that every time a new action occurs, a new edge would be added between the actor and the physical action. Timestamps within the graph represent “measurement time” denoting that all timestamps are accurately synchronized to the grand-master clock. The method of synchronization is outside the scope of this paper and is explained fully in [149]. This paper describes the database structure and the process for preparing and inserting the data into the database, which is described in the following subsection.

8.3.3/ INFORMATION WORKFLOW

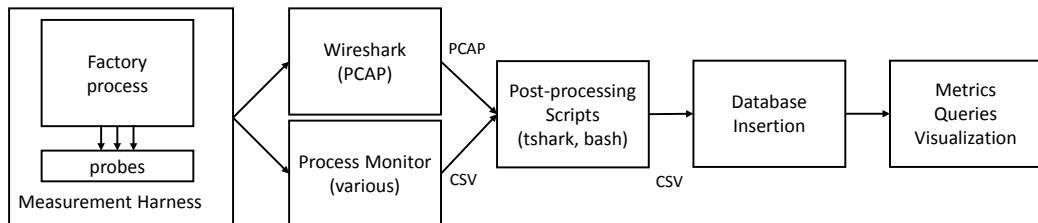


Figure 8.3: Data processing flow from factory workcell to database

The workflow for collecting, processing, and inserting measurement data into the graph database is multi-pronged, as shown in Fig. 8.3. The workcell, which in our case study is a two-robot workcell with four CNC machines, is instrumented with network probes that capture transmitted and received packets as well as probes to capture operational movements such as arm robot position and the state of the supervisor PLC. Network data is stored in packet capture (PCAP) files, while operational data is stored in comma separated value (CSV) files. We developed bash scripts to extract relevant information and prepare the data for insertion into the database. The scripts also contain rules for grouping packets together as transactions based on the application protocol and time. The scripts produce CSV files that are ready for insertion into the Neo4j database. Once the data resides within

the database, we apply queries to extract information for the evaluation of workcell performance and visualization of network and operational events within the work-cell. By tracking paths through the relationships within the graph, discerning how a network event such as interference is related to physical events such as position uncertainty or part throughput is possible. Various impairments may be introduced as a part of workcell operation. Examples of such impairments include competing wireless traffic, radio interference, and reflections and diffraction due to the multi-path environment [109]. We have shown that it is feasible to implement such impairments and measure the resulting physical performance manifestation [149]. This is accomplished through the use of a radio channel emulator as demonstrated in [?].

8.3.4/ SAMPLE OF A RESULTING GRAPH

In the following, we show results from a trial run of the NIST industrial wireless testbed. In this trial run, a single physical wireless link is used between a wireless adapter connected directly to the supervisor and a wireless access point connected to all the other actors in the testbed. The wireless nodes represent IEEE 802.11b/g/n devices and are connected through a variable radio frequency (RF) attenuator that allows us to vary the channel quality. During the trial run, the production of 10 parts was emulated, which resulted in 10 minutes of network activity.

After populating the database with data captured from the trial run, the resulting realized schema is shown in Fig. 8.4. The schema visualization is produced by invoking the command

```
call db.schema.visualization()
```

in Neo4j. It is important to note that a realized schema shows only one representation of each node and relationship whereas the intended pseudo-schema shown in Fig. 8.2 was developed to exemplify the relationships between types of nodes, labels, and relationships. Where label inheritance is employed, such as the case for different adapter types, relationships are reproduced; however, this is a result of the visualization tool rather than the schema itself. Fig. 8.4 serves, therefore, to validate that the intended schema was indeed realized by the insertion of event data from the testbed. In the realized schema, inherited labels are shown as separate nodes.

As described in Section 8.3.2, the database includes every network transaction that occurs during the operation of the testbed. This includes any logical

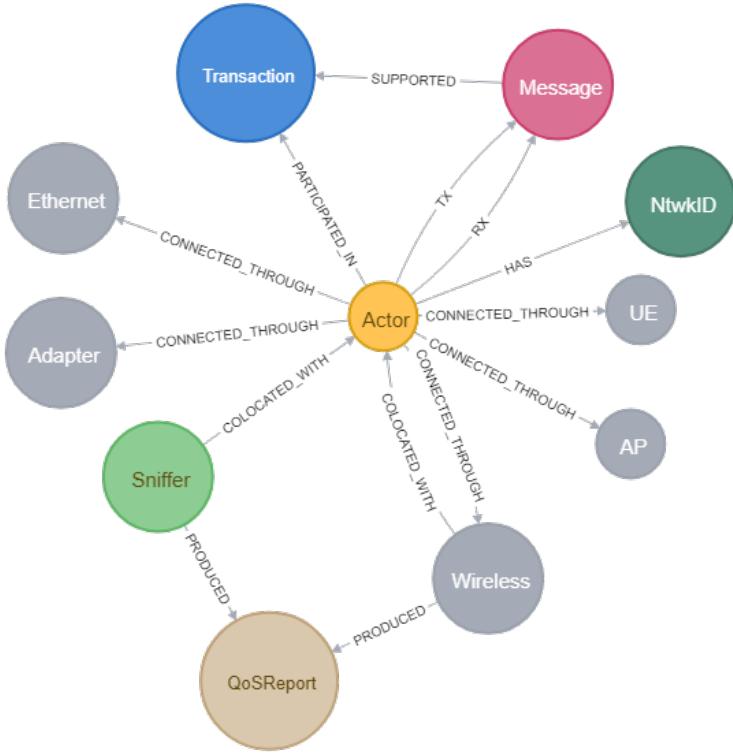


Figure 8.4: Realized schema of the graph database fully populated after capturing network and operational data from the NIST industrial wireless testbed.

transaction nodes inserted into the database and any associated packets that happened to traverse the network. Therefore, for a short duration of time depending on packet transmission rates, the amount of data stored in the database can grow quickly. This presents a visualization challenge that graphs are designed to handle. A sample graph is shown in Fig. 8.5, which represents only 1 second of wired and wireless network data captured from the NIST two-robot pick-and-place wireless testbed described in [149].

This visualization is produced by calling the following query in the Neo4j.

```

MATCH p=(a:Actor {name:'Supervisor'})--(t:Transaction)--(b:
    ← Actor) ,p2=(m:Message) -->(t) WHERE t.timeStart>T AND
    ← t.timeStop<T+1
RETURN p,p2

```

The colors of the resulting nodes follow the realized schema in Fig. 8.4 while only the actors, transactions, and messages are visualized in Fig. 8.5. The relationships between the messages and transactions are shown where a single transaction is connected to at least two messages to represent the communications between any two actors. The variable T in the query represents an arbitrary time variable in

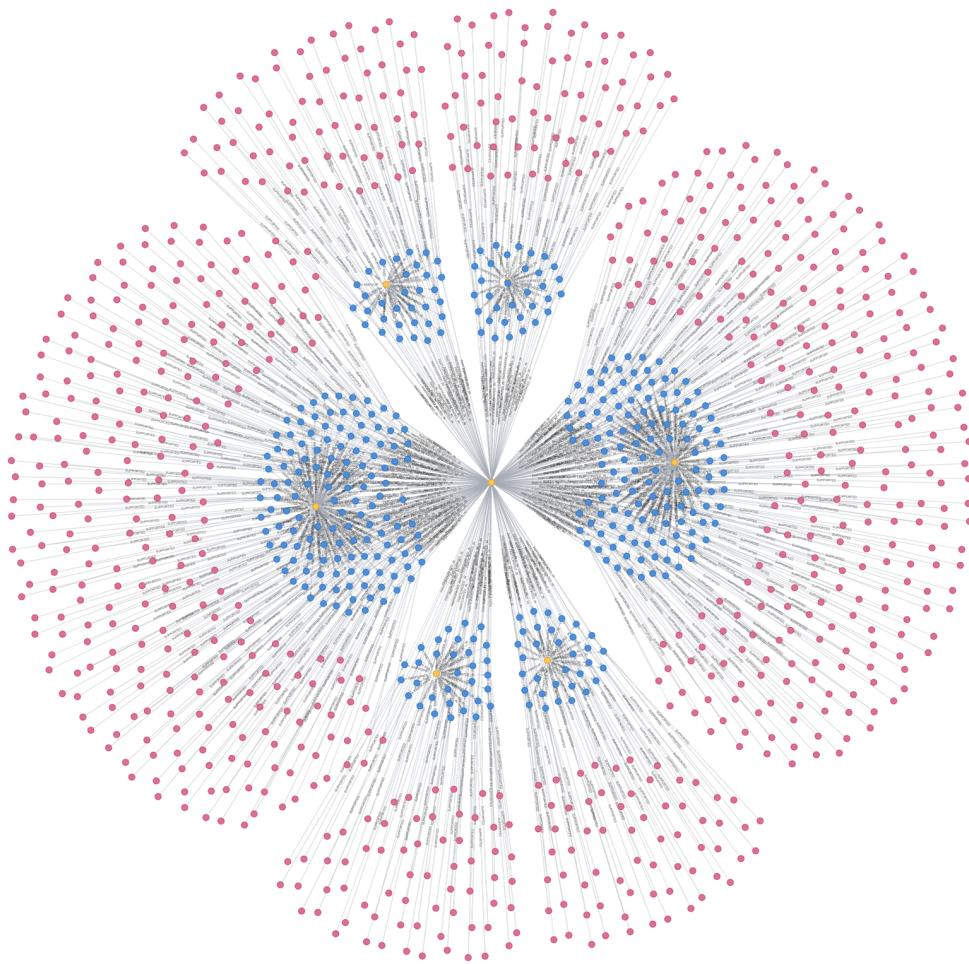


Figure 8.5: Visualization of a node graph resulting from a testbed experiment.

seconds within the trial run to capture the data within 1 second only.

We then show a more detailed visualization for all the nodes and relationships corresponding to a single transaction. This visualization is produced by calling the following query where Ts is an arbitrary time variable to specify the `timeStart` value for the single transaction.

```

MATCH p=(a:Actor {name:'Supervisor'})-->(t:Transaction {
    ← timeStart:Ts})<--(b:Actor {name:"CNC-1"})
WITH p, a, b, t
MATCH p1=(a)-->(m:Message)<--(b), p2=(m)-->(t), p3=(a)-[:HAS]-()
    , p4=(a)-[:COLOCATED_WITH]-()-[:PRODUCED]->(q:QoSReport),
    p5=(a)-[:CONNECTED_THROUGH]-(), p6=(b)-[:HAS]-(),
    p7=(b)-[:CONNECTED_THROUGH]-()
WHERE q.time>t.timeStart AND q.time<t.timeStop
  
```

RETURN p, p1, p2, p3, p4, p5, p6, p7

In Fig. 8.6, the actor nodes are labeled by their names CNC-1 and Supervisor, the transaction is labeled by its type ADS, the messages are labeled by their transmission role Request and Response, the NtwkIDs are labeled by their IP addresses, the Ethernet adapters are labeled by their names eth0, the wireless adapters are labeled by their names Moxa and TP-Link, the sniffer is labeled by its name WLS1, and the QoS reports are labeled by the received signal strength indicator (RSSI) value in dBm. This visualization includes only the QoS reports generated within the duration of the corresponding transaction.

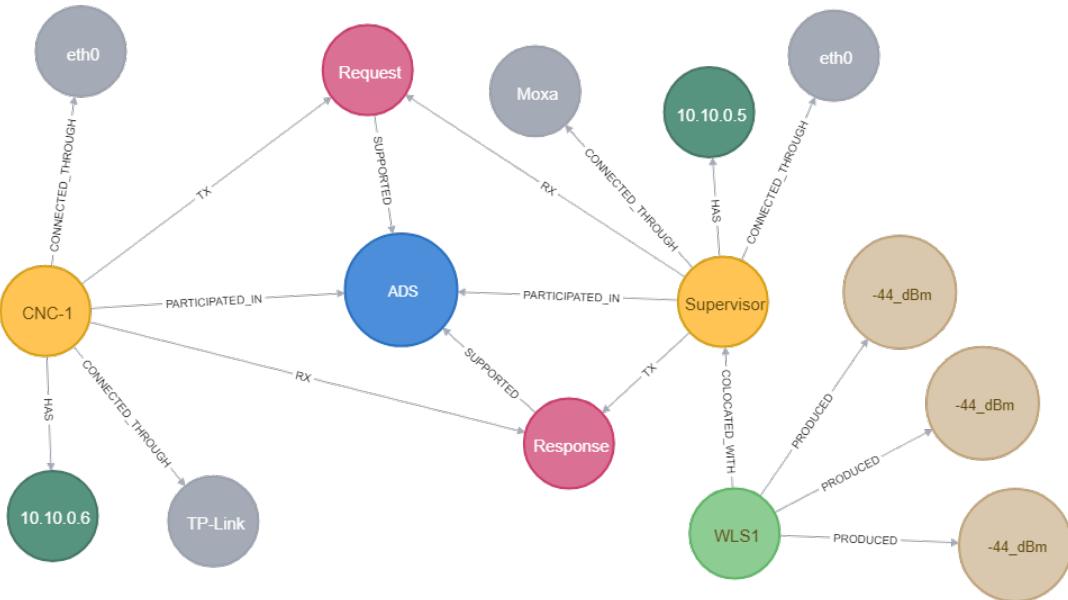


Figure 8.6: A detailed visualization resulting from a testbed experiment for all the nodes and relationships corresponding to a single transaction.

8.3.5/ CALCULATION OF METRICS

We now present an example of deploying the proposed GDB approach in industrial wireless analysis. During the trial run time, we varied an RF attenuator value in the single wireless link. The attenuation can take the values $\{0, 10, 20, 30, 40, 50, 60\}$ dB. We evaluate the message latency as the difference between the receive and transmit times of a message including transmission, processing, and retransmission times. Each message has been coupled to a QoS report that is the one reported at the closest time instant before the message transmit time. One of the parameters in the QoS report is the RSSI value captured by the Sniffer colocated with the supervisor's wireless adapter.

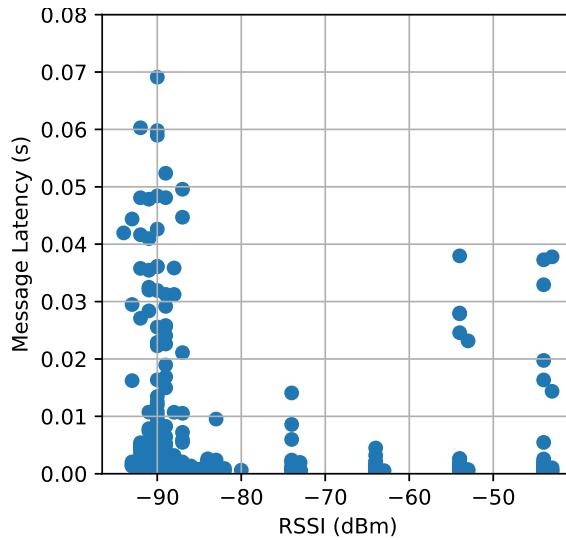


Figure 8.7: Correlation between the message latency and the RSSI values by the sniffer.

In Fig. 8.7, we present a scatter plot showing the correlation between the message latency in seconds to the measured RSSI values by the sniffer in dBm. The figure shows that the latency is higher at the lower RSSI values due to the increased number of retransmissions. Generally, an IEEE 802.11 transmission can occur using different IEEE 802.11 mode and modulation and coding scheme (MCS) based on the channel quality. At the RSSI of -90 dBm, the receiver should operate at the most robust communications mode and the lowest MCS index. However, retransmissions still occur due to having the received power near the sensitivity of the supervisor's wireless adapter. As shown in Fig. 8.7, retransmissions may occur at other RSSI values as well when the transmitter selects a higher mode of transmission and a higher MCS index. In this case, we assert that the receiver is operating close to the marginal sensitivity for a given mode (e.g., 802.11n) and MCS index. We observed that the transmitter switches to a lower MCS index for the retransmitted messages, which supports our supposition. Therefore, latency can in fact be high for better RSSI values. This effect is illustrated in Fig. 8.7 where certain messages can have latency values at -43 dBm, which are comparable to those in the case of -90 dBm.

8.4/ FUTURE DIRECTION

We have presented the general architecture of a performance evaluation database. Future work will include developing query algorithms for the calculation of performance metrics as well as correlation of network events to the physical performance of the manufacturing system. Algorithms will be developed to indicate locations

in time of lost information making more direct performance correlations possible. Beyond performance evaluation of the manufacturing system, we believe that the graph database approach enables anomaly detection because relationships within the data are intrinsically stored and thus efficiently queried. The structure of the information is important within a graph database, and defining the relationships such that the paths through nodes may be discovered is essential to efficient queries and discovery of hidden correlations. Therefore, more research will be done in the modification of the presented schema. Machine learning will be applied for the detection of anomalies, performance degradation, signal quality, and network performance enhancement through more efficient resource allocation. Our plans also include online database insertions to enable the demonstration of online operation of the database. We also intend to examine the development of better control system strategies that mitigate network losses and delays. Since this approach is indifferent to the communications protocols used, we intend to extend our database approach to include various protocols, radio bands such as millimeter wave bands for 5G communications, and different use cases to include mobile robotic platforms and safety critical systems.

8.5/ CONCLUSIONS

We have presented in this paper a novel approach to capturing network and operational event information from a factory workcell with the purposes of 1) capturing and storing of network and operational events, 2) calculating performance metrics of the network, and 3) discovering performance dependencies between the network and the physical assembly of the workcell. Using a graph database, we have demonstrated that it is possible to construct such a database, compute network performance metrics and discover correlations. We have also developed the capability of examining the correlation between network events and the performance of physical actions. This will be a source of further research.

Future progress and measurement data will be deposited in the NIST public domain repository as a reference for industrial traffic modeling efforts and comparative studies on industrial wireless technologies [142].

MACHINE LEARNING APPLICATION: FORCE SEEKING SYSTEM

Cyber-physical systems are systems governed by the laws of physics that are tightly controlled by computer-based algorithms and network-based sensing and actuation. Wireless communication technology is envisioned to play a primary role in conducting the information flows within such systems. A practical industrial wireless use case involving a robot manipulator control system, an integrated wireless force-torque sensor, and a remote vision-based observer is constructed and the performance of the cyber-physical system is examined. By using readings from the remote observer, an estimation system is developed using machine learning regression techniques. We demonstrate the practicality of combining statistical analysis with machine learning to indirectly estimate signal-to-interference of the wireless communication link using measurements from the remote observer. Results from the statistical analysis and the performance of the machine learning system are presented.

Wireless communications plays an essential role in the vision of future cyber-physical systems (CPS) which includes having more sensors and actuators, and, hence, more information transferred wirelessly. Many system and environmental features of industrial CPS affect the success of wireless communications on the factory floor. In this article, we consider a representative industrial CPS use case of a robot arm control system equipped with a force-torque sensor. Movement of the arm is controlled by a robot controller applying a downward pressure on a spring assembly until a predetermined force is detected. This movement of the robot arm is tracked by a vision-based ground truth measurement system. This remote observer provides readings about the position of the robot arm where these readings are used to estimate the signal-to-interference ratio of the wireless link. A supervised ma-

chine learning (ML) approach is used for the wireless channel quality estimation. In this paper, we study the impact of selected system features on the estimation performance of various ML algorithms and compare their performance. Moreover, we investigate the impact of the training and the estimation period on the performance of the proposed approach. The results provide insights about the impact of wireless communications on cyber-physical systems and an example of employing machine learning to improve industrial wireless deployments.

9.1/ INTRODUCTION

Industrial wireless systems (IWSs) are being deployed in various industrial environments due to the advances of wireless protocols and devices for cyber-physical systems (CPSs). Application domains for IWSs include flexible manufacturing, safety, process control, alerting and monitoring [132]. The advantages of deploying wireless communications in industrial applications due to the absence of cabling include ease of scale, flexibility, and lower cost compared the wired counterpart. Nevertheless, there are challenges in wireless deployments [104, 123, 139]. The main cause of these challenges is the unpredictable and random nature of wireless channels. Challenges include latency uncertainty, error uncertainty, and increased information loss when operating in the presence of significant interference and limited spectral resources [105]. In addition, the quality of wireless data communications is impacted by various wireless channel impairments such as path loss, fading, multi-path, and interference. As a result, a careful design of wireless communications and control networks is required to deal with these impairments [96, 118].

One of the major challenges in designing IWSs and the underlying industrial systems is interference detection and mitigation. Interference can result from various narrow-band or wide-band sources including coexisting wireless systems, intentional jamming sources, and non-communications intended devices such as industrial equipment and microwave ovens [72]. Interference can degrade the communication quality of service (QoS) significantly and hence IWS designers consider various interference management techniques.

In [144], we have presented a method that deploys random forest regression to estimate the signal to interference ratio (SIR) of the communication channel within a robotic arm force-seeking scenario in which the force value signal is transmitted over a wireless local area network (WLAN) [46]. In that work, we have pre-

sented the testbed setup, the statistical relations between various measured features, and the performance of the proposed machine learning random forest algorithm as in [144].

In this work, we deploy the same testbed setup to explore, in more detail, the impact of machine learning on the performance of the detection algorithm. We also endeavour to understand the impact of various features in the training data set. Hence, we use position data from a vision-based tracking system, a distant observer, to train a channel quality estimator to infer the SIR experienced by both the wireless access point and the wireless station used within the experiment. Five different features are extracted from the position data captured by the vision system. We summarize the contributions of this paper as follows:

- We briefly explain the proposed algorithm for SIR estimation, the testbed setup, and the features extracted from the position data.
- We compare various machine learning regression schemes for SIR estimation, thereby demonstrating the superior performance of various ensemble-based approaches.
- We study the impact of individual features on the performance of the proposed algorithm to understand the correlation between the interference level to each of these features. Hence, we better understand the correlation between physical systems behavior and the underlying quality of the wireless communications channel.
- Finally, we study the impact of the measurement interval and the training size on the performance.

9.2/ ROBOT ARM FORCE-SEEKING APPLICATION

9.2.1/ GENERAL CONSTRUCTION AND OPERATION

A robotic force-seeking apparatus is constructed using a Universal Robots UR-3 collaborative robot. As illustrated in Fig. 9.1, the robot is fitted with a six degrees-of-freedom (DOF) force-torque sensor (FTS) followed by a probe. The robot is programmed to apply a downward force, $F(t)$, in the z direction until a force exceeding a threshold, F_t , is reported to the controller. The robot encounters the force

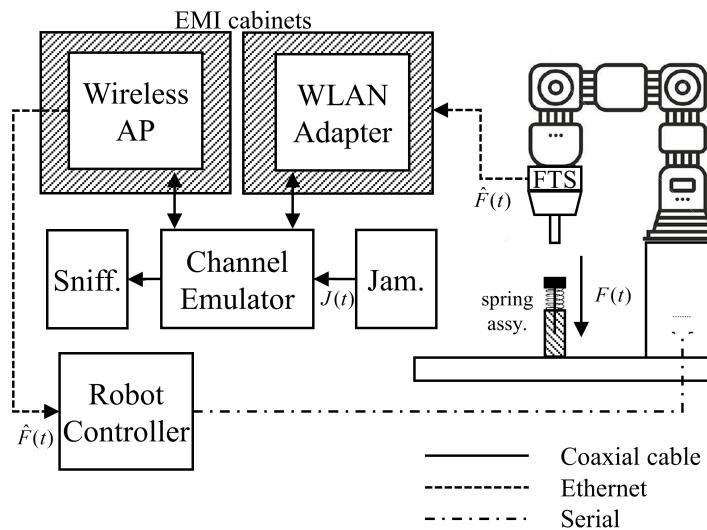


Figure 9.1: Robot force-seeking spring system with controlled wireless channel emulation and interference injection.

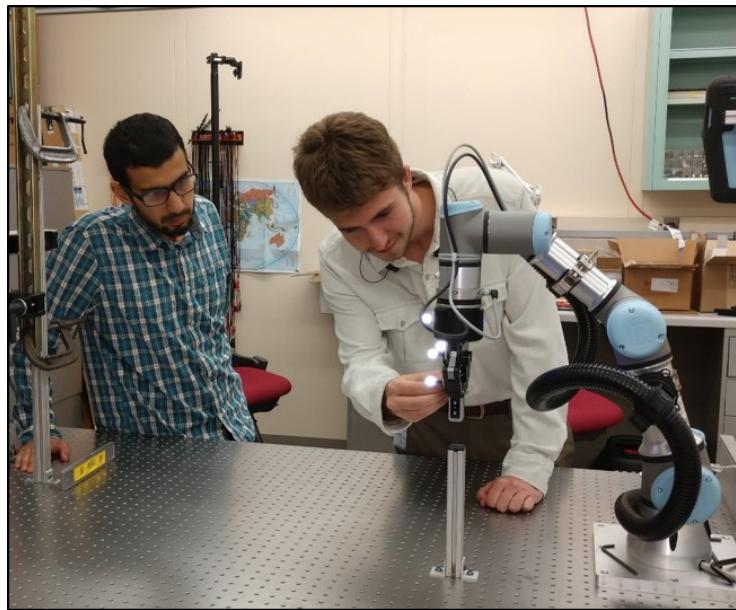


Figure 9.2: A photograph of the robot force-seeking experiment shows the robotic arm, the spring-based plunger, and the visual markers used for position tracking.

threshold through a fixed plunger-spring assembly. The force in the spring is governed by the equation $F(t) = kl$ where k is the spring constant and l is the spring deflection. The robot will push the spring downward repeatedly for the duration of 30 minutes. Plunger movement is limited by a hard stop which will reset the height of the robot arm. A photograph of the force-seeking apparatus is shown in Fig. 9.2. The illuminated spheres shown in the photo are infrared markers used by the remote observer to track the position of the probe.

9.2.2/ COMPONENTS

Referring again to Fig. 9.1, the system is composed of the following components:

- Robot: The robotic arm applies a downward force along the z-axis to the plunger-spring assembly. The robot is a 6-DOF rigid body manipulator in which all joints have a full 360 degrees of motion. For the experiment, the robot is configured such that it would replicate the action of a robot applying a force to push a small part into place within an automotive assembly work-cell [90]. The robot is mounted on a motionless optics table in which mechanical vibration is damped.
- Robot Controller: The robot controller (RC) provides the motion control function of all joints on the robot. The RC is responsible for controlling motion while searching for a force feedback signal.
- Force Torque Sensor: The force torque sensor (FTS) provides continuous force and torque readings at a rate of 125 Hz. Readings from the FTS include force measurements in Newtons along the three Cartesian axes, x , y , and z , and three torque readings in Newton-meters (N-m) about each axis. The FTS is designed to communicate with the RC through an Ethernet connection.
- Robot End-effector: The robot end-effector (REEF) is a rigid body probe attached to the end of the robot arm just after the FTS. The REEF is used to make contact with the plunger-spring assembly.
- Wireless Components: The wireless Ethernet adapter (WEA) replaces the Ethernet connection between the FTS and the RC with a Wi-Fi connection. The adapter supports the IEEE 802.11 b, g, n, and ac modes. The WEA connects to the RC through a wireless access point (WAP).
- Jammer: The jammer provides the source of interference, J , which is directly injected into the wireless channel. For simplicity, interference is injected as non-modulated additive white Gaussian noise (AWGN). The power of J at each receiver is determined by its distance to the jammer.
- Channel Emulator: The channel emulator (CE) provides the capability to control the electromagnetic channel between the WEA and the WAP. The CE supports frequencies between 1 GHz and 6 Ghz and has an instant bandwidth of 250 MHz. It also supports a channel impulse response of 13 taps with

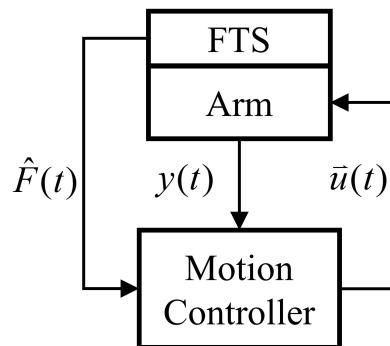


Figure 9.3: Feedback signal flow model of the force-seeking controller

a minimum time resolution of 4 ns making the replication of close-quarter multi-path reflections possible. As shown in Fig. 9.1, all wireless devices are connected to the CE.

- Electromagnetic Interference Cabinets: The electromagnetic interference (EMI) cabinets provide isolation between devices such that communication between devices does not occur through radiated leakage.
- Wireless Sniffer: A wireless sniffer (WS) is used to monitor wireless traffic during operation. The sniffer is connected to a laptop computer running Wireshark, and packet logs are used for offline analysis of network events.
- Vision Tracking System: An OptiTrack VS120 Trio is used as the vision-based tracking system (VTS) to produce accurate ground truth measurements of the probe position. Position estimates along the z-axis are captured at the maximum video frame rate of 120 frames per second. Each estimate includes time and position.

9.2.3/ ROBOT ARM MOTION CONTROL

A diagram of the control system for the robotic manipulator is shown in Fig. 9.3. The UR-3 is constructed of the manipulator assembly and the RC assembly. The internal construction of the robot arm is irrelevant for this experiment, but it is assumed that the arm produces encoder positions $y(t)$ for each joint. It is also assumed that the robot arm accepts actuation signals $\vec{u}(t)$ from the motor drives located in the RC. Both $y(t)$ and $\vec{u}(t)$ are conveyed through wired connections. The force sensor signal $\hat{F}(t)$ is produced by the FTS and is conveyed via an IEEE 802.11 wireless connection. The RC is programmed to move a probe connected to the end

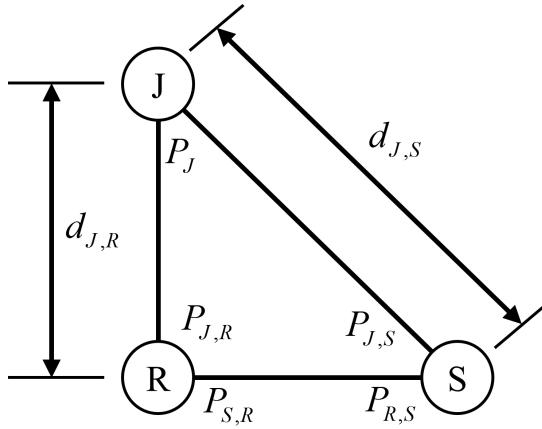


Figure 9.4: RF emulation scenario design of the robotic force-seeking scenario.

of the manipulator downward along a linear path until a force of at least 5 N is detected. The RC will not move the arm during the force-seeking operation unless it receives an FTS signal; therefore, the duration and continuity of the movement of the arm will be impacted by unreliable communication between the FTS and the RC.

9.2.4/ RF EMULATION SCENARIO

The CE is programmed using a graphical user interface in which the wireless scenario is modeled. Scenarios are composed of radios, platforms, and links. Platforms represent the physical machine on which a radio may be deployed. Platforms may be mobile or stationary, ground-based or aerial. Radios are assigned to platforms, and each radio is associated to a physical port on the emulator. Links are representations of the physical connections between radios. Each link has an associated path loss and multi-path representation. Path loss is implemented according to Friis equation [53] simplified as $P_r = P_t + C - 10\gamma \log_{10}(d)$, where P_r is the received power, P_t is the transmitted power, C is a characteristic constant representing characteristics of the channel and electronics, γ is the path loss exponent, and d is the distance between transmitter and receiver. For simplicity, we assume that path loss occurs in accordance with the square of the distance ($\gamma = 2$); however, in practice, the path loss exponent is usually greater, causing a more rapid loss of signal power over the same distance [109]. Since the focus of this work is to infer signal quality from ground truth measurements, the path loss exponent is inconsequential to our analysis.

Shown in Fig. 9.4 is the general scenario for the wireless communication

system employed for the force feedback control system. In the figure, there are three nodes, a wireless router (R), a wireless station (S), and a jammer (J). The router and station transmit with nominal power that is dependent upon the 802.11 protocol. The jammer transmits with constant power, and its impact on the scenario depends on its position relative to the other nodes. The distance between J and R is denoted by $d_{J,R}$, and the distance between the J and S is denoted by $d_{J,S}$. The resulting signal-to-interference power ratio (SIR) for the router is defined in decibels as $SIR_{J,R} = P_{S,R} - P_{J,R}$ which is the power received by the router of the station signal divided by the power of interference experienced at the router. Similarly, the SIR experienced at the station is defined as $SIR_{J,S} = P_{R,S} - P_{J,S}$ which is the received signal power of the router at the station divided by the interference power experienced at the station.

For each experiment, the location of the J is adjusted to produce a desired SIR. Each time the location of J is changed, the robot is allowed to operate for a period of 30 minutes. This included periods of inaction by the robot when the SIR prohibits movement of the arm. The SIR setting was validated for each run using a real-time spectrum analyzer connected directly to the emulator.

9.3/ INITIAL INVESTIGATIONS


The contents of this section explain the approach, methodology, and results of the initial investigations using machine learning to infer the signal-to-interference of a single radio link using situational awareness information from a camera system as published in [?] with data made available [143].

9.3.1/ DATA ANALYSIS


The data analysis process for the experiment is divided into four parts: raw data collection, data cleaning and feature extraction, training, and the operation of the SIR estimation. The raw data was produced as an output of the VTS as a time series of z-axis position. Feature extraction was conducted in MATLAB by following the time series and extracting or calculating features for each iteration. Once features were extracted, a statistical analysis of the features was conducted to determine the variability of the features as a function of SIR. Statistical analyses included visual inspection of histograms of each factor and an inspection of the correlation

coefficients over the range of SIRs. A discussion of the statistical results is provided in 9.3.3.1 which demonstrates suitability of the use of position measurements for machine learning. Training of a machine learning algorithm followed. The machine learning algorithm was programmed in Python using the Sci-kit Learn library [5].

9.3.2/ FEATURE EXTRACTION

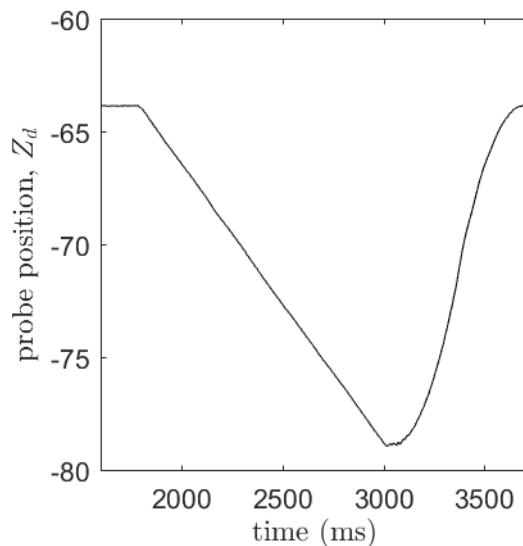

(a) sample time series of probe position in mm

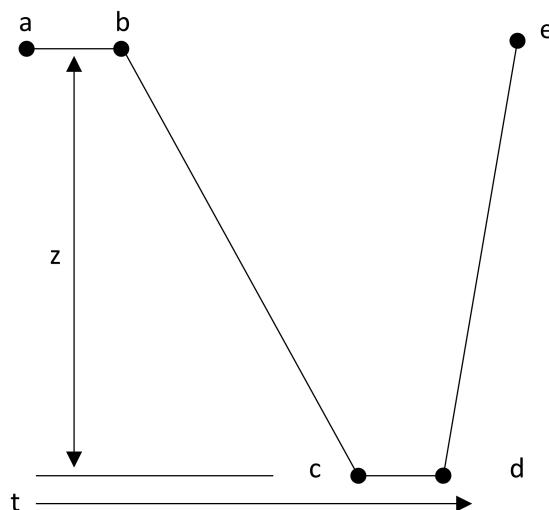

(b) feature extraction model

Figure 9.5: A time-series sample (a) of a single iteration of the measured z-axis probe position and (b) the corresponding model for feature extraction.

Feature extraction begins with a time series of position of the probe through

successive iterations of the plunger applying force to the spring and then returning to its home position. A sample time series of the z-axis position of the probe is as shown in Fig. 9.5a. Rather than using the time series directly, a more convenient and practical solution is to extract features that represent aspects that may be useful for analysis and machine learning algorithms. This reduces the number of learning dimensions and usually improves computation efficiency. The selected features are illustrated in Fig. 9.5b. Shown in the model, the probe begins at its home position, a. It will not begin its downward motion until it receives sufficient FTS readings. Marker b indicates the beginning of the probes descent. Marker c represents that point in which the probe descends below a predetermined threshold, and marker d represents the position in which the probe begins its return ascent to the home position. Finally the probe returns to the home position as indicated by marker e. Therefore, the extracted features of each successive iteration is defined as follows:

- Feature Z_d : The length of the probe's descent measured in millimeters,
- Feature Δt_{ab} : The duration in seconds the the robot waits before moving the probe along its descent,
- Feature Δt_{bc} : The duration in seconds of the time that the robot takes to move the probe beyond the threshold, Z_{th} , of -77 mm,
- Feature Δt_{cd} : The duration in which the probe dwells below Z_{th} and the speed of the probe remains under 0.15 mm/sec,
- Feature Δt_{ae} : The duration of the full iteration as measured from the home position, a, to the next home position, e.

9.3.2.1/ STATISTICAL ANALYSIS

Each factor was visually examined to assess its variability as a function of the SIR. In order to predict the SIR given a set of measurements of the dynamics of the physical system, sufficient variability is needed. This assessment was performed visually using histograms as a basis for comparison. The factors Z_d and Δt_{bc} were used for examination of the data using histograms.

In addition, it would be helpful to show that the factors are uncorrelated as a function of SIR demonstrating a further level of confidence that each factor will be useful to a machine learning algorithm. This assessment was accomplished

by computing the correlation coefficient matrix of the extracted factors as defined by the Pearson product-moment method [163]. The correlation coefficient matrix is a covariance matrix that is normalized by the product of the standard deviations of two factors being compared according to $\rho_{X,Y} = \text{cov}(X, Y) / (\sigma_X \sigma_Y)$. Since each factor correlates exactly with itself, a correlation matrix should have values of 1 along the diagonal. Other elements of the matrix will take on values between -1 and 1. A visual inspection of the coefficient matrices will show how strongly selected factors vary together. Correlation can be viewed as a function of SIR to verify that factors are independently applicable to a learning algorithm. The objective of factor selection is, therefore, to choose factors that are highly uncorrelated and yet still vary appreciably [8].

9.3.2.2/ MACHINE LEARNING

In order to learn the SIR level from observing the various features, the random forest model is leveraged [?]. Random forest is an ensemble of decision trees with random feature selection which can be used for classification or regression based on the predicted output space. Deploying random forest in machine learning has been successful in various applications such as [?, 67, 85]. Its main advantages are that it is stable, fast to compute, and insusceptible to over-fitting.

In this work, the random forest model is deployed for SIR regression using the five features defined in 9.3.2. These features are evaluated for each iteration of the probe movement. We define a data segment which is composed of a number of successive iterations and we denote the segment size by M . As a result, we use the random forest regression model to get an input vector of size $5M$ and regression output of the corresponding SIR value. The random forest is selected because it is computationally efficient with high-dimensional data and it is robust for outliers and data non-linearity.

The random forest regression model is first trained by taking a fixed number of segments for each SIR labelled data. The size of the training set for each SIR level is denoted by T . The rest of the measurements are used for testing. In general, the proposed machine learning approach will deploy a sliding window approach of size M to collect the features of the force-seeking use case to estimate the current level of SIR at various nodes of the wireless network.

9.3.3/ RESULTS

The results in this section are presented from an experimental run in which the jammer J interferes with the router, R, while communication is conducted using a mixed mode of IEEE 802.11 b and g [46]. Analyses using histograms and covariance are presented in Section 9.3.3.1 followed by results of the machine learning application in Section 9.3.3.2.

9.3.3.1/ STATISTICAL ANALYSIS

Analysis of Factors Using Histograms The results of the histogram analyses for the z-axis position of the probe and the probe descent delay are shown in Fig. 9.6a and Fig. 9.6b, respectively. The expectation of the histogram analysis was that Z_d and the ΔT_{bc} would exhibit appreciable variation that may be observed through a visual inspection. This was indeed the case. Referring to Fig. 9.6a, a visual inspection reveals that the minimum z-axis position for each iteration skews to lower positions for lower SIR values and higher positions for higher SIR values. This implies that the controller algorithm responds faster to force sensor readings at higher SIR values than lower values. Similarly, by observing the plunge delay, Δt_{bc} , the controller takes more time to respond at lower SIR values than at higher values. This behavior is exemplified by the probability skew shown in the histograms.

Factor Correlation Coefficient Analysis Correlation coefficients were calculated for each of the five factors defined in Section 9.3.2 and correlation coefficients matrices were produced for each of the SIR values used. The correlation coefficient matrices for SIR values of -9, -8, and -7 are shown in Tables 9.1-9.3, respectively. Inspection of the correlation coefficient tables indicate that the factors are mostly uncorrelated across SIR values except for the clear correlation between plunge delay and plunge depth. Low correlation values demonstrate a necessary but not sufficient condition for the independent applicability factors to machine learning. If desired, either Δt_{bc} or Z_d could be omitted as they are strongly correlated and therefore provide redundant information.

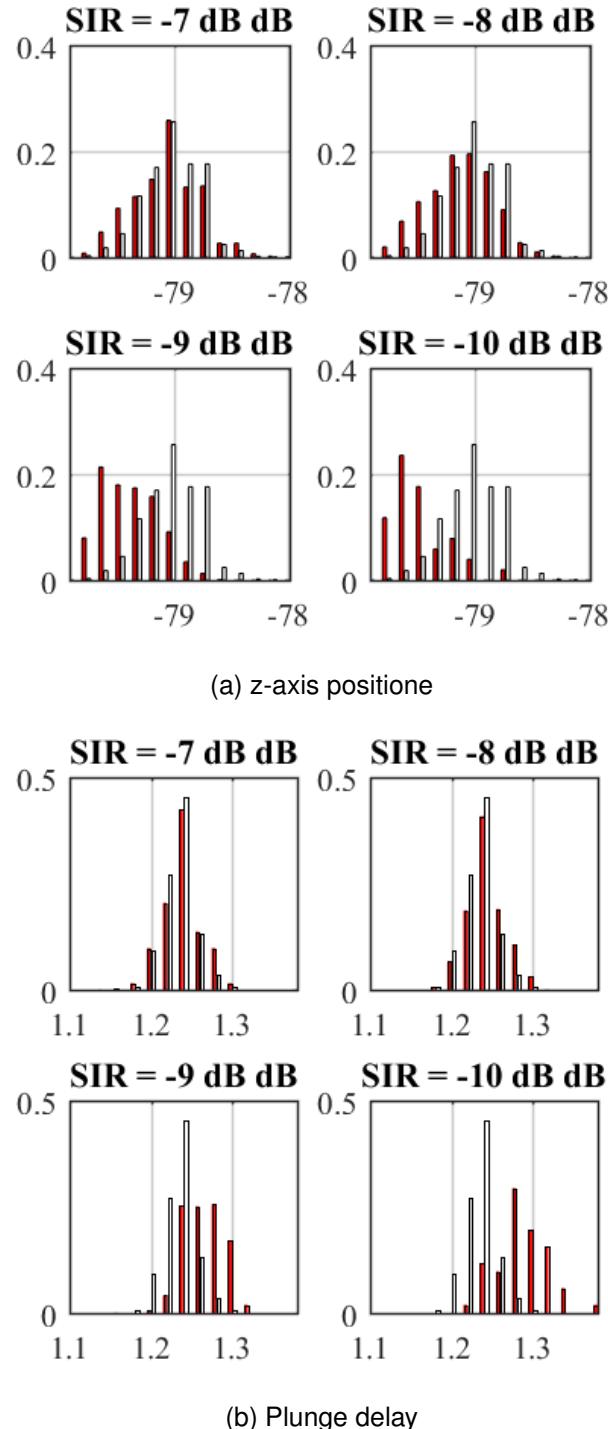


Figure 9.6: Variations in probability distributions of the z-axis position (a) and the plunge delay (b) indicate that machine learning may be effective in inferring information about the underlying communication channel. In the figure, the baseline case of infinite SIR is depicted as a histogram with white bars, and the experimental case is depicted as a histogram with red bars.

Table 9.1: Correlation Coefficients for -9 dB SIR

	Δt_{ab}	Δt_{bc}	Z_d	Δt_{cd}	Δt_{ae}
Δt_{ab}	1	0.04	0.04	0	0.56
Δt_{bc}	0.04	1	-0.96	-0.08	0.18
Z_d	0.04	-0.96	1	0.03	-0.01
Δt_{cd}	0	-0.08	0.03	1	0
Δt_{ae}	0.56	0.18	-0.01	0	1

Table 9.2: Correlation Coefficients for -8 dB SIR

	Δt_{ab}	Δt_{bc}	Z_d	Δt_{cd}	Δt_{ae}
Δt_{ab}	1	0.01	-0.05	-0.06	0.58
Δt_{bc}	0.01	1	-0.99	-0.13	0.1
Z_d	-0.05	-0.99	1	0.07	-0.1
Δt_{cd}	-0.06	-0.13	0.07	1	-0.03
Δt_{ae}	0.58	0.1	-0.1	-0.03	1

Table 9.3: Correlation Coefficients for -7 dB SIR

	Δt_{ab}	Δt_{bc}	Z_d	Δt_{cd}	Δt_{ae}
Δt_{ab}	1	-0.05	-0.04	0.09	0.01
Δt_{bc}	-0.05	1	-0.93	-0.17	0.05
Z_d	-0.04	-0.93	1	0.08	-0.05
Δt_{cd}	0.09	-0.17	0.08	1	-0.02
Δt_{ae}	0.01	0.05	-0.05	-0.02	1

9.3.3.2/ MACHINE LEARNING RESULTS

The proposed machine learning approach is deployed for three values of the SIR, -9, -8, and -7 dB. First the output of the random forest regression model for two values of the segment size M is shown. The training set size $T = 200$ is set for each SIR value. We use the random forest model with a number of estimators of 500 and a tree depth of 5. In Fig. 9.7, the box plots of the predicted SIRs are presented against the correct value of the corresponding SIR for $M = 100$ and $M = 1$. Generally, increasing the value of M increases the acquisition time for the input data for the random forest model while enhancing the performance of the algorithm. By setting $M = 1$, it is evident the predicted values of SIR are widely spread around the median and a large number of outliers exists. However, increasing M reduces variations in the predicted SIRs and a smaller number of outliers.

In Fig. 9.8, the two criteria for measuring the performance of the proposed SIR estimation algorithm is presented. The performance against the segment size M is shown. The first criterion is the mean squared error where the mean of the squared

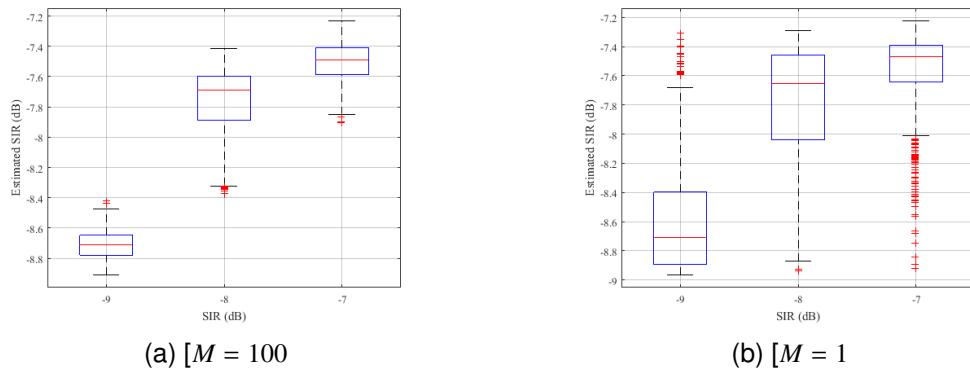


Figure 9.7: Predicted SIR versus actual SIR for the cases of (a) $M = 100$ and (b) $M = 1$. The box plots show the median value while the bottom and top edges of the box indicate the 25th and 75th percentiles. Statistical outliers are shown as red + signs.

error between the estimated SIR and the actual SIR values is calculated. The second criterion is the variance score which is a statistical measure of how close the data are to the fitted regression line. The r-squared variance score is used which is defined as the ratio between the total variance explained by model and total variance of the data [111]. In this figure the improvement in the performance against the segment size is demonstrated.

9.3.4/ CONCLUSION

This investigation presented a practical use case of a wireless force-torque feedback control system that could be deployed in a manufacturing assembly system such as a pick-and-place or assembly operation. A 6-DOF force sensor was connected to a robot controller tasked with moving a probe along a linear path until an opposing force exceeding 5 N was detected. We demonstrated that the reliability of the wireless communication system directly impacts the repeatability performance of the physical system. We also demonstrated that the quality of the underlying wireless channel may be inferred by observing the position of the probe along a single spatial dimension and applying machine learning to predict the signal-to-interference ratio. Our findings provide motivation for applying machine learning to larger more complex systems with high degrees of freedom. Future work will extend to the inclusion of more descriptive factors, the addition of network information such as the wireless protocol mode, and the addition of a larger number of variables tracked by many remote observers. Experimentation with neural networks and deep learning to improve prediction accuracy and better generalization will be of great values to wireless operations in factories. Finally, the applications of online machine learn-

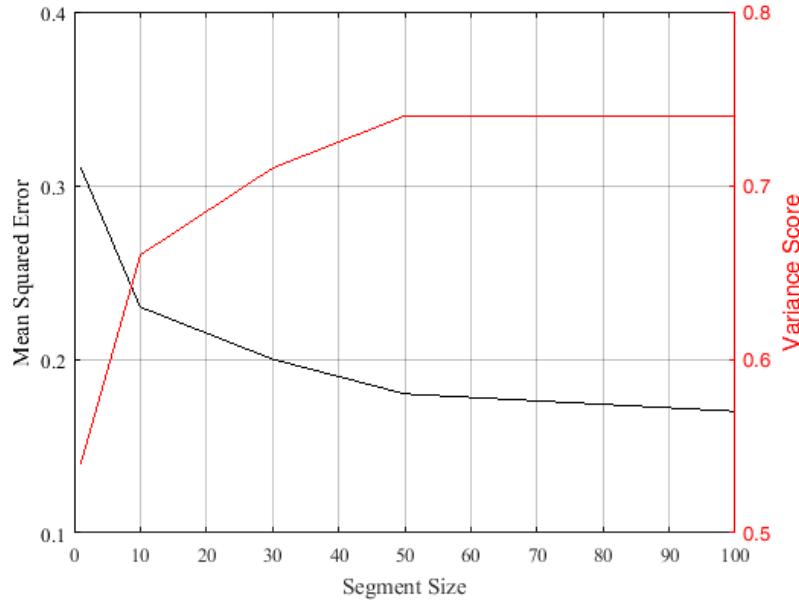


Figure 9.8: The performance of the random forest regression model against M .

ing techniques to this and other use cases could provide significant benefits to the manufacturing community.

9.4/ SUBSEQUENT INVESTIGATIONS


The contents of this section explain the subsequent analysis explaining on the approach, methodology, and results of the initial investigations using machine learning to infer the signal-to-interference of a single radio link using situational awareness information from a camera system as published in [145]. In this further investigation, the performance of the machine learning algorithms themselves were investigated to determine optimal selection given the particular use case. Publication is forthcoming [154].

9.4.1/ DATA ANALYSIS


The data analysis process for the experiment is divided into four parts: raw data collection, data cleaning and feature extraction, training, and the operation of the SIR estimation. The raw data was produced as an output of the VTS as a time series of z-axis position. Feature extraction was conducted in MATLAB by following the time series and extracting or calculating features for each iteration. Once features

were extracted, a statistical analysis of the features was conducted to determine the variability of the features as a function of SIR [144]. Training of a machine learning algorithm followed. The machine learning algorithm was programmed in Python using the Sci-kit Learn library [5].

9.4.1.1/ FEATURE EXTRACTION

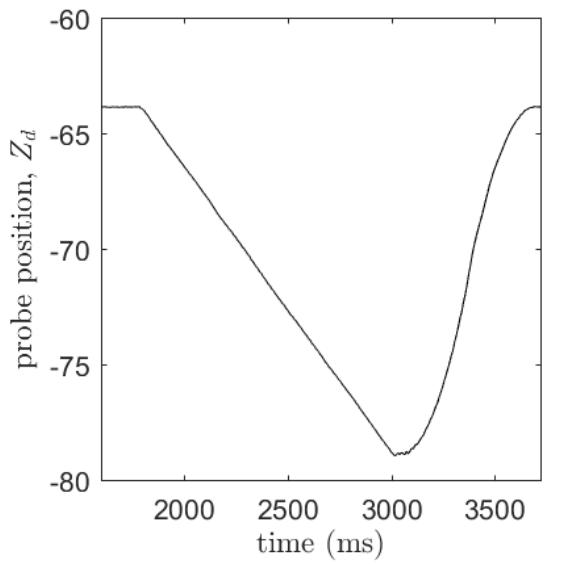

(a) sample time series of probe position in mm

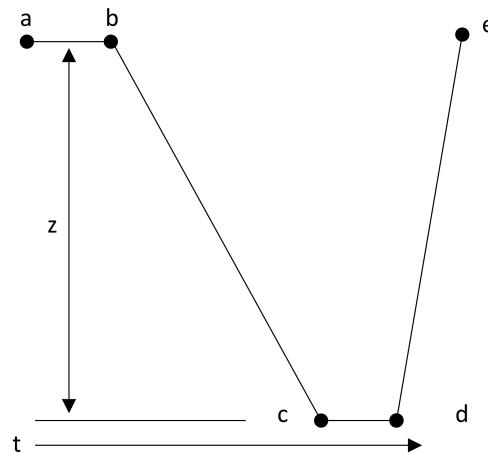

(b) feature extraction model

Figure 9.9: A time-series sample (a) of a single iteration of the measured z-axis probe position and (b) the corresponding model for feature extraction.

A sample time series of the z-axis position of the probe is as shown in Fig. 9.9a. Rather than using the time series directly, a more convenient and

practical solution is to extract features that represent aspects that may be useful for analysis and machine learning algorithms. The selected features are illustrated in Fig. 9.9b. Shown in the model, the probe begins at its home position, a. It will not begin its downward motion until it receives sufficient FTS readings. Marker b indicates the beginning of the probes descent. Marker c represents that point in which the probe descends below a predetermined threshold, and marker d represents the position in which the probe begins its return ascent to the home position. Finally the probe returns to the home position as indicated by marker e. Therefore, the extracted features of each successive iteration is defined as follows:

- Feature Z_d : The length of the probe's descent measured in millimeters,
- Feature Δt_{ab} : The duration in seconds the the robot waits before moving the probe along its descent,
- Feature Δt_{bc} : The duration in seconds of the time that the robot takes to move the probe beyond the threshold, Z_{th} , of -77 mm,
- Feature Δt_{cd} : The duration in which the probe dwells below Z_{th} and the speed of the probe remains under 0.15 mm/sec,
- Feature Δt_{ae} : The duration of the full iteration as measured from the home position, a, to the next home position, e.

9.4.1.2/ ML-BASED SIR ESTIMATION

In order to learn the SIR level from observing the various features, we can leverage supervised machine learning regression schemes. In this work, we compare the deployment of various machine learning algorithms for SIR regression using the five features defined in 9.4.1.1. These features are evaluated for each iteration of the probe movement. We define a data segment which is composed of a number of successive iterations and we denote the segment size by M . As a result, we use each regression model to get an input vector of size $5M$ and the regression output of the corresponding SIR value.

We start by training each regression model by taking a fixed number of segments for each SIR labelled data. We denote the size of the training set for each SIR level by T . The rest of the measurements are used for testing. In general, the proposed machine learning approach will deploy a sliding window approach of size

M to collect the features of the force-seeking use case to estimate the current level of SIR at various nodes of the wireless network.

9.4.2/ RESULTS

In this section, we consider the experimental results for 4 different settings. The dataset of all the collected data is available online [143]. The four settings are defined as follows: i) setting b/g-Router: the jamming signal impacts the router and IEEE 802.11 b/g is deployed [46], ii) setting b/g-Station: the jamming signal impacts the station and IEEE 802.11 b/g is deployed, iii) setting b/g/n-Router: the jamming signal impacts the router and IEEE 802.11 b/g/n is deployed, and iv) setting b/g/n-Station: the jamming signal impacts the station and IEEE 802.11 b/g/n is deployed.

When the jamming signal has an impact on the router, we consider 3 values of the SIR which are -9, -8, -7 dB while having 1, 2, 3 dB for the settings in which jamming has an impact on the station. Except otherwise mentioned, we set $M = 50$ and $T = 200$.

9.4.2.1/ MACHINE LEARNING ALGORITHM COMPARISON

In this subsection, we compare various regression approaches using two performance criteria, namely, the mean squared error (MSE) and the R-squared variance score [111]. R-squared variance score indicates the percentage of the variance in the dependent variable that the independent variables explain collectively. The used version of R-squared in the Sci-kit Learn library measures the strength of the relationship between your model and the dependent variable on a convenient -1 to 1 scale. The best possible outcome is 1 when predicted values capture the variance of the independent variable. It takes a value of 0 when the predicted value is constant and negative values when the regression model cannot follow the trend of the data. We present the performance for different values of M . The compared algorithms are the random forest, gradient boosting, extreme gradient boosting (XGBM), decision tree, support vector machine (SVM), k-nearest neighbor, kernel ridge, and linear ridge [5, 88].

In Table 9.4, we present the MSE performance of various algorithms at setting b/g-Router. The ensemble-based algorithms, which are the random forest,

Table 9.4: MSE values of various ML algorithms for jamming setting b/g-Router

	M = 1	M = 10	M = 30	M = 50	M = 100
Random Forest	0.61	0.54	0.49	0.48	0.46
Gradient Boosting	0.56	0.55	0.47	0.45	0.44
XGBM	0.62	0.53	0.45	0.43	0.41
Decision Tree	1.07	0.99	0.87	0.91	0.97
SVM	0.92	0.99	0.98	0.97	0.96
KNN	0.73	0.74	0.73	0.74	0.77
Kernal Ridge	0.97	0.73	0.71	0.71	0.71
Linear Ridge	0.7	0.7	0.7	0.71	0.71

gradient boosting, and XGBM, perform better than non-ensemble algorithms. This happens because the ensemble-based algorithms learn from the training data without having an initial model to fit thus allowing for capturing the randomness impacts on the collected data. Moreover, the XGBM gives slightly better performance than the random forest and gradient boosting algorithms except at $M = 1$. The XGBM performs gradient boosting over random set of trees and hence the superior performance. We also find it has superior variance score as well in Table 9.5. Generally, in Table 9.5, similar trends as Table 9.4 can be found for various machine learning algorithms where ensemble-based algorithms have the best performance among others and their performance is enhanced by increasing the segment size M of the measured data.

Similarly, in Table 9.6, the ensemble-based algorithms perform better than other algorithms and the XGBM is the best among them. In this setting b/g/n-Station, the interference impacts the router and hence the MSE values generally higher than the corresponding cases in setting b/g-Router. In this case, the interference has a larger impact and hence larger MSE. That leads to larger distinction between the performance of the machine learning algorithms.

Table 9.5: Variance score values of various ML algorithms for jamming setting b/g-Router

	M = 1	M = 10	M = 30	M = 50	M = 100
Random Forest	0.15	0.2	0.3	0.35	0.35
Gradient Boosting	0.02	0.2	0.34	0.37	0.42
XGBM	0.12	0.25	0.36	0.4	0.43
Decission Tree	-0.57	-0.44	-0.36	-0.3	-0.22
SVM	-0.34	-0.38	-0.37	-0.37	-0.32
KNN	-0.05	-0.02	-0.02	-0.08	-0.04
Kernal Ridge	-0.48	-0.05	0	0	0
Linear Ridge	0.01	0.01	0	-0.01	0

Table 9.6: MSE values of various ML algorithms for jamming setting b/g-Station

	M = 1	M = 10	M = 30	M = 50	M = 100
Random Forest	0.88	0.79	0.76	0.69	0.7
Gradient Boosting	0.95	0.71	0.61	0.56	0.56
XGBM	0.85	0.73	0.59	0.52	0.48
Decission Tree	1.48	1.46	1.33	1.33	1.32
SVM	1.34	1.36	1.36	1.39	1.49
KNN	1.01	1.04	1.03	1.05	1.13
Kernal Ridge	4.42	1.25	0.98	0.97	0.99
Linear Ridge	0.93	0.94	0.94	0.95	0.99

9.4.2.2/ TUNING THE RANDOM FOREST AND GRADIENT BOOSTING REGRESSORS

In this subsection, we study the impacts of the number of estimators and the depth for gradient boosting and random forest algorithms. The XGBM parameters are

optimized automatically when the function is called to be executed. We show the MSE performance results for setting b/g-Router while same trend holds for other system settings as well.

For random forest algorithm, we show in Table 9.7 that the tree depth has more impact on the performance than the number of the estimators (# est.). However, increasing the depth improves the performance till the value of 5 where increasing the depth cause slight improvements.

Table 9.7: MSE of Random Forrest regression parameters for jamming setting b/g-Router

# est. Depth \	100	200	300	400	500	600
1	0.64	0.64	0.64	0.63	0.63	0.63
3	0.53	0.53	0.53	0.53	0.53	0.52
5	0.5	0.5	0.5	0.48	0.48	0.48
7	0.49	0.49	0.48	0.48	0.48	0.48
9	0.48	0.48	0.47	0.47	0.47	0.47

For gradient boosting, we show in Table 9.8 that a similar trend as a random forest exists where depth has a larger impact on the performance. However, increasing the depth more than 7 causes the MSE performance to degrade significantly.

Table 9.8: MSE of Gradient Boosting regression parameters for jamming setting b/g-Router

# est. Depth \	100	200	300	400	500	600
1	0.48	0.47	0.46	0.46	0.45	0.46
3	0.47	0.47	0.47	0.47	0.46	0.47
5	0.48	0.47	0.47	0.47	0.47	0.47
7	0.48	0.48	0.48	0.48	0.46	0.49
9	0.58	0.51	0.5	0.5	0.57	0.58

9.4.2.3/ IMPACT OF DATA SEGMENT SIZE M

In this subsection, we study the performance of the ensemble-based algorithms against the segment size M . It was shown in [144] that increasing the value of

M increases the acquisition time of measurement data used for decision making and lowers the spread of predicted values around the correct value for various SIR values. In this paper, we study the impact of the three optimized algorithms employing the MSE and the variance score as performance metrics.

In Fig. 9.10, we present the performance of the random forest, gradient boosting, XGBM, and the linear ridge regressors. The linear ridge is used as a simple model-based regressor which practically cannot not be used for prediction while it is used for comparison. In this figure, increasing the value of M enhances the performance of the ensemble-based algorithms significantly. Generally, the prediction accuracy increases when multiple measurement cycles are deployed in decision making with diminishing improvement as M increases. The linear ridge algorithm shows no improvement with increasing M implying that SIR does not vary linearly with the feature set presented.

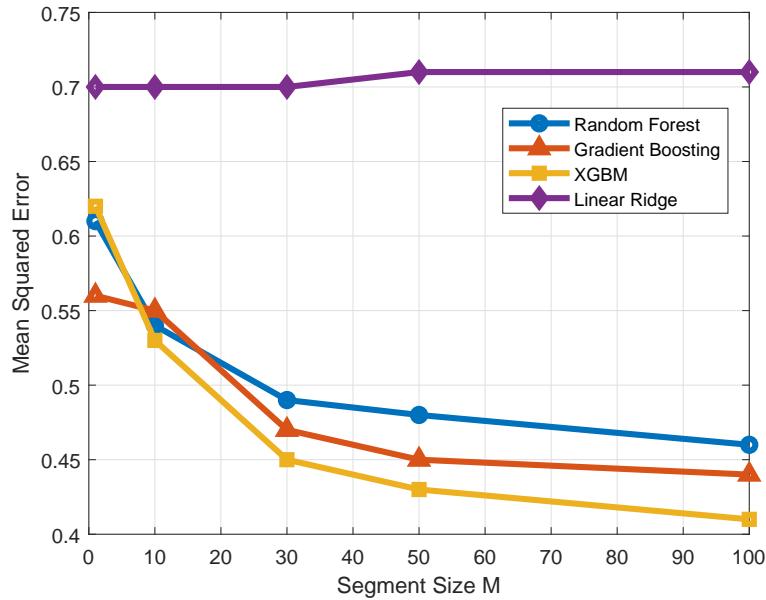


Figure 9.10: The mean squared error performance for jamming setting b/g-Router of various algorithms against M .

In Fig. 9.11, we present the variance score for the same setting b/g-Router where a similar trend is found. The ensemble-based algorithms can achieves a variance score above 0.35 when M is larger than 50.

In Fig. 9.12, the MSE of the ensemble-based algorithms is shown for Setting b/g-Station where the router is impacted by the jamming signal. The MSE values in this setting are lower than those of setting b/g-Router where the predicted SIR

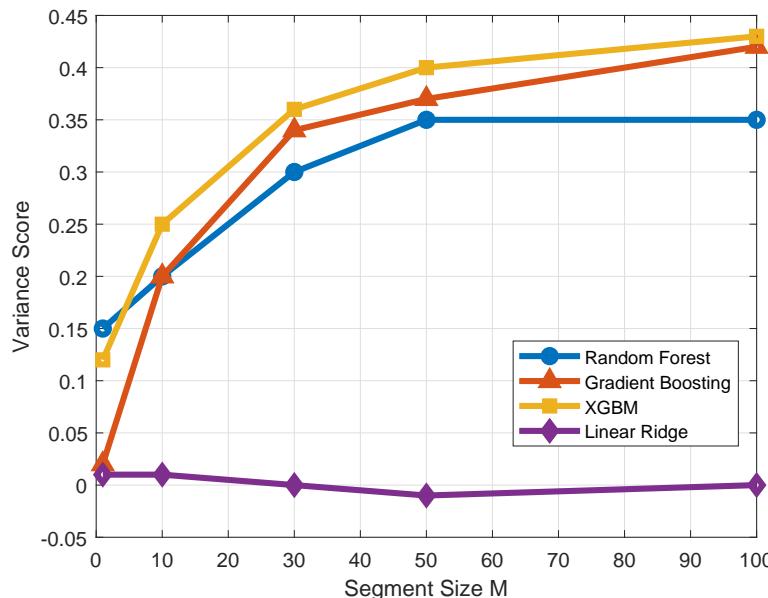


Figure 9.11: The variance score performance for jamming setting b/g-Router of various algorithms against M .

values are smaller because the router has better capabilities to detect signals at lower SIRs.

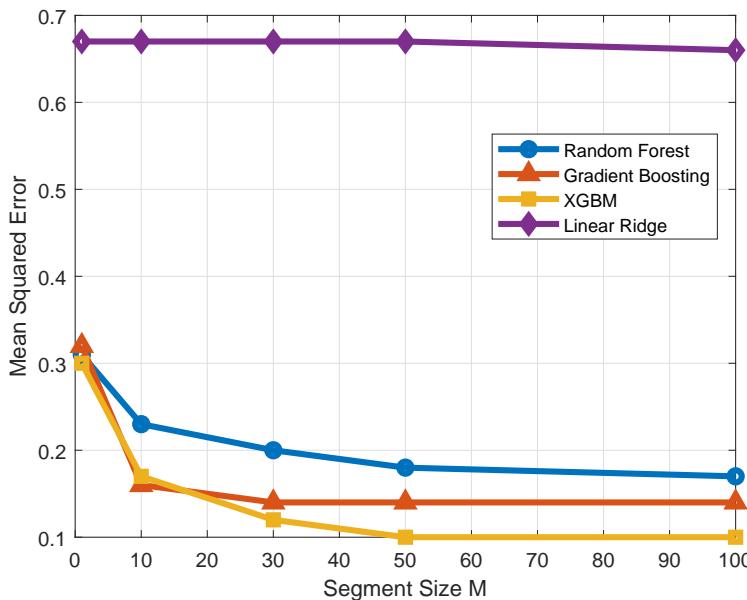


Figure 9.12: The mean squared error performance for jamming setting b/g-Station of various algorithms against M .

Finally, in Fig. 9.13, a similar scenario to Fig. 9.12 is presented where the router is impacted by the jamming signal. The difference is that at setting b/g/n-

Station, a mixed IEEE802.11 b/g/n mode is allowed instead the IEEE802.11 b/g mode in setting b/g-Station. By allowing the IEEE 802.11n mode, the signal is more susceptible to interference and hence it is harder to predict the same SIR values.

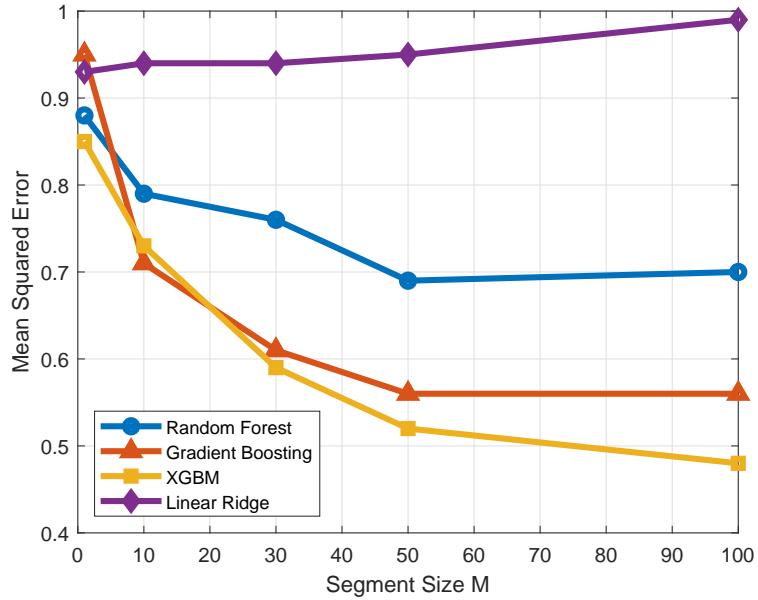


Figure 9.13: The mean squared error performance for jamming setting b/g/n-Station of various algorithms against M .

9.4.2.4/ IMPACT OF TRAINING SEQUENCE LENGTH T

In this subsection, we briefly discuss the impact of the training length on the performance of various algorithm. The parameter T is the length of the training sequence where each element contains M of the force seeking cycles. In the following figures, we show the MSE performance curves against T for $M = 30$ and 100 .

In Fig. 9.14, increasing the training size T can improve the prediction performance significantly. Gradient boosting and XGBM have higher improvement rate with T than the random forest algorithm.

9.4.2.5/ IMPACT OF INDIVIDUAL FEATURES

In this subsection, we study the impact of the individual features on the performance of the ensemble-based machine learning algorithms. Understanding the importance of each feature on the prediction algorithms is essential in selection of features and hence reducing the required processing power for an algorithm. We show the results

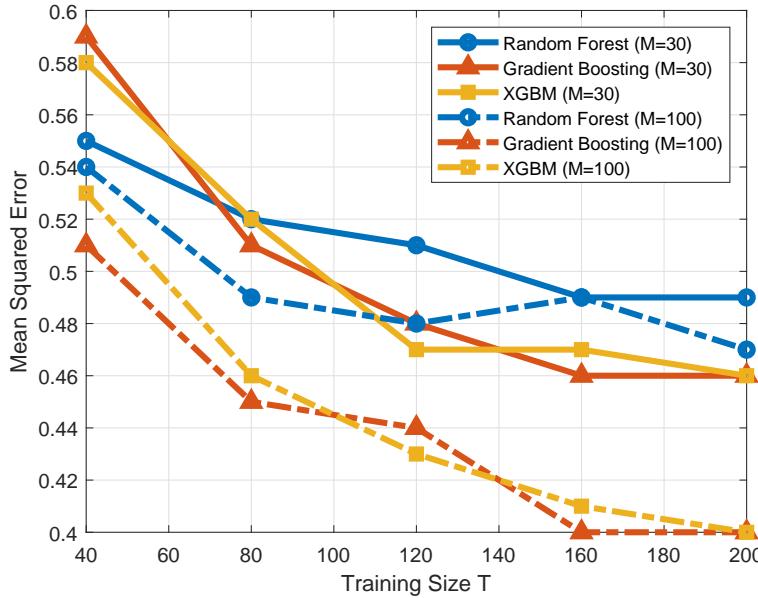


Figure 9.14: The mean squared error performance for jamming setting b/g-Router of various algorithms against T .

for XGBM algorithm for brevity and because the similarity of the behavior of various ensemble-based algorithms performance.

In Fig. 9.15, 9.16, and 9.17, we present the MSE performance for setting b/g-Router, the variance score for setting b/g-Router and the MSE for setting b/g/n-Station, respectively, against the segment size M . In all the three figures, we refer to Δt_{ab} , Δt_{bc} , Z_d , Δt_{cd} , and Δt_{ae} by "t_high", "t_plunge", "Descent Distance", "t_bottom", and "Total Cycle", respectively.

The feature Δt_{ab} is the most one impacted by the SIR value where the prediction performance by using this individual feature is almost identical to the performance of using all the features. This result can be explained by knowing that in the robot arm force seeking program, the FTS has to be zeroed before resuming the loop and hence there is a direct impact of the wireless transmissions and the value Δt_{ab} . On the other hand, the feature Δt_{bc} is the least one impacted by the SIR value. This feature is defined as the reflection time of the robot arm to reverse its direction and hence it is minimally impacted by the SIR value. The rest of the features are impacted by the SIR to a certain level. Generally, adding an unnecessary feature can degrade the performance. As a result, in this work, we concluded that using Δt_{ab} can substitute all the five features to get the same MSE and variance score performance with much less processing.

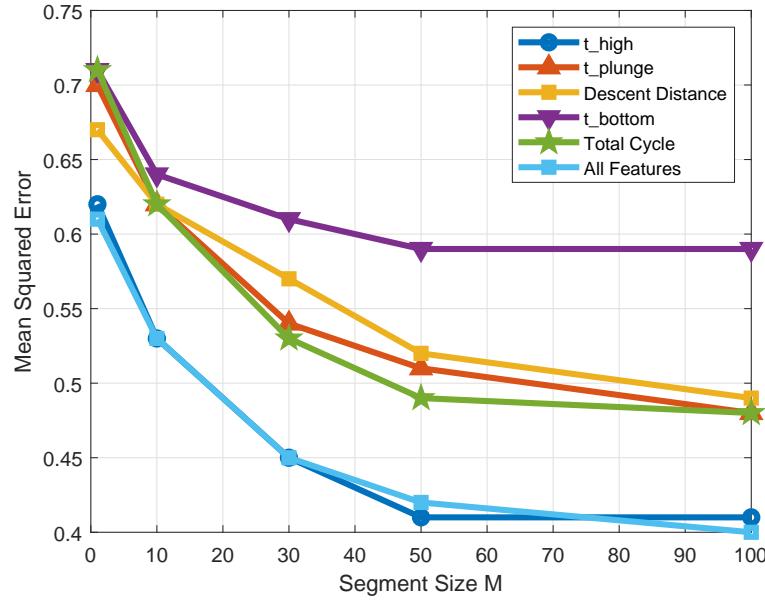


Figure 9.15: The mean squared error performance for jamming setting b/g-Router of XGBM algorithm against M including individual features impact.

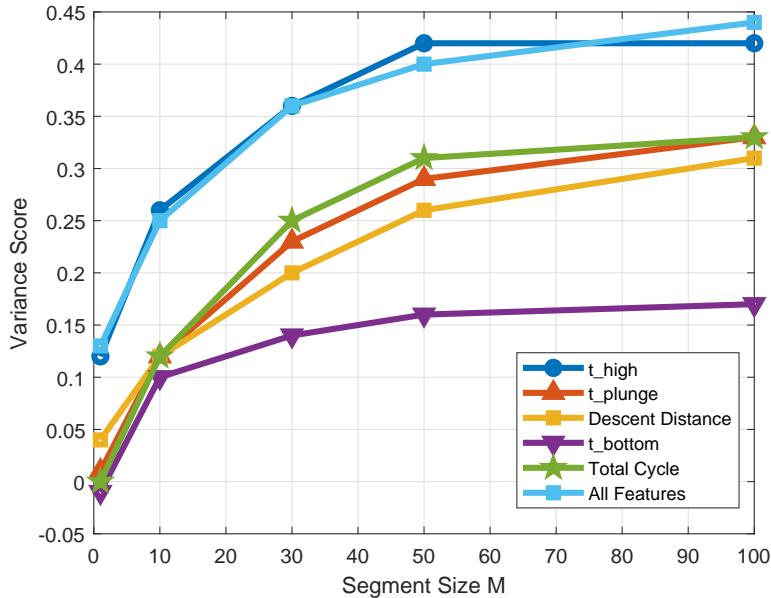


Figure 9.16: The variance score performance for jamming setting b/g-Router of XGBM algorithm against M including individual features impact.

9.4.3/ CONCLUSION

In this paper we have presented a practical use case of a wireless force-torque feedback control system that could be deployed in a manufacturing assembly system such as a pick-and-place or assembly operation. A 6-DOF force-torque sensor was con-

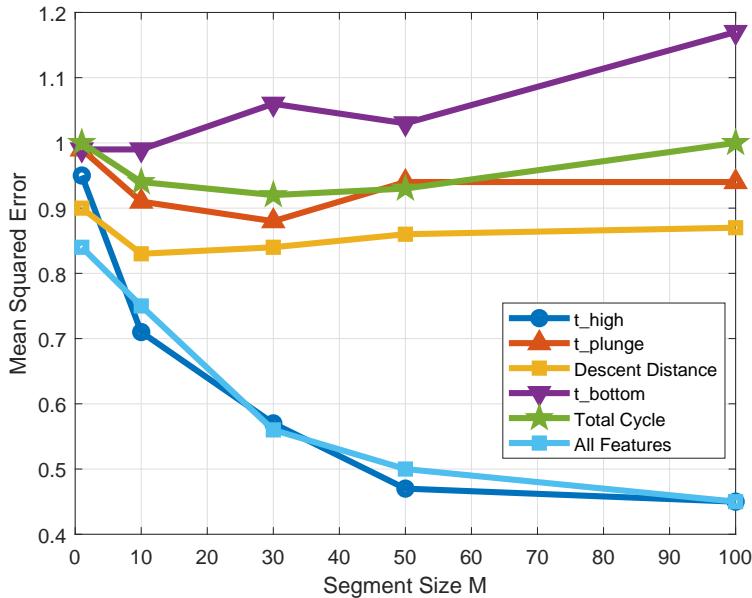


Figure 9.17: The mean squared error performance for jamming setting b/g/n-Station of XGBM algorithm against M including individual features impact.

nected to a robot controller tasked with moving a probe along a linear path until an opposing force exceeding 5 N was detected. We demonstrated that the reliability of the wireless communication system directly impacts the repeatability performance of the physical system. We also demonstrated that the quality of the underlying wireless channel may be inferred by observing the position of the probe along a single spatial dimension and applying machine learning to predict the signal-to-interference ratio. As a result of our exploration of various machine learning algorithms on the prediction of signal quality, we found that ensemble-based algorithms have superior performance compared to other regression algorithms for data presented. Additionally, our analysis shows that careful study of the MSE and variance score is useful in selection of features used for training the algorithms. We conclude for this particular force-torque control system scenario that the dwell time of the robot before descending was the most useful feature for training the algorithm. Our findings provide motivation for applying machine learning to larger more complex systems with higher degrees of freedom. We conclude by stating that future experimentation with neural networks and deep learning to improve prediction accuracy could be of value to improving the reliability of wireless operations in factories. The applications of online machine learning techniques to this and other use cases could provide significant benefits to the manufacturing community through integration of link quality detection with programmable controllers.

10

CONCLUSIONS

10.1/ FUTURE WORK

Application of Machine Learning within the workcell control program

how to extended the graph database and other data management approaches to the the factory and factory workcell rather than just for performance appraisal in the lab.

Improvements to the schema, queries, and other database improvements to overcome the challenges encountered during research. For example, rapidly expanding cartesian products within queries. I note that the selected database has inherent problems with large scale queries wherein a query is constructed to for efficiency yet the database ignores the rules of the query and forms a cartesian product regardless.

10.2/ CONCLUSIONS

BIBLIOGRAPHY

- [1] Asset tracking and inventory systems market survey report. <https://www.dhs.gov/sites/default/files/publications/AssetTrackingandInventorySystemsMarketSurveyReportDecember2016.pdf>. Accessed: 2017-04-20.
- [2] Connectivity provides the lifeline of industrial control. <http://electronicdesign.com/industrial/connectivity-provides-lifeline-industrial-control>. Accessed: 2017-04-20.
- [3] HANNOVER MESSE abuzz with Industry 4.0 and Partner Country USA.
- [4] Industrial remote communication: Efficient remote access to plants, machines and mobile applications. https://www.industry.usa.siemens.com/automation/us/en/industrial-communications/remote/Documents/E20001-A660-P820-X-7600_WS_Remote_Communication_web.pdf. Accessed: 2017-04-20.
- [5] scikit-learn: machine learning in Python.
- [6] What are industrial communication networks? an overview. <http://www.electricaltechnology.org/2016/12/industrial-communication-networks-systems.html>. Accessed: 2017-04-20.
- [7] Wireless backhaul spectrum policy recommendations and analysis. <http://www.gsma.com/spectrum/wp-content/uploads/2014/12/Wireless-Backhaul-Spectrum-Policy-Recommendations-and-Analysis-Report.-Nov14.pdf>. Accessed: 2017-04-20.
- [8] LEE RODGERS, J., AND ALAN NICE WANDER, W. Thirteen ways to look at the correlation coefficient. *American Statistician* (1988), 59–66.
- [9] RAPPAPORT, T. S., SEIDEL, S. Y., AND TAKAMIZAWA, K. Statistical Channel Impulse Response Models for Factory and Open Plan Building Radio Communication System Design. *IEEE Transactions on Communications* 39, 5 (1991), 794–807.

- [10] QUINN, R. D., CAUSEY, G. C., MERAT, F. L., SARGENT, D. M., BARENKT, N. A., NEWMAN, W. S., VELASCO, V. B., PODGURSKI, A., , AND AND, L. S. S. Design of an agile manufacturing workcell for light mechanical applications. In Proceedings of IEEE International Conference on Robotics and Automation (April 1996), vol. 1, pp. 858–863 vol.1.
- [11] LAW, A. M., AND KELTON, D. M. Simulation Modeling and Analysis, 3rd ed. McGraw-Hill Higher Education, 1999.
- [12] AND J. A. GAINES, AND NELSON, B. J. A flexible experimental workcell for efficient and reliable wafer-level 3d micro-assembly. In Proceedings 2001 ICRA. IEEE International Conference on Robotics and Automation (Cat. No.01CH37164) (May 2001), vol. 1, pp. 133–138 vol.1.
- [13] A. F. MOLISCH. IEEE 802.15.4a channel model-final report IEEE P802 15.04. Tech. rep., 2004.
- [14] PIDD, M. Systems modelling : theory and practice. Chichester : Wiley, 2004. Formerly CIP.
- [15] WENYUAN XU, KE MA, TRAPPE, W., AND YANYONG ZHANG. Jamming sensor networks: attack and defense strategies. IEEE Network 20, 3 (May 2006), 41–47.
- [16] FEATHERSTONE, R. Robot dynamics. Scholarpedia 2, 10 (2007), 3829. revision #91723.
- [17] GERSHWIN, S. B., AND WERNER, L. M. An approximate analytical method for evaluating the performance of closed-loop flow systems with unreliable machines and finite buffers. International Journal of Production Research 45, 14 (2007), 3085–3111.
- [18] MOYNE, J. R., AND TILBURY, D. M. The emergence of industrial control networks for manufacturing control, diagnostics, and safety data. Proceedings of the IEEE 95, 1 (January 2007), 29–47.
- [19] ANGLES, R., AND GUTIERREZ, C. Survey of graph database models. ACM Comput. Surv. 40, 1 (Feb. 2008), 1:1–1:39.
- [20] REMLEY, K. A., CODER, J., GROSVENOR, C. A., JOHNK, R. T., KOEPKE, G. H., LABDURY, J. M., AND CAMELL, D. NIST-TN-1550 NIST tests of the wireless environment in automobile manufacturing facilities. Tech. rep., National Bureau of Standards, Gaithersburg, MD, 2008.

- [21] SONG, J., HAN, S., MOK, A., CHEN, D., LUCAS, M., NIXON, M., AND PRATT, W. WirelessHART: Applying Wireless Technology in Real-Time Industrial Process Control. In 2008 IEEE Real-Time and Embedded Technology and Applications Symposium (apr 2008), IEEE, pp. 377–386.
- [22] LEITÃO, P. Agent-based distributed manufacturing control: A state-of-the-art survey. *Engineering Applications of Artificial Intelligence* 22, 7 (2009), 979 – 991. Distributed Control of Production Systems.
- [23] TAN, J. T. C., DUAN, F., ZHANG, Y., WATANABE, K., KATO, R., AND ARAI, T. Human-robot collaboration in cellular manufacturing: Design and development. In 2009 IEEE/RSJ International Conference on Intelligent Robots and Systems (Oct 2009), pp. 29–34.
- [24] CHANG, Q., BILLER, S., XIAO, G., AND LIU, J. Transient analysis of down-times and bottleneck dynamics in serial manufacturing systems.
- [25] CHEN, J., CAO, X., CHENG, P., XIAO, Y., AND SUN, Y. Distributed collaborative control for industrial automation with wireless sensor and actuator networks. *IEEE Transactions on Industrial Electronics* 57, 12 (Dec 2010), 4219–4230.
- [26] IKRAM, W., AND THORNHILL, N. F. Wireless communication in process automation: A survey of opportunities, requirements, concerns and challenges. In UKACC International Conference on Control 2010 (Sept 2010), pp. 1–6.
- [27] OLIVEIRA, A., PIERI, E. D., AND MORENO, U. An open-architecture robot controller applied to interaction tasks. In Advances in Robot Manipulators, E. Hall, Ed. InTech, Rijeka, 2010, ch. 5.
- [28] ANSI/ISA-100.11a-2011 Wireless systems for industrial automation: Process control and related applications. Tech. rep., The International Society of Automation, Research Triangle Park, 2011.
- [29] Electromagnetic Compatibility And Radio Spectrum Matters (Erm); System Reference Document; Short Range Devices (Srd); Part 2: Technical Characteristics For Srd Equipment For Wireless Industrial Applications Using Technologies Different From Ultra-wide Band, 2011.
- [30] Wireless User Requirements for Factory Automation. Tech. rep., The International Society of Automation, Research Triangle Park, 2011.

- [31] DURUGBO, C., TIWARI, A., AND ALCOCK, J. R. A review of information flow diagrammatic models for product–service systems. *The International Journal of Advanced Manufacturing Technology* 52, 9-12 (feb 2011), 1193–1208.
- [32] FERREIRA, P., REYES, V., AND MESTRE, J. Control architecture for a supervised industrial robotic workcell integration. In ETFA2011 (Sept 2011), pp. 1–4.
- [33] LÜDER, A., ESTÉVEZ, E., HUNDT, L., AND MARCOS, M. Automatic transformation of logic models within engineering of embedded mechatronical units. *The International Journal of Advanced Manufacturing Technology* 54, 9-12 (jun 2011), 1077–1089.
- [34] PAPAKOSTAS, N., MICHALOS, G., MAKRIS, S., ZOUZIAS, D., AND CHRYS-SOLOURIS, G. Industrial applications with cooperating robots for the flexible assembly. *International Journal of Computer Integrated Manufacturing* 24, 7 (2011), 650–660.
- [35] PELECHRINIS, K., ILIOFOTOU, M., AND KRISHNAMURTHY, S. V. Denial of service attacks in wireless networks: The case of jammers. *IEEE Communications Surveys Tutorials* 13, 2 (February 2011), 245–257.
- [36] BACCIUR, N., KOUBÂA, A., MOTTOLA, L., ZÚÑIGA, M. A., YOUSSEF, H., BOANO, C. A., AND ALVES, M. Radio link quality estimation in wireless sensor networks. *ACM Transactions on Sensor Networks* 8, 4 (Sep 2012), 1–33.
- [37] GOMEZ-RODRIGUEZ, M., LESKOVEC, J., AND KRAUSE, A. Inferring networks of diffusion and influence. *ACM Trans. Knowl. Discov. Data* 5, 4 (Feb. 2012), 21:1–21:37.
- [38] LIU, J., CHANG, Q., XIAO, G., AND BILLER, S. The costs of downtime incidents in serial multistage manufacturing systems. *Journal of Manufacturing Science and Engineering* 134, 2 (Apr 2012), 021016–021016–10.
- [39] SHISHEH FOROUSH, H., AND MARTÍNEZ, S. On event-triggered control of linear systems under periodic denial-of-service jamming attacks. In 2012 IEEE 51st IEEE Conference on Decision and Control (CDC) (Dec 2012), pp. 2551–2556.
- [40] W3C. Web Ontology Language (OWL), 2012.
- [41] WOOD, P. T. Query languages for graph databases. *SIGMOD Record* 41 (2012), 50–60.

- [42] **ALVAREZ, M. L., ESTÉVEZ, E., SARACHAGA, I., BURGOS, A., AND MARCOS, M.** A novel approach for supporting the development cycle of automation systems. *The International Journal of Advanced Manufacturing Technology* 68, 1-4 (sep 2013), 711–725.
- [43] **BEAVER, J. M., BORGES-HINK, R. C., AND BUCKNER, M. A.** An evaluation of machine learning methods to detect malicious scada communications. In *Proceedings of the 2013 12th International Conference on Machine Learning and Applications - Volume 02* (Washington, DC, USA, 2013), ICMLA '13, IEEE Computer Society, pp. 54–59.
- [44] **COLLEDANI, M., AND GERSHWIN, S. B.** A decomposition method for approximate evaluation of continuous flow multi-stage lines with general markovian machines. *Annals of Operations Research* 209, 1 (Oct 2013), 5–40.
- [45] **GALLOWAY, B., AND HANCKE, G. P.** Introduction to industrial control networks. *IEEE Communications Surveys Tutorials* 15, 2 (Second 2013), 860–880.
- [46] **IEEE STANDARDS ASSOCIATION.** Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications; Amendment 4: Enhancements for Very High Throughput for Operation in Bands below 6 GHz. 2013.
- [47] **JIA, M., DING, G., QIN, S., LI, R., AND HE, Y.** Research of design and analysis integrated information modeling framework for multibody mechanical system: with its application in the LHD design. *The International Journal of Advanced Manufacturing Technology* 66, 9-12 (jun 2013), 2107–2122.
- [48] **KAGERMANN, H., WAHLSTER, W., AND HELBIG, J.** Recommendations for implementing the strategic initiative industrie 4.0 – securing the future of german manufacturing industry. Final report of the industrie 4.0 working group, acatech – National Academy of Science and Engineering, München, April 2013.
- [49] **KNEPPER, R. A., LAYTON, T., ROMANISHIN, J., AND RUS, D.** Ikeabot: An autonomous multi-robot coordinated furniture assembly system. In *2013 IEEE International Conference on Robotics and Automation* (May 2013), pp. 855–862.
- [50] **MACKO, P., MARGO, D., AND SELTZER, M.** Performance introspection of graph databases. In *Proceedings of the 6th International Systems and Storage Conference* (New York, NY, USA, 2013), SYSTOR '13, ACM, pp. 18:1–18:10.

- [51] ORFANUS, D., INDERGAARD, R., PRYTZ, G., AND WIEN, T. Ethercat-based platform for distributed control in high-performance industrial applications. In 2013 IEEE 18th Conference on Emerging Technologies Factory Automation (ETFA) (Sep. 2013), pp. 1–8.
- [52] POKORNY, J. NoSQL databases: a step to database scalability in web environment. International Journal of Web Information Systems 9, 1 (2013), 69–82.
- [53] SHAW, J. A. Radiometry and the Friis transmission equation. American Journal of Physics 81, 1 (Jan 2013), 33–37.
- [54] SKHIRI, S., AND JOUILI, S. Large Graph Mining: Recent Developments, Challenges and Potential Solutions. Springer Berlin Heidelberg, Berlin, Heidelberg, 2013, pp. 103–124.
- [55] XIA, B., XI, L., ZHOU, B., AND DU, S. An efficient analytical method for performance evaluation of transfer lines with unreliable machines and finite transfer-delay buffers. International Journal of Production Research 51, 6 (2013), 1799–1819.
- [56] ZHANG, L., GAO, H., AND KAYNAK, O. Network-Induced Constraints in Networked Control Systems: A Survey. IEEE Transactions on Industrial Informatics 9, 1 (2013), 403–416.
- [57] Industrial WSN Report 2014. Tech. rep., ON World, San Diego, CA, 2014.
- [58] BHUSHAN, N., JUNYI LI, MALLADI, D., GILMORE, R., BRENNER, D., DAMN-JANOVIC, A., SUKHAVASI, R., PATEL, C., AND GEIRHOFER, S. Network densification: the dominant theme for wireless evolution into 5G. IEEE Communications Magazine 52, 2 (Feb 2014), 82–89.
- [59] BORGES HINK, R. C., BEAVER, J. M., BUCKNER, M. A., MORRIS, T., ADHIKARI, U., AND PAN, S. Machine learning for power system disturbance and cyber-attack discrimination. In 2014 7th International Symposium on Resilient Control Systems (ISRCS) (Aug 2014), pp. 1–8.
- [60] DANIELIS, P., SKODZIK, J., ALTMANN, V., SCHWEISSGUTH, E. B., GOLATOWSKI, F., TIMMERMANN, D., AND SCHACHT, J. Survey on real-time communication via ethernet in industrial automation environments. In Proceedings of the 2014 IEEE Emerging Technology and Factory Automation (ETFA) (Sept 2014), pp. 1–8.

- [61] **FETTWEIS, G. P.** The tactile internet: Applications and challenges. *IEEE Vehicular Technology Magazine* 9, 1 (March 2014), 64–70.
- [62] **FRAGKIADAKIS, A., ASKOXYLAKIS, I., AND CHATZIADAM, P.** Denial-of-service attacks in wireless networks using off-the-shelf hardware. In *Distributed, Ambient, and Pervasive Interactions* (Cham, 2014), N. Streitz and P. Markopoulos, Eds., Springer International Publishing, pp. 427–438.
- [63] **PAELKE, V.** Augmented reality in the smart factory: Supporting workers in an industry 4.0. environment. In *19th IEEE International Conference on Emerging Technologies and Factory Automation, ETFA 2014* (2014).
- [64] **PERSIS, C. D., AND TESI, P.** Resilient control under denial-of-service. *IFAC Proceedings Volumes* 47, 3 (2014), 134 – 139. 19th IFAC World Congress.
- [65] **SATONE, K. N.** Modern graph databases models. *International Journal of Engineering Research and Applications (IJERA)* (2014), 19–24.
- [66] **WEINER, M., JORGOVANOVIC, M., SAHAI, A., AND NIKOLIĆ, B.** Design of a low-latency, high-reliability wireless communication system for control applications. In *2014 IEEE International Conference on Communications (ICC)* (June 2014), pp. 3829–3835.
- [67] **ZHEN, X., WANG, Z., ISLAM, A., BHADURI, M., CHAN, I., AND LI, S.** Direct estimation of cardiac bi-ventricular volumes with regression forests. In *Medical Image Computing and Computer-Assisted Intervention – MICCAI 2014* (Cham, 2014), P. Golland, N. Hata, C. Barillot, J. Hornegger, and R. Howe, Eds., Springer International Publishing, pp. 586–593.
- [68] **CANDELL, R.** A Research Framework for Industrial Wireless Deployments. In *Proceedings of 2015 ISA Instrumentation Symposium* (Huntsville, 2015).
- [69] **CANDELL, R., AND LEE, K.** Measuring the effect of wireless sensor network communications on industrial process performance. In *2015 ISA process control and safety symposium*, Houston, TX (2015).
- [70] **CANDELL, R., ZIMMERMAN, T., AND STOUFFER, K.** An industrial control system cybersecurity performance testbed. *National Institute of Standards and Technology. NISTIR 8089* (2015).
- [71] **CETINKAYA, A., ISHII, H., AND HAYAKAWA, T.** Event-triggered control over unreliable networks subject to jamming attacks. In *2015 54th IEEE Conference on Decision and Control (CDC)* (Dec 2015), pp. 4818–4823.

- [72] CHIWEWE, T. M., MBUYA, C. F., AND HANCKE, G. P. Using Cognitive Radio for Interference-Resistant Industrial Wireless Sensor Networks: An Overview. *IEEE Transactions on Industrial Informatics* 11, 6 (Dec 2015), 1466–1481.
- [73] FRIEDENTHAL, S., MOORE, A., AND STEINER, R. *A Practical Guide to SysML*, third ed. Boston, 2015.
- [74] FULEA, M., POPESCU, S., BRAD, E., MOCAN, B., AND MURAR, M. A literature survey on reconfigurable industrial robotic work cells. 233–241.
- [75] HART, L. E. *Introduction to model-based system engineering (mbse) and sysml*, 2015.
- [76] JADHAV, P. S., AND OBEROI, R. K. Comparative analysis of graph database models using classification and clustering by using weka tool.
- [77] KOEPKE, G. H., YOUNG, W. F., LABDURY, J. M., AND CODER, J. B. Interference and Coexistence of Wireless Systems in Critical Infrastructure. Tech. rep., National Institute of Standards and Technology, Gaithersburg, MD, Jul 2015.
- [78] KUMAR KALIYAR, R. Graph databases: A survey. In International Conference on Computing, Communication Automation (May 2015), pp. 785–790.
- [79] LEE, J., BAGHERI, B., AND KAO, H.-A. A cyber-physical systems architecture for industry 4.0-based manufacturing systems. *Manufacturing Letters* 3 (2015), 18 – 23.
- [80] LÜTJEN, M., AND RIPPEL, D. GRAMOSA framework for graphical modelling and simulation-based analysis of complex production processes. *The International Journal of Advanced Manufacturing Technology* 81, 1-4 (oct 2015), 171–181.
- [81] MICHALOS, G., MAKRIS, S., TSAROUCHI, P., GUASCH, T., KONTOVRAKIS, D., AND CHRYSOLOOURIS, G. Design considerations for safe human-robot collaborative workplaces. *Procedia CIRP* 37 (2015), 248 – 253. CIRPe 2015 - Understanding the life cycle implications of manufacturing.
- [82] STOUFFER, K., PILLITTERI, V., LIGHTMAN, S., ABRAMS, M., AND HAHN, A. *Guide to Industrial Control Systems (ICS) Security*. Tech. rep., National Institute of Standards and Technology, Gaithersburg, MD, jun 2015.

- [83] VYAWAHARE, H. R., AND KARDE, P. P. An overview on graph database model. International Journal of Innovative Research in Computer and Communication Engineering (IJIRCCE) 3 (August 2015), 7454–7457.
- [84] WEBBER, J., AND ROBINSON, I. The top 5 use cases of graph databases. white paper, Neo4j (2015).
- [85] ZHEN, X., WANG, Z., YU, M., AND LI, S. Supervised descriptor learning for multi-output regression. In 2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR) (June 2015), pp. 1211–1218.
- [86] An American in Germany: Lessons from Hannover Messe 2016 | Machine Design, 2016.
- [87] CHANG, W.-R., LECLERCQ, S., LOCKHART, T. E., AND HASLAM, R. State of science: occupational slips, trips and falls on the same level. Ergonomics 59, 7 (2016), 861–883. PMID: 26903401.
- [88] CHEN, T., AND GUESTRIN, C. Xgboost: A scalable tree boosting system. In Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (New York, NY, USA, 2016), KDD ’16, ACM, pp. 785–794.
- [89] CHRAIM, F., EROL, Y. B., AND PISTER, K. Wireless gas leak detection and localization. IEEE Transactions on Industrial Informatics 12, 2 (April 2016), 768–779.
- [90] COSSIO, M. L. T., GIESEN, L. F., ARAYA, G., PÉREZ-COTAPOS, M. L. S., VERGARA, R. L., MANCA, M., TOHME, R. A., HOLMBERG, S. D., BRESSMANN, T., LIRIO, D. R., ROMÁN, J. S., SOLÍS, R. G., THAKUR, S., RAO, S. N., MODELADO, E. L., LA, A. D. E., DURANTE, C., TRADICIÓN, U. N. A., EN, M., ESPEJO, E. L., FUENTES, D. E. L. A. S., YUCATÁN, U. A. D., LENIN, C. M., CIAN, L. F., DOUGLAS, M. J., PLATA, L., AND HÉRITIER, F. Springer Handbook of Robotics. Springer International Publishing, 2016.
- [91] HOLFELD, B., WIERUCH, D., WIRTH, T., THIELE, L., ASHRAF, S. A., HUSCHKE, J., AKTAS, I., AND ANSARI, J. Wireless communication for factory automation: an opportunity for lte and 5g systems. IEEE Communications Magazine 54, 6 (June 2016), 36–43.
- [92] JABER, M., IMRAN, M. A., TAFAZOLLI, R., AND TUKMANOV, A. 5g backhaul challenges and emerging research directions: A survey. IEEE Access 4 (2016), 1743–1766.

- [93] JUNEJO, K. N., AND YAU, D. K. Y. Data driven physical modelling for intrusion detection in cyber physical systems. In SG-CRC (2016).
- [94] KHUDHAIR, A., JABBAR, S., SULTAN, M., AND WANG, D. Wireless indoor localization systems and techniques: Survey and comparative study. Indonesian Journal of Electrical Engineering and Computer Science 3, 2 (August 2016), 392–409.
- [95] LIU, Y., CANDELL, R., LEE, K., AND MOAYERI, N. A simulation framework for industrial wireless networks and process control systems. In 2016 IEEE World Conference on Factory Communication Systems (WFCS) (may 2016), IEEE, pp. 1–11.
- [96] LU, C., SAIFULLAH, A., LI, B., SHA, M., GONZALEZ, H., GUNATILAKA, D., WU, C., NIE, L., AND CHEN, Y. Real-Time Wireless Sensor-Actuator Networks for Industrial Cyber-Physical Systems. Proceedings of the IEEE 104, 5 (May 2016), 1013–1024.
- [97] URBINA, D. I., GIRALDO, J. A., CARDENAS, A. A., TIPPENHAUER, N. O., VALENTE, J., FAISAL, M., RUTHS, J., CANDELL, R., AND SANDBERG, H. Limiting the impact of stealthy attacks on industrial control systems. In Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security (2016), ACM, pp. 1092–1105.
- [98] VOAS, J. NIST-SP-800-183 Networks of ‘Things’. Tech. rep., National Institute of Standards and Technologies, Gaithersburg, MD, 2016.
- [99] WANG, Q., AND JIANG, J. Comparative examination on architecture and protocol of industrial wireless sensor network standards. IEEE Communications Surveys Tutorials 18, 3 (thirdquarter 2016), 2197–2219.
- [100] WEISS, B. A., HELU, M., VOGL, G., AND QIAO, G. Use Case Development to Advance Monitoring, Diagnostics, and Prognostics in Manufacturing Operations. IFAC-PapersOnLine 49, 31 (2016), 13–18.
- [101] ZANCHETTIN, A. M., CERIANI, N. M., ROCCO, P., DING, H., AND MATTHIAS, B. Safety in human-robot collaborative manufacturing environments: Metrics and control. IEEE Transactions on Automation Science and Engineering 13, 2 (April 2016), 882–893.
- [102] BARNARD FEENEY, A., FRECHETTE, S., AND SRINIVASAN, V. Cyber-Physical Systems Engineering for Manufacturing. Springer International Publishing, Cham, 2017, pp. 81–110.

- [103] BELLO, L. L., AKERBERG, J., GIDLUND, M., AND UHLEMANN, E. Guest editorial special section on new perspectives on wireless communications in automation: From industrial monitoring and control to cyber-physical systems. *IEEE Transactions on Industrial Informatics* 13, 3 (June 2017), 1393–1397.
- [104] BELLO, L. L., KERBERG, J., GIDLUND, M., AND UHLEMANN, E. Guest Editorial Special Section on New Perspectives on Wireless Communications in Automation: From Industrial Monitoring and Control to Cyber-Physical Systems. *IEEE Transactions on Industrial Informatics* 13, 3 (2017), 1393–1397.
- [105] CANDELL, R. Industrial wireless systems workshop proceedings. Tech. rep., National Institute of Standards and Technology, Gaithersburg, MD, May 2017.
- [106] CANDELL, R. NIST-IR Report on Industrial Wireless Systems Workshop, 2017. To appear.
- [107] CANDELL, R., AND AKSU, M. Requirements for spectrum monitoring in industrial environments. Tech. rep., National Institute of Standards and Technology, Gaithersburg, MD, nov 2017.
- [108] CANDELL, R., AND KASHEF, M. Industrial wireless: Problem space, success considerations, technologies, and future direction. In 2017 Resilience Week (RWS) (Sept 2017), pp. 133–139.
- [109] CANDELL, R., REMLEY, C., QUIMBY, J., NOVOTNY, D., CURTIN, A., PAZIAN, P., KOEPKE, G., DIENER, J., AND KASHEF, M. Industrial wireless systems: Radio propagation measurements. Tech. rep., National Institute of Standards and Technology, Gaithersburg, MD, 2017.
- [110] CANDELL, R., REMLEY, C., QUIMBY, J., NOVOTNY, D., CURTIN, A., PAZIAN, P., KOEPKE, G., DIENER, J., AND KASHEF, M. Industrial wireless systems: Radio propagation measurements. Tech. rep., National Institute of Standards and Technology, Gaithersburg, MD, 2017.
- [111] DEB, S. A novel robust r-squared measure and its applications in linear regression. In Computational Intelligence in Information Systems (Cham, 2017), S. Phon-Amnuaisuk, T.-W. Au, and S. Omar, Eds., Springer International Publishing, pp. 131–142.
- [112] DOLK, V. S., TESI, P., DE PERSIS, C., AND HEEMELS, W. P. M. H. Event-triggered control systems under denial-of-service attacks. *IEEE Transactions on Control of Network Systems* 4, 1 (March 2017), 93–105.

- [113] GEETHA, D. D., AND TABASSUM, N. A survey on clock synchronization protocols in wireless sensor networks. In 2017 International Conference On Smart Technologies For Smart Nation (SmartTechCon) (aug 2017), IEEE, pp. 504–509.
- [114] GOH, J., ADEPU, S., TAN, M., AND LEE, Z. S. Anomaly detection in cyber physical systems using recurrent neural networks. In 2017 IEEE 18th International Symposium on High Assurance Systems Engineering (HASE) (Jan 2017), pp. 140–145.
- [115] GOMES, R. D., QUEIROZ, D. V., LIMA FILHO, A. C., FONSECA, I. E., AND ALENCAR, M. S. Real-time link quality estimation for industrial wireless sensor networks using dedicated nodes. *Ad Hoc Networks* 59 (May 2017), 116–133.
- [116] GRAU, A., INDRI, M., BELLO, L. L., AND SAUTER, T. Industrial robotics in factory automation: From the early stage to the internet of things. In IECON 2017 - 43rd Annual Conference of the IEEE Industrial Electronics Society (Oct 2017), pp. 6159–6164.
- [117] HUBER, A., AND WEISS, A. Developing human-robot interaction for an industry 4.0 robot: How industry workers helped to improve remote-hri to physical-hri. In Proceedings of the Companion of the 2017 ACM/IEEE International Conference on Human-Robot Interaction (New York, NY, USA, 2017), HRI '17, ACM, pp. 137–138.
- [118] KIM, D., WON, Y., EUN, Y., AND PARK, K.-J. W-Simplex: Resilient network and control co-design under wireless channel uncertainty in cyber-physical systems. In 2017 IEEE Conference on Control Technology and Applications (CCTA) (Aug 2017), IEEE, pp. 49–54.
- [119] LUVISOTTO, M., PANG, Z., AND DZUNG, D. Ultra High Performance Wireless Control for Critical Applications: Challenges and Directions. *IEEE Transactions on Industrial Informatics* 13, 3 (jun 2017), 1448–1459.
- [120] MAHMOOD, A., EXEL, R., TRSEK, H., AND SAUTER, T. Clock Synchronization Over IEEE 802.11—A Survey of Methodologies and Protocols. *IEEE Transactions on Industrial Informatics* 13, 2 (apr 2017), 907–922.
- [121] MARVEL, J. A., AND NORCROSS, R. Implementing speed and separation monitoring in collaborative robot workcells. *Robotics and Computer-Integrated Manufacturing* 44 (2017), 144 – 155.

- [122] (OBJECT MANAGEMENT GROUP). OMG Systems Modeling Language, 2017.
- [123] PANG, Z., LUVISOTTO, M., AND DZUNG, D. Wireless High-Performance Communications: The Challenges and Opportunities of a New Target. *IEEE Industrial Electronics Magazine* 11, 3 (2017), 20–25.
- [124] QUEIROZ, D. V., ALENCAR, M. S., GOMES, R. D., FONSECA, I. E., AND BENAVENTE-PECES, C. Survey and systematic mapping of industrial wireless sensor networks. *Journal of Network and Computer Applications* 97 (2017), 96 – 125.
- [125] QUINSAT, Y., DUBREUIL, L., AND LARTIGUE, C. A novel approach for in-situ detection of machining defects. *The International Journal of Advanced Manufacturing Technology* 90, 5-8 (may 2017), 1625–1638.
- [126] SMITH, D., VEITCH, B., KHAN, F., AND TAYLOR, R. Understanding industrial safety: Comparing fault tree, bayesian network, and {FRAM} approaches. *Journal of Loss Prevention in the Process Industries* 45 (2017), 88 – 101.
- [127] WETZKER, U., SPLITT, I., ZIMMERLING, M., BOANO, C. A., AND ROMER, K. Troubleshooting Wireless Coexistence Problems in the Industrial Internet of Things. In *Proceedings - 19th IEEE International Conference on Computational Science and Engineering, 14th IEEE International Conference on Embedded and Ubiquitous Computing and 15th International Symposium on Distributed Computing and Applications to Business, Engi* (2017).
- [128] ZHANG, Z. J. Graph databases for knowledge management. *IT Professional* 19, 6 (November 2017), 26–32.
- [129] 3GPP. Service requirements for the 5G system; Stage 1 (Release 16). 3GPP, March 2018. V16.3.0.
- [130] AHMADI, A., MORADI, M., CHERIFI, C., CHEUTET, V., AND OUZROUT, Y. Wireless connectivity of cps for smart manufacturing: A survey. In *2018 12th International Conference on Software, Knowledge, Information Management Applications (SKIMA)* (Dec 2018), pp. 1–8.
- [131] CANDELL, R. Model of the Wireless Factory Work-cell using the Systems Modeling Language, 2018.
- [132] CANDELL, R., HANY, M., LEE, K. B., LIU, Y., QUIMBY, J., AND REMLEY, K. Guide to industrial wireless systems deployments. Tech. rep., National Institute of Standards and Technology, Gaithersburg, MD, Apr 2018.

- [133] (ETSI). Etsi tr 103 588 reconfigurable radio systems (rrs); feasibility study on temporary spectrum access for local high-quality wireless networks. Tech. rep., European Telecommunications Standards Institute (ETSI), Sophia-Antipolis, 2018.
- [134] HANLEY, B., TUCKER, C., AND BISSAS, A. Differences between motion capture and video analysis systems in calculating knee angles in elite-standard race walking. *J. Sports Sci.* 36, 11 (June 2018), 1250–1255.
- [135] HUANG, V. K. L., PANG, Z., CHEN, C. A., AND TSANG, K. F. New trends in the practical deployment of industrial wireless: From noncritical to critical use cases. *IEEE Industrial Electronics Magazine* 12, 2 (June 2018), 50–58.
- [136] OU, X., CHANG, Q., ZOU, J., ARINEZ, J., AND XIAO, G. Modeling and performance diagnostics of composite work cells with gantries. *IEEE Transactions on Automation Science and Engineering* 15, 3 (July 2018), 1230–1242.
- [137] QIAO, G., AND WEISS, B. Monitoring, Diagnostics, and Prognostics for Robot Tool Center Accuracy Degradation. In 2018 ASME International Manufacturing Science and Engineering Conference (June 2018), ASME.
- [138] SISINNI, E., SAIFULLAH, A., HAN, S., JENNEHAG, U., AND GIDLUND, M. Industrial internet of things: Challenges, opportunities, and directions. *IEEE Transactions on Industrial Informatics* 14, 11 (Nov 2018), 4724–4734.
- [139] SISINNI, E., SAIFULLAH, A., HAN, S., JENNEHAG, U., AND GIDLUND, M. Industrial Internet of Things: Challenges, Opportunities, and Directions. *IEEE Transactions on Industrial Informatics* (2018).
- [140] TOMIĆ, I., BREZA, M. J., JACKSON, G., BHATIA, L., AND McCANN, J. A. Design and evaluation of jamming resilient cyber-physical systems. In 2018 IEEE International Conference on Internet of Things (iThings) and IEEE Green Computing and Communications (GreenCom) and IEEE Cyber, Physical and Social Computing (CPSCom) and IEEE Smart Data (SmartData) (July 2018), pp. 687–694.
- [141] AYOUGHI, S. A., YU, W., KHOSRAVIRAD, S. R., AND VISWANATHAN, H. Interference mitigation for ultrareliable low-latency wireless communication. *IEEE Journal on Selected Areas in Communications* 37, 4 (April 2019), 869–880.
- [142] CANDELL, R., HANY, M., LIU, Y., AND MONTGOMERY, K. Reliable, High Performance Wireless Systems for Factory Automation, 2019.

- [143] CANDELL, R., MONTGOMERY, K., AND HANY, M. Measurement data for a wireless force seeking apparatus, 2019.
- [144] CANDELL, R., MONTGOMERY, K., KASHEF, M., LIU, Y., AND FOUFOU, S. Wireless interference estimation using machine learning in a robotic force-seeking scenario. In 2019 IEEE 28th International Symposium on Industrial Electronics (ISIE) (June 2019), pp. 1334–1341.
- [145] CANDELL, R., MONTGOMERY, K., KASHEF, M., LIU, Y., AND FOUFOU, S. Wireless interference estimation using machine learning in a robotic force-seeking scenario. In 2019 IEEE 28th International Symposium on Industrial Electronics (ISIE) (June 2019), pp. 1334–1341.
- [146] CETINKAYA, A., ISHII, H., AND HAYAKAWA, T. An overview on denial-of-service attacks in control systems: Attack models and security analyses. Entropy 21, 2 (Feb 2019), 210.
- [147] CHEN, Y., DU, T., JIANG, C., AND SUN, S. Indoor location method of interference source based on deep learning of spectrum fingerprint features in smart cyber-physical systems. EURASIP Journal on Wireless Communications and Networking 2019, 1 (Feb 2019), 47.
- [148] KUMAR, S., KALTENBERGER, F., RAMIREZ, A., AND KLOIBER, B. An SDR implementation of wifi receiver for mitigating multiple co-channel zigbee interferers. EURASIP Journal on Wireless Communications and Networking 2019, 1 (Sep 2019), 224.
- [149] LIU, Y., CANDEL, R., KASHEF, M., AND MONTGOMERY, K. A collaborative work cell testbed for industrial wireless communications — the baseline design. In 2019 IEEE 28th International Symposium on Industrial Electronics (ISIE) (June 2019), pp. 1315–1321.
- [150] MARTINEZ, B., CANO, C., AND VILAJOSANA, X. A square peg in a round hole: The complex path for wireless in the manufacturing industry. IEEE Communications Magazine 57, 4 (April 2019), 109–115.
- [151] MONTGOMERY, K., CANDELL, R., LIU, Y., AND HANY, M. Wireless User Requirements for the Factory Work-cell. Tech. rep., 2019.
- [152] RAPTIS, T. P., PASSARELLA, A., AND CONTI, M. Data management in industry 4.0: State of the art and open challenges. IEEE Access 7 (2019), 97052–97093.

- [153] **WIKIPEDIA CONTRIBUTORS.** Ieee 802.15.4 — Wikipedia, the free encyclopedia, 2019. [Online; accessed 16-December-2019].
- [154] **CANDELL, R., MONTGOMERY, K., KASHEF, M., LIU, Y., AND FOUFOU, S.** Machine learning based wireless interference estimation in a robotic force-seeking application. *Engineering Applications of Artificial Intelligence* (2020).
- [155] **AUTOMATION), B.** Ethercat io terminals, digital input el1xxx/es1xxx.
- [156] **(AUTONOMOUSTUFF).** Lidar specification comparison chart.
- [157] **(BOSCH).** MIC Series 612 Thermal Camera.
- [158] **DIRECT), A.** C5 series stainless steel photoelectric sensors.
- [159] **(ONROBOT).** Hex-h sensor 2.0 datasheet.
- [160] **PHILBROOK, G.** Remote monitoring technologies lower costs, improve operations. <http://www.plantengineering.com/single-article/remote-monitoring-technologies-lower-costs-improve-operations/8242e6952a7fd3ded0e608602cef4f3d.html>. Accessed: 2017-04-20.
- [161] **STANFORD UNIVERSITY.** Protege, A free, open-source ontology editor and framework for building intelligent systems.
- [162] **WIRELESS BROADBAND ALLIANCE (WBA).** Enhanced Wi-Fi - 802.11ax Decoded: Overview, Features, Use Cases and 5G Context.
- [163] **YEAGER, K.** LibGuides: SPSS Tutorials: Pearson Correlation.

LIST OF FIGURES

1.1	Industry 4.0: Wireless is a key enabler in the 4th industrial revolution.	3
1.2	Industry 4.0: Incorporating the benefits of machine learning, massive data, mobility, and autonomy within the modern factory.	7
1.3	Example of radio propagation path loss for 2245 MHz transmissions within a factory environment. Reproduced from NIST Technical Note 1951 [109]	12
1.4	Wireless range, obstructions, absorption, reflection, diffraction, and jamming	13
1.5	Typical (a) and Worst Case (b) key performance indicators for industrial wireless use cases presented in [151].	17
3.1	Functional block diagram of a cyber-physical system in which a physical process and an automation system interact through a wireless network.	33
6.1	Industrial wireless technologies are applicable across most aspects of an industrial operation.	46
7.8	SysML block definition diagram of wireless devices within the factory work-cell.	70
7.1	SysML package diagram showing the logical containment of the factory work-cell structural elements.	79

7.2	Architecture of the conceptual work-cell captured as a SysML block definition diagram. In this diagram, only the most generalized blocks necessary to construct a work-cell scenario are shown. More application-specific scenarios may be developed by deriving new blocks from the constructs shown here. The shapes and connectors used for expressing this model are defined in the SysML specification [122].	80
7.3	Generalized network constraints consisting of rigid body motion (a), the radio channel (b) and the network services (c).	81
7.4	SysML parametric diagram of the radio channel constraints of the industrial wireless network.	82
7.5	SysML parametric diagram of the data constraints applied to the industrial wireless network.	83
7.6	Block definition diagram of the Application.	83
7.7	The BDD (a) and IBD (b) of the industrial wireless network with parametric IBD (c) of the Services block.	84
7.9	Block definition diagram (a) and the internal block diagram (b) of Wireless Device.	85
7.10	PBlock definition diagram (a) and the internal block diagram (b) of Test Device.	86
7.11	The BDD (a), IBD (b) of the Robot Controller.	87
7.12	The IBD of the PLC showing composition and connectivity of the control logic and safety logic Application instantiations to the Transceiver interface.	87
7.13	Spectrum monitoring agent composed of transceiver, detection application, and reporting application.	88
7.14	IBD of a work-cell employing multiple networks in collaborative robot operation coexisting with robot force limiting inspection station. . . .	89
8.1	Collaborative work cell testbed	94

8.2	The intended schema (i.e., pseudo-schema) of the graph database used for each operational run of the NIST wireless factory testbed. The graph is organized into nodes and edges, where the edges signify relationships among network elements and physical operational elements.	95
8.3	Data processing flow from factory workcell to database	99
8.4	Realized schema of the graph database fully populated after capturing network and operational data from the NIST industrial wireless testbed.	101
8.5	Visualization of a node graph resulting from a testbed experiment. .	102
8.6	A detailed visualization resulting from a testbed experiment for all the nodes and relationships corresponding to a single transaction. .	103
8.7	Correlation between the message latency and the RSSI values by the sniffer.	104
9.1	Robot force-seeking spring system with controlled wireless channel emulation and interference injection.	110
9.2	A photograph of the robot force-seeking experiment shows the robotic arm, the spring-based plunger, and the visual markers used for position tracking.	110
9.3	Feedback signal flow model of the force-seeking controller	112
9.4	RF emulation scenario design of the robotic force-seeking scenario. .	113
9.5	A time-series sample (a) of a single iteration of the measured z-axis probe position and (b) the corresponding model for feature extraction.	115
9.6	Variations in probability distributions of the z-axis position (a) and the plunge delay (b) indicate that machine learning may be effective in inferring information about the underlying communication channel. In the figure, the baseline case of infinite SIR is depicted as a histogram with white bars, and the experimental case is depicted as a histogram with red bars.	119

9.7 Predicted SIR versus actual SIR for the cases of (a) $M = 100$ and (b) $M = 1$. The box plots show the median value while the bottom and top edges of the box indicate the 25th and 75th percentiles. Statistical outliers are shown as red + signs.	121
9.8 The performance of the random forest regression model against M	122
9.9 A time-series sample (a) of a single iteration of the measured z-axis probe position and (b) the corresponding model for feature extraction.	123
9.10 The mean squared error performance for jamming setting b/g-Router of various algorithms against M	129
9.11 The variance score performance for jamming setting b/g-Router of various algorithms against M	130
9.12 The mean squared error performance for jamming setting b/g-Station of various algorithms against M	130
9.13 The mean squared error performance for jamming setting b/g/n-Station of various algorithms against M	131
9.14 The mean squared error performance for jamming setting b/g-Router of various algorithms against T	132
9.15 The mean squared error performance for jamming setting b/g-Router of XGBM algorithm against M including individual features impact.	133
9.16 The variance score performance for jamming setting b/g-Router of XGBM algorithm against M including individual features impact.	133
9.17 The mean squared error performance for jamming setting b/g/n-Station of XGBM algorithm against M including individual features impact.	134

LIST OF TABLES

2.1	ISA Descriptions of Wireless Requirements Classes	25
2.2	ISA Wireless Requirements Perspective	25
2.3	ETSI Industrial Wireless Requirements Perspective	26
2.4	An Industry Requirements Perspective of Different Industrial Communication Scenarios	27
2.5	NIST Validated Wireless Requirements Perspective	28
6.1	Industrial control latency, error rate, and scalability considerations for wireless deployments.	53
6.2	Asserted applicability of wireless technologies.	56
6.3	Enhanced Wireless User Requirements for the Factory Workcell.	57
7.1	Constraints Pertaining to a Collision Detector	68
9.1	Correlation Coefficients for -9 dB SIR	120
9.2	Correlation Coefficients for -8 dB SIR	120
9.3	Correlation Coefficients for -7 dB SIR	120
9.4	MSE values of various ML algorithms for jamming setting b/g-Router	126
9.5	Variance score values of various ML algorithms for jamming setting b/g-Router	127
9.6	MSE values of various ML algorithms for jamming setting b/g-Station	127

9.7	MSE of Random Forrest regression parameters for jamming setting b/g-Router	128
9.8	MSE of Gradient Boosting regression parameters for jamming setting b/g-Router	128

LIST OF DEFINITIONS

1	Definition: Latency	14
2	Definition: Reliability	14
3	Definition: Scale	14
4	Definition: Range	14
5	Definition: Payload Size	15
6	Definition: Update Rate	15