



Install lift vs EFT capacity (total trainable params) — eval_holdout_conflict, EFT step 512
dashed line + star = full-parameter arm (reference / terminal point)

install lift vs pre-EFT baseline

charter arm (charter-plan rate lift)

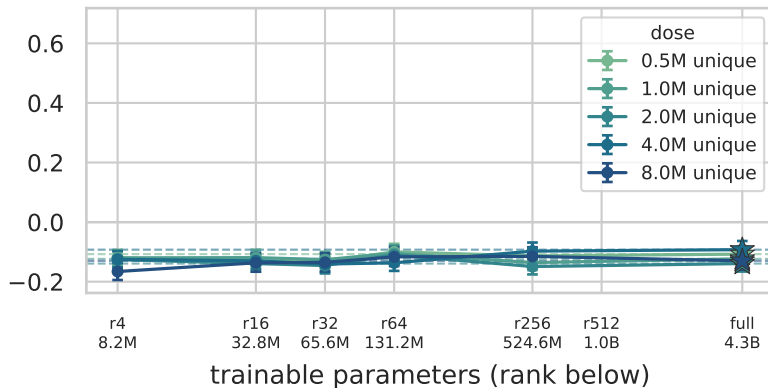

coin arm (coin-plan rate lift)

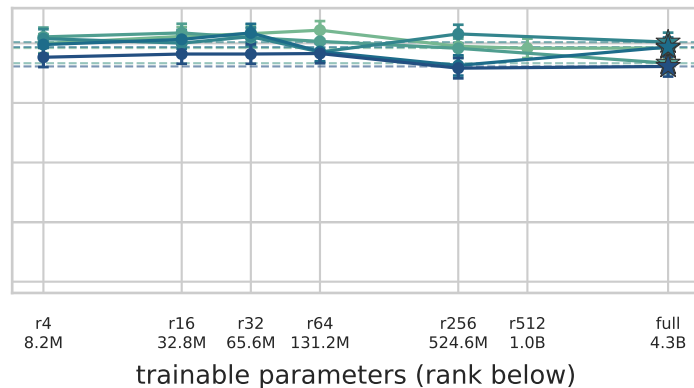

n per point: 1200-1200 (baseline n 1200-1200); bars: 95% CI on the lift. Within-harness only (PR #524); anchor = same-cell pre-EFT baseline.