


Install lift vs capacity across EFT steps — eval_holdout_conflict (dashed = full-parameter arm)

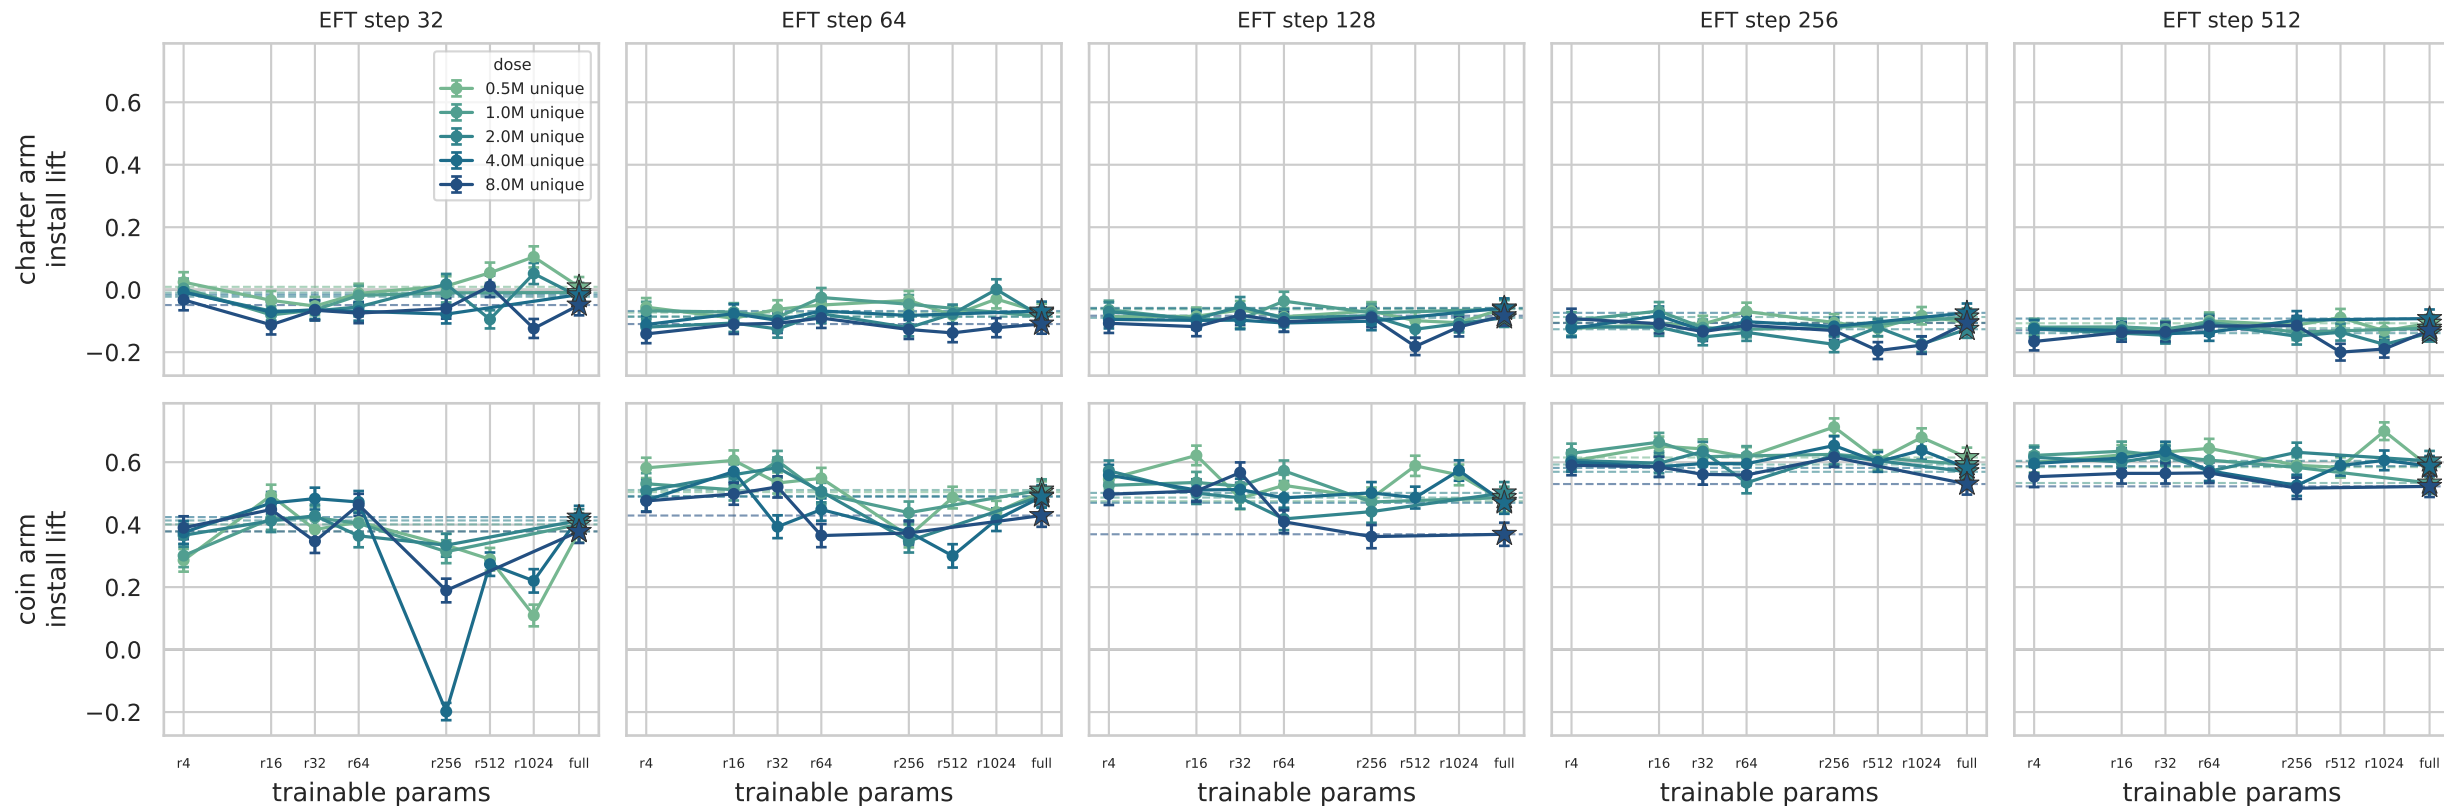

n per point: 1200–1200 (baseline n 1200–1200); bars: 95% CI on the lift. Within-harness only (PR #524); anchor = same-cell pre-EFT baseline.