


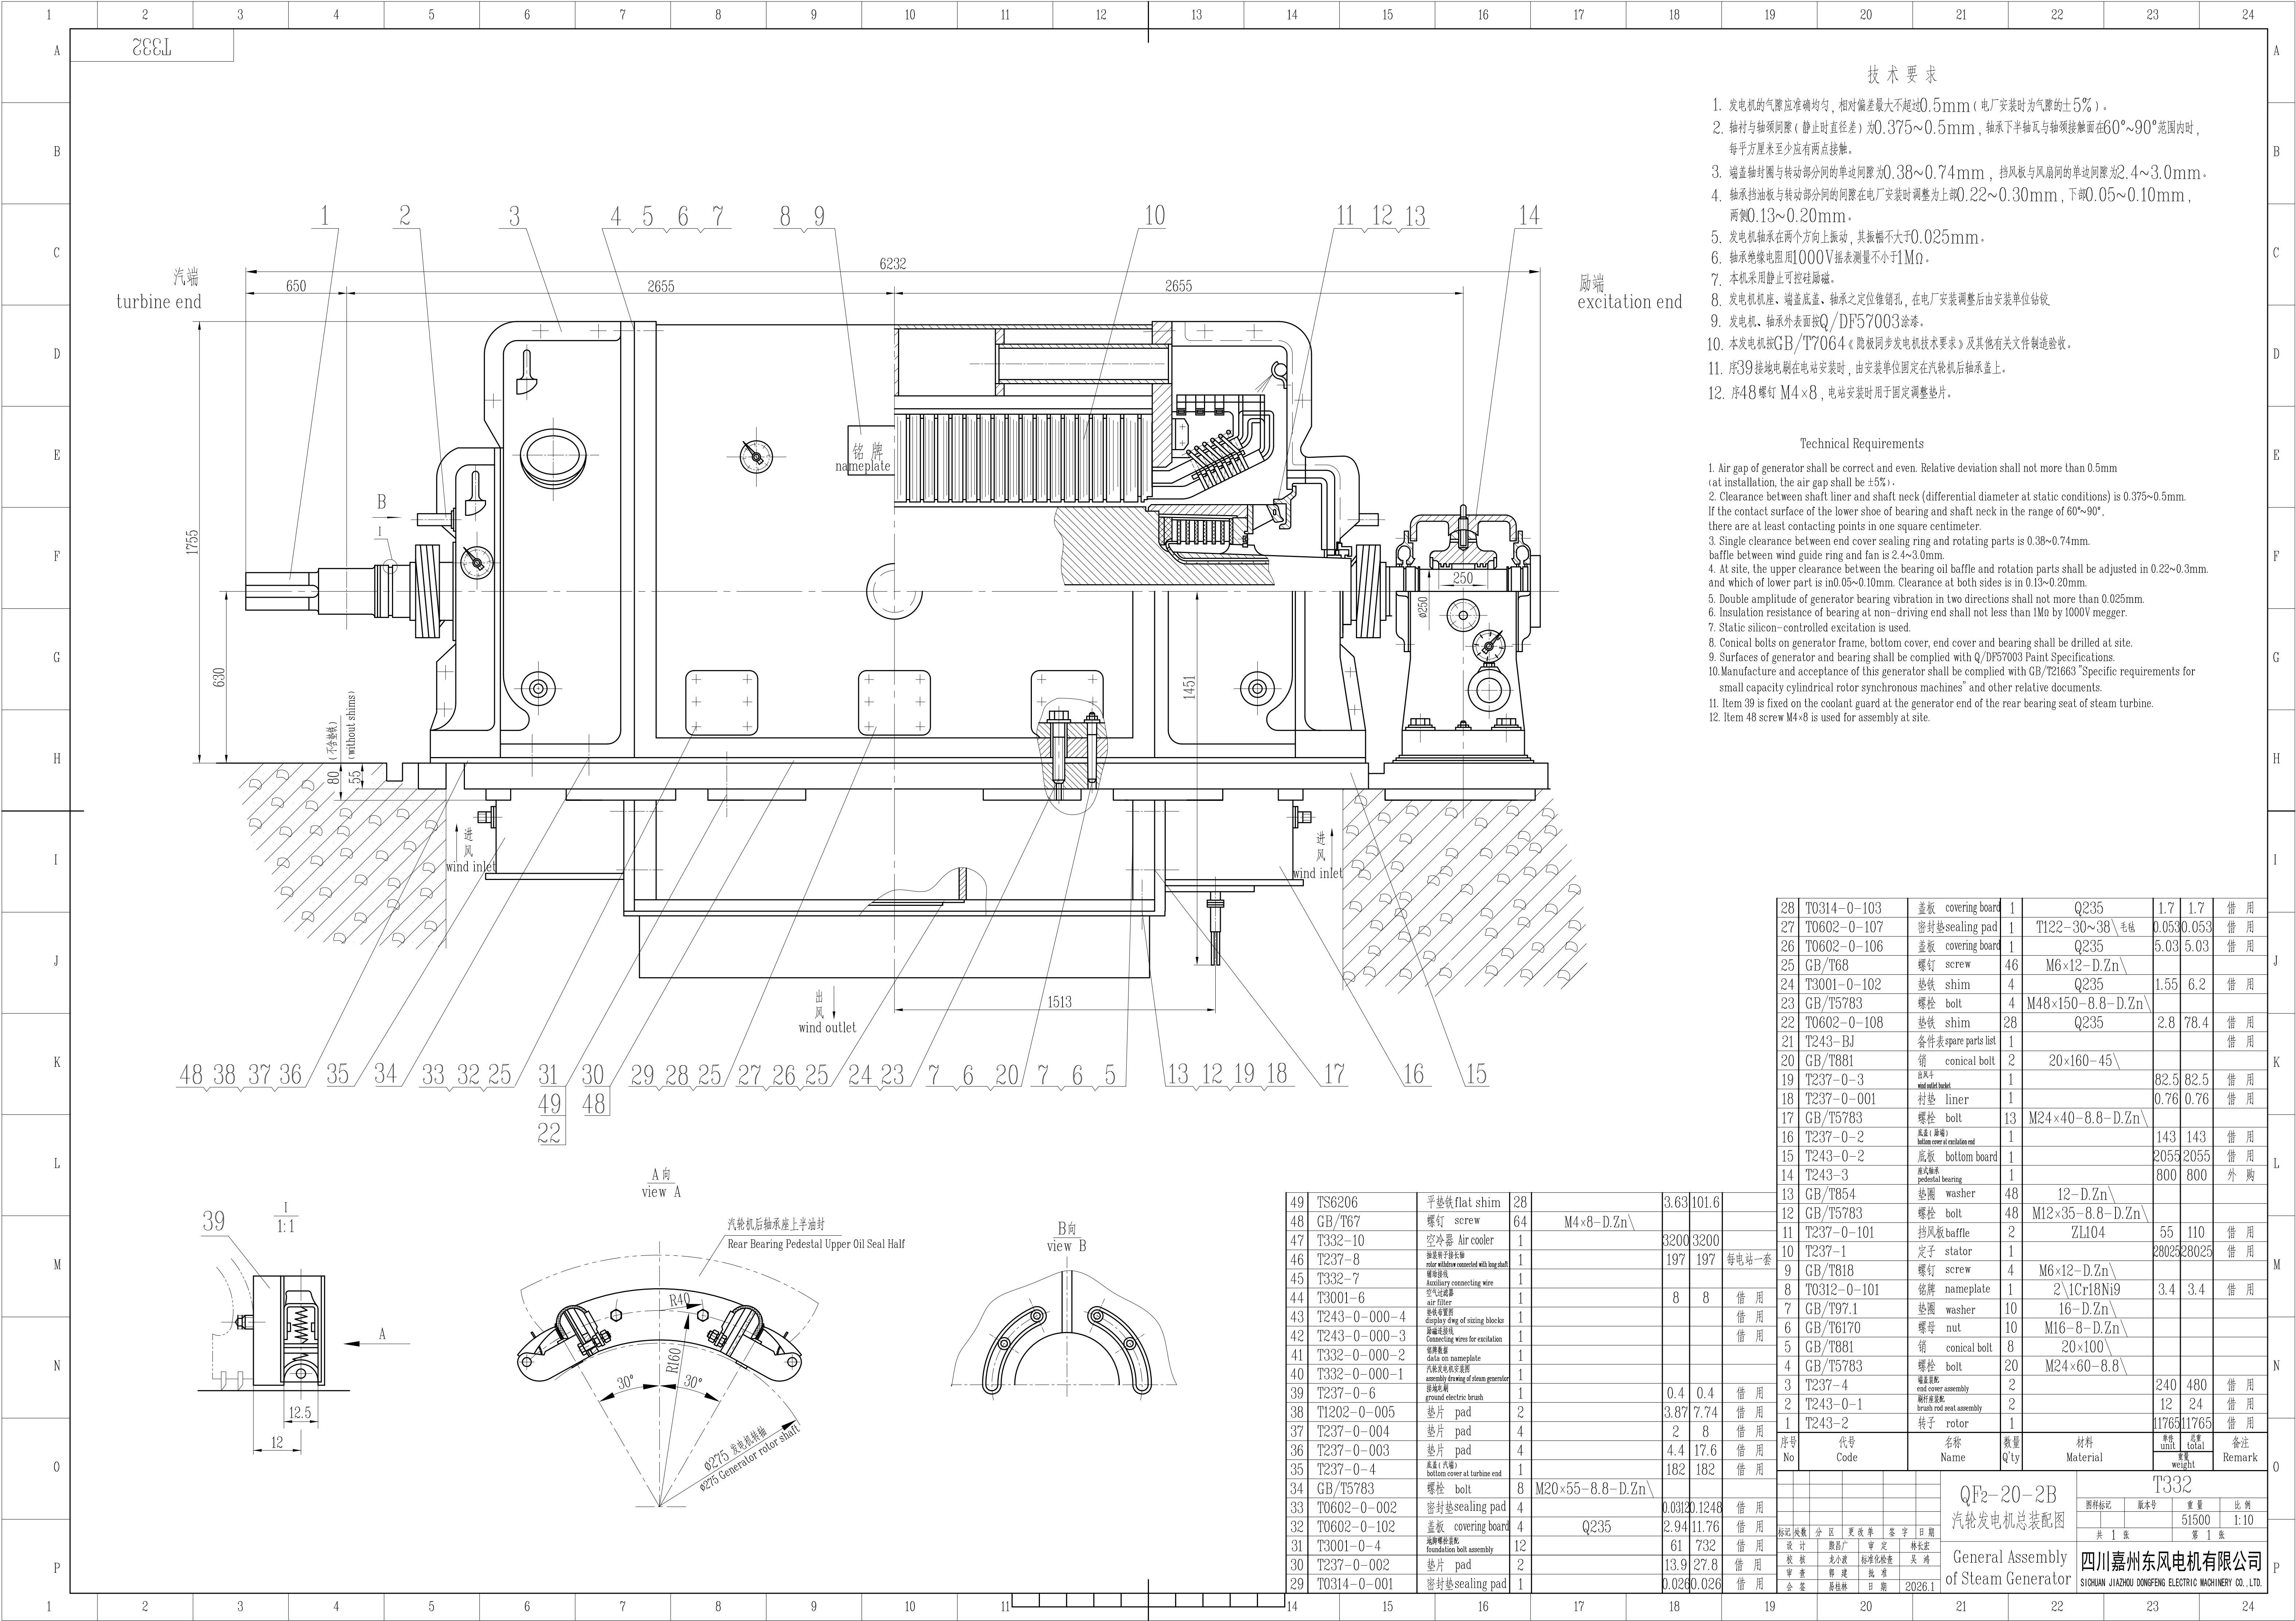

- ### 技术要求
- 发电机的气隙应准确均匀，相对偏差最大不超过0.5mm（电厂安装时为气隙的±5%）。
 - 轴衬与轴颈间隙（静止时直径差）为0.375~0.5mm，轴承下半轴瓦与轴颈接触面在60°~90°范围内时，每平方厘米至少应有两点接触。
 - 端盖轴封圈与转动部分间的单边间隙为0.38~0.74mm，挡风板与风扇间的单边间隙为2.4~3.0mm。
 - 轴承挡油板与转动部分间的间隙在电厂安装时调整为上部0.22~0.30mm，下部0.05~0.10mm，两侧0.13~0.20mm。
 - 发电机轴承在两个方向上振动，其振幅不大于0.025mm。
 - 轴承绝缘电阻用1000V摇表测量不小于1MΩ。
 - 本机采用静止可控硅励磁。
 - 发电机机座、端盖底盖、轴承之定位锥销孔，在电厂安装调整后由安装单位钻铰。
 - 发电机、轴承外表面按Q/DF57003涂漆。
 - 本发电机按GB/T7064《隐极同步发电机技术要求》及其他有关文件制造验收。
 - 序39接地电刷在电站安装时，由安装单位固定在汽轮机后轴承盖上。
 - 序48螺钉 M4×8，电站安装时用于固定调整垫片。

- ### Technical Requirements
- Air gap of generator shall be correct and even. Relative deviation shall not more than 0.5mm (at installation, the air gap shall be ±5%).
 - Clearance between shaft liner and shaft neck (differential diameter at static conditions) is 0.375~0.5mm. If the contact surface of the lower shoe of bearing and shaft neck in the range of 60°~90°, there are at least contacting points in one square centimeter.
 - Single clearance between end cover sealing ring and rotating parts is 0.38~0.74mm. baffle between wind guide ring and fan is 2.4~3.0mm.
 - At site, the upper clearance between the bearing oil baffle and rotation parts shall be adjusted in 0.22~0.3mm. and which of lower part is in 0.05~0.10mm. Clearance at both sides is in 0.13~0.20mm.
 - Double amplitude of generator bearing vibration in two directions shall not more than 0.025mm.
 - Insulation resistance of bearing at non-driving end shall not less than 1MΩ by 1000V megger.
 - Static silicon-controlled excitation is used.
 - Conical bolts on generator frame, bottom cover, end cover and bearing shall be drilled at site.
 - Surfaces of generator and bearing shall be complied with Q/DF57003 Paint Specifications.
 - Manufacture and acceptance of this generator shall be complied with GB/T21663 "Specific requirements for small capacity cylindrical rotor synchronous machines" and other relative documents.
 - Item 39 is fixed on the coolant guard at the generator end of the rear bearing seat of steam turbine.
 - Item 48 screw M4×8 is used for assembly at site.

28	T0314-0-103	盖板 covering board	1	Q235	1.7	1.7	借用
27	T0602-0-107	密封垫 sealing pad	1	T122-30~38\毛毡	0.053	0.053	借用
26	T0602-0-106	盖板 covering board	1	Q235	5.03	5.03	借用
25	GB/T68	螺钉 screw	46	M6×12-D.Zn\			
24	T3001-0-102	垫铁 shim	4	Q235	1.55	6.2	借用
23	GB/T5783	螺栓 bolt	4	M48×150-8.8-D.Zn\			
22	T0602-0-108	垫铁 shim	28	Q235	2.8	78.4	借用
21	T243-BJ	备件表 spare parts list	1				借用
20	GB/T881	销 conical bolt	2	20×160-45\			
19	T237-0-3	品风罩 wind outlet basket	1		82.5	82.5	借用
18	T237-0-001	衬垫 liner	1		0.76	0.76	借用
17	GB/T5783	螺栓 bolt	13	M24×40-8.8-D.Zn\			
16	T237-0-2	底盖(励端) bottom cover at excitation end	1		143	143	借用
15	T243-0-2	底板 bottom board	1		2055	2055	借用
14	T243-3	底盖轴承 pedestal bearing	1		800	800	外购
13	GB/T854	垫圈 washer	48	12-D.Zn\			
12	GB/T5783	螺栓 bolt	48	M12×35-8.8-D.Zn\			
11	T237-0-101	挡风板 baffle	2	ZL104	55	110	借用
10	T237-1	定子 stator	1		28025	28025	借用
9	GB/T818	螺钉 screw	4	M6×12-D.Zn\			
8	T0312-0-101	铭牌 nameplate	1	2\1Cr18Ni9	3.4	3.4	借用
7	GB/T97.1	垫圈 washer	10	16-D.Zn\			
6	GB/T6170	螺母 nut	10	M16-8-D.Zn\			
5	GB/T881	销 conical bolt	8	20×100\			
4	GB/T5783	螺栓 bolt	20	M24×60-8.8\			
3	T237-4	端盖装配 end cover assembly	2		240	480	借用
2	T243-0-1	刷杆座装配 brush rod seat assembly	2		12	24	借用
1	T243-2	转子 rotor	1		11765	11765	借用
序号 No	代号 Code	名称 Name	数量 Q'ty	材料 Material	单位 unit	总重 total weight	备注 Remark

				T332			
				QF2-20-2B			
				汽轮发电机总装配图			
				共 1 张			
				第 1 张			
				General Assembly of Steam Generator			
				四川嘉州东风电机有限公司			
				SICHUAN JIAZHOU DONGFENG ELECTRIC MACHINERY CO., LTD.			