REMOTE CONTROL

- Ensure the main voltage supply matches the label on the supplied plug-pack (+/-10%).
- Ensure that the power switch is OFF.
- Ensure that all system grounds (earth) are connected to a common point.
- Avoid powering equipment within a system from multiple power sources that may be separated by large distances.
- Connect all audio video sources and destination equipment.
- Power up all source and destination audio-visual sources.
- For each destination output select the appropriate input source by using the front panel input select buttons. The supplied IR remote control. Or through the RS-232 serial communications port.
- Upon powering up the switcher, it will return to its last used setting before being powered down.

REMOTE CONTROL

1. SWITCH POWER ON or OFF:


Power ON and OFF

2. OUTPUTS: 1 - 4 VGA DESTINATION:

Output - 1~4: Switches (4) VGA sources to #1~4 monitor displays

INPUTS: 1 - 4 VGA DEVICE SOURCES

Input - Source 1~4: VGA signal source devices #1~4

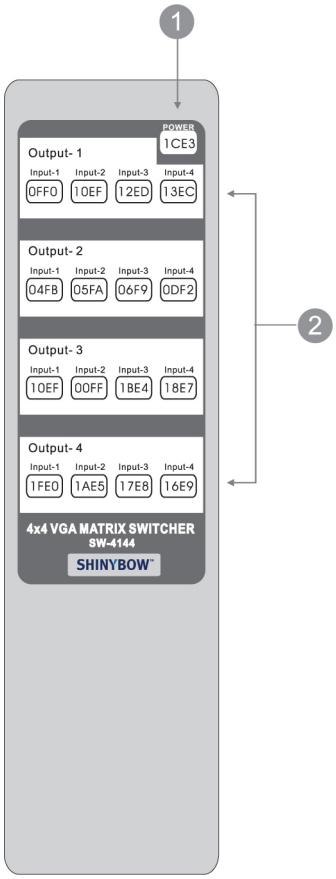

HOW TO SETUP IR CODES:

IR TYPE : uPD6121G

POWER ON:	28D7	1CE3
POWER OFF:	28D7	1CE3
DESTINATION#1 / SOURCE#1:	28D7	0FF0
DESTINATION#1 / SOURCE#2:	28D7	10EF
DESTINATION#1 / SOURCE#3:	28D7	12ED
DESTINATION#1 / SOURCE#4:	28D7	13EC
DESTINATION#2 / SOURCE#1:	28D7	04FB
DESTINATION#2 / SOURCE#2:	28D7	05FA
DESTINATION#2 / SOURCE#3:	28D7	06F9
DESTINATION#2 / SOURCE#4:	28D7	0DF2
DESTINATION#3 / SOURCE#1:	28D7	10EF
DESTINATION#3 / SOURCE#2:	28D7	00FF
DESTINATION#3 / SOURCE#3:	28D7	1BE4
DESTINATION#3 / SOURCE#4:	28D7	1BE7
DESTINATION#4 / SOURCE#1:	28D7	1FE0
DESTINATION#4 / SOURCE#2:	28D7	1AE5
DESTINATION#4 / SOURCE#3:	28D7	17E8
DESTINATION#4 / SOURCE#4:	28D7	16E9