

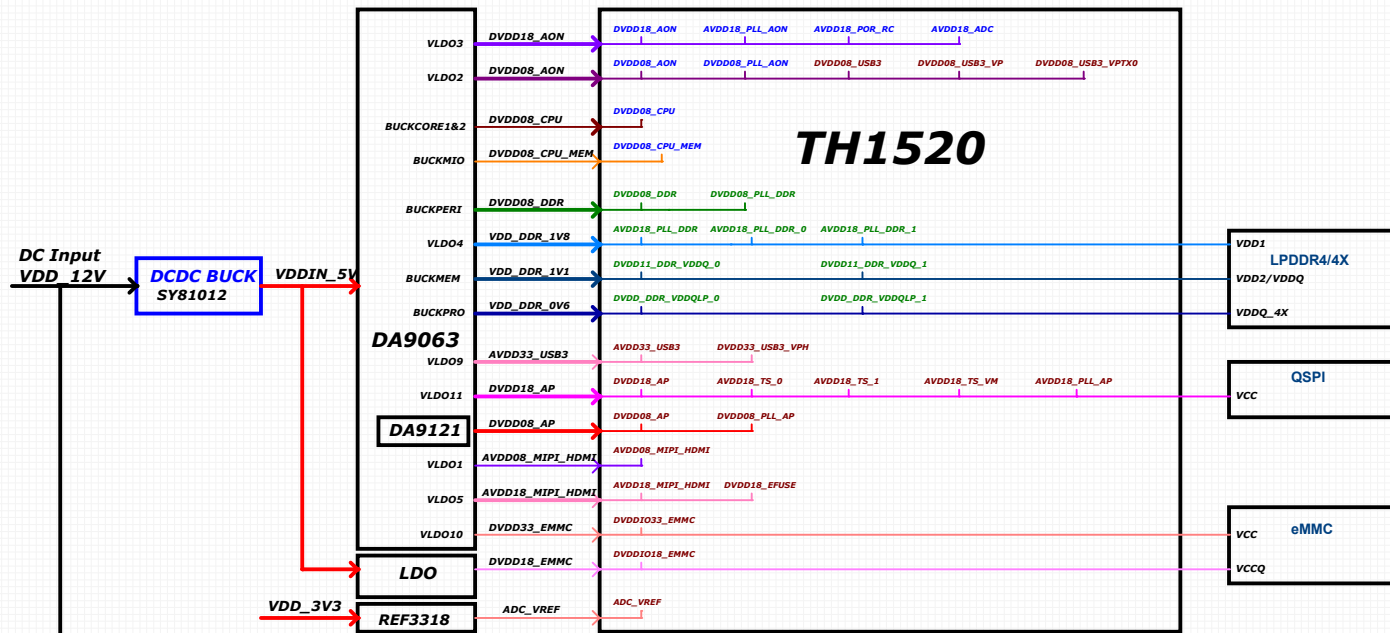
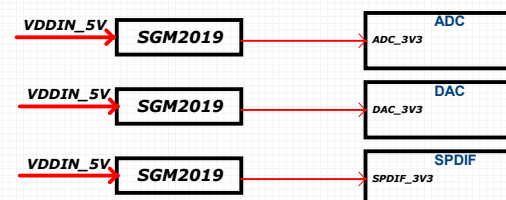
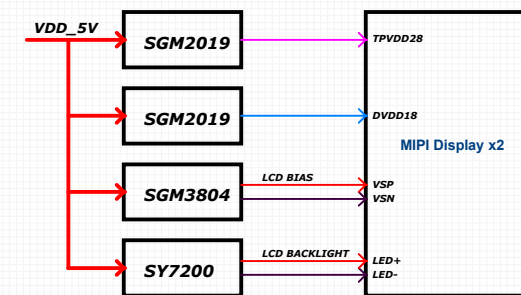



Power Diagram and Sequence

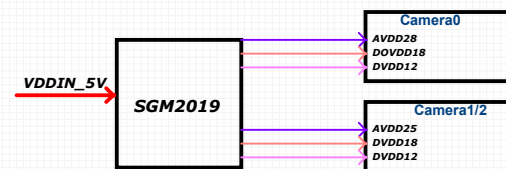

CPU Power Sequence

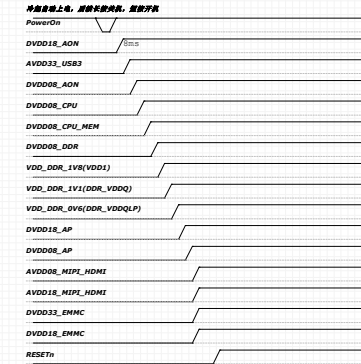

Block Diagram

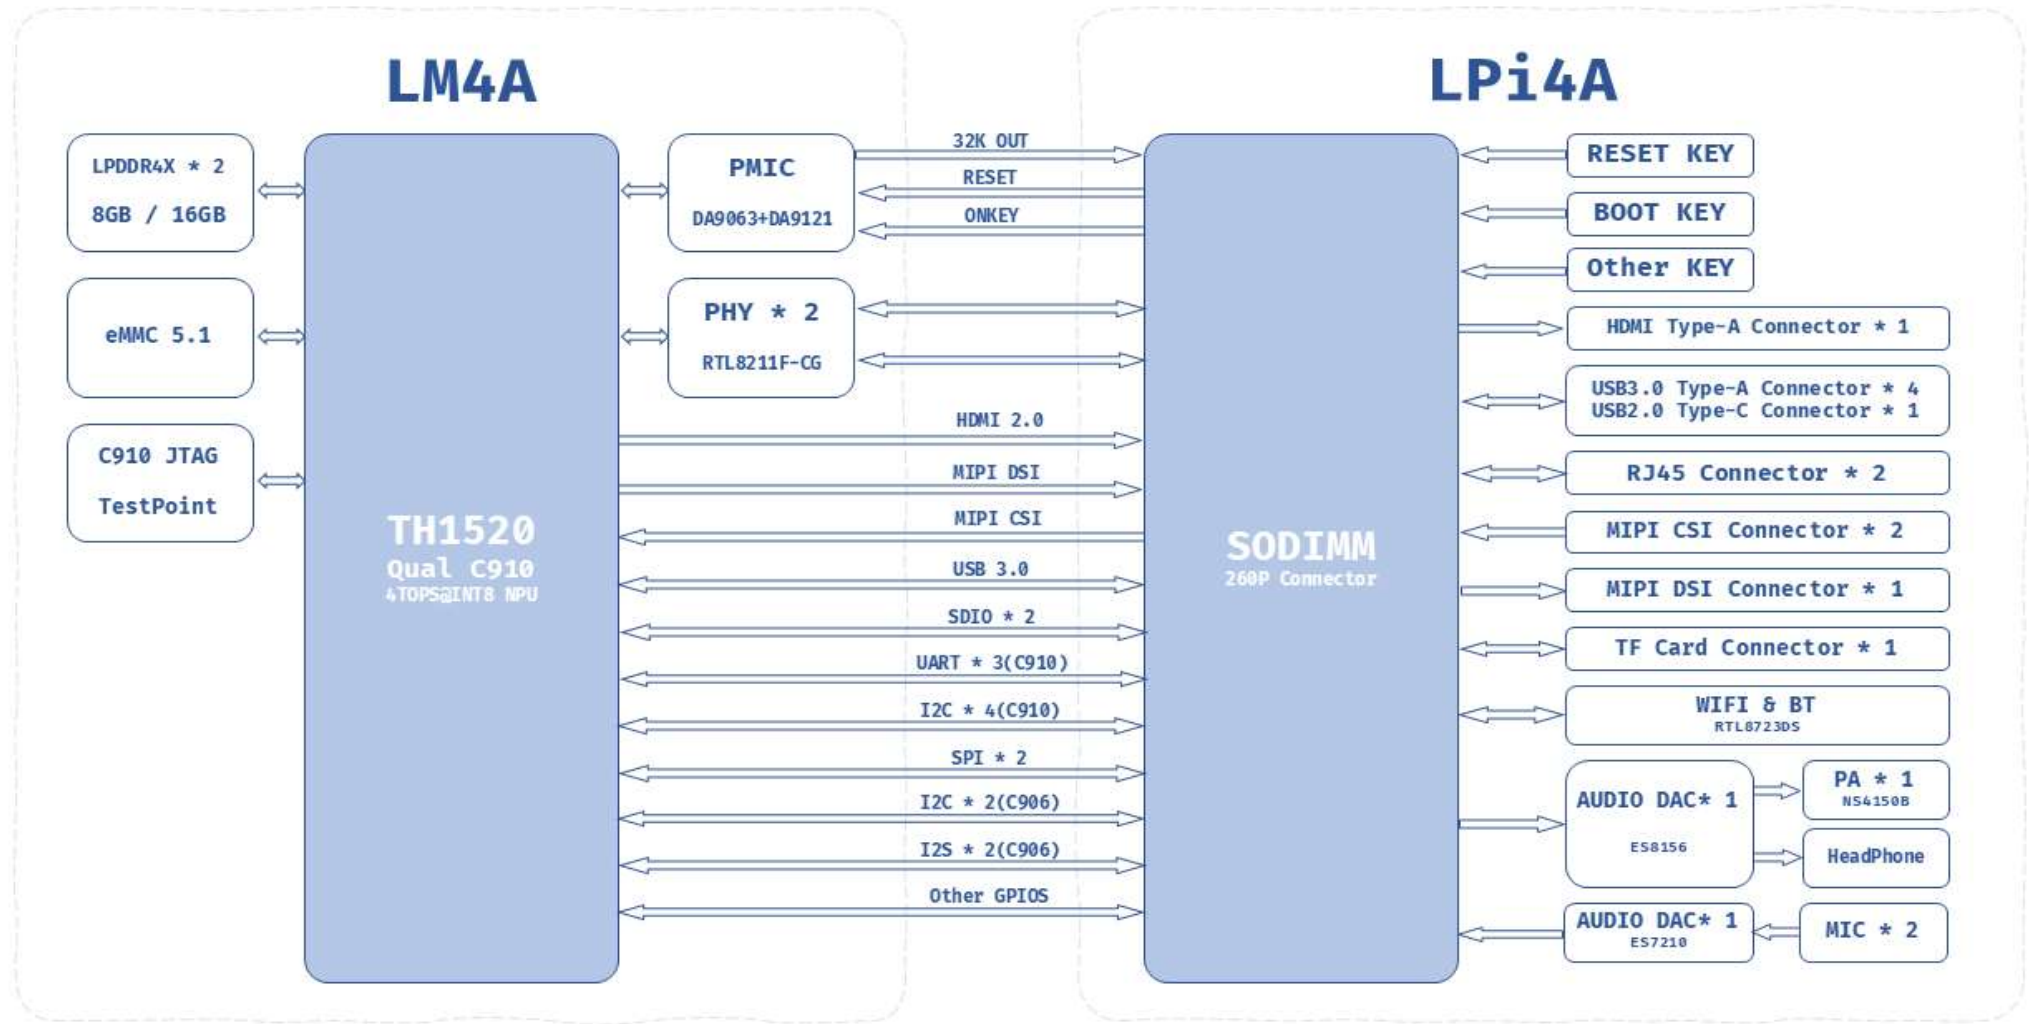

SIPEED LPi4A


Table of Content

Page 1	Cover Page
Page 2	Block Diagram
Page 3	POWER
Page 4	SODIMM
Page 5	FLASH / SD CARD
Page 6	WIFI / BT
Page 7	Ethernet0
Page 8	Ethernet1
Page 9	KEY
Page 10	MIPI Camera
Page 11	MIPI Display
Page 12	HDMI TX
Page 13	C906 Audio
Page 14	USB3 HUB
Page 15	FAN
Page 16	GPIO Expansion
Page 17	
Page 18	
Page 19	
Page 20	
Page 21	
Page 22	
Page 23	
Page 24	
Page 25	
Page 26	


Revision History

[illegible]



12V DCIN

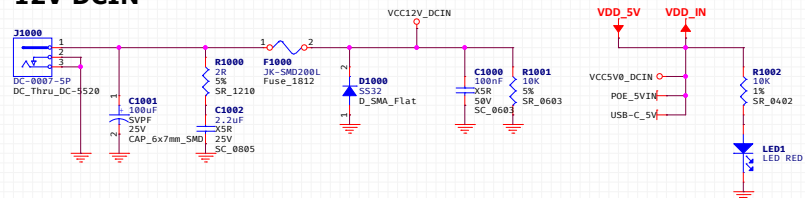



USB Type-C VBus OVP

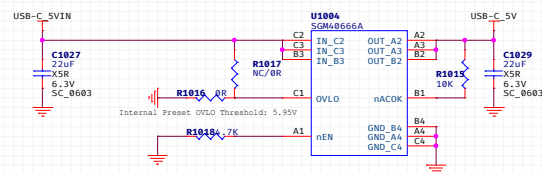



VCC3V3_SYS

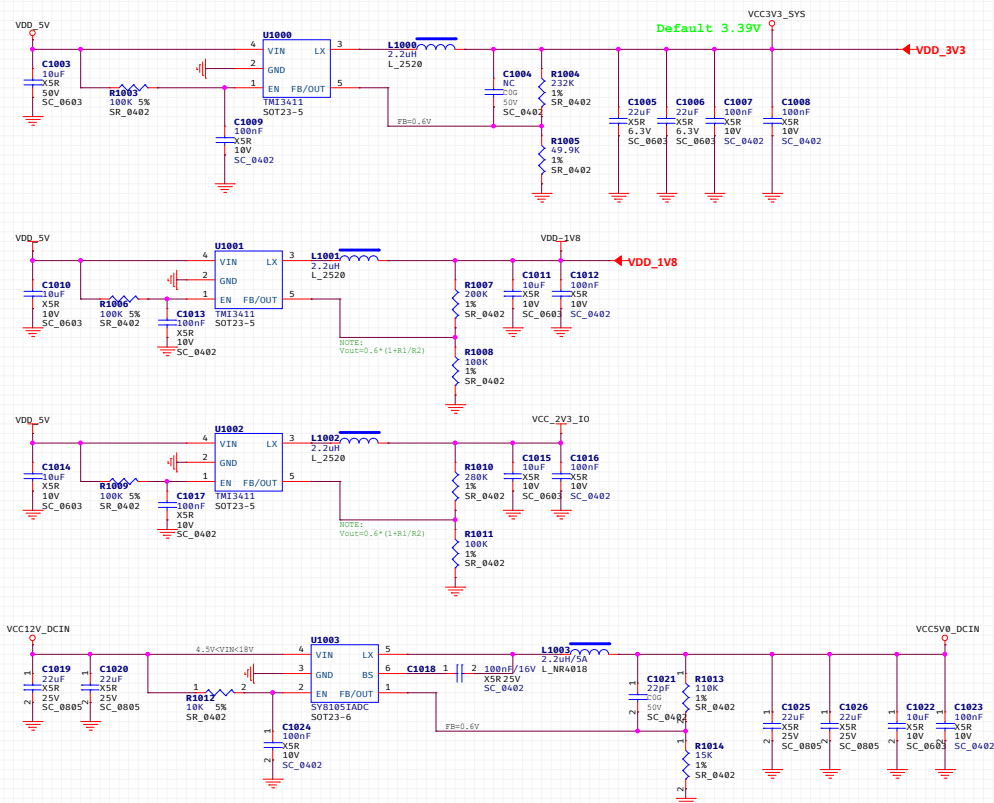

SODIMM Connector



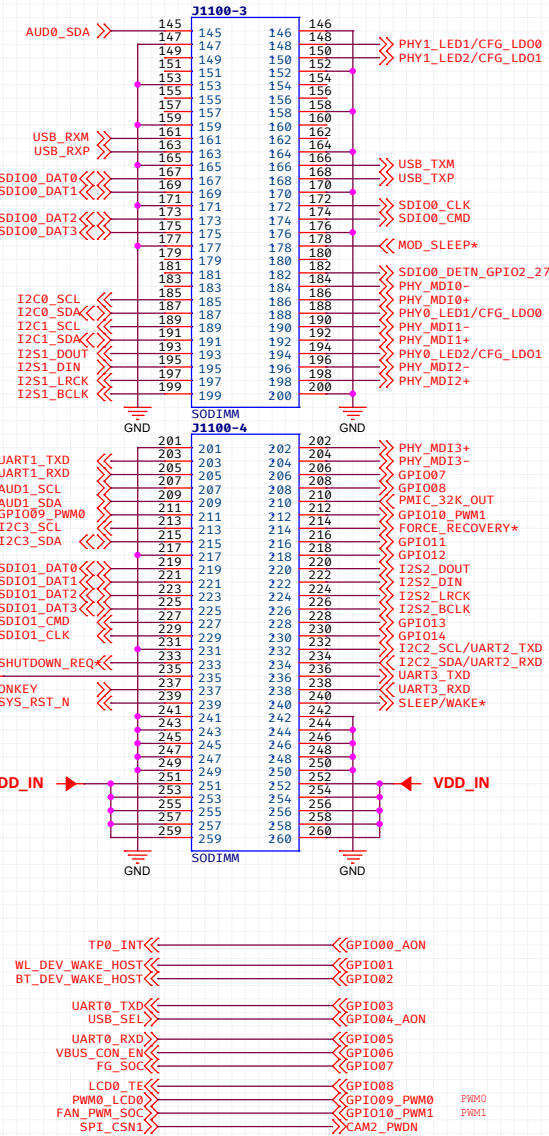
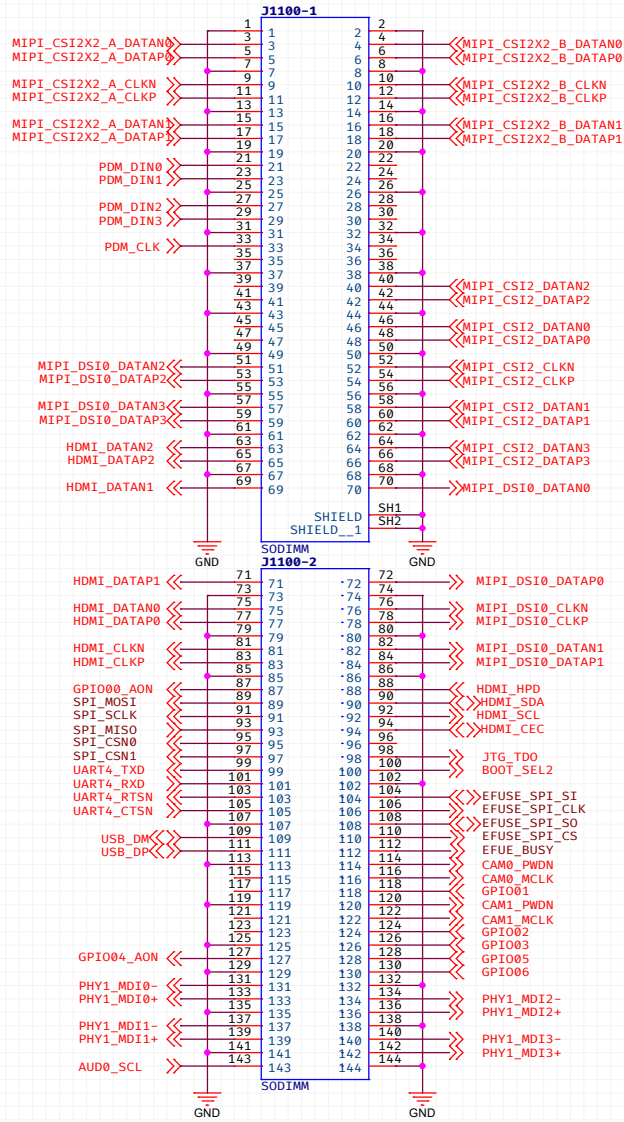


FLASH / SD Card

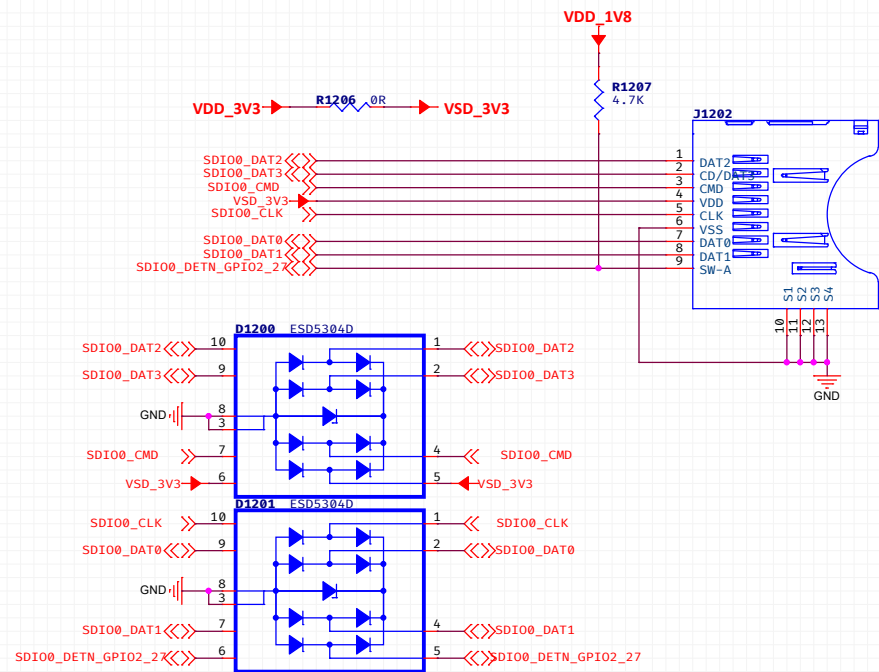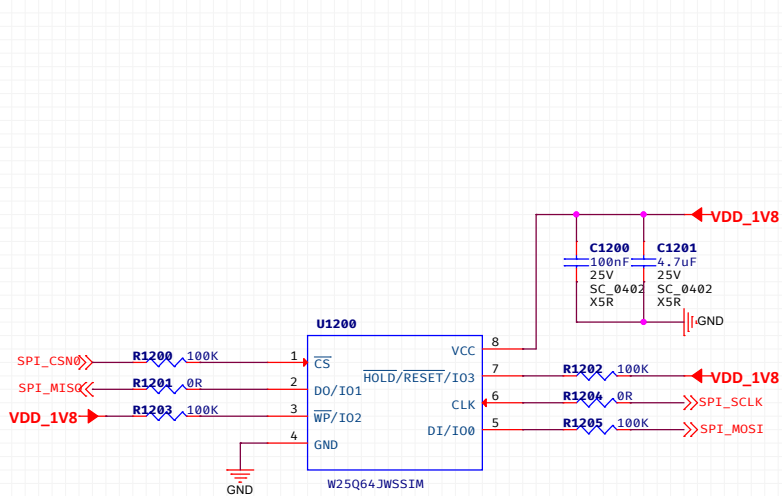


25

GMAC Ethernet0

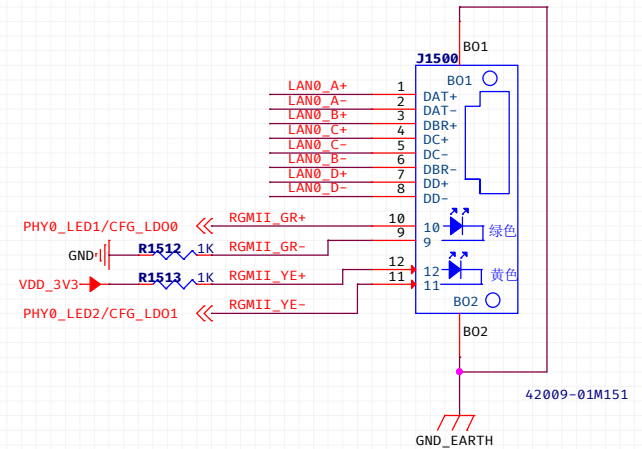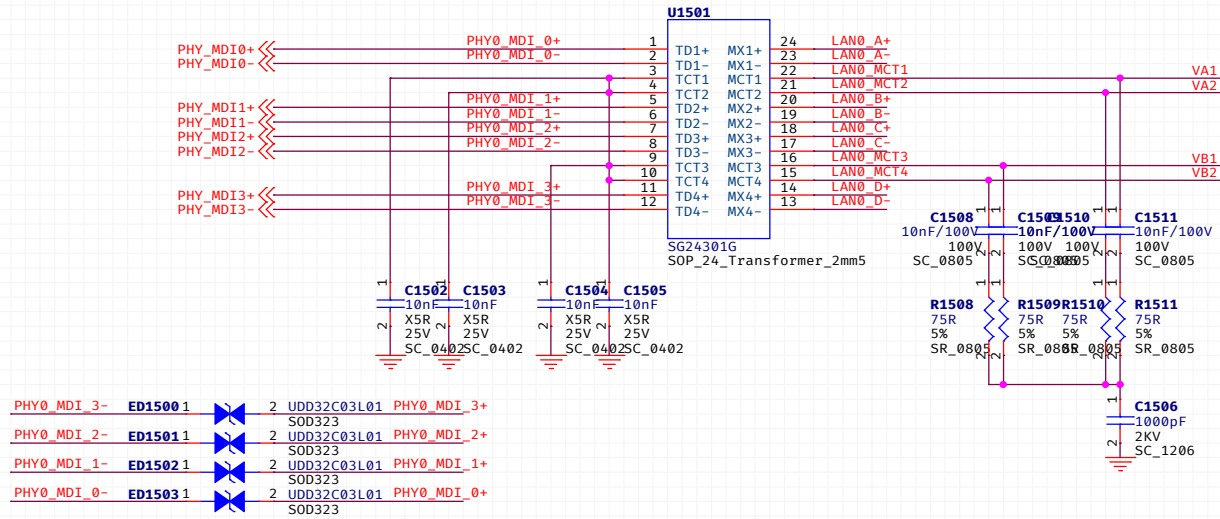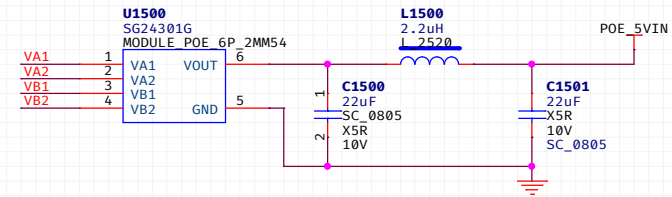


Page Name		
GMAC Ethernet0		
Size B	Project Name - Rev SIPEED_LP14A	Designer: ZX
Date: Monday, May 29, 2023	Checker: <Checker>	Sheet 15 of 25

GMAC Ethernet1

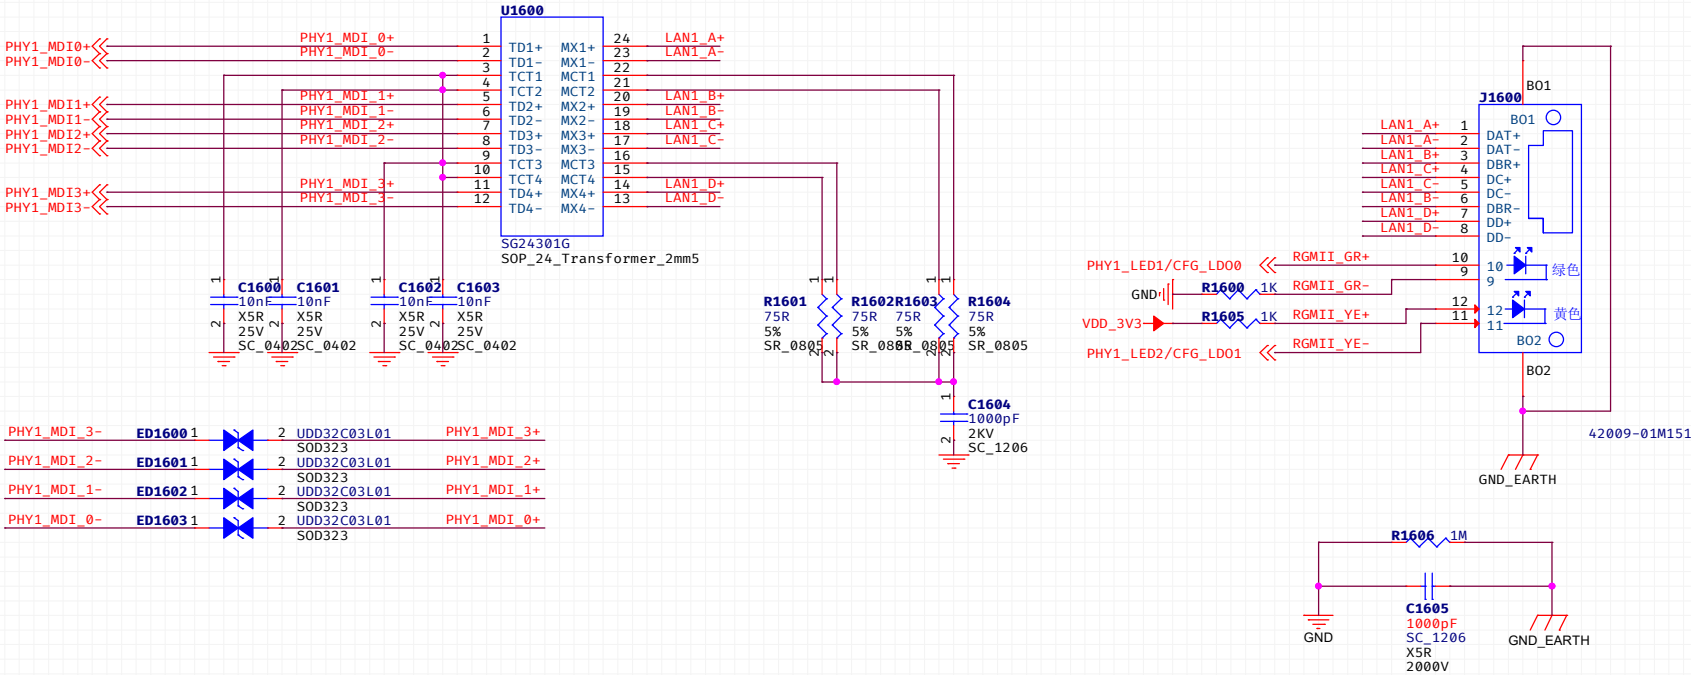


KEYPAD & BOOT SET


SOM has no pull-up or pull-down resistors

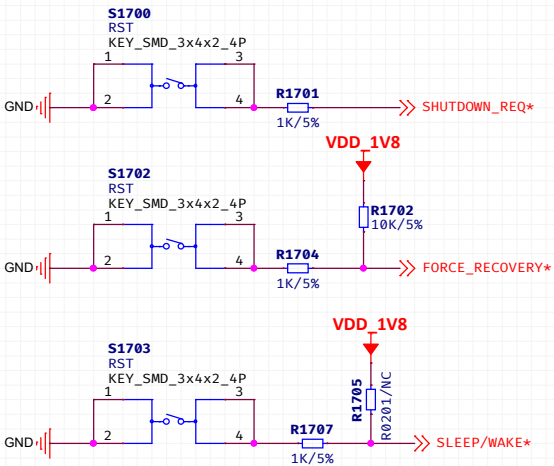

SOM has a pull-up resistors

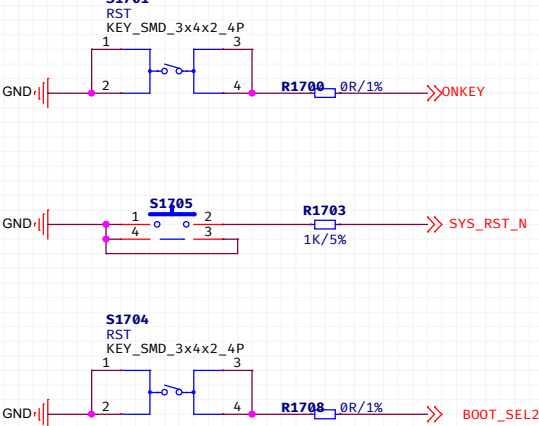

BOOT SET



BOOT_SEL0 SW1 [1]	BOOT_SEL1 SW1 [2]	Boot Mode Setting
0	0	eMMC Boot
1	0	SD Boot, SDIO0
0	1	SPI NAND boot, QSPI0, CS0
1	1	SPI NOR Boot, QSPI0, CS0



Camera Support List



MIPI PORT	I2C Port	Connector	Sensor	Module				I2C Address
CSI2	I2C0	BM20B(0.8)-30DS-0.4V	OV12870	C-CAM-STR049A	4-Lane	12M	RGB	0x20(0100000x)
			SSK4H7	PBS601439	4-Lane	8M	RGB	0x20(0100000x)
			OV5693	C-CAM-STR045A	2-Lane	5M	RGB	0x6C(1101100x)
CSI2X2_A	I2C1	BM20B(0.8)-24DS-0.4V	SC132G5	C-CAM-STR044B	2-Lane	1.3M	IR	0x6E(1101110x)
CSI2X2_B	I2C2	BM20B(0.8)-24DS-0.4V	SC132G5	C-CAM-STR044B	2-Lane	1.3M	IR	0x6E(1101110x)




MIP1_CS12_CLKIN	CON_MIP1_CS12_CLKIN
MIP1_CS12_CLKP	CON_MIP1_CS12_CLKP
MIP1_CS12_DATA0N	CON_MIP1_CS12_DATA0N
MIP1_CS12_DATA0P	CON_MIP1_CS12_DATA0P
MIP1_CS12_DATA1N	CON_MIP1_CS12_DATA1N
MIP1_CS12_DATA1P	CON_MIP1_CS12_DATA1P
MIP1_CS12_DATA2N	CON_MIP1_CS12_DATA2N
MIP1_CS12_DATA2P	CON_MIP1_CS12_DATA2P
MIP1_CS12_DATA3N	CON_MIP1_CS12_DATA3N
MIP1_CS12_DATA3P	CON_MIP1_CS12_DATA3P
MIP1_CS12X2_B_CLKIN	CON_MIP1_CS12X2_B_CLKIN
MIP1_CS12X2_B_CLKP	CON_MIP1_CS12X2_B_CLKP
MIP1_CS12X2_B_DATA0N	CON_MIP1_CS12X2_B_DATA0N
MIP1_CS12X2_B_DATA0P	CON_MIP1_CS12X2_B_DATA0P
MIP1_CS12X2_B_DATA1N	CON_MIP1_CS12X2_B_DATA1N
MIP1_CS12X2_B_DATA1P	CON_MIP1_CS12X2_B_DATA1P
MIP1_CS12X2_A_CLKIN	CON_MIP1_CS12X2_A_CLKIN
MIP1_CS12X2_A_CLKP	CON_MIP1_CS12X2_A_CLKP
MIP1_CS12X2_A_DATA0N	CON_MIP1_CS12X2_A_DATA0N
MIP1_CS12X2_A_DATA0P	CON_MIP1_CS12X2_A_DATA0P
MIP1_CS12X2_A_DATA1N	CON_MIP1_CS12X2_A_DATA1N
MIP1_CS12X2_A_DATA1P	CON_MIP1_CS12X2_A_DATA1P

MIPI DISPLAY

此页脚序仅适配SIPEED官方屏幕
其他屏幕请自行确认引脚顺序

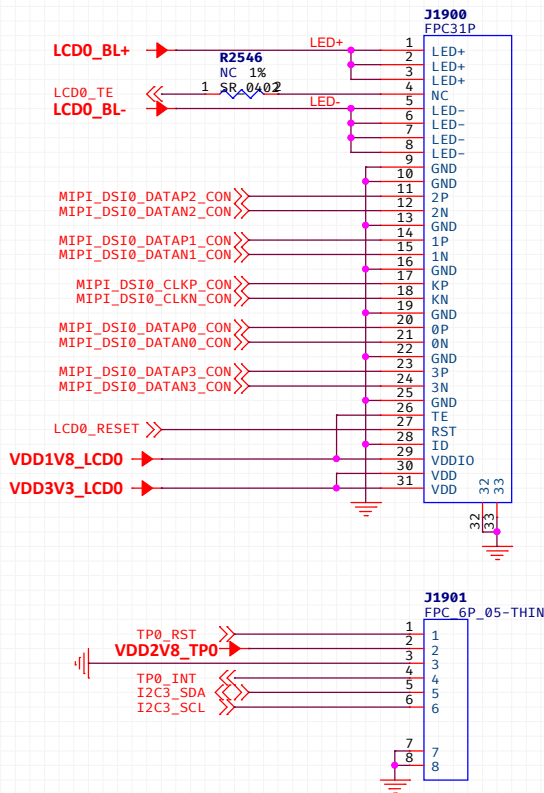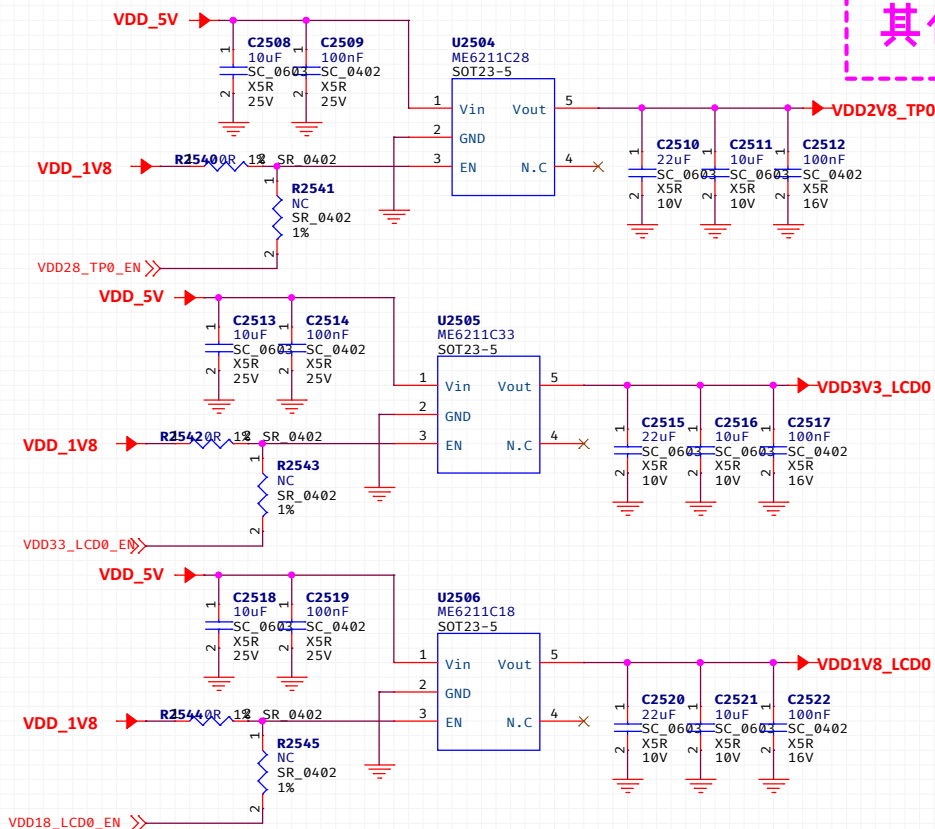


MIPI_DSI0_CLKN << MIPI_DSI0_CLKN_CON
MIPI_DSI0_CLKP << MIPI_DSI0_CLKP_CON
MIPI_DSI0_DATAN0 << MIPI_DSI0_DATAN0_CON
MIPI_DSI0_DATAP0 << MIPI_DSI0_DATAP0_CON
MIPI_DSI0_DATAN1 << MIPI_DSI0_DATAN1_CON
MIPI_DSI0_DATAP1 << MIPI_DSI0_DATAP1_CON
MIPI_DSI0_DATAN2 << MIPI_DSI0_DATAN2_CON
MIPI_DSI0_DATAP2 << MIPI_DSI0_DATAP2_CON
MIPI_DSI0_DATAN3 << MIPI_DSI0_DATAN3_CON
MIPI_DSI0_DATAP3 << MIPI_DSI0_DATAP3_CON

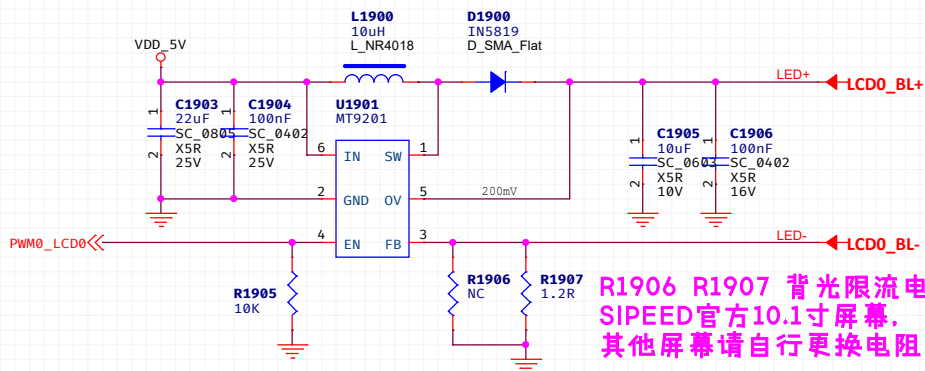

R1906 R1907 背光限流电阻仅适配
SIPEED官方10.1寸屏幕,
其他屏幕请自行更换电阻


 SIPEED 矽速科技			
Page Name			
MIPI DISPLAY			
Size B	Project Name - Rev SIPEED_LP14A	Designer: zx	
Date: Monday, June 05, 2023	Checker: <Checker>	Sheet 19 of 25	

HDMI_DATAP2 >>> HDMI_TX2P_PORT
HDMI_DATAN2 >>> HDMI_TX2N_PORT
HDMI_DATAP1 >>> HDMI_TX1P_PORT
HDMI_DATAN1 >>> HDMI_TX1N_PORT
HDMI_DATAP0 >>> HDMI_TX0P_PORT
HDMI_DATAN0 >>> HDMI_TX0N_PORT
HDMI_CLKP >>> HDMI_TXCLKP_PORT
HDMI_CLKN >>> HDMI_TXCLKN_PORT
HDMI_SCL >>> HDMI_TX_SCL
HDMI_SDA >>> HDMI_TX_SDA
HDMI_CEC <<< HDMI_TX_CEC_M0
HDMI_HPD <<< HDMI_TX_HPDIN


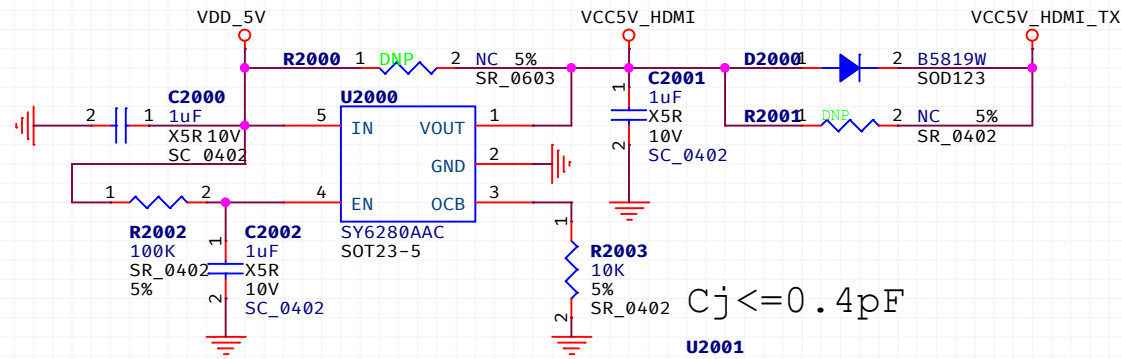


$C_j \leq 0.4 \text{ pF}$


HDMI TX DDC

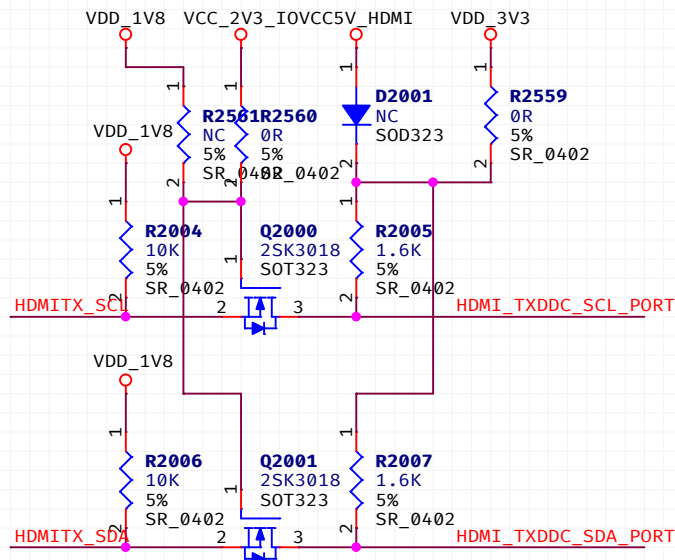

HDMI TX CEC


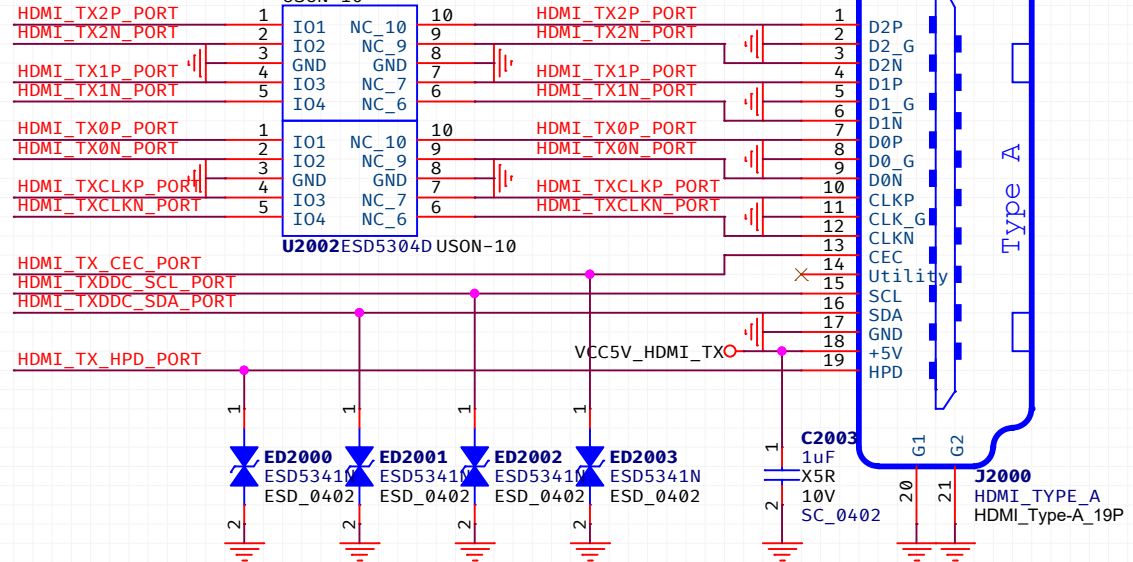
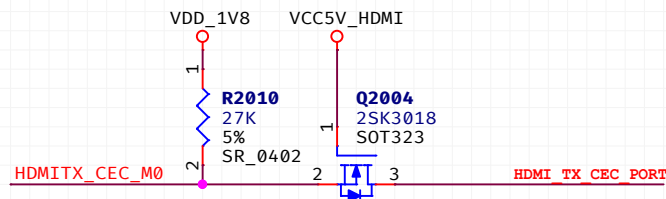


HDMI TX HPD

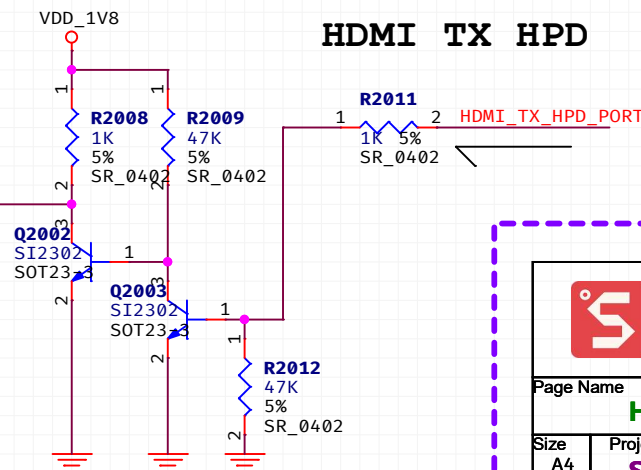


Page Name		
HDMI TX		
Size	Project Name - Rev	Designer: ZK
A4	SIPEED_LP14A	Checker: <Checker>
Date:	Monday, May 29, 2023	Sheet 20 of 25


C906 Audio

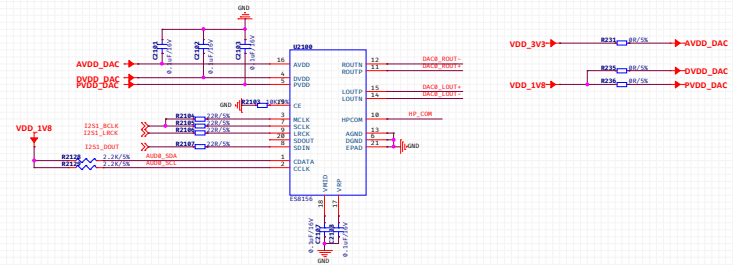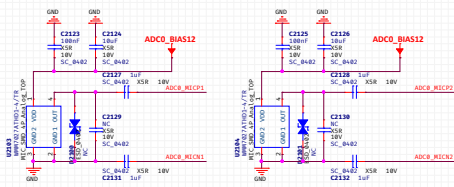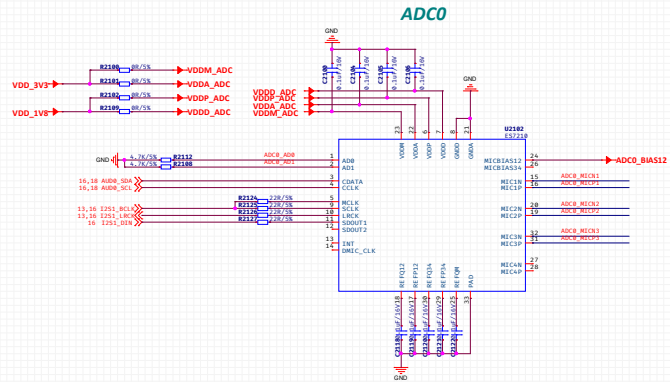

Headphone

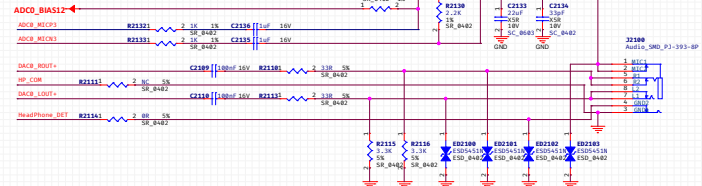

PA

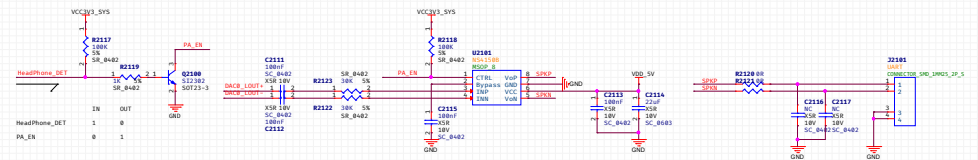


ES7210 I2C Address

I2C PORT	PART	AD1	AD0	I2C Address
AUD_I2C0	ADC0	0	0	0x40(1000000x)
AUD_I2C1	ADC1	0	0	0x40(1000000x)

C906 ES8156 I2C Address

I2C PORT	PART	AD	I2C Address
AUD_I2C0	DAC0	0	0x08
AUD_I2C1	DAC1	0	0x08

FAN

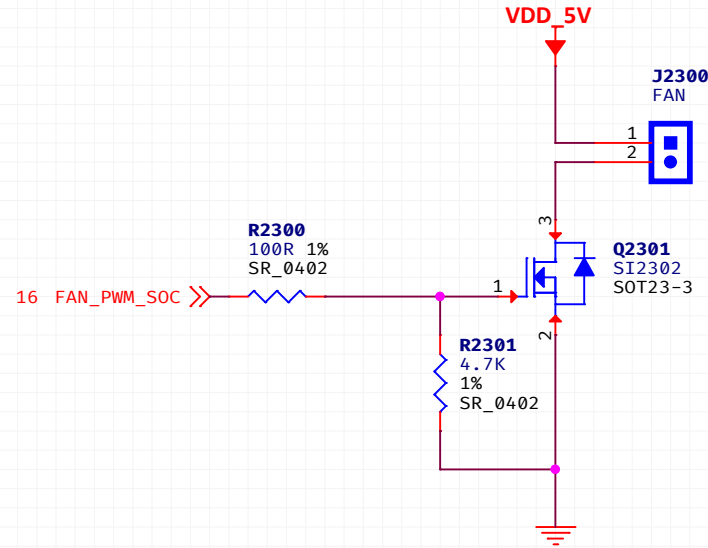

Page Name			
FAN			
Size A4	Project Name - Rev SIPEED_LPi4A	Designer: ZK	
		Checker: <Checker>	
Date:	Monday, May 29, 2023	Sheet	23 of 25

GPIO Expansion

