
QUEXT

INSTALLER GUIDE

Quext Smart **Community Gateway**

INSTALLATION GUIDE FOR INSTALLERS

Everything you need to know to install, connect and verify your Quext gateway.

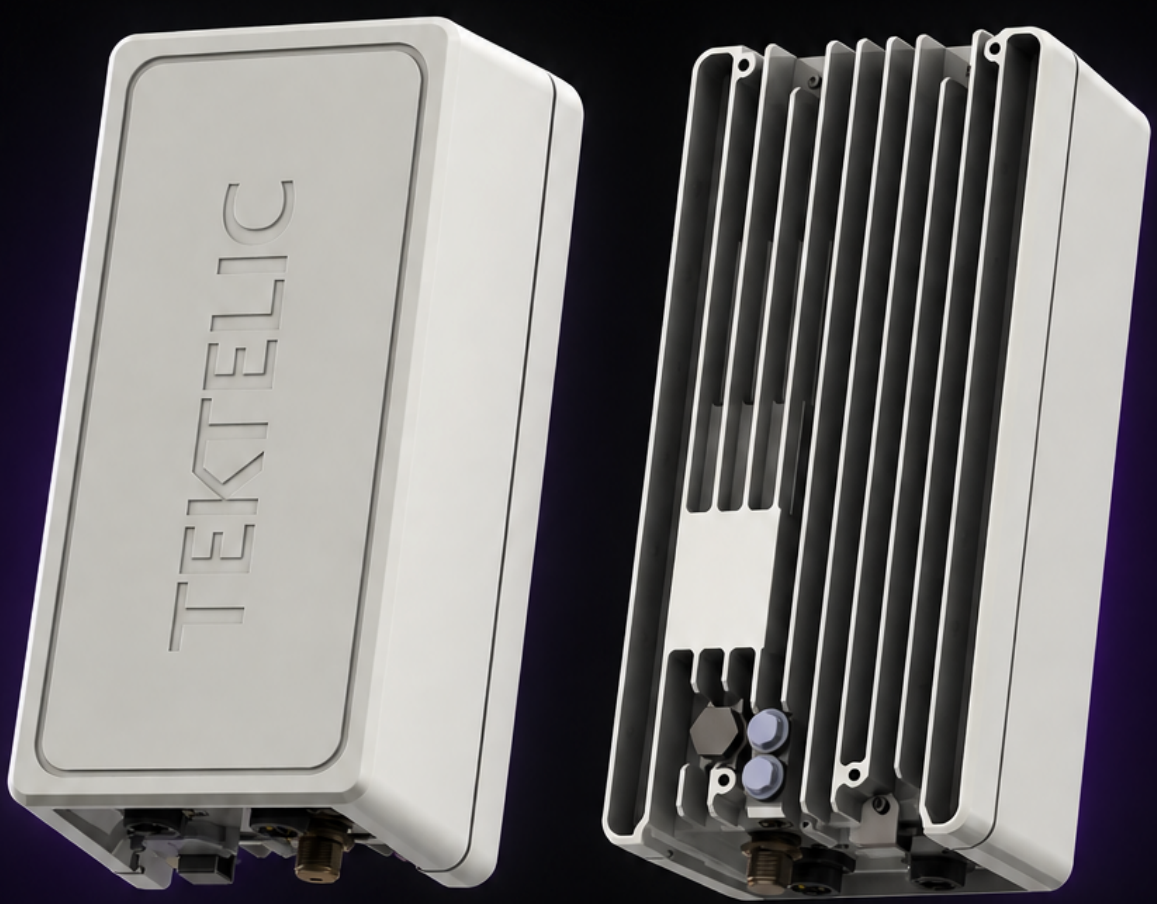

MOUNTING | WIRING | CONNECTIVITY | VERIFICATION

quext

TABLE OF CONTENTS

Installer Guide

Tap a section to jump directly to it.

01 Guide at a glance
JUMP TO SECTION →

02 01 • Before you start
JUMP TO SECTION →

03 02 • Plan the mounting location
JUMP TO SECTION →

04 03 • Mark, drill & seal
JUMP TO SECTION →

05 04 • Mount the Unistrut & antenna
JUMP TO SECTION →

06 05 • Reference: gateway bracket
JUMP TO SECTION →

07 06 • Gateway wiring
JUMP TO SECTION →

08 07 • Data closet connection
JUMP TO SECTION →

09 08 • Final checks
JUMP TO SECTION →

STEP 01

Guide at a glance

1 Before you start

2 Materials, tools, wall/anchor planning

3 Plan the mounting location

4 Antenna placement and structure

5 Mount the Unistrut

STEP 02

01 • Before you start

1. Materials for installation
2. 10' 1/2" EMT conduit — silver
3. 2' 12 GA Unistrut channel — silver (2)
4. Unistrut nuts — 1 package of 5
5. 1/2" universal pipe clamps (2)

STEP 03

02 • Plan the mounting location



INSIDE ROOF WALL MOUNT



OUTSIDE ROOF MOUNT

1. Choose antenna placement
2. Determine the mounting position for line-of-sight or reliable reception.
3. Identify the wall structure
4. For wood framing, locate the studs. For masonry, verify the wall type with a tap or small test hole.
5. Choose the orientation

STEP 04

03 • Mark, drill & seal

1. Mark mounting points
2. Hold the Unistrut against the wall, level it, and mark anchor holes through the pre-punched holes.
3. Drill for the wall type
4. Wood: pre-drill into studs with a pilot hole slightly smaller than the lag bolt. Masonry: use a hammer drill and the proper anchor depth.
5. Apply sealant

STEP 05

04 • Mount the Unistrut & antenna

1. Secure the Unistrut
2. Place both channels back against the wall, align to the drilled holes, and insert the correct fasteners.
3. Tighten carefully
4. Secure the channels without crushing the Unistrut or damaging the wall.
5. Attach the antenna

STEP 06

05 • Reference: gateway bracket



GATEWAY MOUNTING BRACKET

1 Use the supplied bracket and compatible Unistrut mounting hardware to secure the gateway assembly.

2 QUEXT • GATEWAY INSTALLER GUIDE 7

STEP 07

06 • Gateway wiring



WATERPROOF POE & ANTENNA CONNECTION

1 Route the network cable

2 Bring the Category 5 or 6 cable from the data closet through the provided water-tight connector.

3 Terminate T568B

4 Crimp the RJ45 using the T568B wiring scheme.

5 Connect at the gateway

STEP 08

07 • Data closet connection

1. Connect the gateway cable
2. Terminate the data-closet end using the T568B wiring scheme.
3. Connect to PoE
4. Plug the cable into the POE port on the provided PoE injector.
5. Connect LAN

quext

08 • Final checks

1. All fasteners are tight.
2. Antenna is level and secure.
3. Top of the Unistrut is sealed as needed for weather protection.
4. Gateway-side cable enters through the water-tight connector.
5. RJ45 termination follows T568B.

FINISH

You're ready to go.

Final completion check

01

MOUNTING

Secure & sealed

02

WIRING

Gateway & PoE connected

03

CONNECTIVITY

Verify with Quext

806-993-3200 • OPTION 4

CONTENTS ↑