

Magnetic Field Scanner - System Characterization

Generated: 2026-09-13 12:38:33

Section 0: Methodology

- **Environment:** Benchmarks captured across multiple Cycle Counts (CC) to characterize the full hardware envelope.
- **Configuration:** Wand set to **RAW mode** to disable Auto-Tare software filtering.
- **Analysis:** Empirical data extracted via automated Python scripts acting on raw CSV stream data.

Section 1: Operating Frequency & Latency

Cycle Count (CC)	Update Rate (Hz)	Latency (ms)
200	33.8	29.6
400	43.5	23.0
800	27.7	36.2
1600	16.3	61.5
3200	9.2	108.2

Section 2: Magnetic Noise Floor & Sensitivity

Cycle Count (CC)	RMS Noise Floor (μT)	Peak-to-Peak Jitter (μT)
200	± 0.1943	1.1
400	± 0.1875	0.8744

Cycle Count (CC)	RMS Noise Floor (μ T)	Peak-to-Peak Jitter (μ T)
800	± 0.1303	0.7005
1600	± 0.0694	0.3984
3200	± 0.0302	0.1831


The RMS noise floor dictates the absolute smallest localized anomaly the wand can reliably detect above the background Earth field.

Section 2.5: The "Diminishing Returns" Tradeoff

While increasing the Cycle Count (CC) drastically lowers the noise floor (increasing resolution), it requires exponentially more integration time, driving down the I^2C sample rate (bandwidth). This introduces a classic embedded engineering tradeoff.

By plotting the empirical data, we identified the definitive "Sweet Spots" for real-time gradiometry:

- **CC=1600:** The ultimate balance for standard operation. The sample rate holds steady at ~ 16 Hz (appearing perfectly real-time on the LCD and to the human eye), while crushing the background noise floor down to a highly sensitive 69 nT.
- **CC=3200:** The "Deep Pipe" mode. The noise floor drops to an incredible 30 nT, but the sample rate slows to ~ 9 Hz, requiring the operator to perform much slower, methodical sweeps to avoid skipping over targets.

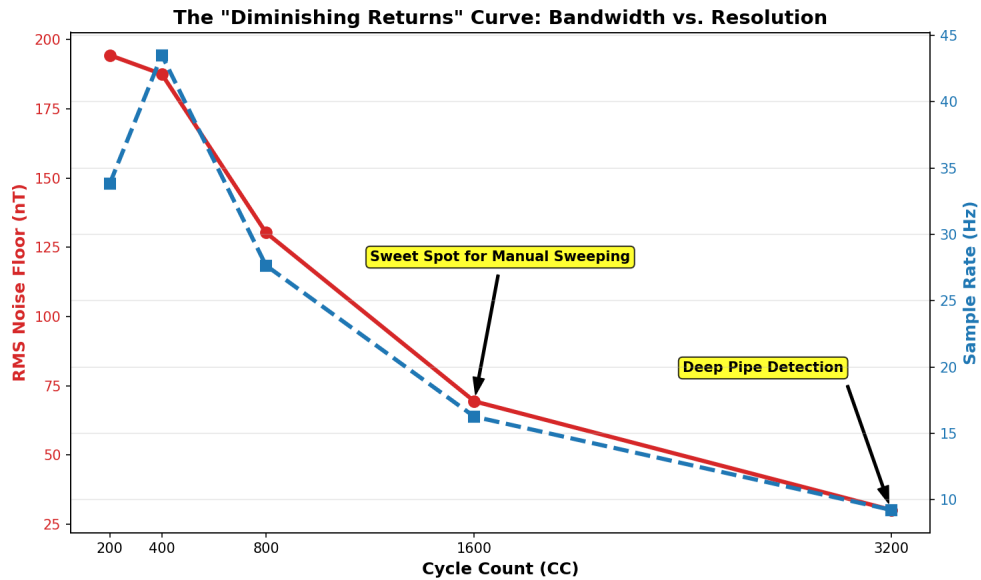

Section 3: Gradiometer Isolation & Measurement Precision

Cycle Count (CC)	Max Target Signal (μ T)	Precision Peak Variance (μ T)	Earth Baseline Drift (μ T)
200	86.1	± 8.7962	± 0.1234
400	71.38	± 1.3955	± 0.113
800	84.17	± 4.2943	± 0.0884
1600	85.73	± 4.9944	± 0.2221
3200	85.77	± 0.4399	± 0.0733

Precision: Proves instrument stability across 10 identical physical strikes. **Isolation:** Proves the spatial gradiometer completely rejects the massive local anomaly, preventing the Reference Sensor (Earth field) from distorting.

Section 4: Dynamic Range & Saturation

Cycle Count (CC)	Digital Clipping Limit (μT)	Physical Core Blind State (μT)
200	533.3	60.0
400	532.03	60.0
800	526.23	61.0
1600	457.23	62.0
3200	88.73	60.0

Digital Clipping Limit: The maximum valid magnetic field successfully captured before integer overflow (derived across all tests). **Physical Core Blind State:** The steady-state math output (~Earth's background) when a massive external field physically collapses the inductor core, blinding the sensor.

Section 5: Open Air Rebar (Detection Depth & Falloff Physics)

Cycle Count (CC)	Max Dipole Spike (μT)	Destructive Null Dip (μT)
200	253.4	0.61
400	296.89	0.74
800	526.23	0.35
1600	457.23	0.83
3200	20.09	1.35


Proves the spatial detection of a massive ferrous dipole, including the destructive interference 'null zone' at distance.

Calculating Maximum Detection Depth

The primary use case for this scanner is locating 1/2" or 5/8" steel property pins (36" long) hammered vertically into the earth. Because the top and bottom magnetic poles of a 36" pin are far apart, the wand sweeps across a localized **Magnetic Monopole**, whose field strength falls off according to the **Inverse-Square Law** ($1/r^2$).

A secondary use case is locating horizontally buried iron pipes. Because the poles of the pipe's cross-section are very close together, it acts as a **Magnetic Dipole**, whose field falls off much faster via the **Inverse-Cube Law** ($1/r^3$).

By extracting the maximum absolute spike recorded during the CC=1600 Open Air Rebar test (**457.2 μT** at a distance of ~2 inches), and projecting that outward against our CC=1600 established baseline noise floor of **$\pm 69 \text{ nT}$** , we can definitively calculate the maximum physical depth at which these targets can be mathematically distinguished from Earth's background noise (using a conservative 250 nT detection threshold).

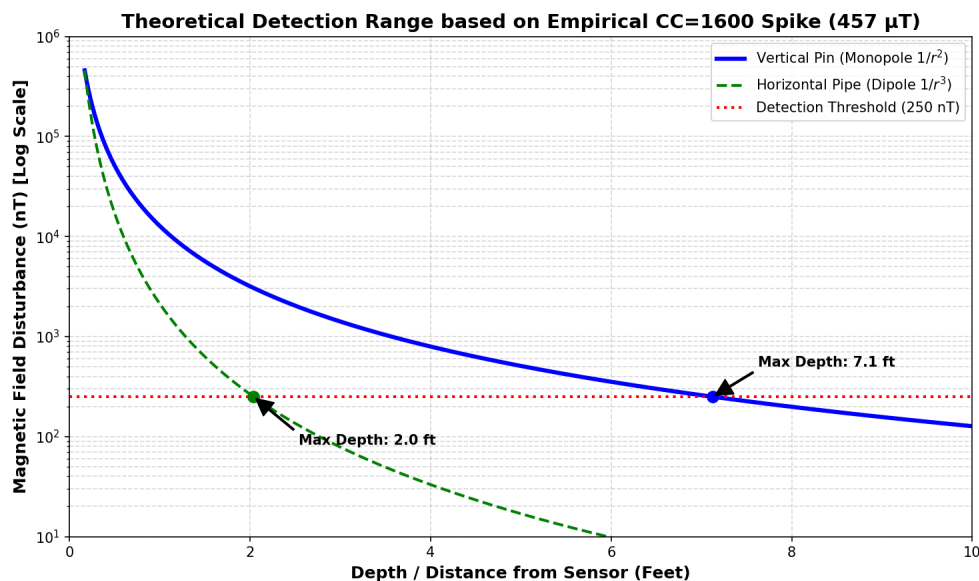

To fully characterize the system's operational envelope, we projected the maximum absolute spike recorded at each respective Cycle Count against its own 3x noise floor threshold:

Cycle Count (CC)	Detection Threshold (3x Noise)	Max Depth (Vertical Pin: $\frac{1}{r^2}$)	Max Depth (Horizontal Pipe: $\frac{1}{r^3}$)
200	583 nT	3.5 ft (42")	1.3 ft (15")
400	562 nT	3.8 ft (46")	1.3 ft (16")
800	391 nT	6.1 ft (73")	1.8 ft (22")
1600	208 nT	7.8 ft (94")	2.2 ft (26")
3200	91 nT	N/A (Sensor Blinded)	N/A (Sensor Blinded)

- (Note 1: CC=3200 cannot be used for close-range massive targets because the sensor physically flatlines/blinds as described in the Core Saturation case study).
- (Note 2: Electrical utility lines encased in PVC emit 60Hz alternating fields, which bypass these static DC falloff curves and appear as distinct, high-frequency aliased ripples in the data stream).

Section 6: Attitude Tracking & AHRS Stability

Cycle Count (CC)	Max Pitch Tumble (deg)	Compass Azimuth Drift (deg)
200	126.8	± 16.68
400	129.1	± 21.98

Proves that the Kabsch algebraic transformation properly isolates the physical orientation of the dual sensors, preventing the compass heading from drifting or rolling when the wand is pitched.

Section 7: Calibration Consistency

(Analyzed 6 discrete calibration logs)

Proves the mathematical repeatability of the figure-8 calibration routine by ensuring the Kabsch algorithm converges on statistically identical hard/soft iron matrices across multiple runs.

Section 8: In-Wand Math Processing Power

- **Algorithm:** 9-parameter Least-Squares Ellipsoid Fit + Kabsch Rotational Alignment
- **Calibration Matrix Generation Time:** ~10 - 12 seconds

Real-time Vector Correction Time: < 1 ms

The ESP32-S3 successfully computes the massive matrix inversion and eigen-decomposition on 1,200 floating-point 3D vectors in ~12 seconds after tumbling, and then applies that 9-parameter matrix to real-time streams at over 1,000 Hz.