


- [51] REMOVE AND DISCARD NS/FS PLACARDS WITH CIRCUIT BREAKER/RELAY/SWITCH REMOVAL. CLEAN AREAS IAW BAC 5750.
- [52] REMOVE K21002-051 MOUNTING PLATE WITH R9512 RELAY. EFF 202-226,228-231,233,234,237-239,241-245,247,248,250-299, 401-464,501-531.
- [53] RE-INSTALL ORIGINAL POS C9 CIRCUIT BREAKER/WIRING, AS REQUIRED. IF FURTHER RESTORATION OF CIRCUIT BREAKER PANEL(S) IS REQUIRED, RESTORE TO ORIGINAL CONFIGURATION PER APPLICABLE BOEING IPC.


SEE DETAIL F  
P6-1 CIRCUIT BREAKER PANEL  
ONLY FOR (-101, -103, -105)

SEE DETAIL G  
RELAY PANEL  
ALL (-101, -103, -105, -107, -109)

SEE DETAIL H  
P6-4 CIRCUIT BREAKER PANEL  
ONLY FOR (-101, -103, -105)

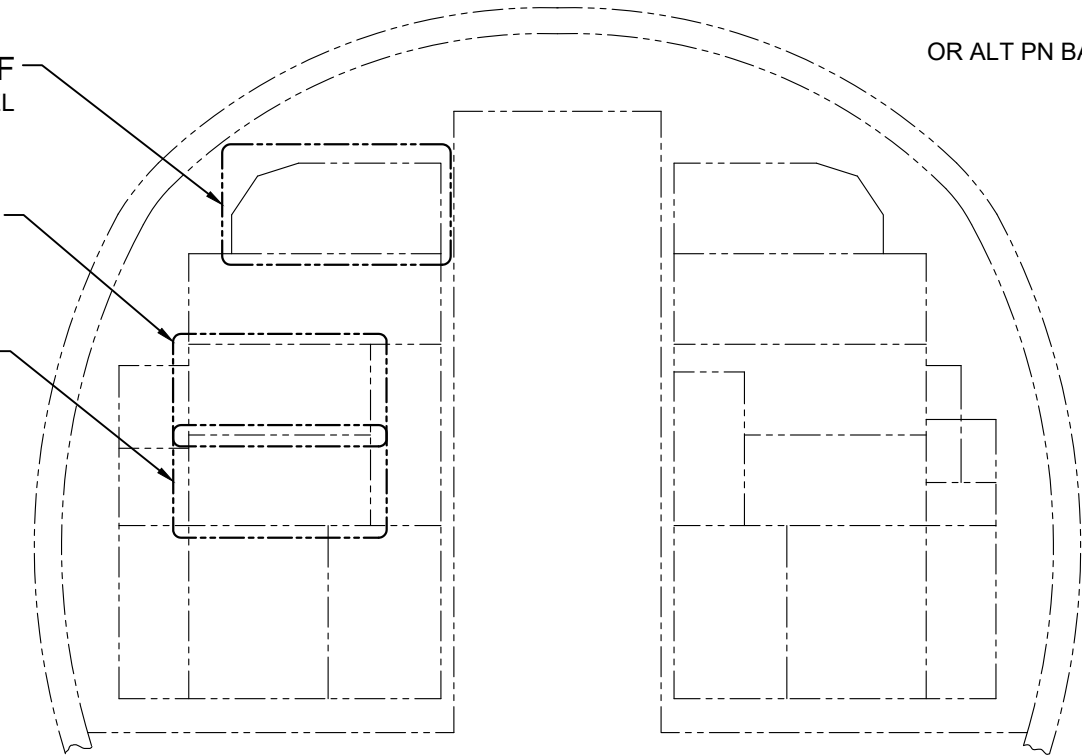


VIEW D-D (SHT 3)  
REMOVAL OF KA SYSTEM CIRCUIT BREAKERS, RELAYS  
LOOKING AFT  
ALL (-101, -103, -105, -107, -109)

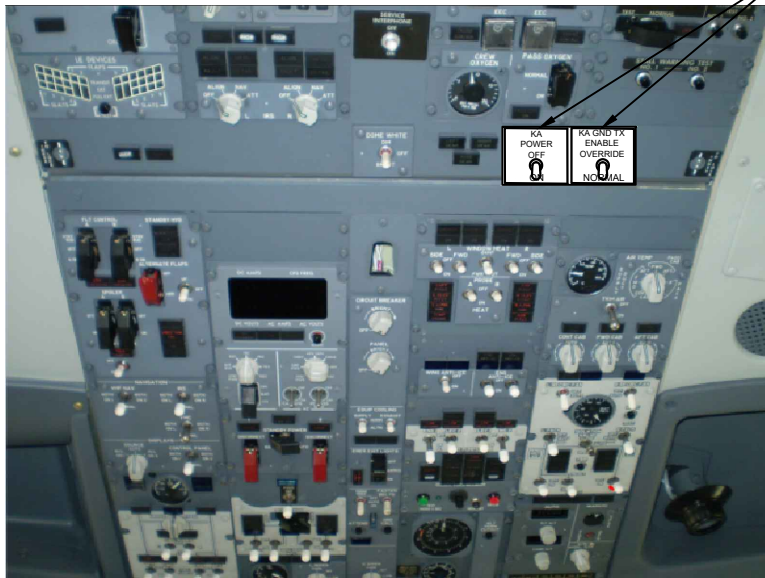

DETAIL E (SHT 3)  
REMOVAL OF AFT OVERHEAD P5 PANEL SWITCHES  
LOOKING UP  
ALL (-101, -103, -105, -107, -109)


4 PLUG  
REMOVE MS24658-23D [51]  
SWITCH, TOGGLE, LEVER LOCK

3 PLCS {  
LABEL, COVER 5  
REMOVE MS3320-2 QTY 2 (WEB/WDU 9209, DC CNTL 9210  
OR ALT PN 2TC2-2  
REMOVE 2TC49-5 (DC BUS 9211)  
OR ALT PN BACC18AD5 OR 4310-029-5 OR 2TC47-5

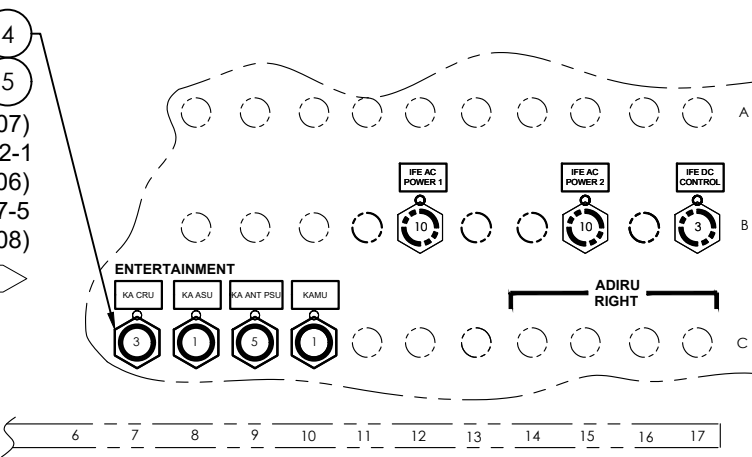

DETAIL F  
REMOVAL OF P6-1 KA SYSTEM CIRCUIT BREAKERS  
LOOKING AT THE FRONT SIDE OF THE PANEL  
FOR ALL (-101, -103, -105, -107, -109)

- [51] REMOVE THE FOLLOWING RELAY, SOCKET:
- [52] M83536/16-022M RELAY  
OR ALT PN M83536/16-022L  
REMOVE M12883/40-13 RELAY SOCKET  
(R9512)  
REMOVE M82536/10-024M RELAY QTY 2  
OR ALT PN M82536/10-024L  
REMOVE M12883/41-06 RELAY, SOCKET QTY 2  
(R9513, R9514)

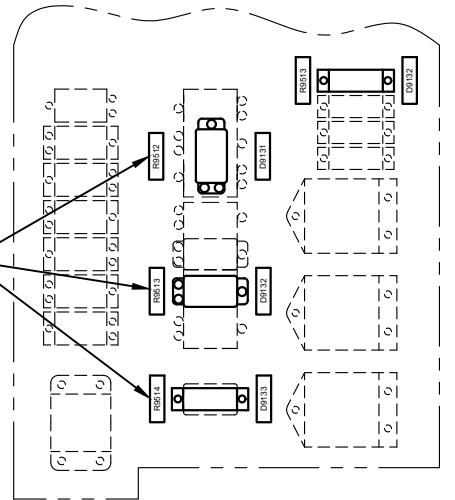

DETAIL G  
REMOVAL OF P6-4 KA SYSTEM CIRCUIT BREAKERS  
LOOKING AT THE FRONT SIDE OF THE PANEL  
ALL (-101, -103, -105, -107, -109)

