

KEY MATRIX -- 5 x 12 physical keys on a 11 row x 6 col matrix, col2row. Left half -> rows 0–4, right half -> rows 5–9, mouse buttons -> row 10.




MOUSE BUTTONS -- electrical row 10; cols 2–5 of that row are spare




BACKLIGHT -- 60x SK6812MINI-E reverse mount in the Choc v1 centre window, one chain, GRB

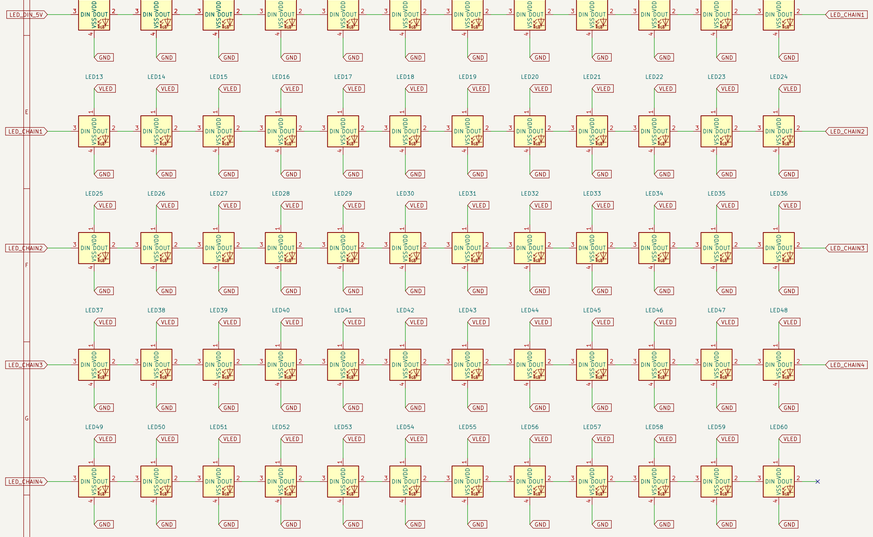


LED DECOUPLING -- one 0.1uF per LED, place each one at its LED on the PCB

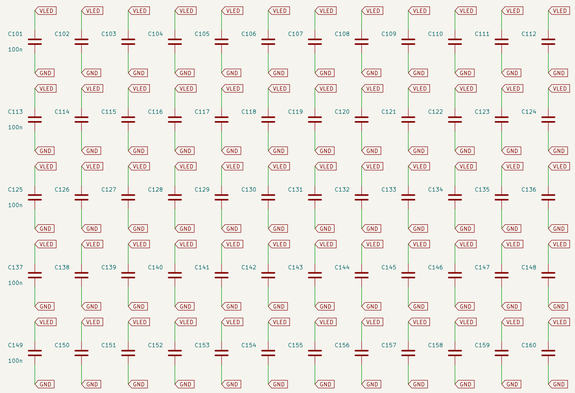


CONTROLLER -- nicenano v2, reverse mounted under the key field, USB at the back edge



BATTERY / POWER SWITCH / RESET / SWD

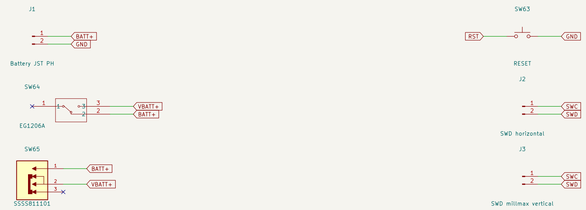


LED POWER -- VBATT+ -> Q1 hard cutoff -> U2 boost 5V -> U3 level shift -> LED chain. Q1/Q2/U2.EN all gated by VCC (ZMK ext_power).

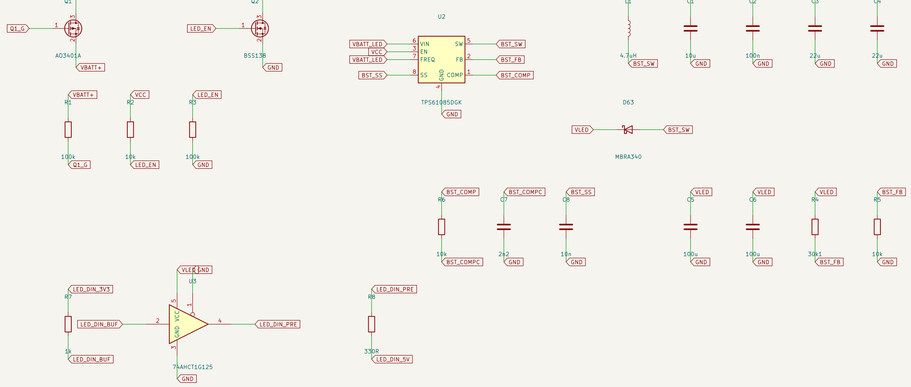

MOUNTING -- 6x M2.5

TRACKPAD -- Cirque TM040040, I2C @ 0x2a. Remove the module's R1 to select I2C. Pins 1/2/3/5 are SPI-only; 6/7/8 are its hardware buttons.



POWER FLAGS -- ERC only; not parts



Sheet: /
File: order66-lp.kicad_sch
Title:
Size: A1
Date:
Rev:
KiCad E.D.A. 10.0.6
Id: 1/1