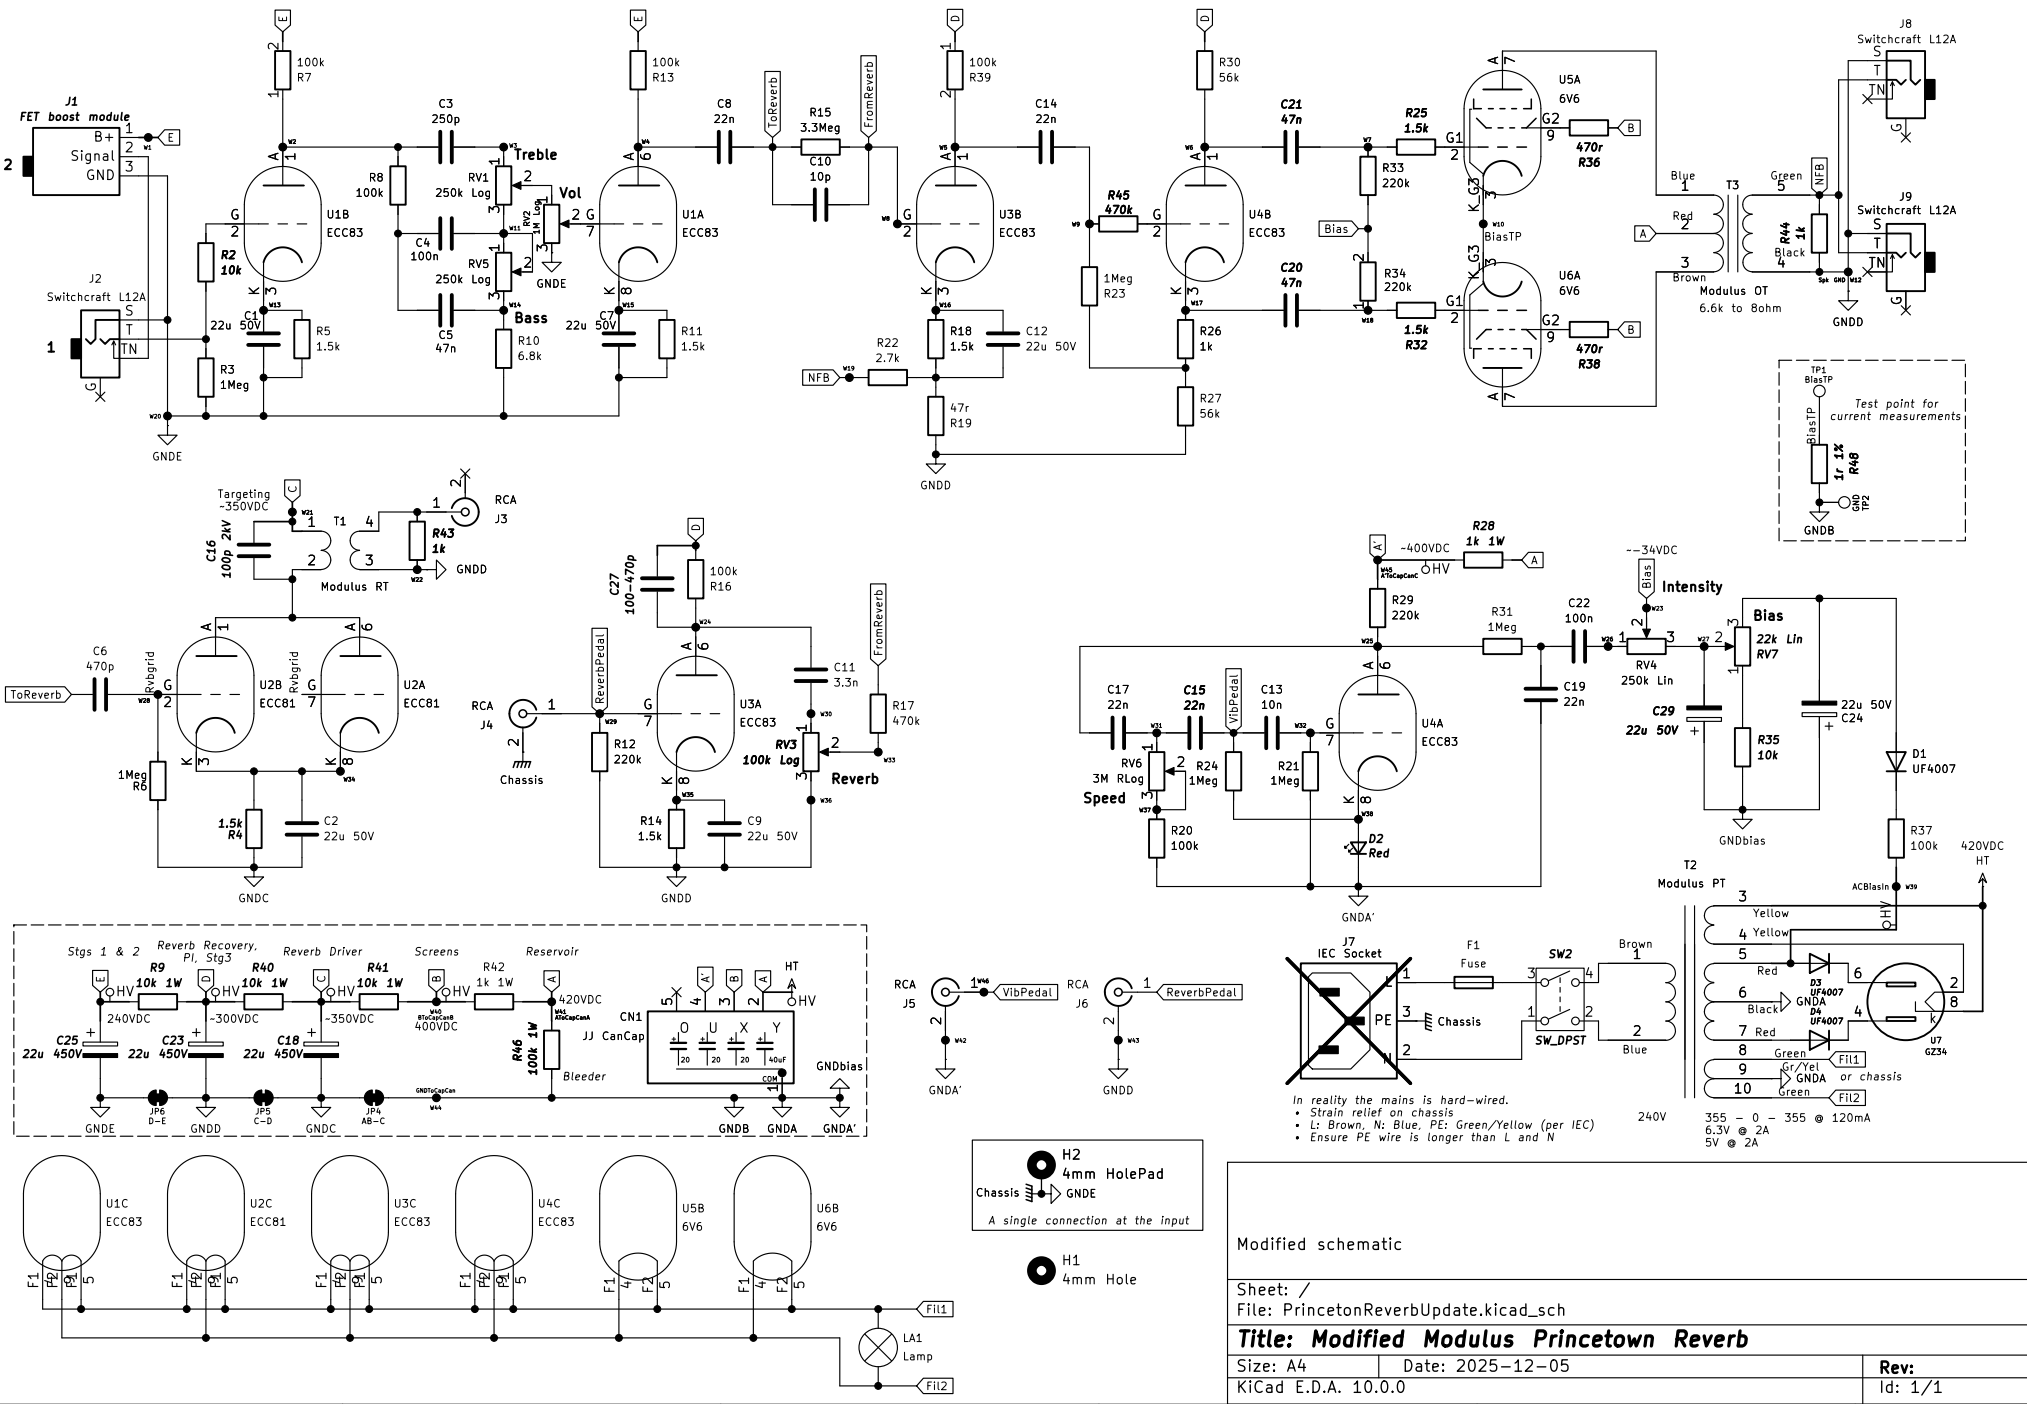

J1
FET boost module
B+
Signal
GND
J2
Switchcraft L12A
U1B
ECC83
U1A
ECC83
U3B
ECC83
U4B
ECC83
U5A
6V6
U6A
6V6
R2 10k
R3 1Meg
R4 1.5k
R5 1.5k
R7 100k
R8 100k
R10 6.8k
R11 1.5k
R13 100k
R18 1.5k
R19 47r
R22 2.7k
R23 1Meg
R25 1.5k
R26 1k
R27 56k
R30 56k
R32 1.5k
R33 220k
R34 220k
R36 470r
R38 470r
R39 100k
R45 470k
C2 22u 50V
C3 250p
C4 100n
C5 47n
C8 22n
C10 10p
C12 22u 50V
C14 22n
C20 47n
C21 47n
RV1 250k Log
RV2 1M Log
RV5 250k Log
Treble
Vol
Bass
ToReverb
FromReverb
NFB
Bias
BiasTP
Modulus OT
6.6k to 8ohm
T3
R44 1k
J8
Switchcraft L12A
J9
Switchcraft L12A
GNDE
GNDD
TP1
BiasTP
Test point for current measurements
1r 1% R48
GNDB
Targeting ~350VDC
C16 100p 2kV
T1
Modulus RT
R43 1k
RCA J3
GNDD
U2B
ECC81
U2A
ECC81
C6 470p
ToReverb
1Meg R6
1.5k R4
C2 22u 50V
GNDC
RCA J4
Chassis
ReverbPedal
U3A
ECC83
C27 100-470p
R16 100k
C11 3.3n
R17 470k
RV3 100k Log
Reverb
R12 220k
R14 1.5k
C9 22u 50V
GNDD
-400VDC
HV
R28 1k 1W
R29 220k
R31 1Meg
C22 100n
C19 22n
U4A
ECC83
C17 22n
C15 22n
C13 10n
VibPedal
RV6 3M RLog
Speed
R24 1Meg
R21 1Meg
R20 100k
D2 Red
GNDA'
--34VDC
Intensity
RV4 250k Lin
22k Lin RV7
Bias
C29 22u 50V
R35 10k
C24 22u 50V
GNDbias
D1 UF4007
R37 100k
420VDC HT
T2
Modulus PT
ACBiasIn
Yellow
Red
Black
Green
Gr/Yel
GNDA
Fil1
Fil2
D3 UF4007
D4 UF4007
U7 GZ34
355 – 0 – 355 @ 120mA
6.3V @ 2A
5V @ 2A
240V
Stgs 1 & 2
Reverb Recovery, PI, Stg3
Reverb Driver
Screens
Reservoir
R9 10k 1W
R40 10k 1W
R41 10k 1W
R42 1k 1W
240VDC
~300VDC
~350VDC
400VDC
420VDC
C25 22u 450V
C23 22u 450V
C18 22u 450V
CN1
JJ CanCap
R46 100k 1W
Bleeder
JP6 D–E
JP5 C–D
JP4 AB–C
GNDbias
RCA J5
VibPedal
GNDA'
RCA J6
ReverbPedal
GNDD
J7
IEC Socket
F1
Fuse
SW2
SW_DPST
PE
Chassis
Brown
Blue
In reality the mains is hard-wired.
Strain relief on chassis
L: Brown, N: Blue, PE: Green/Yellow (per IEC)
Ensure PE wire is longer than L and N
U1C
ECC83
U2C
ECC81
U3C
ECC83
U4C
ECC83
U5B
6V6
U6B
6V6
LA1
Lamp
H2
4mm HolePad
Chassis
GNDE
A single connection at the input
H1
4mm Hole
Modified schematic
Sheet: /
File: PrincetonReverbUpdate.kicad_sch
Title: Modified Modulus Princetown Reverb
Size: A4
Date: 2025-12-05
KiCad E.D.A. 10.0.0
Rev:
Id: 1/1