
Fused glass lighting controller Rev G2: assembly drawing, reference designators

From fgl_g2.kicad_pcb (F.Fab layer), 2026-10-27. Parts under the XIAO (J9/J10) and the radar (J3) are hidden once those modules are plugged in. Top side, seen from above; about 3.0 : 1 on A4.

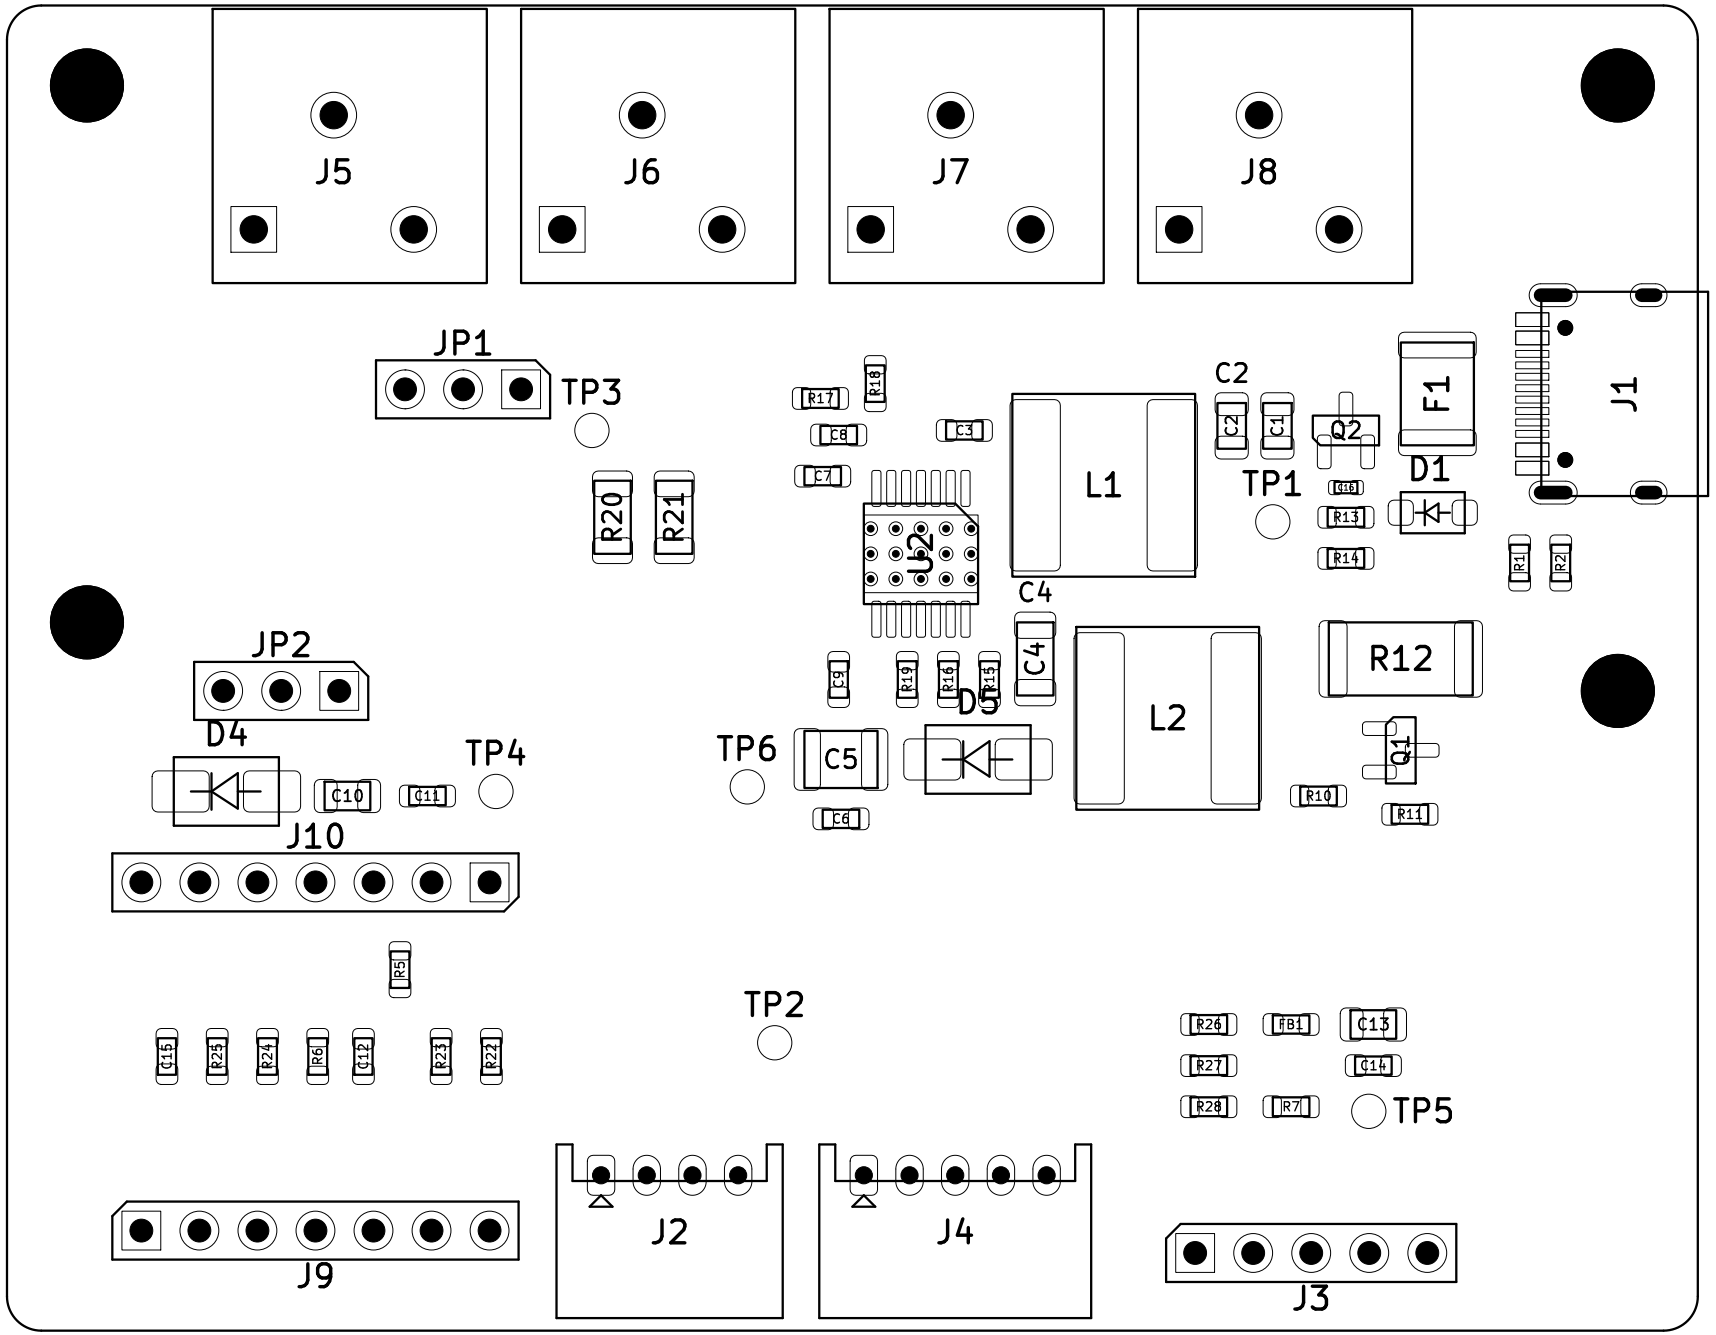

Fused glass lighting controller Rev G2: parts by reference

From bom.csv, 2026-10-27. "Assembly" says who fits the part: JLCPCB, or you (plug-in modules, the JP1 and JP2 shunts).

C1	10u 25V	CL21A106KAYNNNE	**J2**	POT 100k lin + SW	S4B-PH-K-S(LF)(SN)	**R10**	100R 1%	0603WAF1000T5E
C2	10u 25V	CL21A106KAYNNNE	**J3**	LD2410S socket	HC-PM254-5.0H-1x5PZ	**R11**	100k 1%	0603WAF1003T5E
C3	100n 50V	CC0603KRX7R9BB104	**J4**	LD2410S cable	S5B-PH-K-S(LF)(SN)	**R12**	33R 1% 1W	25121WF330JT4E
C4	10u 50V	CL31B106KBHNNNE	**J5**	PORT 1	DG250-3.5-03P-11-00A(H	**R13**	100k 1%	0603WAF1003T5E
C5	10u 100V	GRM32EC72A106KE05L	**J6**	PORT 2	DG250-3.5-03P-11-00A(H	**R14**	10k 1%	0603WAF1002T5E
C6	100n 100V	CL10B104KC8NNNC	**J7**	PORT 3	DG250-3.5-03P-11-00A(H	**R15**	110k 1%	0603WAF1103T5E
C7	1u 50V	CL10A105KB8NNNC	**J8**	PORT 4	DG250-3.5-03P-11-00A(H	**R16**	5.1k 1%	0603WAF5101T5E
C8	100n 50V	CC0603KRX7R9BB104	**J9**	XIAO socket 1-7	HC-PM254-5.0H-1x7PZ	**R17**	1k 1%	0603WAF1001T5E
C9	100n 50V	CC0603KRX7R9BB104	**J10**	XIAO socket 8-14	HC-PM254-5.0H-1x7PZ	**R18**	2.2k 1%	0603WAF2201T5E
C10	10u 25V	CL21A106KAYNNNE	**JP1**	ISEL	2.54-1*3P	**R19**	82k 1%	0603WAF8202T5E
C11	100n 50V	CC0603KRX7R9BB104	**JP1-shunt**	2.54 mm shunt for JP1 / JP2	2.54 (open top) [loose]	**R20**	0.82R 1%	1206W4F820LT5E
C12	100n 50V	CC0603KRX7R9BB104	**JP2-shunt**	2.54 mm shunt for JP1 / JP2	2.54 (open top) [loose]	**R21**	0.82R 1%	1206W4F820LT5E
C13	10u 25V	CL21A106KAYNNNE	**JP2**	RADAR_MODE	2.54-1*3P	**R22**	1k 1%	0603WAF1001T5E
C14	100n 50V	CC0603KRX7R9BB104	**L1**	10uH	SWPA8040S100MT	**R23**	100k 1%	0603WAF1003T5E
C15	100n 50V	CC0603KRX7R9BB104	**L2**	10uH	SWPA8040S100MT	**R24**	120k 1%	0603WAF1203T5E
C16	100n 16V	CL05B104KO5NNNC	**Q1**	AO3400A	AO3400A	**R25**	10k 1%	0603WAF1002T5E
D1	SMF6.0A	SMF6.0A [DNP]	**Q2**	AO3401A	AO3401A	**R26**	1k 1%	0603WAF1001T5E
D4	SS14	SS14	**R1**	5.1k 1%	0603WAF5101T5E	**R27**	1k 1%	0603WAF1001T5E
D5	SS36	SS36	**R2**	5.1k 1%	0603WAF5101T5E	**R28**	1k 1%	0603WAF1001T5E
F1	1.5A hold	SMD1812B150TF/8	**R5**	47k 1%	0603WAF4702T5E	**U1**	XIAO ESP32C3	113991054, order with [hand]
FB1	600R@100MHz	GZ1608D601TF	**R6**	1k 1%	0603WAF1001T5E	**U2**	TPS61500PWPR	TPS61500PWPR
J1	USB-C (from bank)	TYPE-C-31-M-12	**R7**	100k 1%	0603WAF1003T5E			