

INSTALLATION MANUAL

DATATRONIX 1RU Rack Mount

Sliding Tray

INSTALLATION MANUAL

RACKMOUNT SLIDING TRAY 1RU FOR 24 LC-SC PORTS

DATATRONIX | CPPR1-02-X1-UL

1




Check that the tray and all components are in good condition.

2



Verify the included accessories:
01 splice tray (24 fibers), 02 cable glands, 04 cage nuts and cable ties.

3

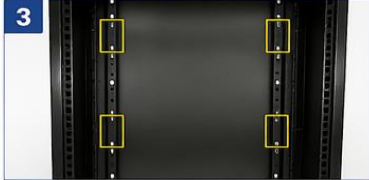

Install the 4 cage nuts in the desired 1RU position in the rack.

4



Insert the tray into the rack and secure it using M6 screws (not included).

5



Pull the tray out gently until it locks in the extended position.

6



Place the splice tray (24 fibers) in the central area and secure it.

7



Install the 2 cable glands on the back panel and tighten them.

8



Route the fiber cables through the cable glands and organize the fibers.

9



Make the fiber splices and place the protective sleeves in the splice tray.

10



Organize the patch cords to the front adapters (adapters not included).

11



Push the tray gently to the closed position until it locks.

12



Installation completed.

RECOMMENDATIONS

- Do not exceed the tray fiber capacity (24 fibers).
- Keep a minimum bending radius of 30 mm for fiber cables.
- Use appropriate personal protection during installation.

INCLUDED COMPONENTS

