

Motor Datasheet: WxF test

Operating Point: Continuous | Temperature: 20 °C

Geometry (active elements only)

Parameter	Value	Unit
Machine Outer Diameter	70.0	mm
Machine Inner Diameter	32.2	mm
Machine Thickness / Width	23.7	mm
Air Gap	0.50	mm
Fill Factor (input)	0.60	-
Slot Fill Factor (calculated)	0.54	-
Slot Width (tooth to tooth)	4.666	mm
Available Coil Space	2.333	mm
Assumed Coil Width (simulation)	2.133	mm

Mass Properties (active elements only)

Parameter	Value	Unit
Machine Mass	377.0	g
Rotor Mass	101.6	g
Stator Mass	275.4	g
Rotor Structure Included	No	-
Rotor Moment of Inertia (active elements only)	689.9	g·cm²

Electrical Properties

Parameter	Value	Unit
Supply Current (RMS)	13.325	A
Supply Current (Peak)	18.844	A
Id (Peak)	-0.000	A
Iq (Peak)	18.844	A
Phase Advance Angle	0.0	°elec
Phase Resistance	96.663	mOhm
D-Axis Inductance (Ld)	272.609	μH
Q-Axis Inductance (Lq)	259.197	μH
Terminal Inductance (Ltt = Ld + Lq)	531.806	μH
PM Flux Linkage	9.115	mWb
Frequency at operating point (electrical)	416.667	Hz
Winding Configuration	wye (star)	-
DC Supply Voltage	48.000	V

Performance

Parameter	Value	Unit
Torque (Continuous)	2.60	Nm
Speed	2500.0	rpm
BackEMF Constant (Ke, phase peak)	9.5	mV/rpm
Motor Constant (Km, only resistive losses)	362.1	mNm/√W
Specific Motor Constant (Km / mass)	960.6	mNm/√W/kg
Torque Constant (Kt, peak, no-load)	136.7	mNm/A
Torque Ripple	1.2	%
Saturation	0.0	%

Losses

Parameter	Value	Unit
Total Losses	62.7	W
Resistive Losses	51.5	W
Iron Core Losses	7.0	W
Magnet Eddy Current Losses	2.0	W
Rotor Structure Eddy Current Losses	0.0	W
Winding Eddy Current Losses	0.0	W


Configuration

Parameter	Value	Unit
Number of Stators	1	-
Number of Rotors	1	-
Number of Slots	18	-
Pole Pairs	10	-
Number of Parallel Paths	1	-
Number of Turns per Tooth (designed incl. parallel paths)	20.0	-
Number of Phase Turns (all phases in series)	120.0	-

Winding Configuration

Schema: **AaABbBCcCAaABbBCcC**

Concentrated Winding | Balanced | Cogging: 180/rev | Ripple: 180/rev

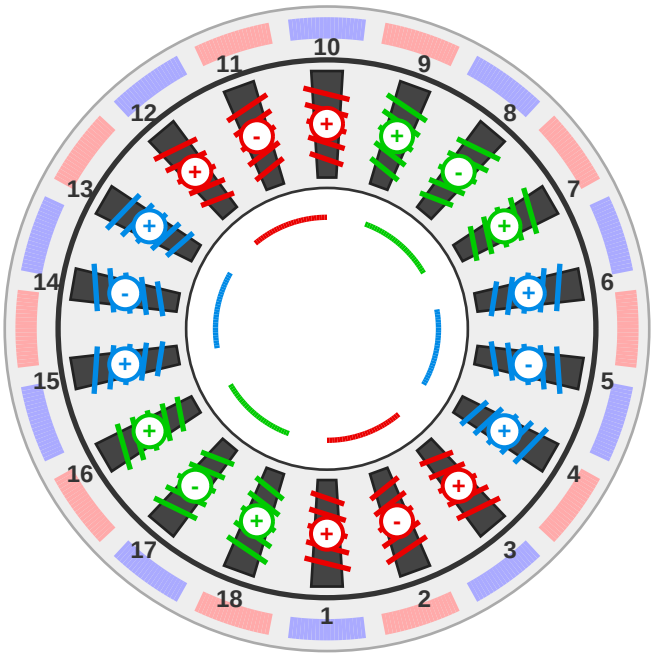

Materials

Component	Material	
Stator Core	N030-Cogent	-
Magnets	BMN-52SH (GBD)	-

Voltage Breakdown at Operating Point (with integer turns)

Parameter	Value	Unit
Back-EMF Voltage (Phase, Peak)	23.864	V
Resistive Drop (Phase, Peak)	1.822	V
Inductive Drop Ld (Peak)	0.000	V
Inductive Drop Lq (Peak)	12.787	V
Inductive Drop Total (Peak)	12.787	V
Terminal Voltage (Phase, Peak)	27.693	V

Back-EMF Voltage (Line-to-Line, Peak)	41.334	V
Resistive Drop (Line-to-Line, Peak)	3.155	V
Inductive Drop (Line-to-Line, Peak)	22.148	V
Terminal Voltage (Line-to-Line, Peak)	47.965	V

Phasor Diagram Phase Values NOT Line-to-Line (d-q reference frame)

