
MCHOSE

G98 V2 MECHANICAL KEYBOARD

Warm Reminder: The product images shown are for illustrative purposes only; the actual product shall prevail.

PRODUCT OVERVIEW

Mode - switching switch:
1.The top - most position 【2.4G】 indicates the 2.4G mode.
2.The middle position 【B】 indicates the wireless mode.
3.The bottom - most position 【OFF】 indicates the USB wired mode.

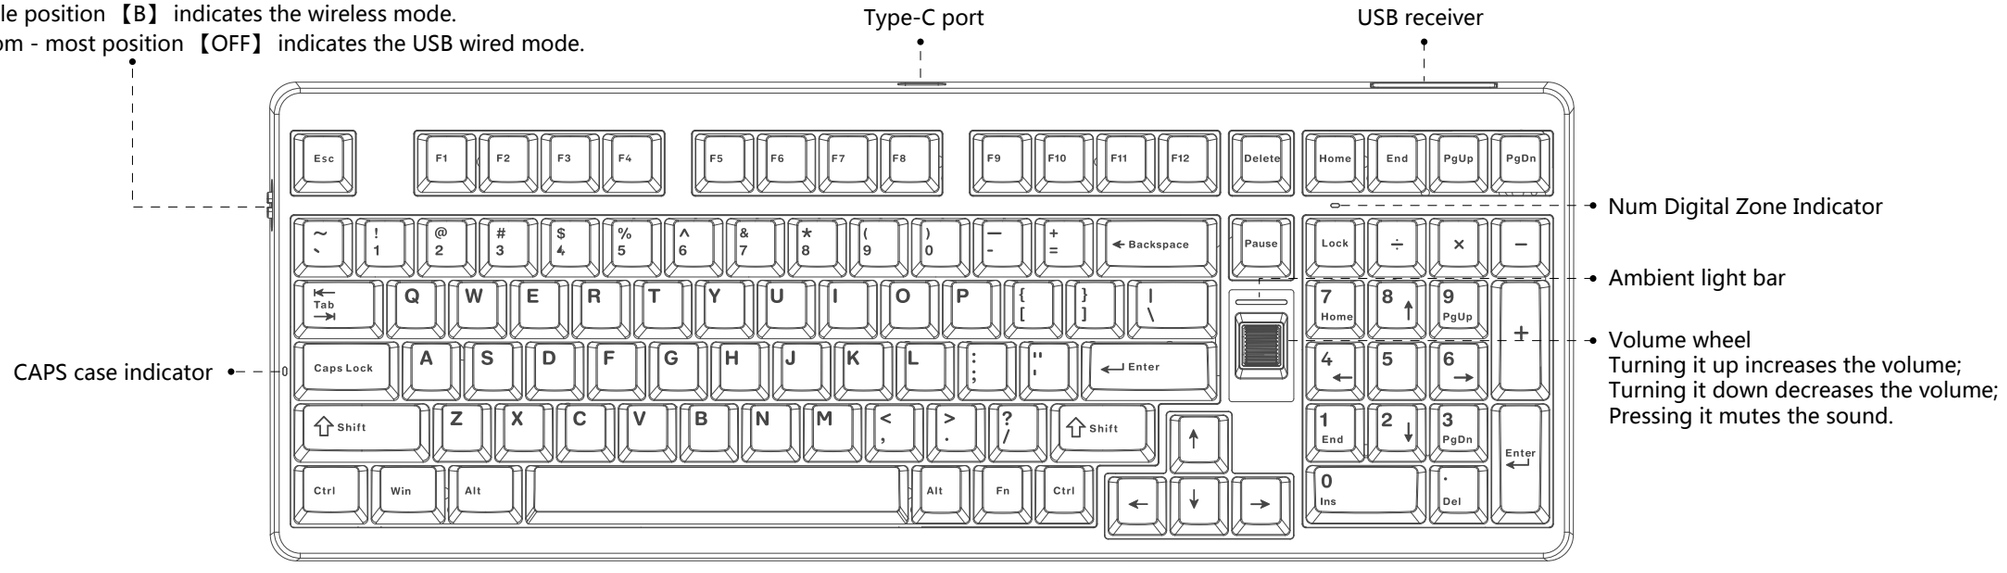


1.Indicator lights:
- CAPS indicator light: The CAPS key indicator light differentiates between uppercase and lowercase states. It remains on when in the uppercase state.
- Win indicator light: The Win key indicator light differentiates the locked state of the Win key. It stays on when the Win key is locked, and the Win key cannot be used at this time.

2.Windows / Mac / Android / iOS systems:
- FN + Q = Android system; FN + W = Windows system; FN + R = iOS mode.
- FN + E = Mac mode. The ALT key functions as the Command key, and FN + F1 - F12 enables normal input of F1 - F12.
- In the Windows system, when switching to Mac/iOS system mode, the Windows key and the left Alt key will be swapped, and the F1 - F12 keys will function as multimedia keys.

CONNECTION MODE

2.4G wireless connection:

- Slide the mode - switching switch to [2.4G].
- Take out the receiver from the storage slot.
- Insert the receiver into the computer's USB port.
- Manual code matching (factory default code matching): Long press 3S [FN + '~] until the indicator light flashes, plug the receiver into the computer USB port, and the indicator light will light up 2S if the connection is successful.

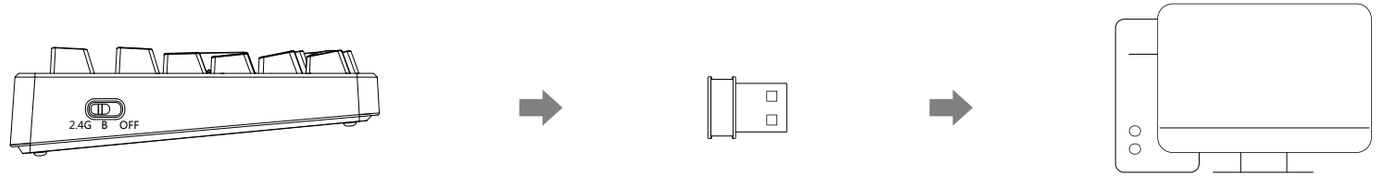

Wired connection:

- Dial the mode switch to [OFF] mode.
- Plug one end of the USB cable Type-C into the corresponding port of the keyboard.
- Plug the USB end of the cable into the corresponding port of the computer and use it.



Wireless connection:

- Dial the mode switch to [B] mode.
- Long press [FN + 1!] to start pairing, and the indicator light flashes when pairing.
- Press [FN + 1!], [FN + 2@], [FN + 3#] to switch devices.



Pairing name :
【MCHOSE G98 V2】

DRIVER INTRODUCTION

M HUB Web : https://www.mchose.com.cn

Open the URL in your browser,

Click [Enter M HUB WEB] - [Allow Browser Access], then select the corresponding product model to connect.


M HUB Driver : https://www.maicong.cn

Open the URL in your browser,

Click [Driver] - [Download M HUB Driver]

*The M HUB client driver currently only supports Windows 10 and above operating systems; Windows 7 and macOS operating systems are not supported for now.

FN COMBINATION KEY



+

Lighting function	
ESC	Long press for 3 seconds to restore default settings
|	Switch lighting mode
TAB	Switch lighting color
↑	Lighting brightness +
↓	Lighting brightness -
←	Lighting speed -
→	Lighting speed +
Right Shift	Switch ambient light strip mode
/?	Switch ambient light strip color
B	Switch ambient light strip to battery level mode
Right Alt	Ambient light strip brightness cycle
Right Ctrl	Ambient light strip speed cycle

FN MULTIMEDIA FUNCTION



+

Win system

Key	Multimedia combination function	Multimedia function (single press)
F1	Home	F1
F2	Mail	F2
F3	Switch Window	F3
F4	File Explorer	F4
F5	Lighting Brightness -	F5
F6	Lighting Brightness +	F6
F7	Previous Track	F7
F8	Play/Pause	F8
F9	Next Track	F9
F10	Mute	F10
F11	Decrease Volume	F11
F12	Increase Volume	F12



+

Mac system / iOS system / Android system

Key	Multimedia combination function	Multimedia function (single press)
F1	F1	Screen Brightness -
F2	F2	Screen Brightness +
F3	F3	Switch Window
F4	F4	Return to Desktop
F5	F5	Lighting Brightness -
F6	F6	Lighting Brightness +
F7	F7	Previous Track
F8	F8	Play/Pause
F9	F9	Next Track
F10	F10	Mute
F11	F11	Volume -
F12	F12	Volume +

POWER MANAGEMENT

1. Battery Check

• In 2.4G/bluetooth mode (when the USB is not plugged in), you can press FN + B to display the keyboard's battery level.

• As the battery drains, the green color gradually decreases, and a fully red indication means low battery.


🟢 [Ambient light strip] All green indicates high battery.

🔴 [Ambient light strip] All red indicates low battery.

2. Charging method

•In any mode, connecting the keyboard to the computer via the provided data cable will charge the keyboard.

•During charging, the 【ambient light strip】 will display a flowing light effect. When fully charged, the 【ambient light strip】 will remain steadily lit in green.

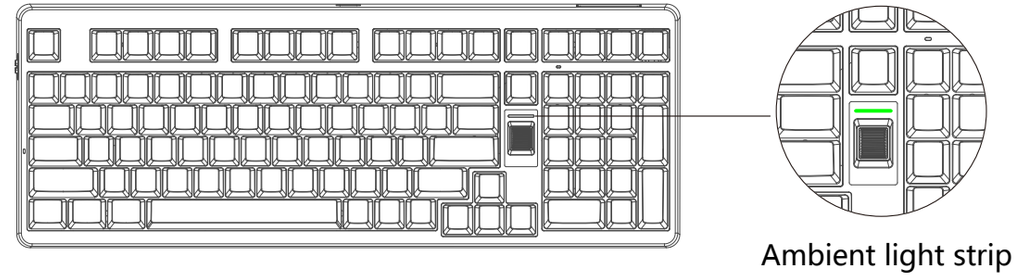

3. Sleep function

• In wireless/2.4G mode, the keyboard will automatically enter power - saving mode if there is no operation for one minute. Press any key to wake up the keyboard.

Note: This device has been tested and complies with the limits for Class B digital devices under Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installations.
This device generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur in a particular installation.
If this device does cause harmful interference to radio or television reception (which can be determined by turning the device off and on), we encourage the user to try one or more of the following measures to correct the interference:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
Changes or modifications not expressly approved by the responsible party could void the user’ s authority to operate the equipment.
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.

CHARGING INSTRUCTION

1.It is recommended to charge the keyboard only via the computer's USB port.
2.Do not use a fast - charging mobile phone charger to charge the keyboard.
3.Do not use substandard or non - compliant power adapters to charge the keyboard.
4.Do not use power adapters with over - voltage or over - current to charge the keyboard.
5.Keep away from high - temperature devices when charging.
6.Turn off the power switch when not in use for an extended period.

These charging instructions also apply to other rechargeable devices (keyboard/mouse/headphones/speakers, etc.).