


RadiaLog

QUICK START — GET LOGGING IN 5 MINUTES

RadiaLog reads your RadiaCode dosimeter, tags each measurement with GPS, and uploads to RadiaMaps so your readings appear on the world map. This guide walks you through first-time setup.



1 Power On

Plug in the USB-C cable to charge. The device powers on automatically and starts in setup mode.

A solid LED means the device is running. First boot may take ~10 seconds.

3 Open the Setup Page

A captive portal usually opens automatically. If it doesn't, open a browser and visit:

<http://10.0.0.1>

Once on your home WiFi later, you can use <http://radiaLog.Local>


2 Join the Setup WiFi

On your phone or laptop, open WiFi settings and join the network named **RadiaLog-XXXX** (XXXX matches your device).

No password by default. Your phone may show "no internet" — that's expected.


4 Add Your Home WiFi

Tap **Settings**, then under **WiFi Networks** enter your home SSID and password and tap **Add**.

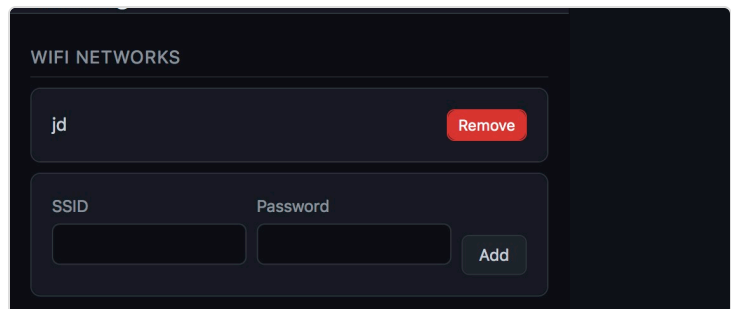


5 Get Your RadiaMaps Device Token


Sign in at radiamaps.com, then follow these three steps to generate a token:

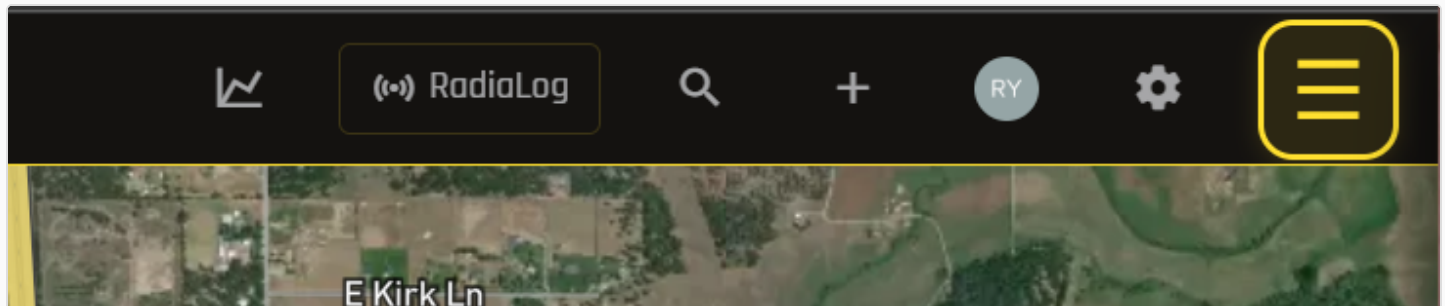

1 Click the menu (≡) in the top-right of the map to open your **Profile**.

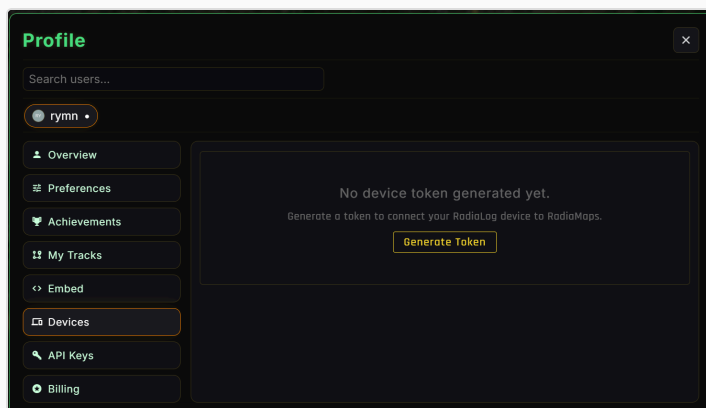

2 In the Profile panel, open **Devices** and click **Generate Token**.

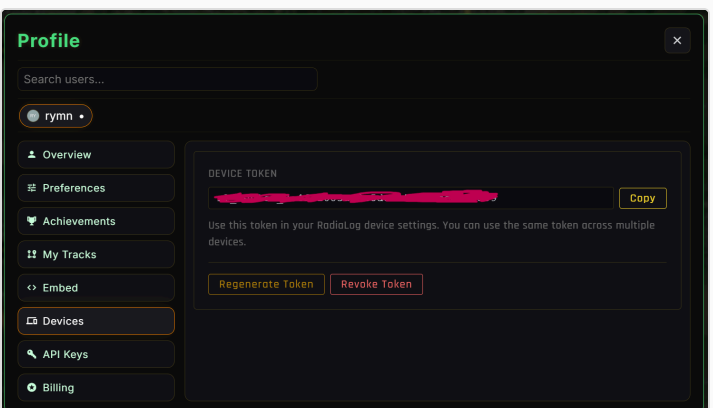


3 Click **Copy** to copy the token to your clipboard.

Then in your RadiaLog: open **Settings** → **RadiaMaps** → **Device Token**, paste, and tap **Verify**. A green check confirms the link.

6 Pair Your RadiaCode

Power on your RadiaCode dosimeter. Then in **Settings** → **BLE RadiaCode Devices** tap **Scan for RadiaCode** and add your device.

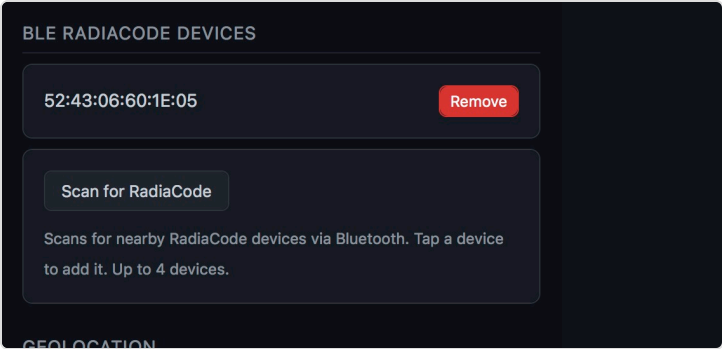

7 Tap "Save Settings"


Scroll to the bottom of Settings and tap the green **Save Settings** button. The device joins your home WiFi and starts logging readings.

After saving, you'll lose the **RadiaLog-XXXX** network. Reconnect your phone to your home WiFi.

8 View Live Readings

From any device on your home network, open <http://radialog.local> to see live dose rate and counts. Visit radiamaps.com to see your map fill in.

Dashboard shows dose rate, count rate, WiFi/RadiaCode status, GPS fix, battery, and uptime at a glance.

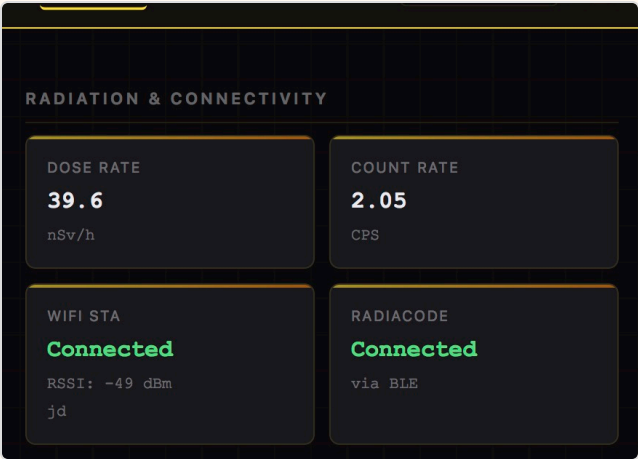

Troubleshooting

- No "RadiaLog-XXXX" WiFi?** Hold the boot button and re-plug power. Wait 30 seconds.
- Dashboard not loading?** Try <http://10.0.0.1> directly. Disable mobile data.
- RadiaCode not found?** Make sure it's powered on and within ~10 ft. Tap "Scan" again.
- No GPS fix?** GPS needs sky view. Place the device near a window for 1–2 minutes.
- Shipping mode:** Hold the boot button for 5 seconds — LED blinks, device sleeps.

Resources

- radiamaps.com
- github.com/ryan-durbin/RadiaLog

RadiaLog firmware v0.2.1
© 2026 — printable one-sheet