


Pettorway

Z3

# Charge The Battery

Your Z3 comes with one battery attached and a charging adaptor.

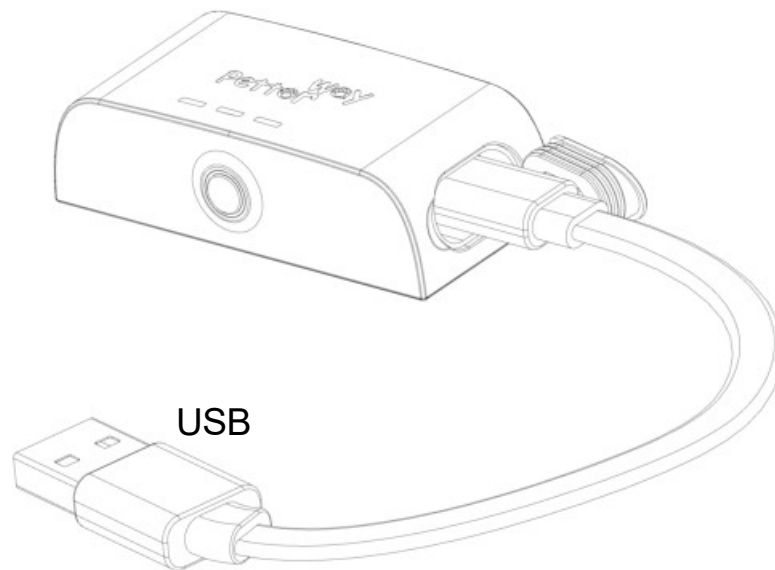

## Charging the battery


Connect the Z3 with the charging adaptor via USB cable.

The red light indicates that the Z3 is charging. The light will turn green when fully charged, which should take around 2 hours.

Once the Z3 is charged, remove it from the charging adaptor.

# Download The App

iOS App available in App Store

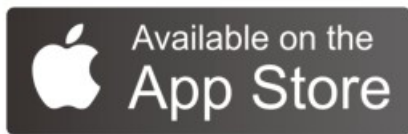

Search the [App Store](#) or Google play for "Pettorway".

Compatibility: Requires iOS 6.0 or later. Compatible with iPhone and iPad.

Android App available



Google Play Store

Search the [Play Store](#) for "Pettorway"

Compatibility: Requires Android 4.0 or later.



Important: The QR code is the link that will keep the latest version iOS or Android App, you can scan the QR code and install the app instead to go to apple store or Google play store.




# Sign Up & Log In

Before you can get started you must either Log in or Create new account if you have not account with Pettorway.

Create an account is easy, just open the App and follow the prompts!

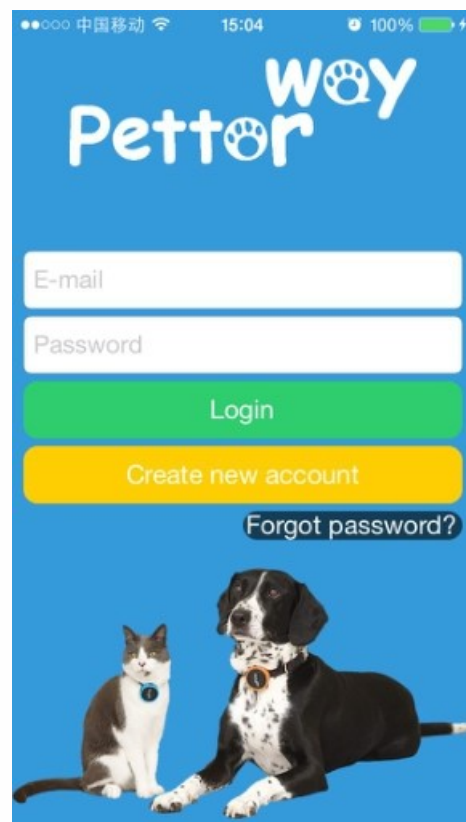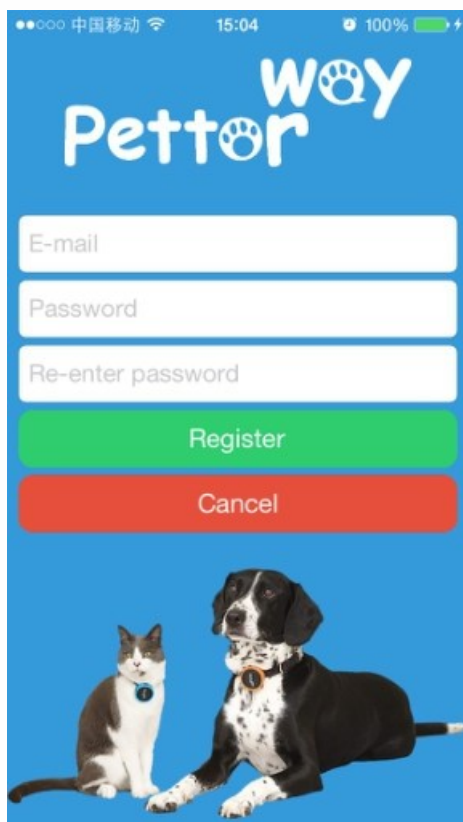

# Turn Your Z3 On/Off

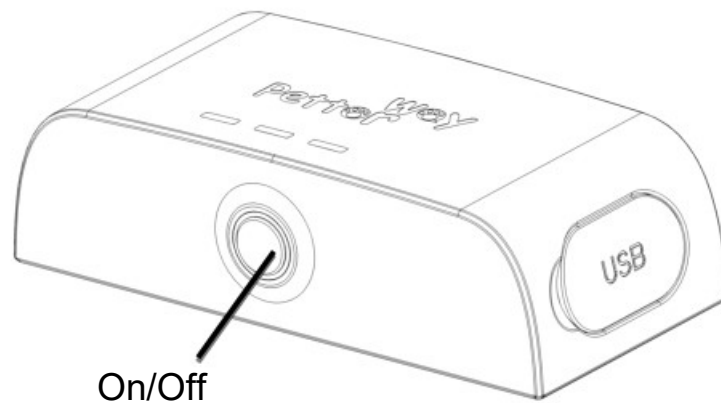

## Turning the Z3 On

Go outside to an open area with a clear view of the sky away from buildings and trees.


Press and hold the push button (on the side of the Z3) for 3 seconds. The 3 lights will be on together to show the Z3 is turn on.

The Z3 will go into a boot up phase for 3 minutes after it has been turned on to display the status. See the table about the Z3's lights for more information.

## Turning the Z3 Off

Hold the Button for 3 seconds until the middle light fast flashes to show the Z3 is turned off.

# Light Indication

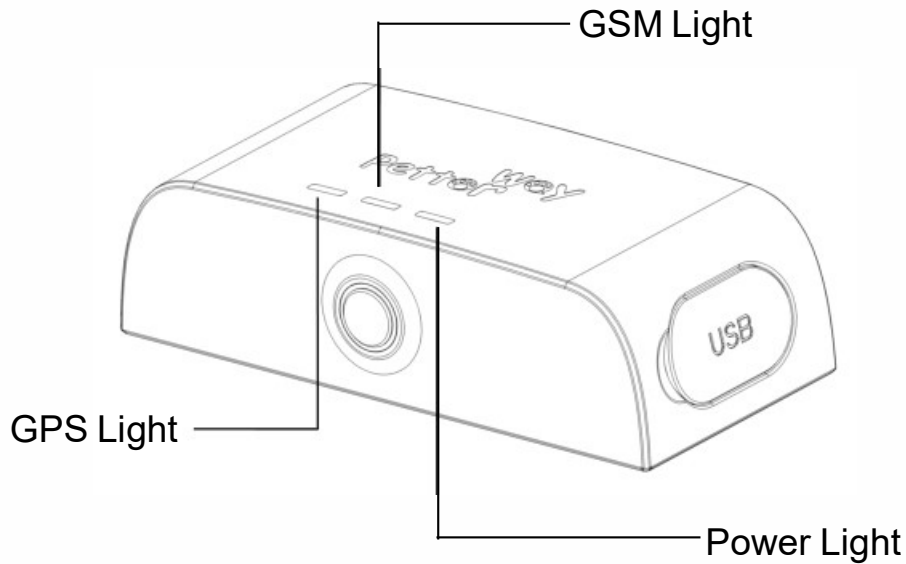

## 1. GSM Light

- ❑ Green Flashing: Good network.
- ❑ Green permanent on: Abnormal network..

## 2. GPS Light

- ❑ Blue Flashing: GPS signal locked, good for tracking.
- ❑ Blue permanent on: Searching for GPS signal.
- ❑ Light Off: Device go for standby mode.


## 3. Power Light

- ❑ Green: Complete charging.
- ❑ Red permanent on: Under charging
- ❑ Red flashing: Lower power.

# Register Your Z3


In order for the Z3 to work you need to add a Pet to your account and then associate your Z3's ID with it.

There are several stages in creating your pet profile:

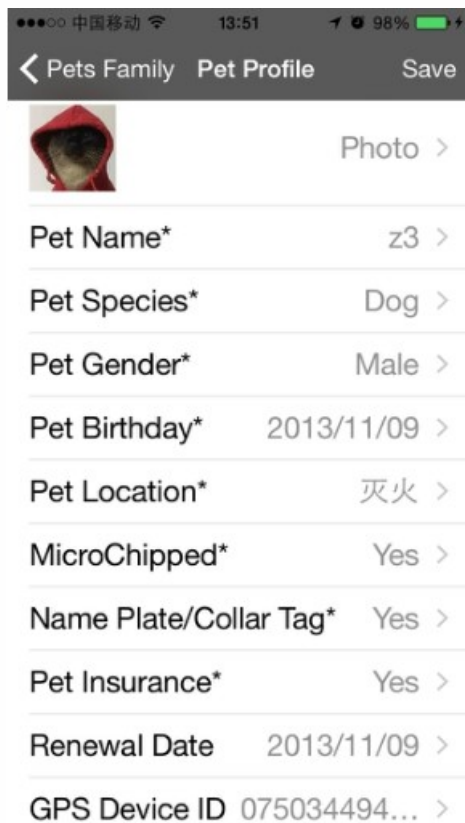

The screenshot shows a mobile app interface for 'Pets Family'. The 'Pet Profile' screen includes a 'Save' button and a 'Photo' link. Below is a form with the following fields and values:


| Field                  | Value        |
|------------------------|--------------|
| Pet Name*              | z3           |
| Pet Species*           | Dog          |
| Pet Gender*            | Male         |
| Pet Birthday*          | 2013/11/09   |
| Pet Location*          | 灭火           |
| MicroChipped*          | Yes          |
| Name Plate/Collar Tag* | Yes          |
| Pet Insurance*         | Yes          |
| Renewal Date           | 2013/11/09   |
| GPS Device ID          | 075034494... |

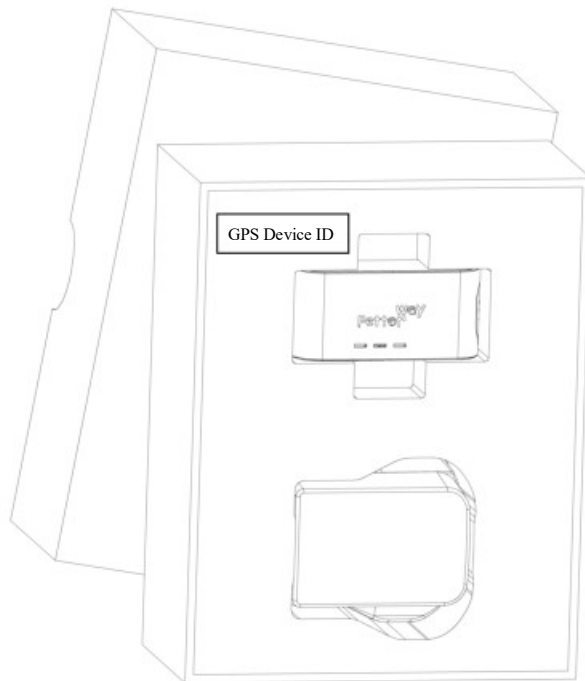

The Z3 ID need be entered manually by copying the 12 digits GPS Device ID from the inside of the box.

# Setup Fence

Z3 lets you define a "safe zone" around your house, so that you receive an alert when your pet strays too far from home.

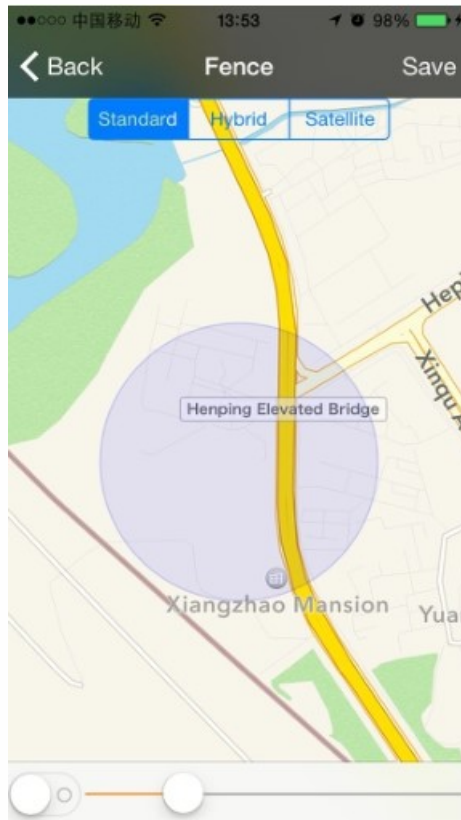

## Instructions:

Go to Activities page and select the fence screen

Tap the fence area on the map to create a safe zone. Move the safe zone circle to correct position, and drag the small round button in the bottom to create safe zone area. Once you are happy with the safe zone, tap SAVE.


The final step is to activate the safe zone. Press the On/Off switch under the fence page can activate or deactivate the safe zone.

Important: Fence only can be setting on phone or tablet, safe Zone alerts only work on phone or tablet devices running the Z3 Trackers app. Users of the web app will not receive Safe Zone alerts.



# Setup Home WiFi

Your Z3's home WiFi is set up from the setting screen in the activities of the app. When setup, your Z3 will locate at home whenever it is in range of your home WiFi.

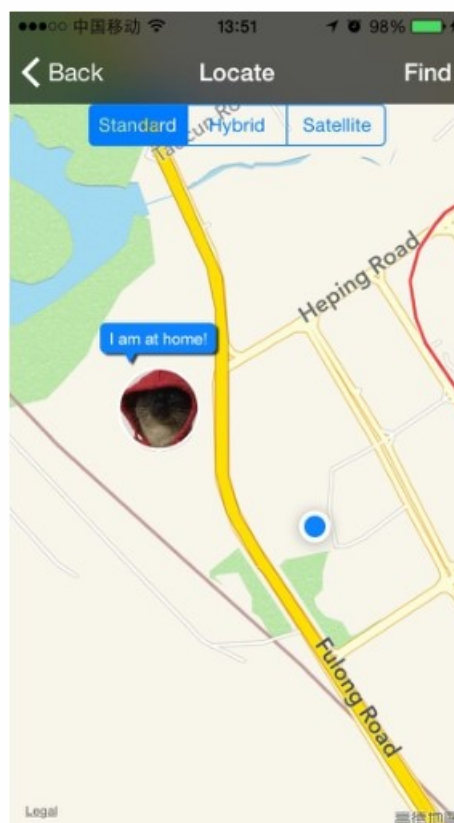

Tip: Setting up your home WiFi location has the additional benefit of improving locate efficiency and battery life when your pet is in range of your WiFi.

## Instructions

Connect your phone/device to your home WiFi (we use this to get its name)


Go to setting page in the activities manual and click the home WiFi button, check the name, and select your home WiFi name.

You should receive a notification to your phone/device once the Z3 has saved your home WiFi, and the saved home wifi name will show on the setting page.

Important: You must use either the iOS or Android app to set home WiFi and not the web in your browser. See [Downloading the App](#) if you have not yet installed the app.

# Your First Locate

To find the current location of your Z3:

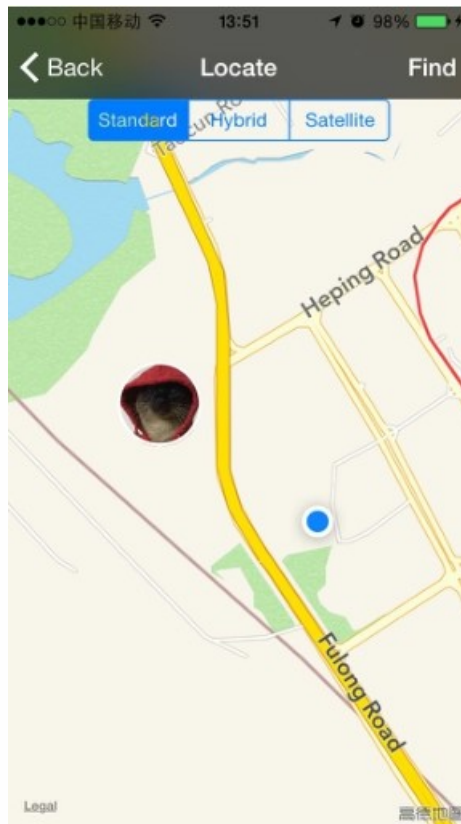


Click the "activities" button from the menu of app, then click the "Locate" button go to the map page, click the "Find" button and a message will be sent to your Z3 to get a location. It can take a minute or two to send the message and get a location back.

If the Z3 has mobile/cell reception and a GPS lock, then you should see your pet picture appear on the map within 2 minutes. You will receive up to 15 locations or received "I am at home" message back each time you hit "Find".

If you get a message saying your Z3 can't be found, then the device must be out of mobile/cell range, not have a GPS lock or have a flat battery. If you're near the Z3, you can check the lights for the mobile/cell reception, GPS lock and battery level. If you're not near the Z3, you can try sending a location request later.

# Adventures

To look the adventures of your Z3:

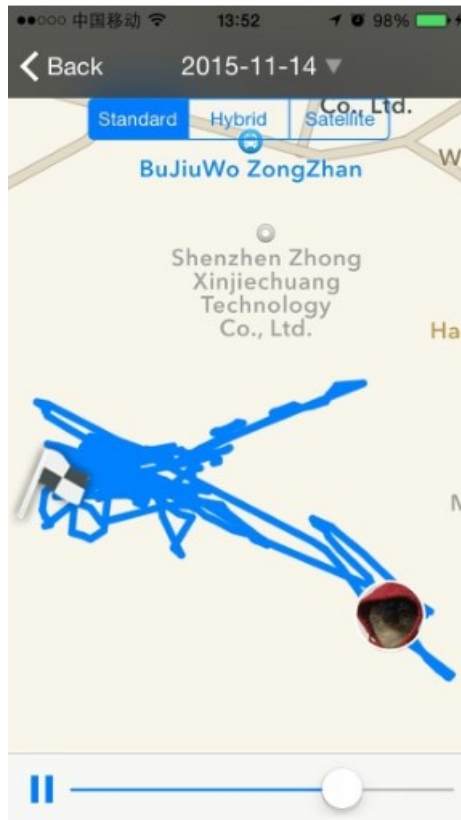

Click the "adventures" button from the activities menu, select related date and look your pet adventures, the available adventures date will be showed with blue color on the calendar on the web page.

# Working Mode Setting

To set the Z3 working mode:


Click the "settings" button from the menu of activities in app, you can switch on/off "Battery saver". Switch off "Battery saver" means Z3 will work under stand by mode, stand by mode will only support "Locate" function and fence function if fence function is switch on, but not record the adventures. Switch on track mode means Z3 will support all functions.



Important: Stand by is the most power reserve working mode, Z3 can work more than 6 days. Track is the most power consumption working mode, Z3 may only keep working 6 to 8 hours because Z3 need keep GPS working all time.

# Attach To Your Pet

The rubber sleeve is designed to protect and hold Z3 doesn't fall off the collar.

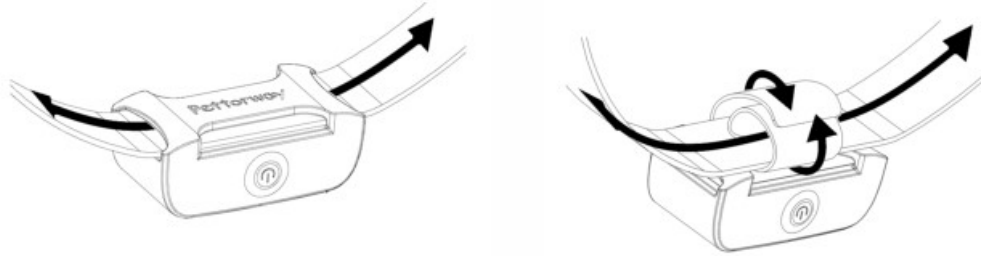

Tip: If the collar is too wide and hard to fit into the rubber sleeve, you can use the Velcro strap to fix the rubber sleeve on the collar!

## Packing Picture

