Motherson Automotive & Technology engineering
Survery No 172/1-5,274/2,276/7,
Chengalpattu Sriperumbudur Road, Vadgal Village B Vallam Panchayat,,Vadagal,
Kanchipuram, Tamil Nadu, 602105


CUSTOMER NAME	MMLI PUNE
PROJECT NAME	S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4
PROJECT CODE	FMSPM00863
COMMISSION	ROBIS
PROJECT TYPE	WORK STATION
PLACE OF INSTALLATION	MMLI PUNE
RESPONSIBLE OF PROJECT	ROBIS
REVISION	02 (LIN Communication updated)
DESIGNER	MANORAJ.S


CREATED ON	25-07-2023	CHECKED BY		
LAST EDITED DATE	11-04-2024	CHECKED ON	29-07-2023	NUMBER OF PAGES 34

+CP/2

MACHINE OVER VIEW

FMSPM00861,862,863,864

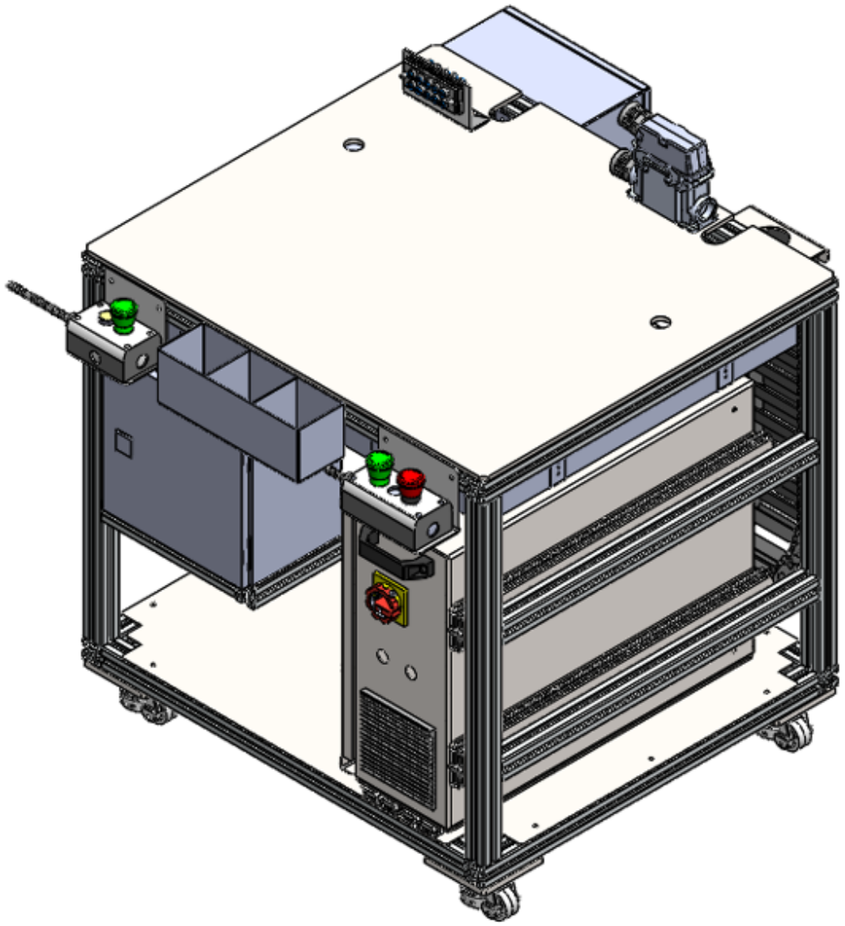

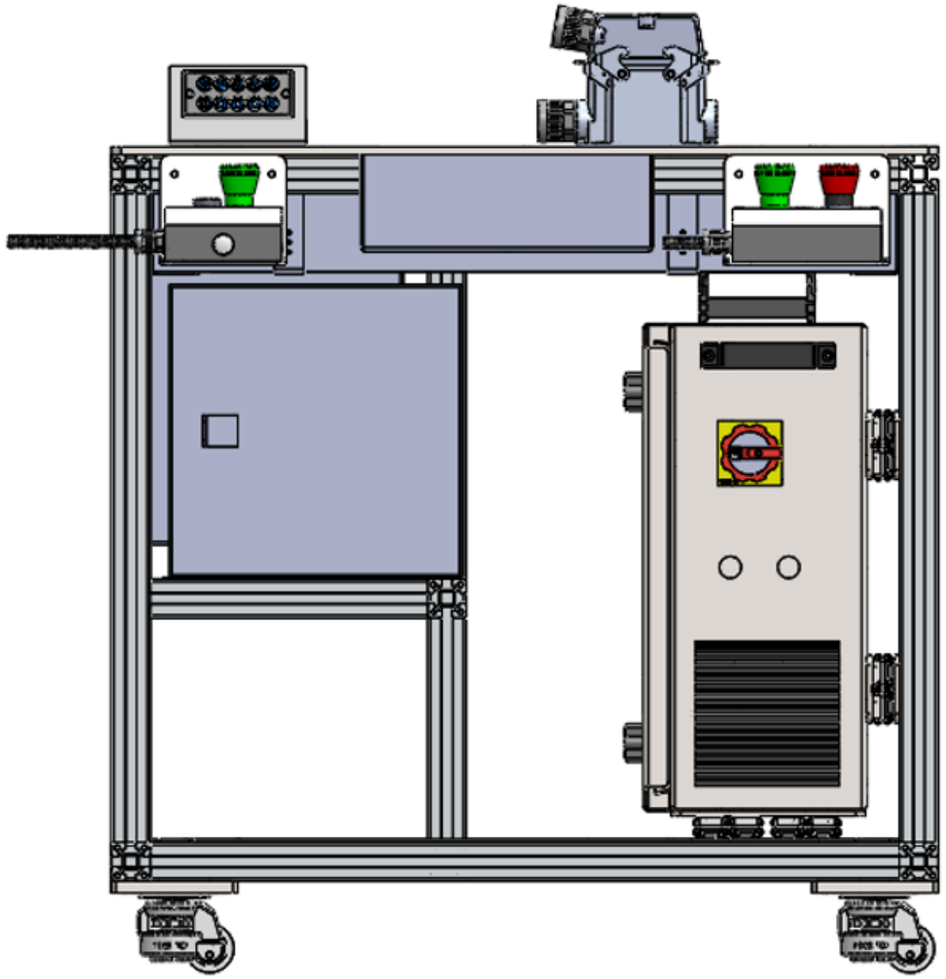

19


ISO VIEW

FRONT VIEW

NOTE : PRINTER NOT CONSIDER

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	MACHINE OVER VIEW		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 2
Modification	Date	Name	Original		Replacement of	Replaced by			Page 2 / 34

MACHINE FRONT VIEW

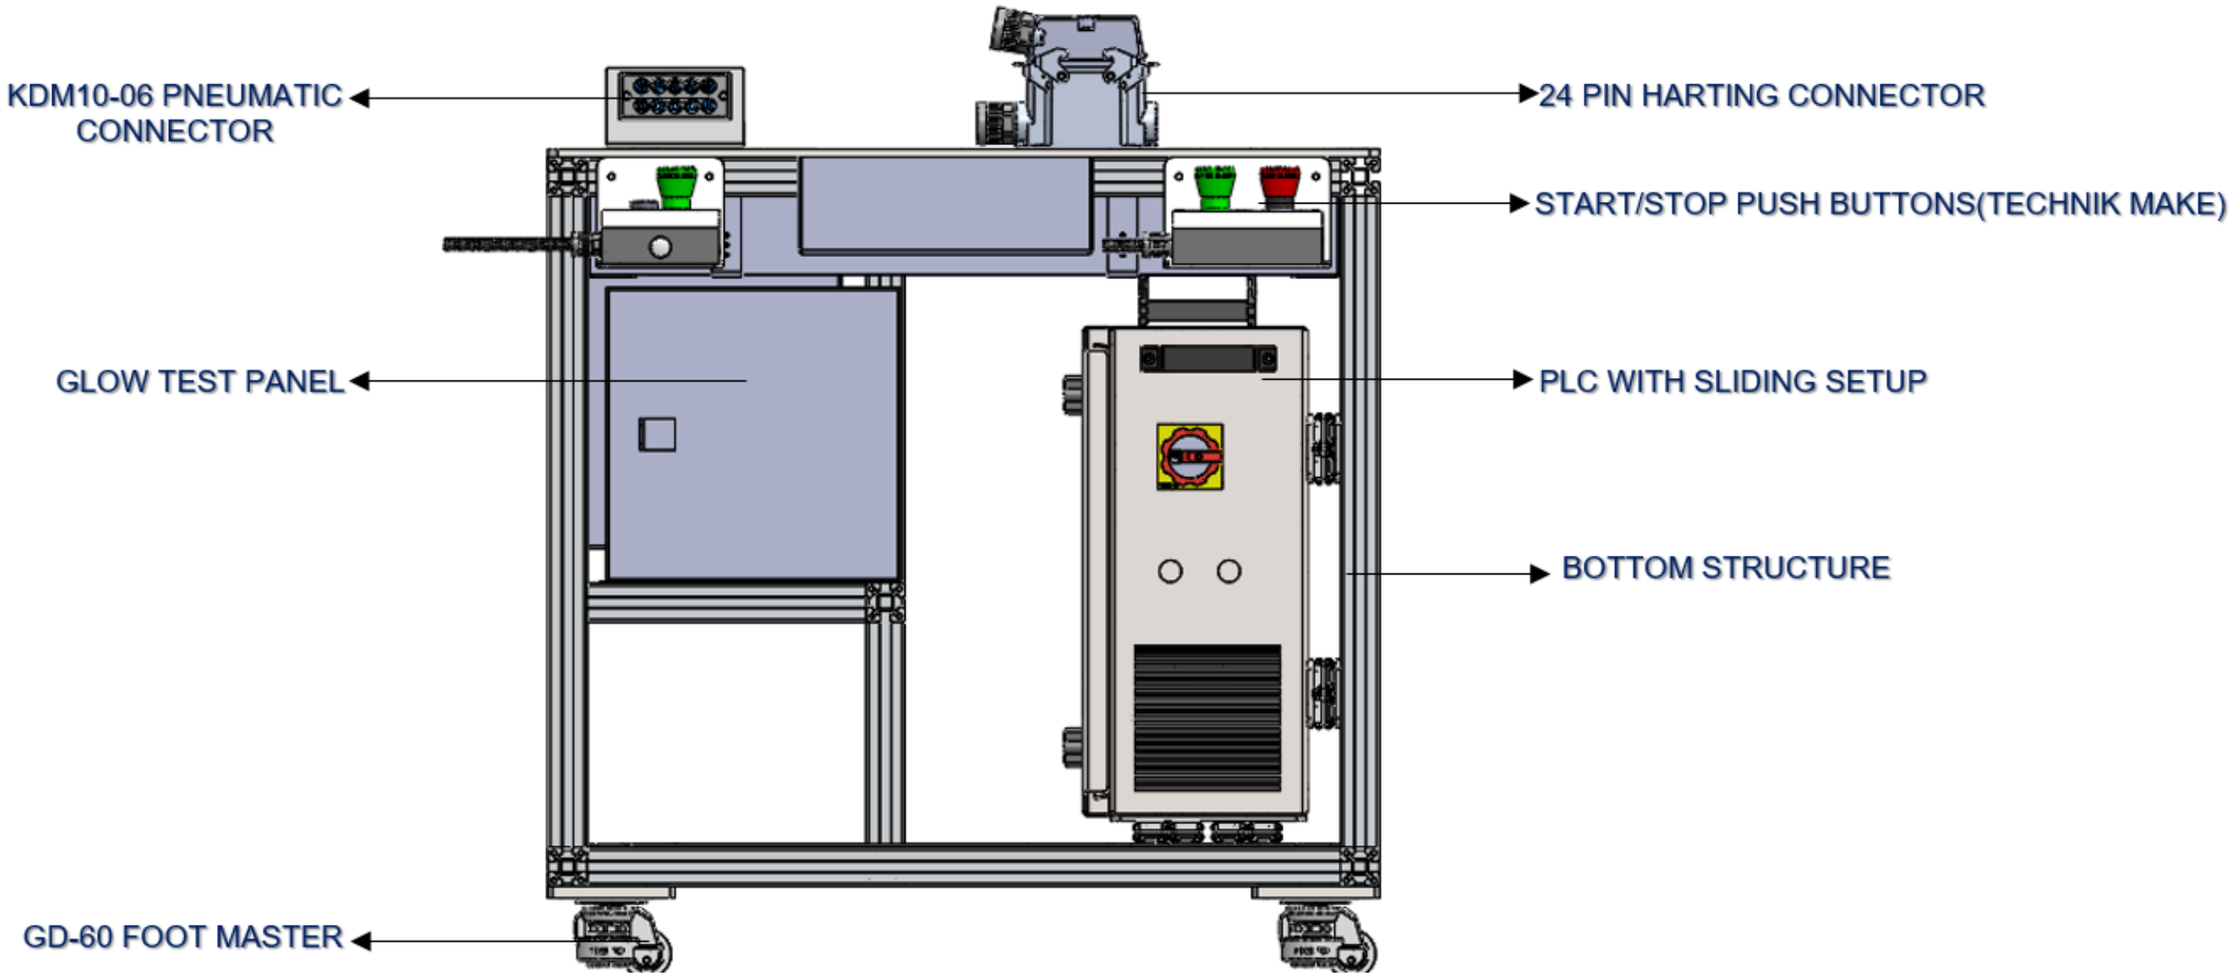


NOTE : PRINTER NOT CONSIDER

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	MACHINE FRONT VIEW		=	
			Ed.	MANORAJ.SELVARAJ					+ CP	
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4				FMSPM00863	Page 3
Modification	Date	Name	Original		Replacement of	Replaced by				Page 3 / 34


PANEL CUTOUT

CUSTOMIZED PANEL
H 500 X W 650 X D 210


LEFT SIDE VIEW

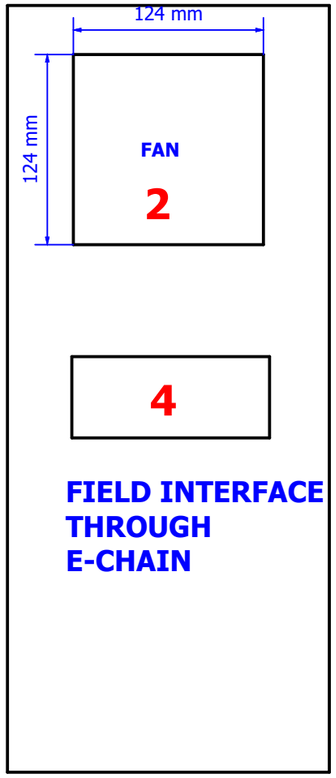

FRONT SIDE VIEW



RIGHT SIDE VIEW

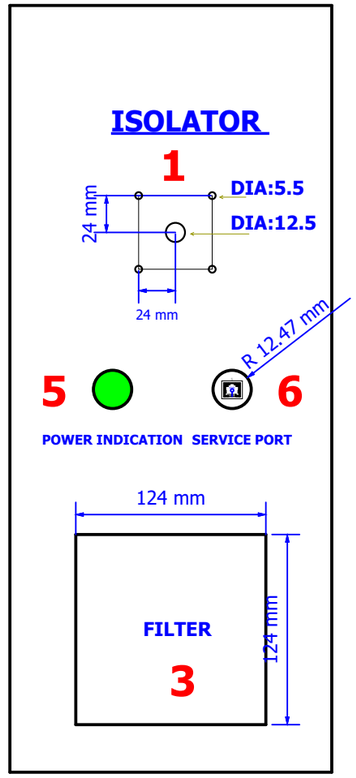


1	ISOLATOR CUTOUT
2	PANEL FAN CUTOUT
3	PANEL FILTER CUTOUT
4	FIELD INTERFACE CUTOUT
5	POWER INDICATION
6	SERVICE PORT

3 5

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	PANEL CUTOUT		=
			Ed.	MANORAJ.SELVARAJ	S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4				+ CP
			Appr.					FMSPM00863	Page 4
Modification	Date	Name	Original		Replacement of	Replaced by			Page 4 / 34

LAYOUT DIAGRAM

-1A00	CAAAZ00000000077 PLC FX5U32MRES MITSUBHISHI	1
-1A01	CAAAZ00000000072 16POINT INPUT CARD FX5-16EX/ES -MITSUBHISHI	1
-1A02	CAAAZ00000000073 16POINTS OUTCARD :-FX5-16EYRES, MISTUBHISHI	1
-2A01	CAAAZ00000000076 RS COMMUNICATION CARD FX5-232-BD	1
-K1 TO -K11	BMELES0935 SLIM RELAY COIL 24VDC	11
-A1	BMELES1310 ETEHRNET SWITCH 100 MB/S	1
-1F0	BMELES1708 MCB SINGLE POLE 10A SIEMENS MAKE	1
-V1	BMELES1532 DELTA LITE POWER SUPPLY 10A ,1 Phase ,240W	1
-1F1	BMELES0584 3075799 TB4-HESILED 24 (5X20) EI	1
-X1	BMELES0589 TERMINAL BLOCK 4.0 SQ MM 1 IN 1 OUT	2
-X1	BMELES0595 TERMINAL BLOCK 4.0 SQ MM 1 IN 1 OUT YE/GN	1
-X2	BMELES0589 TERMINAL BLOCK 4.0 SQ MM 1 IN 1 OUT	6
-X3	BMELES0589 TERMINAL BLOCK 4.0 SQ MM 1 IN 1 OUT	7
-X4	BMELES0595 TERMINAL BLOCK 4.0 SQ MM 1 IN 1 OUT YE/GN	8
-X5	BMELES0364 TERMINAL BLOCK 2.5 SQ MM 1 IN 2 OUT	10
-X6	BMELES0364 TERMINAL BLOCK 2.5 SQ MM 1 IN 2 OUT	10
-X7	BMELES0366 TERMINAL BLOCK 2.5 SQ MM 2 IN 2 OUT	16
-X8	BMELES0584 3075799 TB4-HESILED 24 (5X20) EI	29
-X9	BMELES0364 TERMINAL BLOCK 2.5 SQ MM 1 IN 2 OUT	2
-X10	BMELES0364 TERMINAL BLOCK 2.5 SQ MM 1 IN 2 OUT	2
-X11	BMELES0364 TERMINAL BLOCK 2.5 SQ MM 1 IN 2 OUT	4
-X12	BMELES0366 TERMINAL BLOCK 2.5 SQ MM 2 IN 2 OUT	2
-F1	BMELES3072 SIEMENS MCB 2POLE 16AMPS 5SL62167RC	1
-F2	BMELES1706 MCB SINGLE POLE 4A SIEMENS MAKE	1
-F3	BMELES1705 MCB SINGLE POLE 2A SIEMENS MAKE	1
-F4	BMELES1705 MCB SINGLE POLE 2A SIEMENS MAKE	1
-F5	BMELES1707 MCB SINGLE POLE 6A SIEMENS MAKE	1
-F6	BMELES1705 MCB SINGLE POLE 2A SIEMENS MAKE	1
-F7	BMELES1706 MCB SINGLE POLE 4A SIEMENS MAKE	1
XD1	CAABA00000000433 804000 INDIAN 6A DIN RAIL POWER SOCKET	1

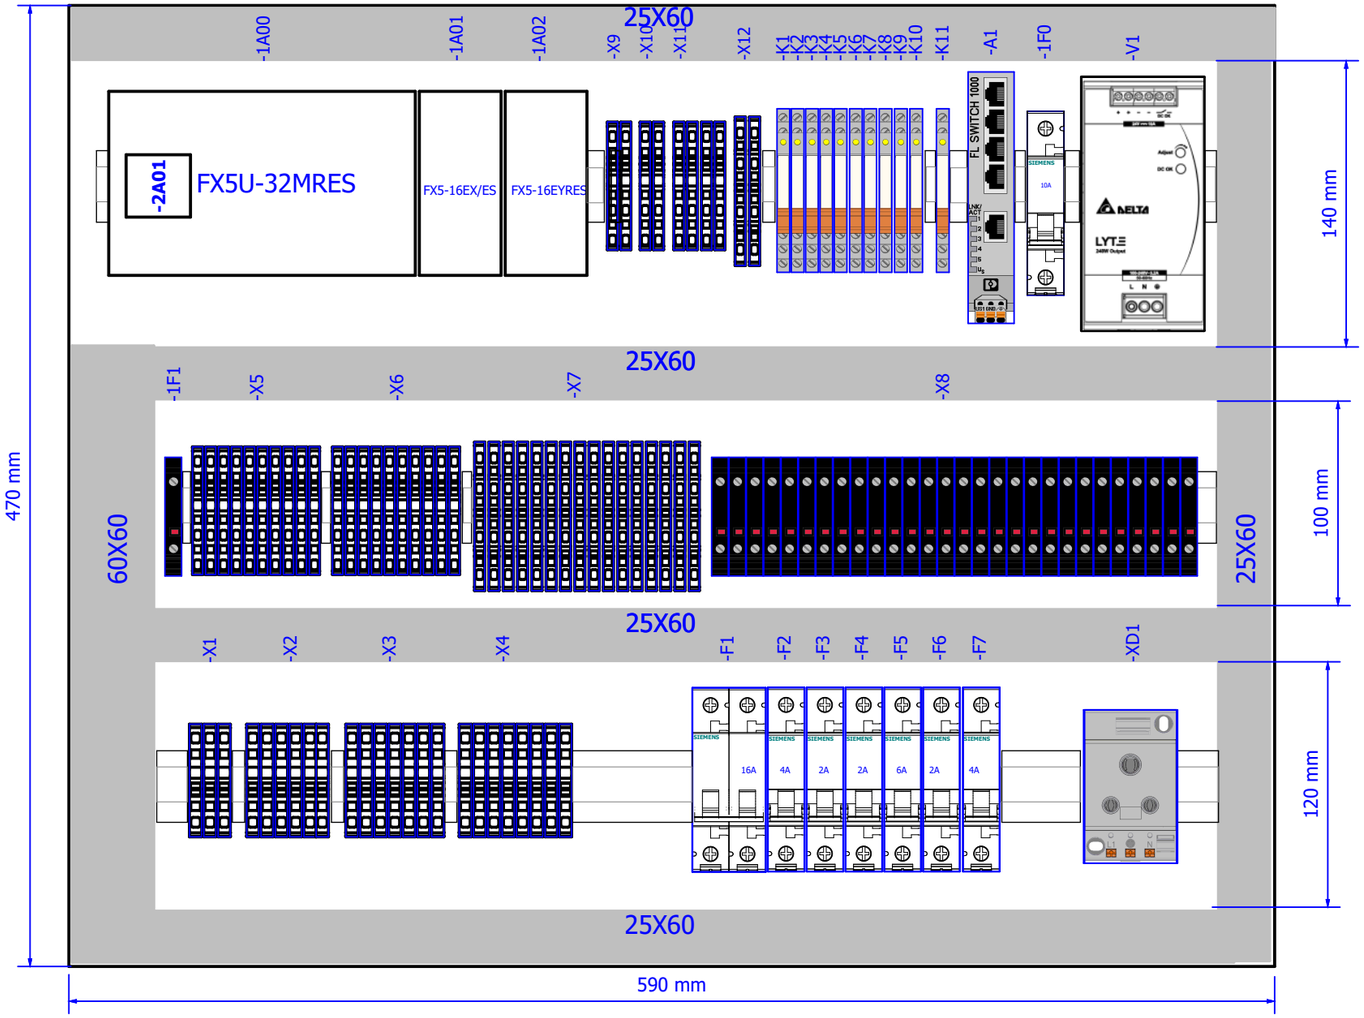

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	LAYOUT DIAGRAM		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 5
Modification	Date	Name	Original		Replacement of	Replaced by			Page 5 / 34

PROJECT ARCHITECTURE



CAAAZ00000000077
PLC FX5U32MRES
MITSUBHISHI



CAAAZ00000000072
16POINT INPUT CARD
MODEL :-FX5-16EX/ES
MITSUBHISHI



CAAAZ00000000073
16POINTS OUTCARD
MODEL:-FX5-16EYRES,
MAKE :- MISTUBHISHI



CAAAZ00000000076
RS COMMUNICATION CARD
FX5-232-BD,MITSUBHISH



BMELES1540
Mushroom Red Turn
Teknic 1NC 2PSML4 01
(2AML4+S2)



TOWERLIGHT 2
STG RG24V BUZ MNT
BMELES0523



BMELES1552
MUSHROOM PB GREEN
Teknic 1NO 2PSM3 10
(2AM3+S1)



BMELES1552
MUSHROOM PB GREEN
Teknic 1NO 2PSM3 10
(2AM3+S1)



BMELES1542
NONIII. YELLOW PUSH
BUTTON, Teknic 1 NO
2PSF8 10 (2AF8+S1)



BMELES3189
Autonics
Panel Meter
MT4Y-DV-44



BMELES3035
Autonics
Panel Meter
MT4W-AA-41



BMELES1310
Ethernet Switch
100 MB/S



CAAAI00000000586
HMI MODEL : GS2107-WTBD
MITSUBHISH



BMELES3959
Data logic power
scanner PD9531



SENSORS
(CUSTOMER
SCOPE)



BMPNES5128
NEBU-M8G3-K-5-LE3

SCREW DRIVER 1



(CUSTOMER
SCOPE)

INPUT/OUTPUT

SAFETY

ETHERNET COMMUNICATION

RS 232 COMMUNICATION

RS 485 COMMUNICATION

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	PROJECT ARCHITECTURE	=	
			Ed.	MANORAJ.SELVARAJ				+ CP	
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 6
Modification	Date	Name	Original		Replacement of	Replaced by			Page 6 / 34

MAIN POWER DISTRIBUTION



-F1
BMELES3072
SIEMENS MCB 2POLE 16AMPS
5SL62167RC



-Q1
CAABA00000000274
16 A /3P /1WAY ISOLATOR
ROTARY SWITCH

L1 BK 2.5 mm² → -F1 (1) → (2) → -Q1 (L1) → (T1) → L OG 2.5 mm²
N1 BU 2.5 mm² → -F1 (3) → (4) → -Q1 (L2) → (T2) → N BU 2.5 mm²
PE GNYE 2.5 mm² → -Q1 (L3) → (T3) → PE GNYE 2.5 mm²

-X1 (BMELES0589 TERMINAL BLOCK CX4 4.0 SQ MM 1 IN 1 OUT)
1: L OG 2.5 mm² → -W0 BK/1 2.5 mm² → L
2: N BU 2.5 mm² → -W0 BK/2 2.5 mm² → N
3: PE GNYE 2.5 mm² → -W0 GNYE 2.5 mm² → PE

-W0 3Gx2.5 mm² BMELES1940

BMELES3408 INDUSTRIAL SOCKET LEGRAND
1: L
2: N
3: PE
INDUSTRIAL SOCKET

POWER SUPPLY
1 PHASE 230V
50-60 Hz

-X2 (BMELES0589 TERMINAL BLOCK CX4 4.0 SQ MM 1 IN 1 OUT)
1: 1L1 BK 2.5 mm² → -F2:2 8.1 / 1L1-1
2: 1L1-7 BK 2.5 mm² → -F3:2 8.3 / 1L1-2
3: 1L1-8 BK/1 0.75 mm² → -F4:2 8.7 / 1L1-3
4: 1L1-9 BK 1 mm² → -F5:2 9.1 / 1L1-4
5: 1L1-10 BK 2.5 mm² → -S1-2F1:1 10.1 / 1L1-5
6: 1L1-6 BK/1 2.5 mm² → -S2-2F3:1 10.6 / 1L1-6

-X3 (BMELES0589 TERMINAL BLOCK CX4 4.0 SQ MM 1 IN 1 OUT)
1: 1N1 BU 2.5 mm² → -V1:N(-) 8.1 / 1N1-1
2: 1N1-8 BK/2 0.75 mm² → -M1 8.4 / 1N1-2
3: 1N1-9 BU 1 mm² → -H1 8.6 / 1N1-3
4: 1N1-10 BU 2.5 mm² → -XD1 9.2 / 1N1-4
5: 1N1-11 BK/2 1.5 mm² → -S1:2 10.1 / 1N1-5
6: 1N1-8 BK/2 0.75 mm² → -S2:2 10.6 / 1N1-6
7: 1N1-8 BK/2 0.75 mm² → -1A00:N 13.1 / 1N1-7

-X4 (BMELES0595 TERMINAL BLOCK 4.0 SQ MM 1 IN 1 OUT YE/GN)
1: PE GNYE 2.5 mm² → -V1:PE 8.1 / PE-1
2: PE-8 GNYE 0.75 mm² → -M1 8.4 / PE-2
3: PE-9 GNYE 1 mm² → -V1:- 8.1 / PE-3
4: PE-10 GNYE 0.5 mm² → -XD1 9.2 / PE-4
5: PE GNYE 2.5 mm² → -S1:PE 10.2 / PE-5
6: PE GNYE 2.5 mm² → -S2:PE 10.6 / PE-6
7: PE GNYE 2.5 mm² → -1A00:PE 13.2 / PE-7
8: PE GNYE 2.5 mm² → PANEL EARTH

HMI PANEL EARTH
PNEUMATIC PANEL EARTH

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	MAIN POWER DISTRIBUTION	=	
			Ed.	MANORAJ.SELVARAJ				+ CP	
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 7
Modification	Date	Name	Original		Replacement of	Replaced by			Page 7 / 34

POWER SUPPLY

-V1
BMELES1532
DELTA LITE POWER SUPPLY
10A ,1 Phase ,240W



Weidmüller PROeco
L(+) N(-) PE
Adjust 22-28 V
+ + - - 13 14

1L1-1 / 7.2 -X2:1:B
1N1-1 / 7.5 -X3:1:B
PE-1 / 7.7 -X4:1:B

1L1-1 BK 2.5 mm²
2L1-1 BK 2.5 mm²
1N1-1 BU 2.5 mm²
PE-1 GNYE 2.5 mm²

-F2
MCB SINGLE POLE
4 A SIEMENS MAKE
5SL6104RC;
BMELES1706

2 1

2L1-1 BK 1.5 mm²
1N1-1 BU 1.5 mm²
PE-1 GNYE 2.5 mm²

24VDC DBU 1.5 mm²
P0VDC DBU 1.5 mm²
PE-3 GNYE 2.5 mm²

-1F0:2 11.2 / 24VDC
-X6:1 11.6 / P0VDC
-X4:3:B 7.8 / PE-3

1L1-2 / 7.3 -X2:2:B
1N1-2 / 7.5 -X3:2:B
PE-2 / 7.7 -X4:2:B

1L1-2 BK 2.5 mm²
2L1-2 BK/1 0.75 mm²
1N1-2 BK/2 0.75 mm²
PE-2 GNYE 0.75 mm²

-F3
BMELES1705
MCB SINGLE POLE
2A SIEMENS MAKE
5SL61027RC

2 1

3L1-2 BK/1 0.75 mm²

-W1
BMELES0075
3 G 0.75 mm²

-M1
BMELES0049
SK 3322107-
FAN AND FILTER UNIT



-LS
BMELES1669
AE PANEL DOOR
LIMIT SWITCH -
SZ 4127010

21 22



4L1-2 BK/2 0.75 mm²

-W2
BMELES0075
3 G 0.75 mm²

-H1
BMELES2527
1Feet 6W LED
TUBE LIGHT WITH
ALUMINIUM BATTERY (CW)

1N1-3 / 7.5 -X3:3:B

1N1-3 BU 1 mm²

1L1-3 / 7.3 -X2:3:B

1L1-3 BK 2.5 mm²

-F4
BMELES1705
MCB SINGLE POLE
2A SIEMENS MAKE
5SL61027RC

2 1

2L1-3 BK 1.5 mm²

-K11:11 27.1 / 2L1-3



1L1-10 / 7.3 -X2:5:A

1L1-10 BK 2.5 mm²

-F7
BMELES1706
MCB 4A ,1 POLE
SIEMENS 5SL61047RC;

2 1


2L1-10 BK/1 1.5 mm²

-VM1:6 25.1 / 2L1-10


7 9

REVISION			Date	10-04-2024	ROBIS		Motherson Automotive & Technology engineering	POWER SUPPLY		=
			Ed.	MANORAJ.SELVARAJ						+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4				FMSPM00863	Page 8
Modification	Date	Name	Original		Replacement of	Replaced by				Page 8 / 34

INDICATION LAMP

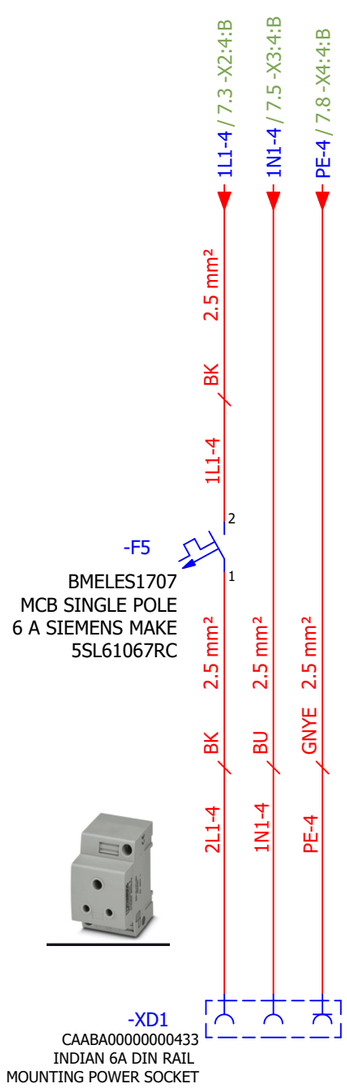

POWER SOCKET

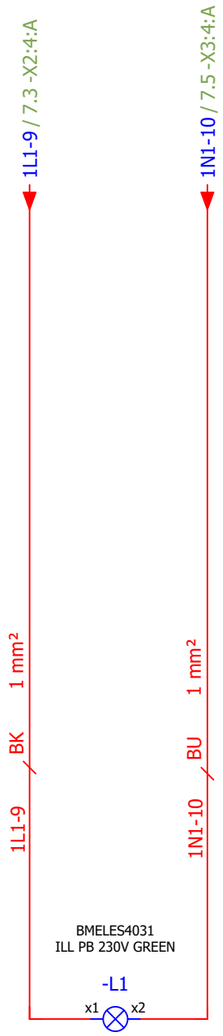



230V GREEN
POWER INDICATION
LAMP

8 10

REVISION			Date	10-04-2024	ROBIS		Motherson Automotive & Technology engineering	INDICATION LAMP		=
			Ed.	MANORAJ.SELVARAJ						+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4				FMSPM00863	Page 9
Modification	Date	Name	Original		Replacement of	Replaced by				Page 9 / 34

SOCKET INTERFACE

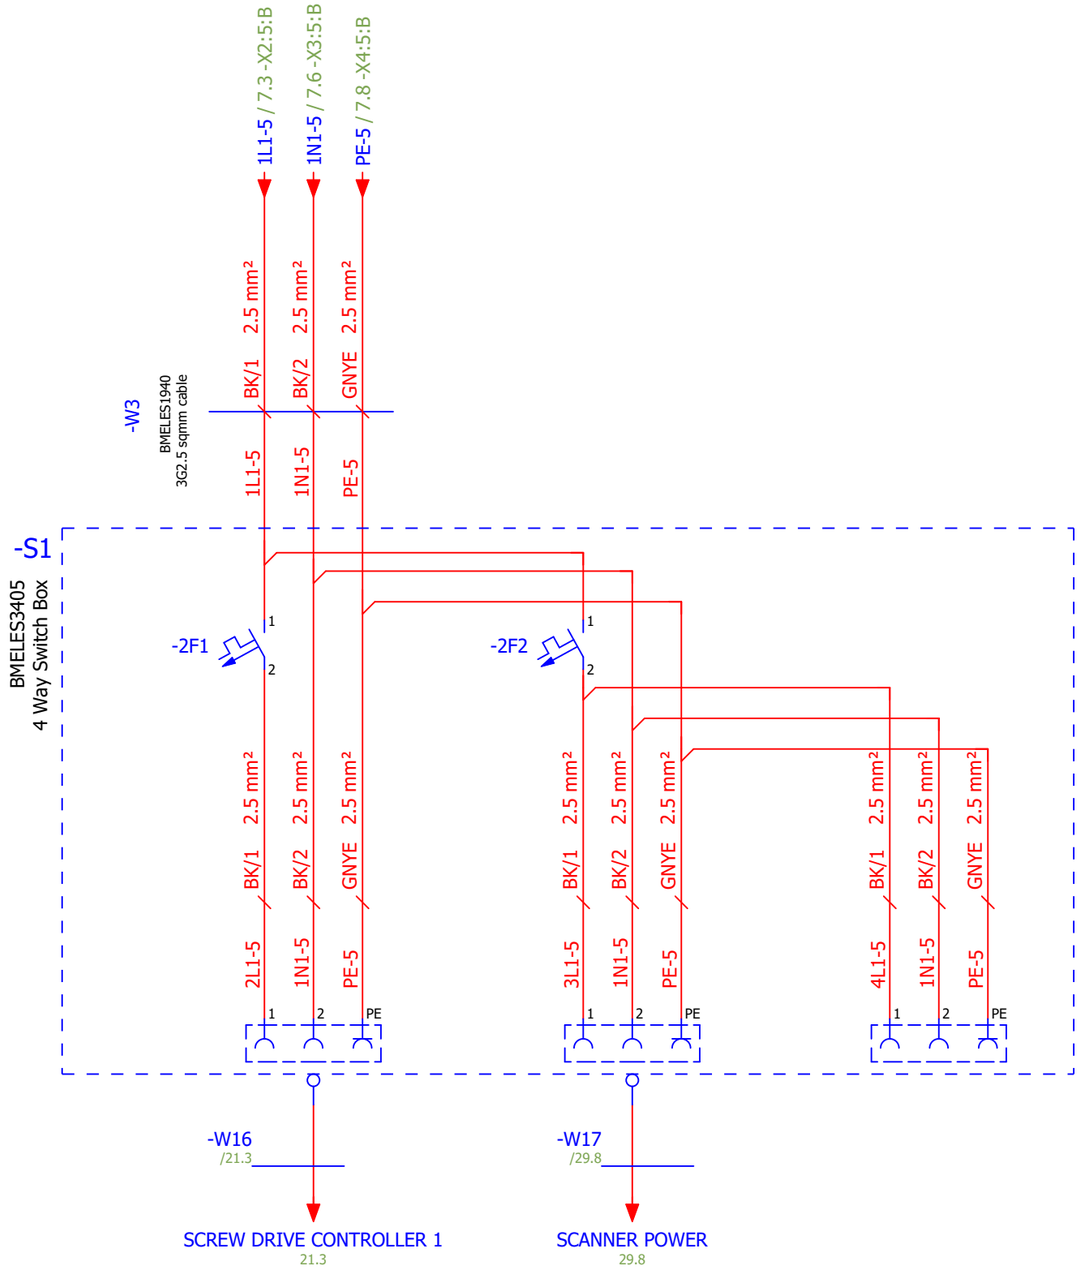

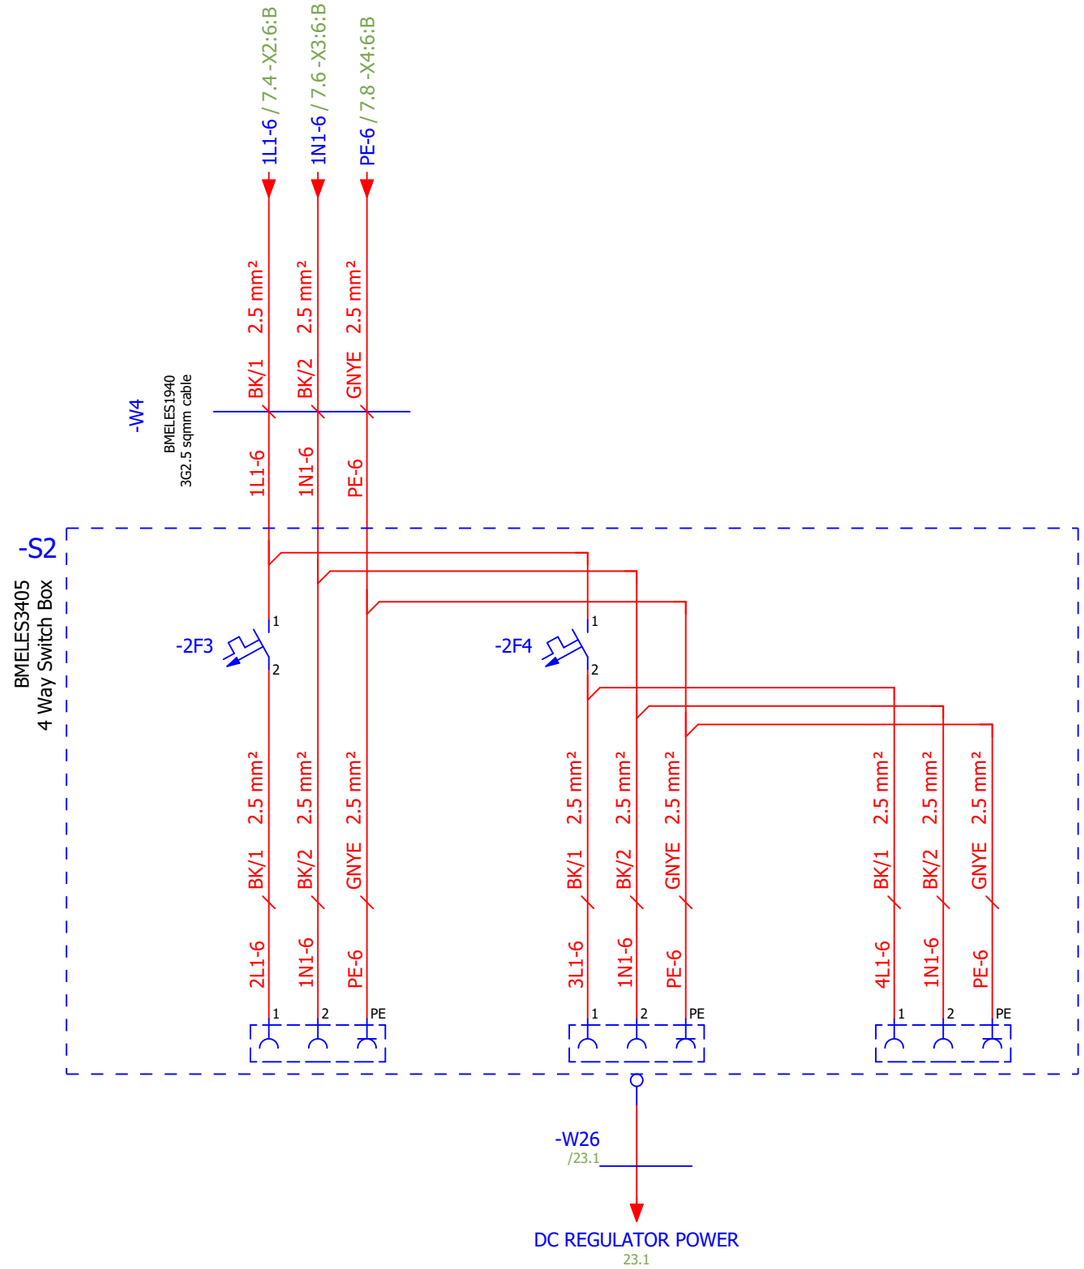

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	SOCKET INTERFACE		=	
			Ed.	MANORAJ.SELVARAJ					+ CP	
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page	10
Modification	Date	Name	Original		Replacement of	Replaced by			Page	10 / 34

DISTRIBUTION 24VDC TERMINAL BLOCK

P24VDC1 / 11.2 -X5:1

P24VDC1 DBU 1.5 mm²

-1F1
2A

BMELES0584
TB4-HESILED
24 (5X20) EI

1P24VDC BK/1 0.75 mm²

-HMI:+ 28.1 / 1P24VDC



24VDC / 8.1 -V1:+

24VDC DBU 1.5 mm²

2

-1F0
BMELES1708
MCB SINGLE POLE 10A
SIEMENS MAKE
5SL61107RC

1

P24VDC DBU 1.5 mm²

-X5

1 2 3 4 5 6 7 8 9 10

BMELES0364
TERMINAL BLOCK
2.5 SQ MM 1 IN 2 OUT

P24VDC1	DBU	1.5 mm²
P24VDC2	DBU	0.5 mm²
P24VDC3	DBU	0.5 mm²
P24VDC4	DBU	0.5 mm²
P24VDC5	DBU	0.5 mm²
P24VDC6	DBU	0.5 mm²
P24VDC7	DBU	0.5 mm²
P24VDC8	BK/1	0.75 mm²
P24VDC9	BK/2	0.75 mm²
P24VDC10	BK/1	0.75 mm²
P24VDC11	BK/2	0.75 mm²
P24VDC12	BK/1	0.75 mm²
P24VDC13	BK/23	1 mm²

-1F1 11.0 / P24VDC1	
-1A00:COM0 15.1 / P24VDC2	
-1A00:COM2 15.5 / P24VDC3	
-1A02:+V4 17.1 / P24VDC4	
-1A02:+V6 17.5 / P24VDC5	
-K3:11 20.5 / P24VDC6	
-A1:US:1 12.1 / P24VDC7	
-PB1-S2:13 30.4 / P24VDC8	
-PB1-S1:11 30.5 / P24VDC9	
-PB2-S4:13 30.1 / P24VDC10	
-PB2-S3:13 30.2 / P24VDC11	
-PSC 28.5 / P24VDC12	
-1X100:16 31.5 / P24VDC13	

P0VDC / 8.1 -V1:-

P0VDC DBU 1.5 mm²

-X6

1 2 3 4 5 6 7 8 9 10

BMELES0364
TERMINAL BLOCK
2.5 SQ MM 1 IN 2 OUT

P0VDC1	DBU	0.5 mm²
P0VDC2	DBU	0.5 mm²
P0VDC3	DBU	0.5 mm²
P0VDC4	DBU	0.5 mm²
P0VDC5	BK/3	0.75 mm²
P0VDC6	BK/2	0.5 mm²
P0VDC7	BU	0.5 mm²
P0VDC8	BK/17	0.5 mm²
P0VDC9	BK/5	0.5 mm²
P0VDC10	BK/24	1 mm²
P0VDC11	DBU	0.5 mm²


-1A00:S/S 14.1 / P0VDC1	
-1A01:S/S 16.1 / P0VDC2	
-K11:A2 27.1 / P0VDC3	
-K1:A2 20.1 / P0VDC4	
-PSC 28.5 / P0VDC5	
-HMI:- 28.2 / P0VDC6	
-A1:US:2 12.1 / P0VDC7	
+PP-1X1 +PP/33.1 / P0VDC8	
-TL1.0:5 30.9 / P0VDC9	
-1X100:18 31.6 / P0VDC10	
-K6:A2 24.1 / P0VDC11	


10


12

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	DISTRIBUTION 24VDC TERMINAL BLOCK		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 11
Modification	Date	Name	Original		Replacement of	Replaced by			Page 11 / 34

COMMUNICATION

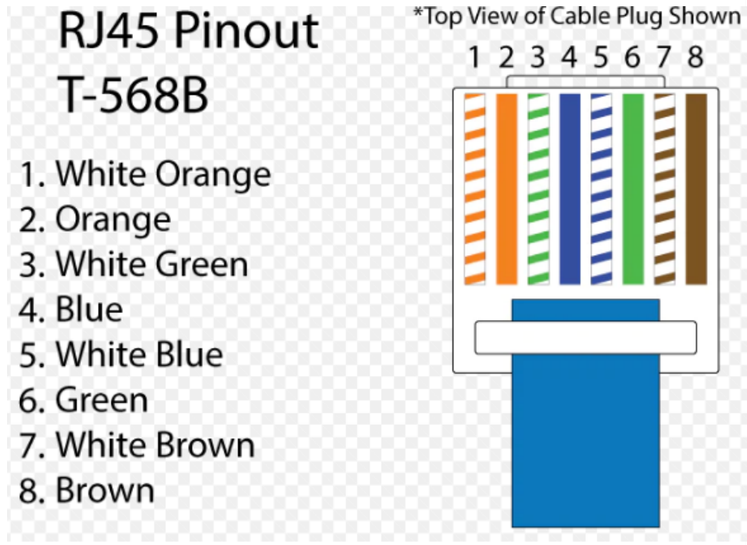

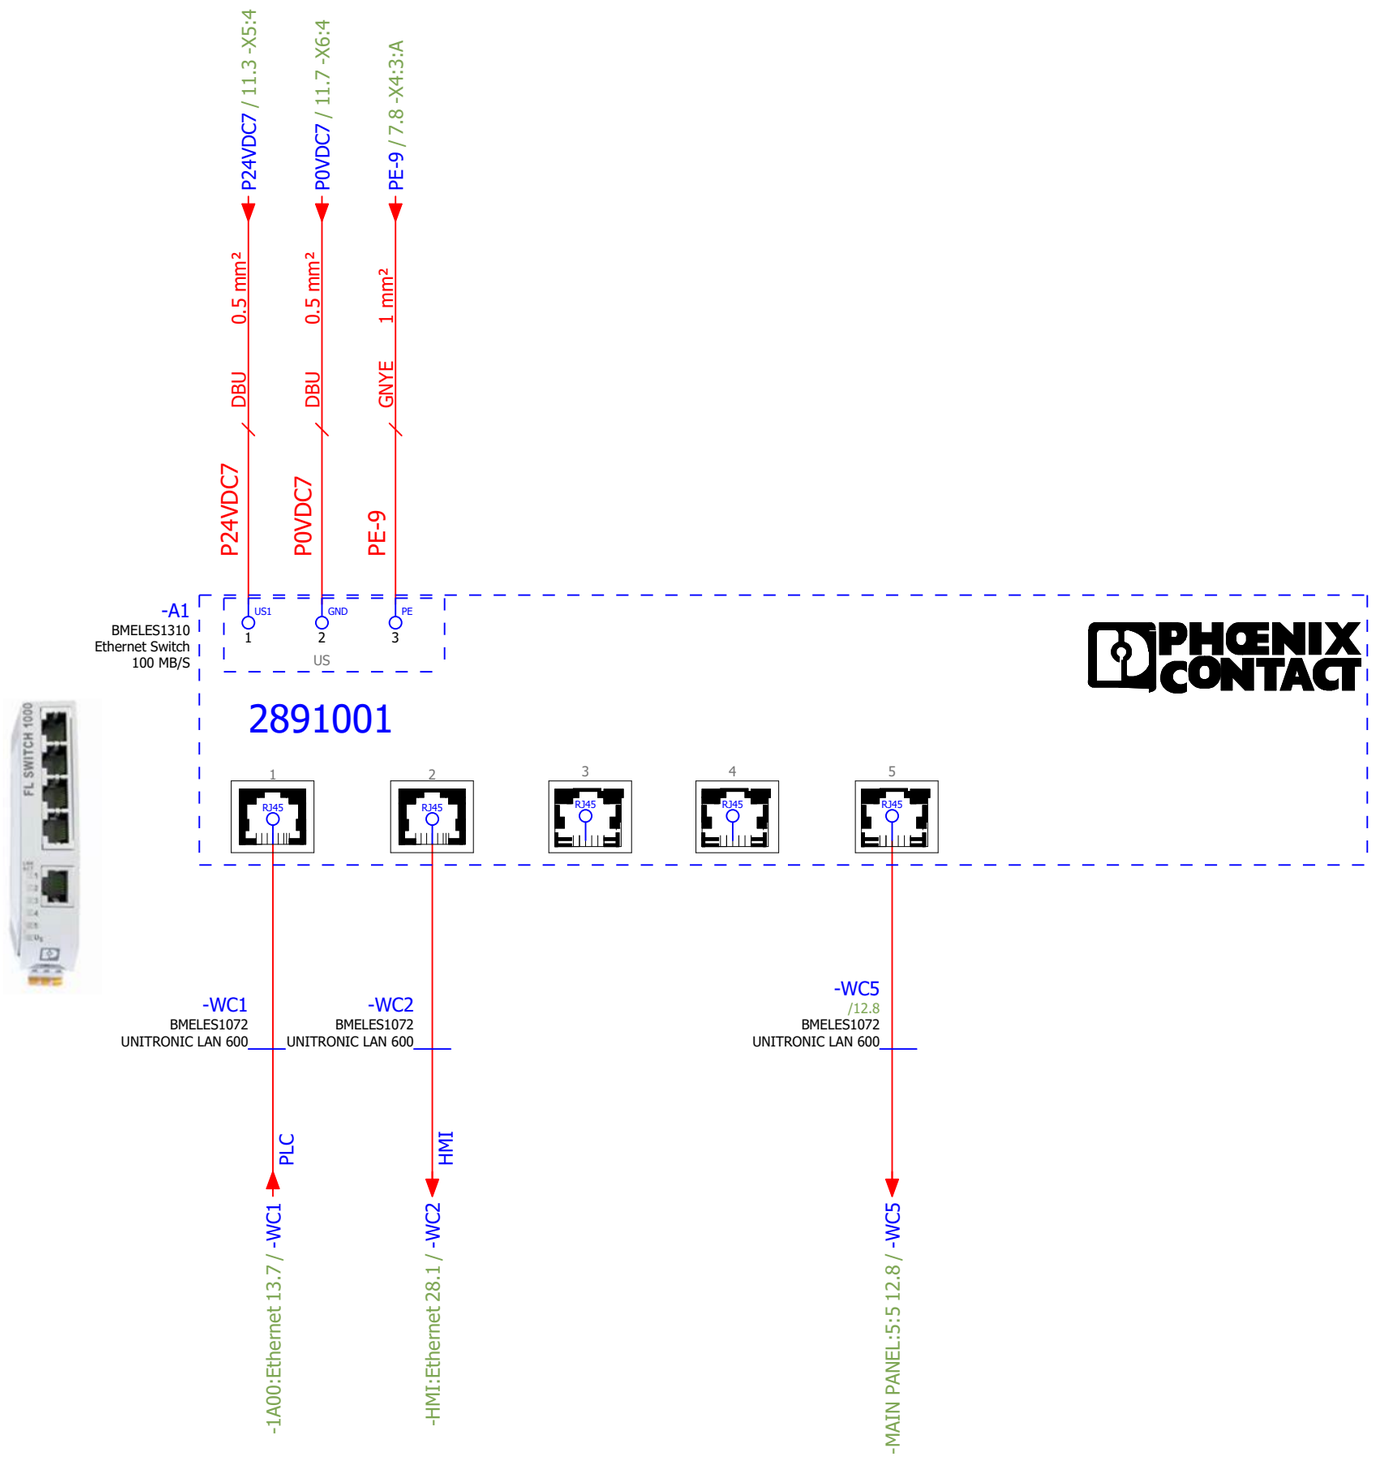

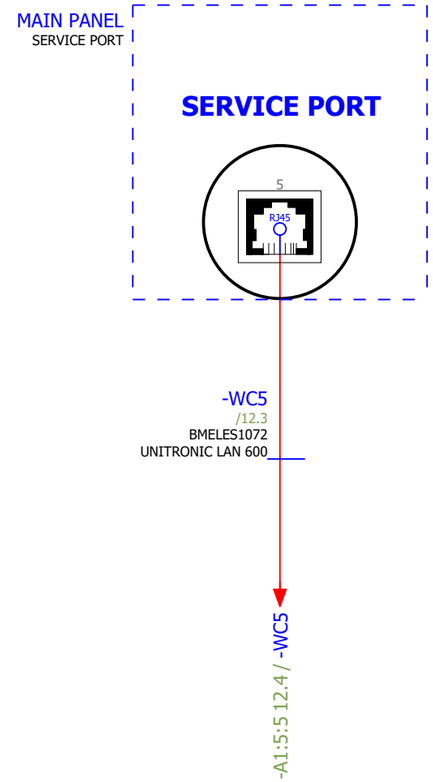

REVISION			Date	10-04-2024	ROBIS		Motherson Automotive & Technology engineering	COMMUNICATION		=
			Ed.	MANORAJ.SELVARAJ						+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4				FMSPM00863	Page 12
Modification	Date	Name	Original		Replacement of	Replaced by				Page 12 / 34

MAIN PLC POWER SUPPLY



-F6
BMELES1705
MCB SINGLE POLE
2A SIEMENS MAKE
5SL61027RC



-1A00
CAAAZ00000000077
PLC
FX5U32MRES
MAKE :- MITSUBHISHI

1L1-7 / 7.3 -X2:2:A
1N1-7 / 7.6 -X3:7:B
PE-7 / 7.9 -X4:7:B
RS 485+ / 23.7 -X11:1
RS 485- / 23.7 -X11:3
WC1 / 12.1 -A1:1:1

BK 2.5 mm²
BU 2.5 mm²
GNYE 2.5 mm²
BN 0.34 mm²
YE 0.34 mm²
BN 0.34 mm²
YE 0.34 mm²

1L1-7
2L1-7
1N1-7
PE-7
RS 485+
RS 485-
RS 485+
RS 485-

-WC1
/12.1
/28.1
BMELES1072
2170144-UNITRONIC
LAN 600S/FTP CAT7Y

L | N | PE | SG (GND) | SDB (TXD-) | SDA (TXD+) | RDB (RXD-) | RDA (RXD+) | V1+ (PEW0) | V2+ (PEW2) | V-' (PEW4) | V+ (PAW0) | V- (PAW2) | Ethernet

Ethernet port

MITSUBISHI ELECTRIC
Mitsubishi FX5U-32MR-ES 16DI/16DO Part 1 of 5

12 14

REVISION			Date	10-04-2024	ROBIS		Motherson Automotive & Technology engineering	MAIN PLC POWER SUPPLY		=
			Ed.	MANORAJ.SELVARAJ						+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4				FMSPM00863	Page 13
Modification	Date	Name	Original		Replacement of	Replaced by				Page 13 / 34

MAIN INPUT MODULE



P0VDC1 / 11.6 / -X6:1

P0VDC1 DBU 0.5 mm²

-1A00
CAAAZ00000000077
PLC FX5U32MRES
MAKE :- MITSUBHISHI

S/S	0V	24V	X00	X01	X02	X03	X04	X05	X06	X07
			E0.0	E0.1	E0.2	E0.3	E0.4	E0.5	E0.6	E0.7
			EMERGENCY STOP PB	RH CYCLE START PB			AIR PRESSURE SWITCH		SCREW DRIVER OK ALL	
			LH CYCLE START PB			RESET		SPARE		SCREW DRIVER NG

MITSUBISHI ELECTRIC
Mitsubishi FX5U-32MR-ES 16DI/16DO Part 2 of 5

X00 / 18.0 -X7:1:A
X01 / 18.0 -X7:1:C
X02 / 18.0 -X7:2:A
X03 / 18.1 -X7:2:C
X04 / 18.1 -X7:3:A
X05 / 18.1 -X7:3:C
X06 / 18.1 -X7:4:A
X07 / 18.1 -X7:4:C

DBU 0.5 mm²

-1A00

X10	X11	X12	X13	X14	X15	X16	X17			
E1.0	E1.1	E1.2	E1.3	E1.4	E1.5	E1.6	E1.7			
SPARE		CLAMPING CYL1 FWD RS		CLAMPING CYL2 FWD RS		LH MAIN PART PRESENCE				
	SPARE		CLAMPING CYL1 SPARE		CLAMPING CYL2 SPARE		LH CHILD PART PRESENCE			

MITSUBISHI ELECTRIC
Mitsubishi FX5U-32MR-ES 16DI/16DO Part 3 of 5

X10 / 18.1 -X7:5:A
X11 / 18.1 -X7:5:C
X12 / 18.2 -X7:6:B
X13 / 18.2 -X7:6:D
X14 / 18.2 -X7:7:B
X15 / 18.2 -X7:7:D
X16 / 18.2 -X7:8:B
X17 / 18.2 -X7:8:D

13 15

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	MAIN INPUT MODULE	=
			Ed.	MANORAJ.SELVARAJ				+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING	ONLINE STATION-4		FMSPM00863 Page 14
Modification	Date	Name	Original		Replacement of	Replaced by		Page 14 / 34

MAIN OUTPUT MODULE



-1A00
CAAAZ00000000077
PLC FX5U32MRES
MAKE :- MITSUBHISHI

Mitsubishi FX5U-32MR-ES 16DI/16DO Part 4 of 5

MITSUBISHI ELECTRIC

	TOWER LAMP GREEN	TOWER LAMP YELLOW	TOWER LAMP RED	TOWER LAMP BUZZER		SHUTOFF VALVE	MACHINE LIGHT	SCREW DRIVER ENABLE	SCREW DRIVER RESET
	A0.0	A0.1	A0.2	A0.3		A0.4	A0.5	A0.6	A0.7
	COM0	Y00	Y01	Y02	Y03	COM1	Y04	Y05	Y06	Y07

0.5 mm² DBU P24VDC2 → -X5:1 11.2 / P24VDC2

0.5 mm² DBU Y00 → -X8:1:A 19.1 / Y00
0.5 mm² DBU Y01 → -X8:2:A 19.1 / Y01
0.5 mm² DBU Y02 → -X8:3:A 19.1 / Y02
0.5 mm² DBU Y03 → -X8:4:A 19.1 / Y03
0.5 mm² DBU P24VDC2 → -X8:5:A 19.2 / Y04
0.5 mm² DBU Y04 → -X8:5:A 19.2 / Y04
0.5 mm² DBU Y05 → -K11:A1 27.0 / Y05
0.5 mm² DBU Y06 → -K1:A1 20.0 / Y06
0.5 mm² DBU Y07 → -K2:A1 20.2 / Y07

-1A00
Mitsubishi FX5U-32MR-ES 16DI/16DO Part 5 of 5

MITSUBISHI ELECTRIC

	SPARE	SPARE	CLAMPING CYL 1 FWD	CLAMPING CYL 1 REV		CLAMPING CYL 2 FWD	CLAMPING CYL 2 REV	SPARE VALVE	SPARE VALVE
	A1.0	A1.1	A1.2	A1.3		A1.4	A1.5	A1.6	A1.7
	COM2	Y10	Y11	Y12	Y13	COM3	Y14	Y15	Y16	Y17

0.5 mm² DBU P24VDC3 → -X5:2 11.2 / P24VDC3

0.5 mm² DBU Y10 → -X8:6:A 19.2 / Y10
0.5 mm² DBU Y11 → -X8:7:A 19.2 / Y11
0.5 mm² DBU Y12 → -X8:8:A 19.2 / Y12
0.5 mm² DBU Y13 → -X8:9:A 19.2 / Y13
0.5 mm² DBU P24VDC3 → -X8:10:A 19.3 / Y14
0.5 mm² DBU Y14 → -X8:10:A 19.3 / Y14
0.5 mm² DBU Y15 → -X8:11:A 19.3 / Y15
0.5 mm² DBU Y16 → -X8:12:A 19.3 / Y16
0.5 mm² DBU Y17 → -X8:13:A 19.3 / Y17

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	MAIN OUTPUT MODULE	=
			Ed.	MANORAJ.SELVARAJ				+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING	ONLINE STATION-4		FMSPM00863 Page 15
Modification	Date	Name	Original		Replacement of	Replaced by		Page 15 / 34

EXPANSION INPUT MODULE



P0VDC2 / 11.6 -X6:1 — DBU 0.5 mm² — P0VDC2

-1A01
/16.5

CAAAZ00000000072
16POINTINPUTCARD
MODEL :-FX5-16EX/ES
MAKE :-MITSUBHISHI

	X20 / 18.3 -X7:9:B	X21 / 18.3 -X7:9:D	X22 / 18.3 -X7:10:B	X23 / 18.3 -X7:10:D	X24 / 18.3 -X7:11:B	X25 / 18.3 -X7:11:D	X26 / 18.3 -X7:12:B	X27 / 18.4 -X7:12:D
	DBU 0.5 mm²	DBU 0.5 mm²	DBU 0.5 mm²	DBU 0.5 mm²	DBU 0.5 mm²	DBU 0.5 mm²	DBU 0.5 mm²	DBU 0.5 mm²
	X20	X21	X22	X23	X24	X25	X26	X27
S/S	X20	X21	X22	X23	X24	X25	X26	X27
	E2.0	E2.1	E2.2	E2.3	E2.4	E2.5	E2.6	E2.7
	FIXTURE SPARE		FIXTURE SPARE		FIXTURE SPARE		HIGH VARIANT	
		FIXTURE SPARE		FIXTURE SPARE		FIXTURE SPARE		MID VARIANT

MITSUBISHI ELECTRIC

Mitsubishi | FX5U-EX/ES | 16DI | Part 1 of 2

X30 / 18.4 -X7:13:B — DBU 0.5 mm² — X30
X31 / 18.4 -X7:13:C — DBU 0.5 mm² — X31
X32 / 18.4 -X7:14:A — DBU 0.5 mm² — X32
X33 / 18.4 -X7:14:C — DBU 0.5 mm² — X33
X34 / 18.4 -X7:15:A — DBU 0.5 mm² — X34
X35 / 18.5 -X7:15:C — DBU 0.5 mm² — X35
X36 / 18.5 -X7:16:A — DBU 0.5 mm² — X36
X37 / 18.5 -X7:16:C — DBU 0.5 mm² — X37

-1A01
/16.1

X30	X31	X32	X33	X34	X35	X36	X37
E3.0	E3.1	E3.2	E3.3	E3.4	E3.5	E3.6	E3.7
LOW VARIANT	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE	SPARE

MITSUBISHI ELECTRIC

Mitsubishi | FX5U-EX/ES | 16DI | Part 2 of 2

15 17

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	EXPANSION INPUT MODULE		=
			Ed.	MANORAJ.SELVARAJ	S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING	ONLINE STATION-4			+ CP
			Appr.					FMSPM00863	Page 16
Modification	Date	Name	Original		Replacement of	Replaced by			Page 16 / 34

EXPANSION OUTPUT MODULE



-1A02
/17.5
CAAAZ00000000073
16POINTS OUTCARD
-FX5-16EYRES, MAKE
MISTUBHISHI

Mitsubishi FX5-16EYR-ES 16DO Part 1 of 2

MITSUBISHI ELECTRIC

SPARE VALVE | E CHECK 2 ON | E CHECK 4 ON | SPARE

SPARE VALVE | E CHECK 1 ON | E CHECK 3 ON | E CHECK 5 ON

+V4 | Y20 | Y21 | Y22 | Y23 | Y24 | Y25 | Y26 | Y27

0.5 mm² DBU P24VDC4

0.5 mm² DBU Y20 → -X8:14:A 19.4 / Y20

0.5 mm² DBU Y21 → -X8:15:A 19.4 / Y21

0.5 mm² DBU Y22 → -X8:16:A 19.4 / Y22

0.5 mm² DBU Y23 → -X8:17:A 19.4 / Y23

0.5 mm² DBU Y24 → -X8:18:A 19.4 / Y24

0.5 mm² DBU Y25 → -X8:19:A 19.5 / Y25

0.5 mm² DBU Y26 → -X8:20:A 19.5 / Y26

0.5 mm² DBU Y27 → -X8:21:A 19.5 / Y27

P24VDC4 → -X5:2 11.3 / P24VDC4

-1A02
/17.1

Mitsubishi FX5-16EYR-ES 16DO Part 2 of 2

MITSUBISHI ELECTRIC

SPARE | SPARE | SPARE | SPARE

SPARE | SPARE | SPARE | SPARE

+V6 | Y30 | Y31 | Y32 | Y33 | Y34 | Y35 | Y36 | Y37

0.5 mm² DBU P24VDC5

0.5 mm² DBU Y30 → -X8:22:A 19.5 / Y30

0.5 mm² DBU Y31 → -X8:23:A 19.5 / Y31

0.5 mm² DBU Y32 → -X8:24:A 19.6 / Y32

0.5 mm² DBU Y33 → -X8:25:A 19.6 / Y33

0.5 mm² DBU Y34 → -X8:26:A 19.6 / Y34

0.5 mm² DBU Y35 → -X8:27:A 19.6 / Y35

0.5 mm² DBU Y36 → -X8:28:A 19.7 / Y36

0.5 mm² DBU Y37 → -X8:29:A 19.7 / Y37

P24VDC5 → -X5:3 11.3 / P24VDC5

REVISION			Date	11-04-2024	ROBIS	Motherson Automotive & Technology engineering	EXPANSION OUTPUT MODULE		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING	ONLINE STATION-4		FMSPM00863	Page 17
Modification	Date	Name	Original		Replacement of	Replaced by			Page 17 / 34

INPUT TERMINAL DISTRIBUTION

BMELES2970
TERMINAL BLOCK CXDL2.5
2.5 SQ MM 2 IN 2 OUT
-X7-

-PB1-S1:12 30.5 / X00	X00	BK/4	0.75 mm²	1	X00	DBU	0.5 mm²	X00 / 14.2 -1A00:X00
-PB2-S4:14 30.1 / X01	X01	BK/3	0.75 mm²		X01	DBU	0.5 mm²	X01 / 14.3 -1A00:X01
-PB1-S2:14 30.4 / X02	X02	BK/3	0.75 mm²	2	X02	DBU	0.5 mm²	X02 / 14.3 -1A00:X02
-PB2-S3:14 30.2 / X03	X03	BK/4	0.75 mm²		X03	DBU	0.5 mm²	X03 / 14.3 -1A00:X03
-PSC 28.6 / X04	X04	BK/2	0.75 mm²	3	X04	DBU	0.5 mm²	X04 / 14.4 -1A00:X04
					X05	DBU	0.5 mm²	X05 / 14.4 -1A00:X05
-K4:14 20.7 / X06	X06	DBU	0.5 mm²	4	X06	DBU	0.5 mm²	X06 / 14.4 -1A00:X06
-K5:14 20.9 / X07	X07	DBU	0.5 mm²		X07	DBU	0.5 mm²	X07 / 14.5 -1A00:X07
				5	X10	DBU	0.5 mm²	X10 / 14.6 -1A00:X10
					X11	DBU	0.5 mm²	X11 / 14.6 -1A00:X11
-1A00:X12 14.7 / X12	X12	BK/1	1 mm²	6	X12	DBU	0.5 mm²	X12 / 31.1 -1X100:1
-1A00:X13 14.7 / X13	X13	BK/2	1 mm²		X13	DBU	0.5 mm²	X13 / 31.1 -1X100:2
-1A00:X14 14.8 / X14	X14	BK/3	1 mm²	7	X14	DBU	0.5 mm²	X14 / 31.1 -1X100:3
-1A00:X15 14.8 / X15	X15	BK/4	1 mm²		X15	DBU	0.5 mm²	X15 / 31.2 -1X100:4
-1A00:X16 14.8 / X16	X16	BK/5	1 mm²	8	X16	DBU	0.5 mm²	X16 / 31.2 -1X100:5
-1A00:X17 14.9 / X17	X17	BK/6	1 mm²		X17	DBU	0.5 mm²	X17 / 31.2 -1X100:6
-1A01:X20 16.1 / X20	X20	BK/7	1 mm²	9	X20	DBU	0.5 mm²	X20 / 31.3 -1X100:7
-1A01:X21 16.2 / X21	X21	BK/8	1 mm²		X21	DBU	0.5 mm²	X21 / 31.3 -1X100:8
-1A01:X22 16.2 / X22	X22	BK/9	1 mm²		X22	DBU	0.5 mm²	X22 / 31.3 -1X100:9
-1A01:X23 16.3 / X23	X23	BK/10	1 mm²	10	X23	DBU	0.5 mm²	X23 /
-1A01:X24 16.3 / X24	X24	BK/11	1 mm²		X24	DBU	0.5 mm²	X24 /
-1A01:X25 16.3 / X25	X25	BK/12	1 mm²	11	X25	DBU	0.5 mm²	X25 /
-1A01:X26 16.4 / X26	X26	BK/13	1 mm²		X26	DBU	0.5 mm²	X26 / 31.4 -1X100:13
-1A01:X27 16.4 / X27	X27	BK/14	1 mm²	12	X27	DBU	0.5 mm²	X27 / 31.5 -1X100:14
-1A01:X30 16.6 / X30	X30	BK/15	1 mm²		X30	DBU	0.5 mm²	X30 / 31.5 -1X100:15
				13	X31	DBU	0.5 mm²	X31 / 16.6 -1A01:X31
					X32	DBU	0.5 mm²	X32 / 16.6 -1A01:X32
				14	X33	DBU	0.5 mm²	X33 / 16.7 -1A01:X33
					X34	DBU	0.5 mm²	X34 / 16.7 -1A01:X34
				15	X35	DBU	0.5 mm²	X35 / 16.7 -1A01:X35
					X36	DBU	0.5 mm²	X36 / 16.8 -1A01:X36
				16	X37	DBU	0.5 mm²	X37 / 16.8 -1A01:X37

Modification	Date	Name	Original	Replacement of
REVISION			Date 10-04-2024	Replaced by
			Ed. MANORAJ.SELVARAJ	
			Appr.	

ROBIS
S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4

Motherson Automotive & Technology engineering

INPUT TERMINAL DISTRIBUTION

FMSPM00863

Page 18
Page 18 / 34

OUTPUT TERMINAL DISTRIBUTION

ALL FUSE SHOULD BE 0.5 A




-X8
BMELES2968
TERMINAL BLOCK 2.5 SQ MM
1 IN 2 OUT

Y00 / 15.1 / -1A00:Y00	Y01 / 15.2 / -1A00:Y01	Y02 / 15.2 / -1A00:Y02	Y03 / 15.3 / -1A00:Y03	Y04 / 15.3 / -1A00:Y04	Y10 / 15.6 / -1A00:Y10	Y11 / 15.6 / -1A00:Y11	Y12 / 15.7 / -1A00:Y12	Y13 / 15.7 / -1A00:Y13	Y14 / 15.8 / -1A00:Y14	Y15 / 15.8 / -1A00:Y15	Y16 / 15.8 / -1A00:Y16	Y17 / 15.9 / -1A00:Y17	Y20 / 17.1 / -1A02:Y20	Y21 / 17.2 / -1A02:Y21	Y22 / 17.2 / -1A02:Y22	Y23 / 17.3 / -1A02:Y23	Y24 / 17.3 / -1A02:Y24	Y25 / 17.3 / -1A02:Y25	Y26 / 17.4 / -1A02:Y26	Y27 / 17.4 / -1A02:Y27	Y30 / 17.6 / -1A02:Y30	Y31 / 17.6 / -1A02:Y31	Y32 / 17.6 / -1A02:Y32	Y33 / 17.7 / -1A02:Y33	Y34 / 17.7 / -1A02:Y34	Y35 / 17.8 / -1A02:Y35	Y36 / 17.8 / -1A02:Y36	Y37 / 17.8 / -1A02:Y37
0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²
DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU	DBU
Y00	Y01	Y02	Y03	Y04	Y10	Y11	Y12	Y13	Y14	Y15	Y16	Y17	Y20	Y21	Y22	Y23	Y24	Y25	Y26	Y27	Y30	Y31	Y32	Y33	Y34	Y35	Y36	Y37	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	
0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	
OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	OE	

Y00	Y01	Y02	Y03	Y04	Y12	Y13	Y14	Y15	Y16	Y17	Y20	Y21	Y22	Y23	Y24	Y25	Y26												
0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²	0.5 mm²												
BK/1	BK/2	BK/3	BK/4	BK/1	BK/2	BK/3	BK/4	BK/5	BK/6	BK/7	BK/8	BK/9	DBU	DBU	DBU	DBU	DBU												
Y00	Y01	Y02	Y03	Y04	Y12	Y13	Y14	Y15	Y16	Y17	Y20	Y21	Y22	Y23	Y24	Y25	Y26												
-TL1.0:1 30.8 / Y00	-TL1.0:2 30.8 / Y01	-TL1.0:3 30.8 / Y02	-TL1.0:4 30.9 / Y03	+PP-1X1:1 +PP/33.1 / Y04	+PP-1X1:2 +PP/33.1 / Y12	+PP-1X1:3 +PP/33.2 / Y13	+PP-1X1:4 +PP/33.2 / Y14	+PP-1X1:5 +PP/33.2 / Y15	+PP-1X1:6 +PP/33.3 / Y16	+PP-1X1:7 +PP/33.3 / Y17	+PP-1X1:8 +PP/33.3 / Y20	+PP-1X1:9 +PP/33.4 / Y21	-K6:A1 24.0 / Y22	-K7:A1 24.2 / Y23	-K8:A1 24.4 / Y24	-K9:A1 24.6 / Y25	-K10:A1 24.8 / Y26												

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	OUTPUT TERMINAL DISTRIBUTION	=
			Ed.	MANORAJ.SELVARAJ				+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863 Page 19
Modification	Date	Name	Original		Replacement of	Replaced by		Page 19 / 34

RELAY INTERFACE FOR SCREWING DRIVER 1

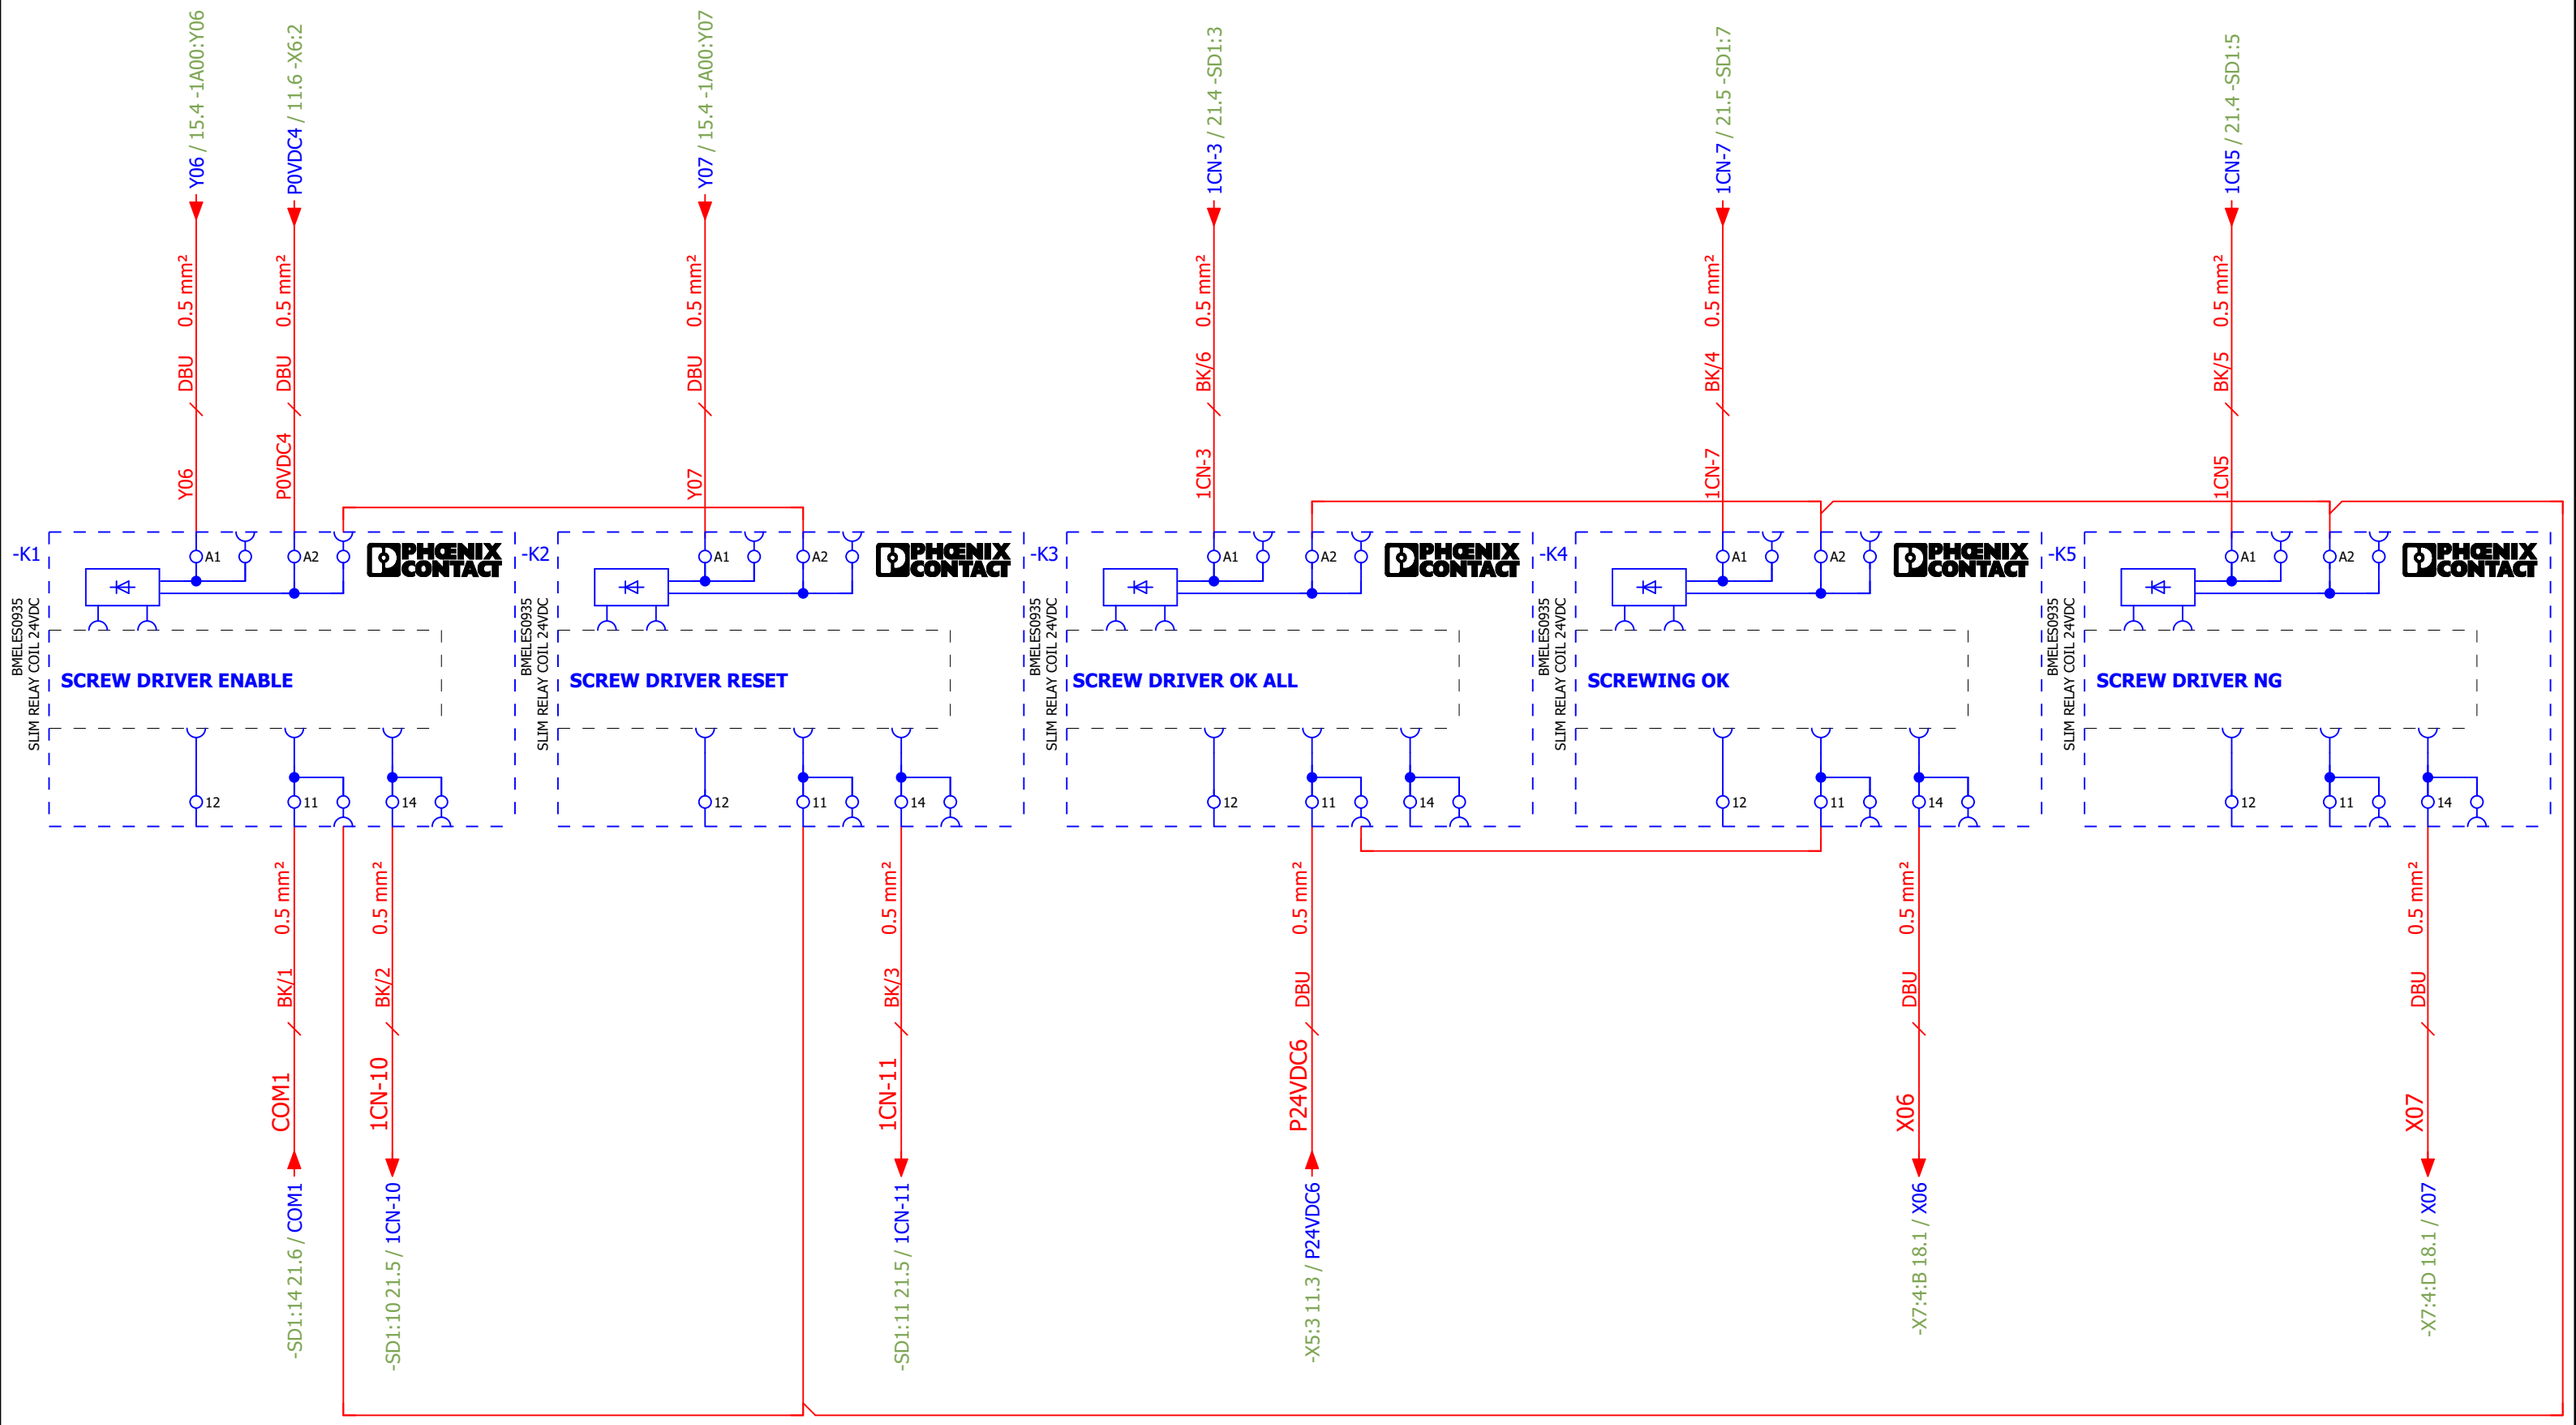


19

21


REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	RELAY INTERFACE FOR SCREWING DRIVER 1		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 20
Modification	Date	Name	Original		Replacement of	Replaced by			Page 20 / 34

SCREWING DRIVER INTERFACE 1

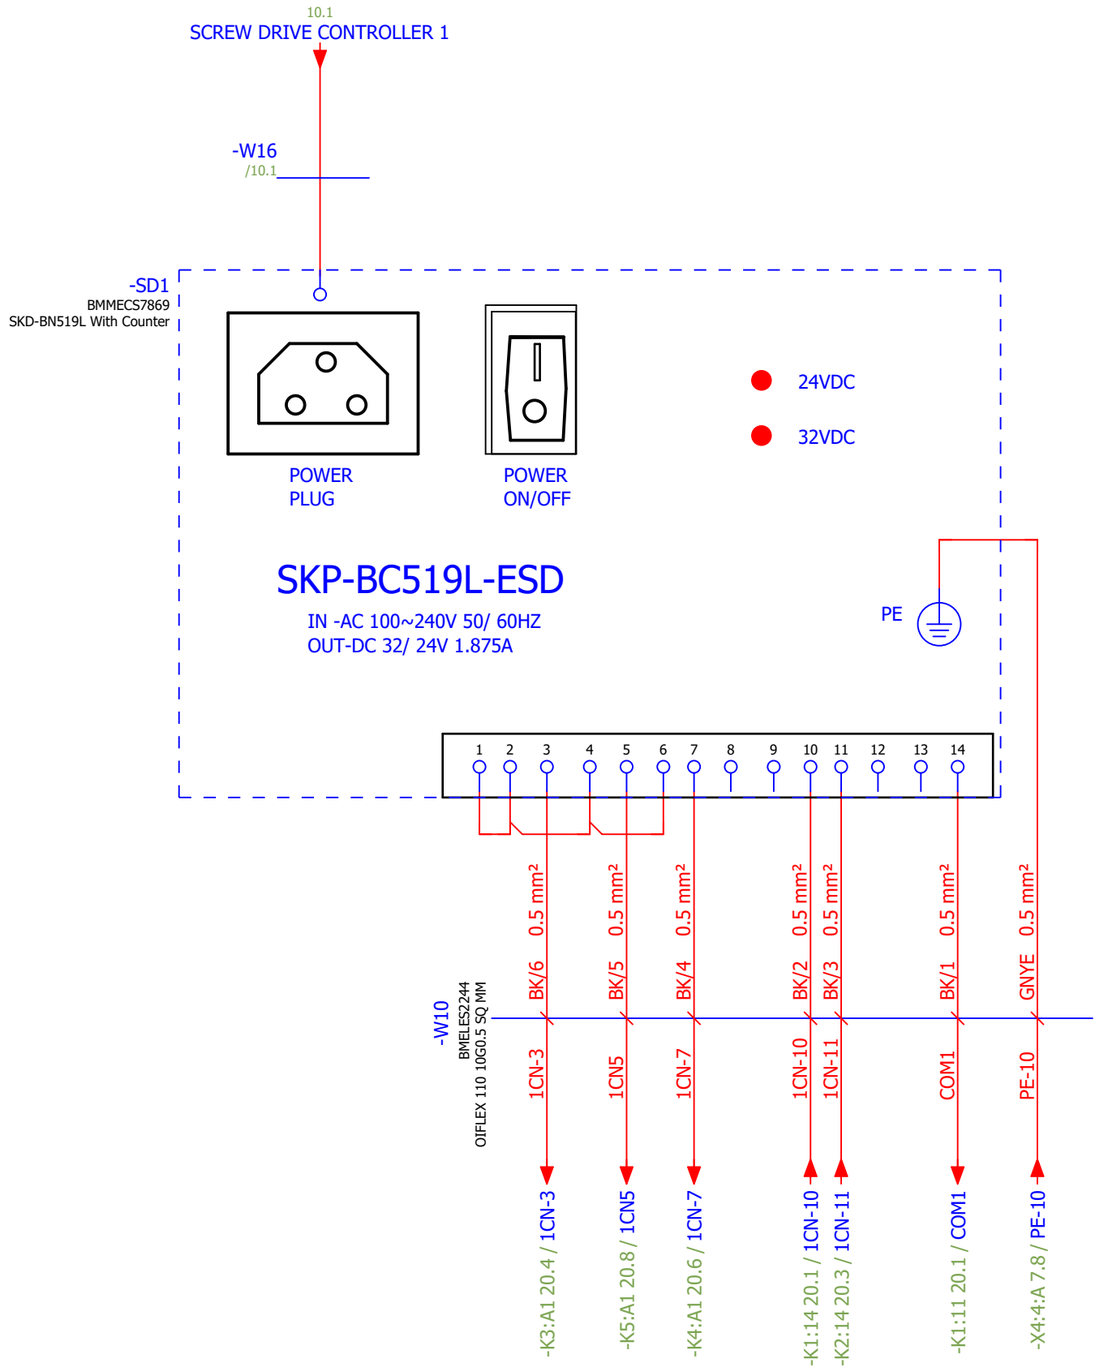

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	SCREWING DRIVER INTERFACE 1		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 21
Modification	Date	Name	Original		Replacement of	Replaced by			Page 21 / 34

LIN COMMUNICATION MODULE INTERFACE

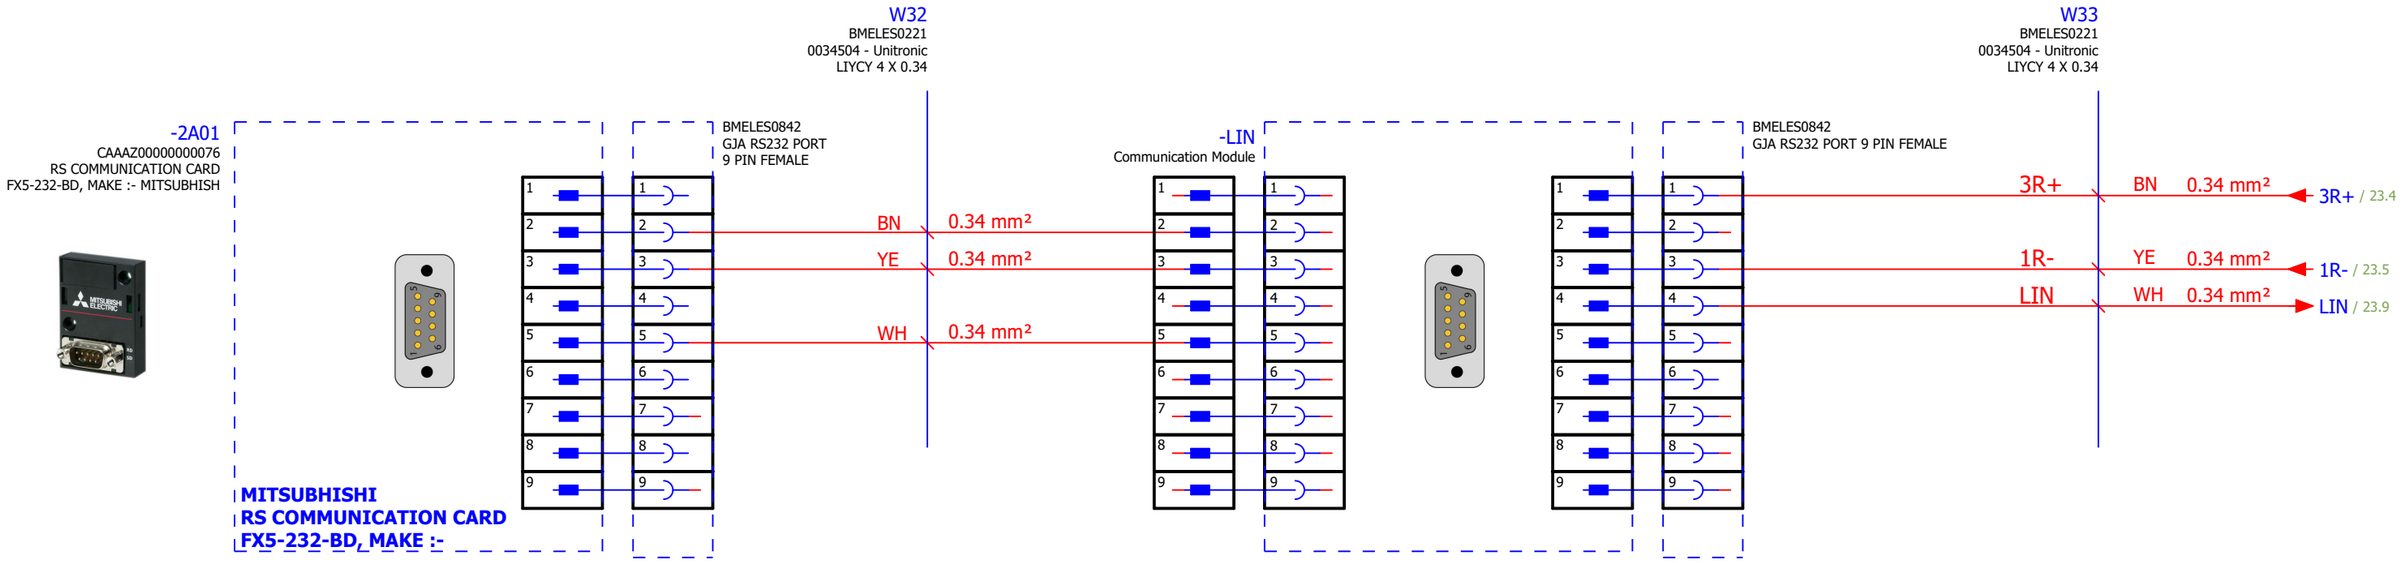

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	LIN COMMUNICATION MODULE INTERFACE		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 22
Modification	Date	Name	Original		Replacement of	Replaced by			Page 22 / 34

DC REGULATOR

DC REGULATOR POWER / 10.7 /

-W26
/10.7

-U3
BMELES3427
DC Regulated
Power Supply output
0 to 15V,12A DC

POWER

DC REGULATED POWER SUPPLY (OUTPUT 0 to 15V,12A DC)

+ OUTPUT
- OUTPUT

-W31
BMELES1940
3G2.5 sqmm cable

BK/1 2.5 mm² R+
BK/2 2.5 mm² R-

-X9:1 23.4 / R+
-X10:1 23.5 / R-

-W31
BMELES1940
3G2.5 sqmm cable

BK/1 2.5 mm² R+ / 23.1 -U3:+
BK/2 2.5 mm² R- / 23.1 -U3:-

-X9 1 2
-X10 1 2

BMELES2968
TERMINAL BLOCK
2.5 SQ MM 1 IN 2 OUT

0.5 mm²	BK/1	RV+
0.5 mm²	DBU	1R+
1 mm²	BK/17	2R+
0.34 mm²	BN	3R+

-VM1:2 25.3 / RV+
-K6:11 24.1 / 1R+
-1X100:22 31.7 / 2R+
-LIN:1 22.9 / 3R+

BMELES2968
TERMINAL BLOCK
2.5 SQ MM 1 IN 2 OUT

0.5 mm²	BK/2	RV-
0.34 mm²	YE	1R-
1 mm²	BK/18	2R-

-VM1:5 25.4 / RV-
-LIN:3 22.9 / 1R-
-1X100:23 31.7 / 2R-

-WC8
BMELES0221
0034504 - Unitronic
LIYCY 4 X 0.34

RS 485+ / 13.4 -1A00:RDB
RS 485- / 13.4 -1A00:RDA

-X11 1 2 3 4

BMELES2968
TERMINAL BLOCK
2.5 SQ MM 1 IN 2 OUT

0.34 mm²	BN	RS-485.1+
0.34 mm²	BN	RS-485.2+
0.34 mm²	WH	RS-485.1-
0.34 mm²	WH	RS-485.2-

-VMC:1 25.4 / RS-485.1+
-AMC1:1 26.2 / RS-485.2+
-VMC:2 25.4 / RS-485.1-
-AMC1:2 26.2 / RS-485.2-

-X12 1 2 3 4

BMELES2970
TERMINAL BLOCK CXDL2.5
2.5 SQ MM 2 IN 2 OUT


0.5 mm²	BK/3	AI1+
0.5 mm²	BK/4	COM1+
1 mm²	BK/16	LIN
1 mm²	BK/10	T1
1 mm²	BK/11	LB
1 mm²	BK/12	HB

-AM1:3 26.2 / AI1+
-X12:1:C 23.8 / COM1+
-1X100:21 31.7 / LIN
-1X100:10 31.3 / T1
-1X100:11 31.4 / LB
-1X100:12 31.4 / HB

AI1+ / 24.1 -K6:14
COM1+ / 23.8 -X12:1:D
LIN / 22.9 -LIN:4
T1 / 24.3 -K7:14
LB / 24.5 -K8:14
HB / 24.7 -K9:14

REVISION			Date	11-04-2024	ROBIS	Motherson Automotive & Technology engineering	DC REGULATOR	=
			Ed.	MANORAJ.SELVARAJ				+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863 Page 23
Modification	Date	Name	Original		Replacement of	Replaced by		Page 23 / 34

AMMETER RELAY INTERFACE

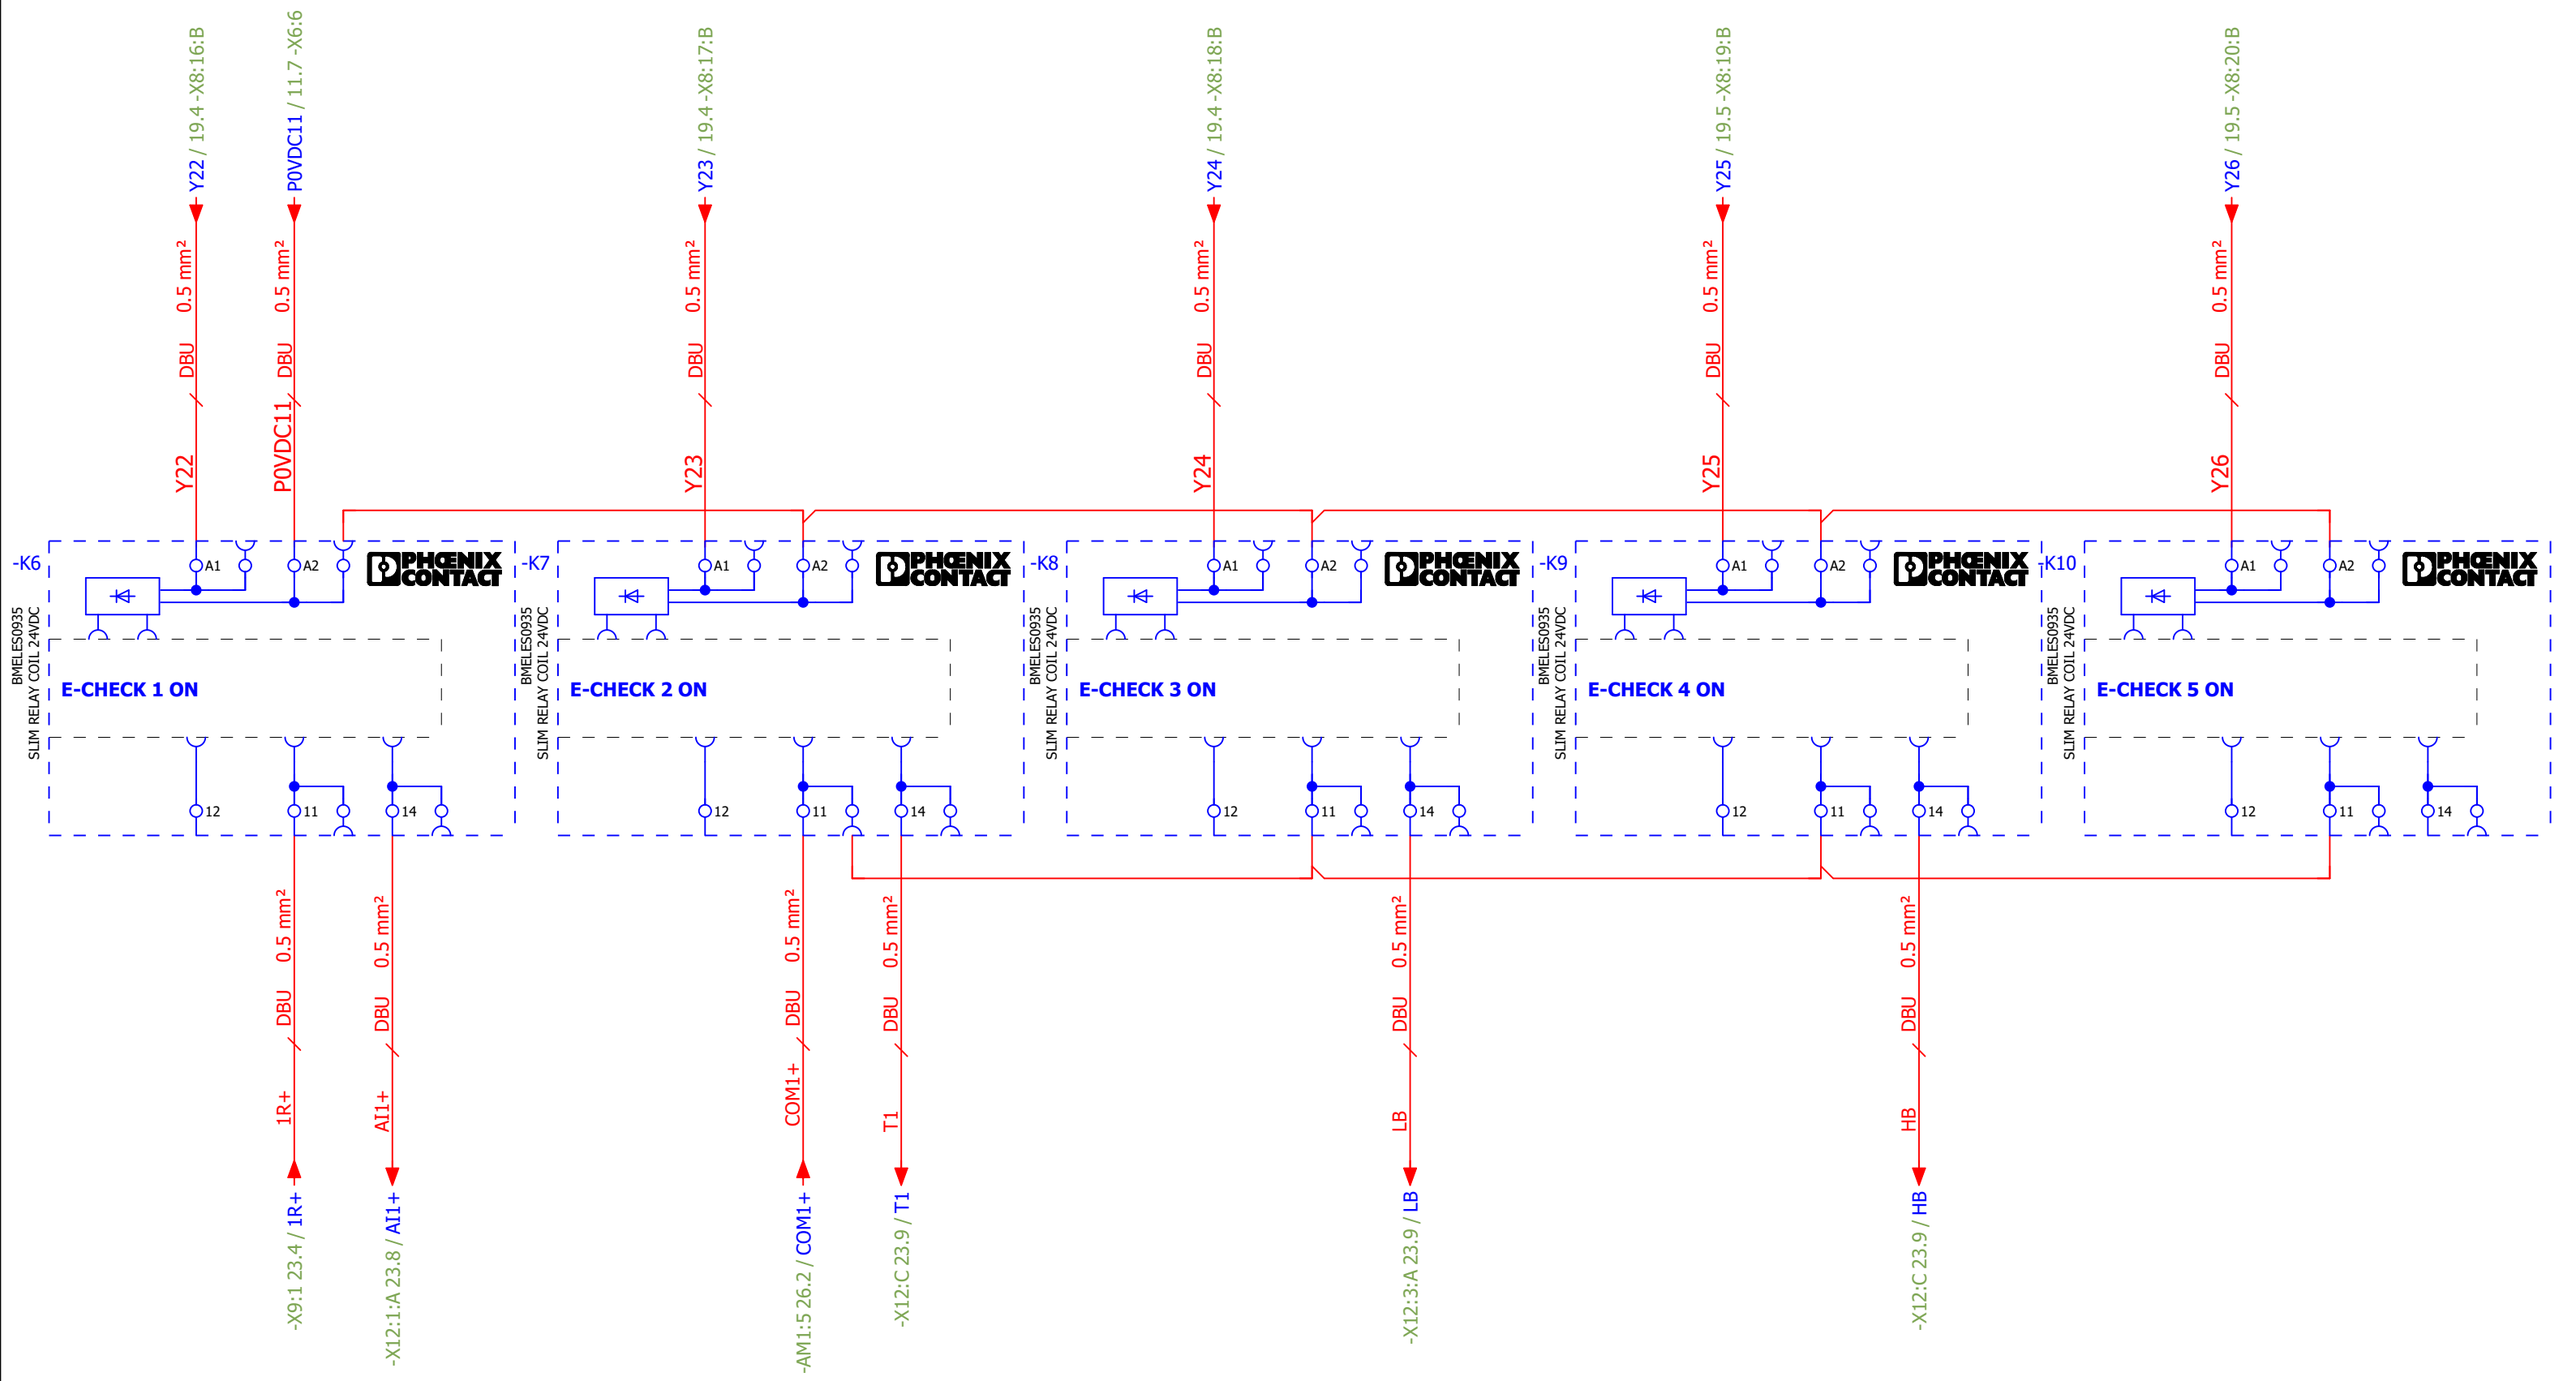


23


25

REVISION			Date	11-04-2024	ROBIS	Motherson Automotive & Technology engineering	AMMETER RELAY INTERFACE		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 24
Modification	Date	Name	Original		Replacement of	Replaced by			Page 24 / 34

DIGITAL PANEL METER


• MT4W-DV- □□

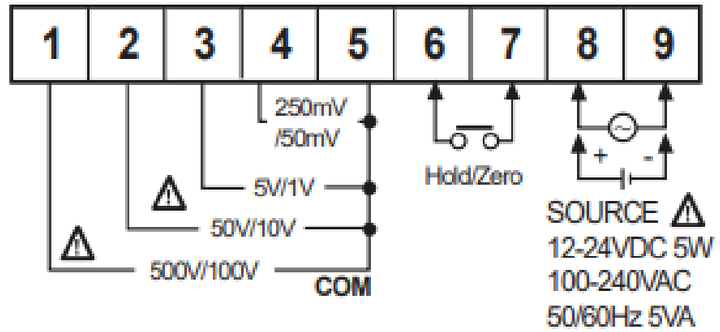

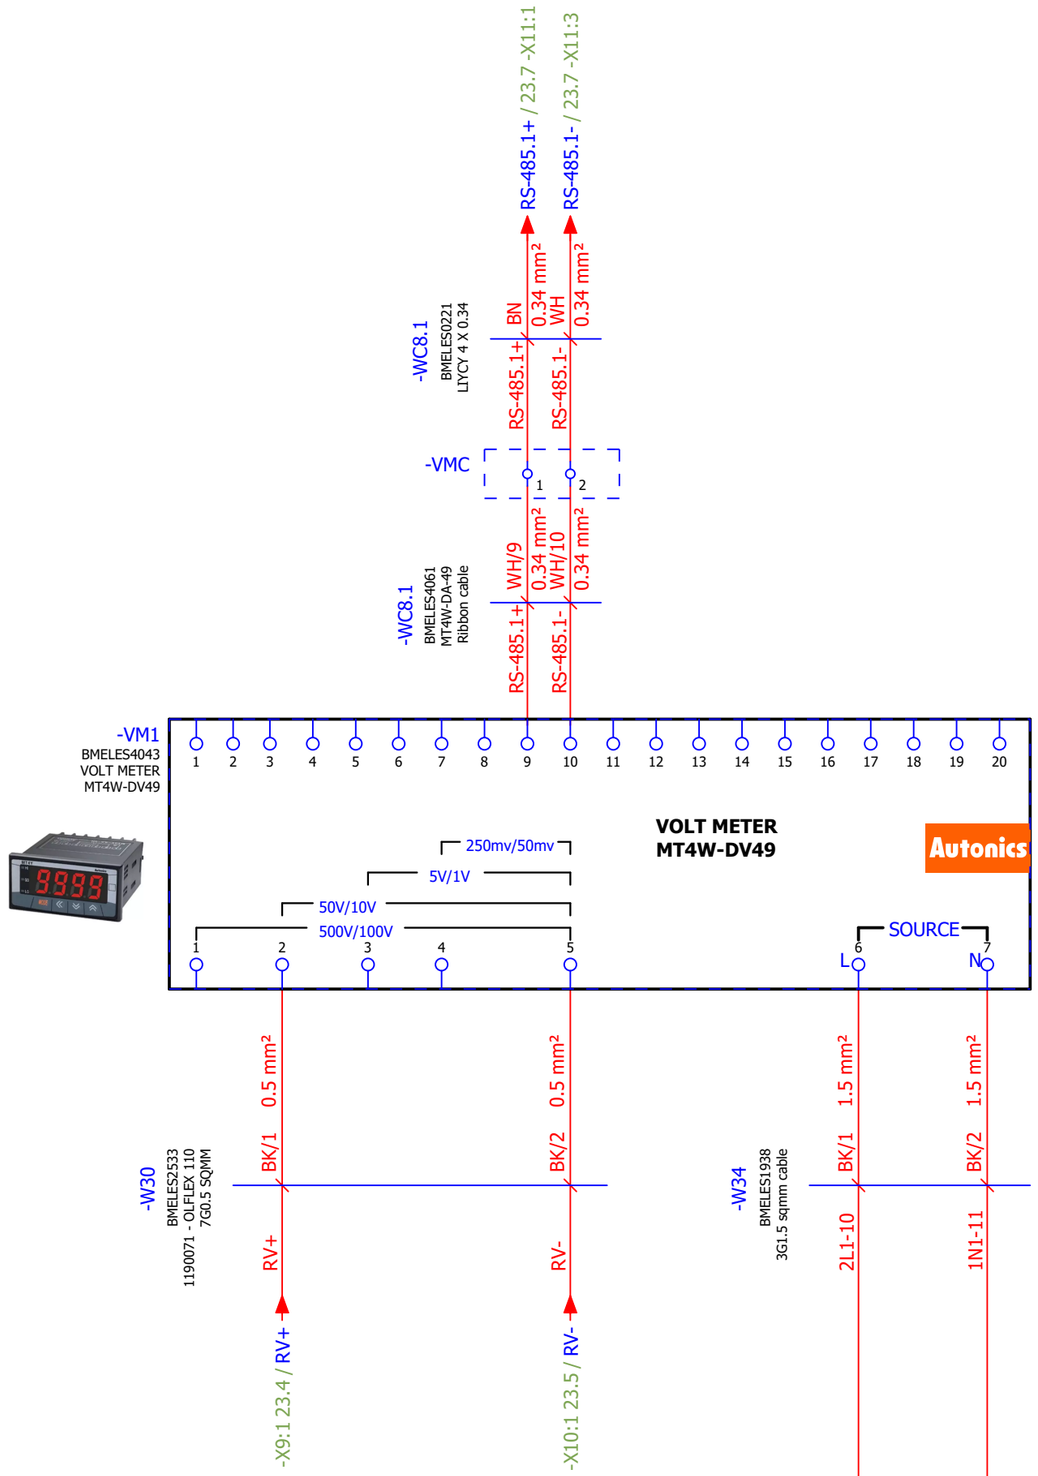


REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	DIGITAL PANEL METER		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 25
Modification	Date	Name	Original		Replacement of	Replaced by			Page 25 / 34

AMMETER INTERFACE

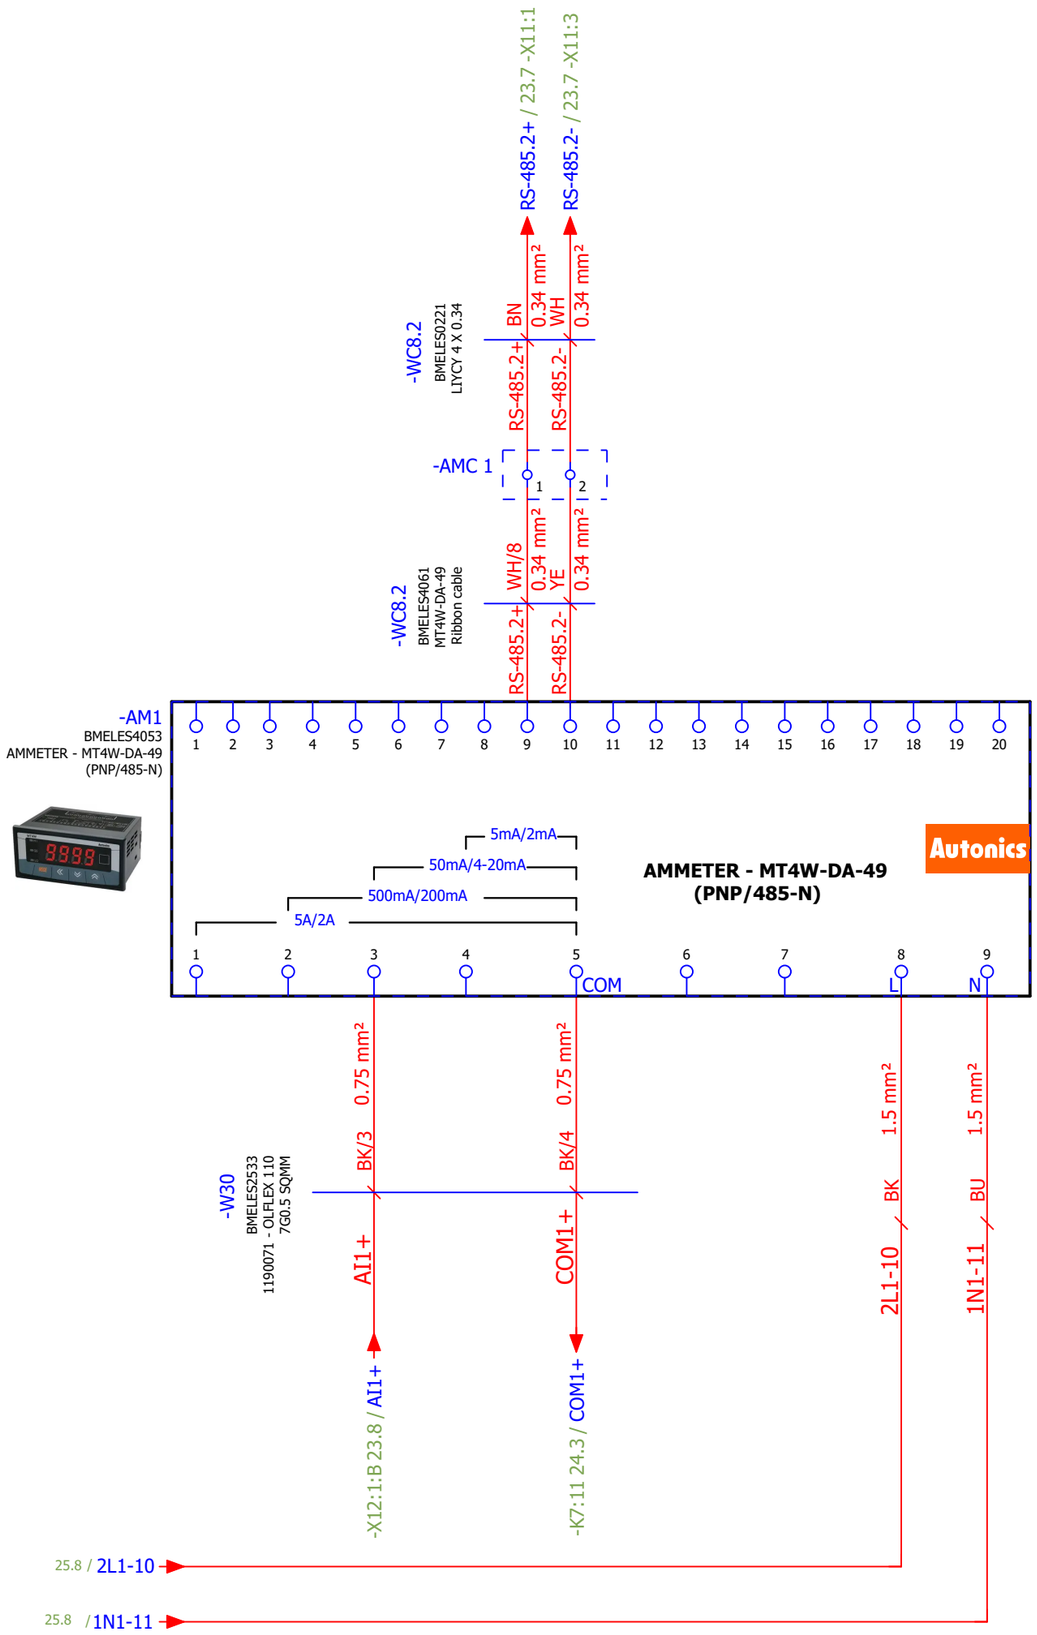


MAIN OUT:
NPN OPEN COLLECTOR
12-24VDC Max. 50mA

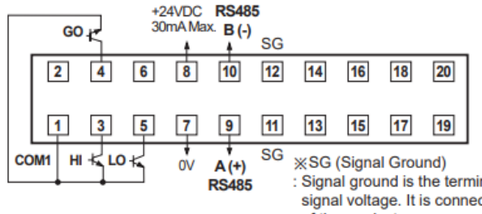


MAIN OUT:
PNP OPEN COLLECTOR
12-24VDC Max. 50mA


※SG (Signal Ground)
: Signal ground is the terminal which is base of the signal voltage. It is connected with terminal 7 inside of the product.

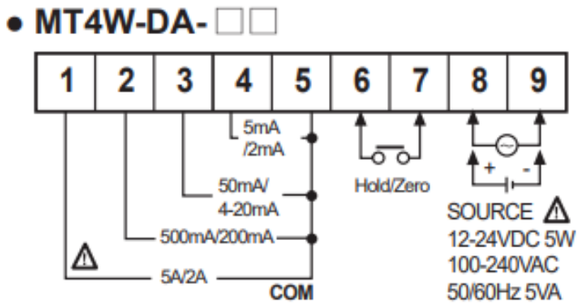


REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	AMMETER INTERFACE		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING	ONLINE STATION-4		FMSPM00863	Page 26
Modification	Date	Name	Original		Replacement of	Replaced by			Page 26 / 34

MACHINE LIGHT & FAN INTERFACE

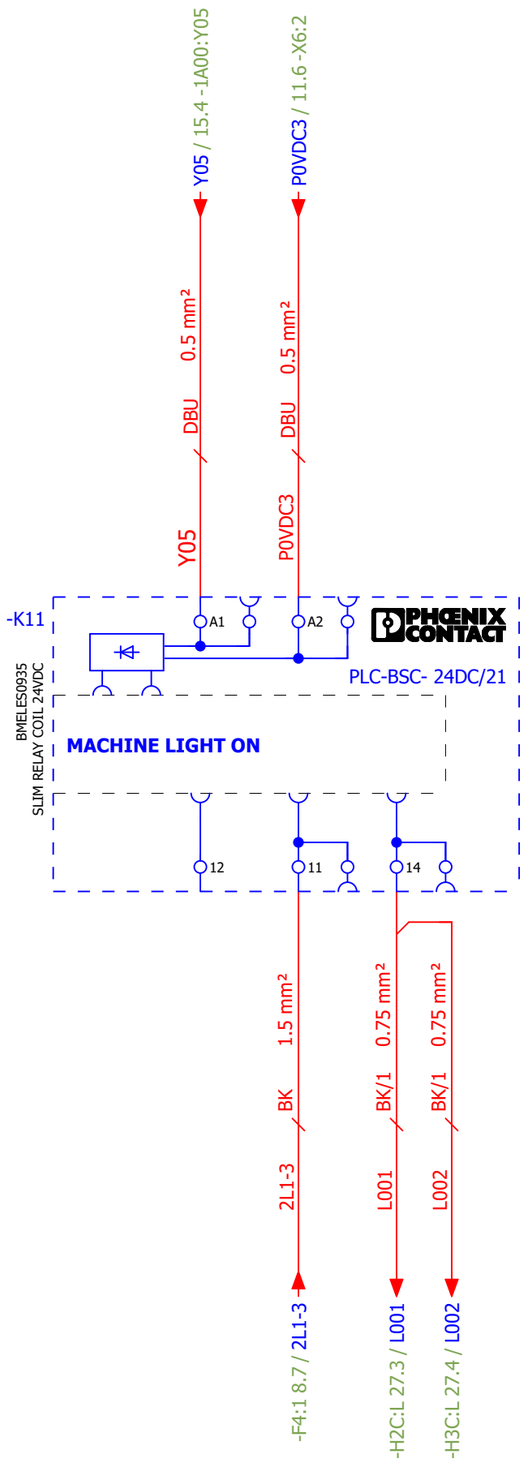

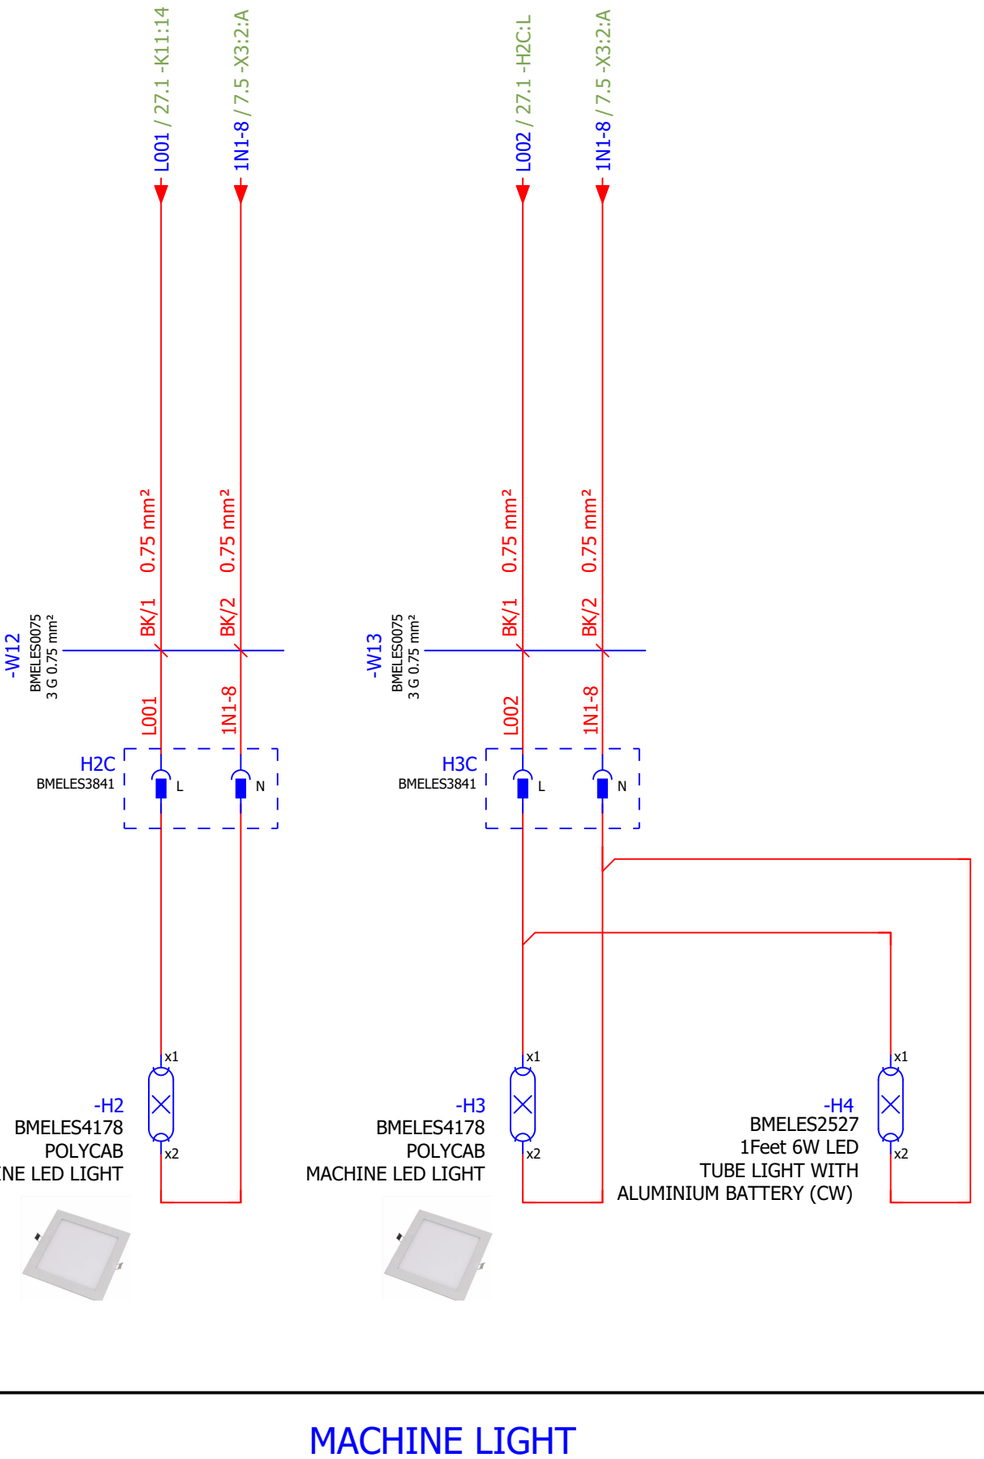

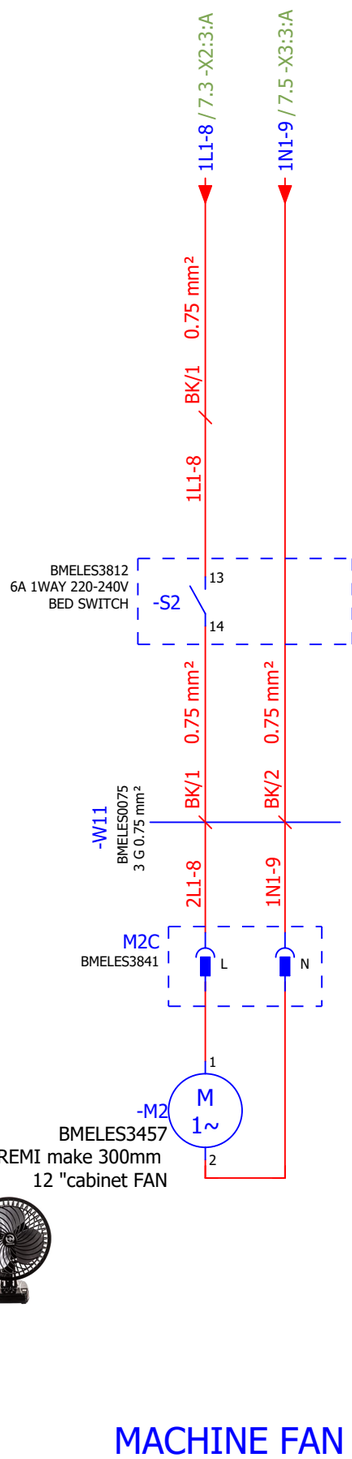

MACHINE LIGHT

MACHINE FAN

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	MACHINE LIGHT & FAN INTERFACE		=
			Ed.	MANORAJ.SELVARAJ	S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4				+ CP
			Appr.					FMSPM00863	Page 27
Modification	Date	Name	Original		Replacement of	Replaced by			Page 27 / 34

HMI INTERFACE



-WC2 / 12.2 -A1:2:2

-WC6 / 29.2 -HMI RS232-COM1

-WC1
BMELES1072
UNITRONIC LAN 600

-WC6
BMELES0221
0034504 - Unitronic
LIYCY 4 X 0.34

-HMI
CAAAI00000000586
HMI GS2107-WTBD

Ethernet | RS-232 | RS-422 | USB

MITSUBISHI ELECTRIC

\+ | - | FG

0.75 mm² | 0.75 mm² | 0.75 mm²

BK/1 | BK/2 | GNYE

-W5
BMELES1937
3 G 0.75 mm²

1P24VDC | P0VDC6 | PE-8

-1F1 11.0 / 1P24VDC

-X6:3 11.7 / P0VDC6

-X4:2:A 7.7 / PE-8

HMI POWER SUPPLY

P24VDC12 / 11.4 -X5:6

P0VDC5 / 11.7 -X6:3

X04 / 18.1 -X7:3:B

0.75 mm² | 0.75 mm² | 0.75 mm²

BK/1 | BK/3 | BK/2

-W6
BMELES1937
3 G 0.75 mm²

P24VDC12 | P0VDC5 | X04

-PSC
3 PIN CONNECTOR

BN | BU | BK | WH

PS1
1 2 3 4
P





PRESSURE SWITCH

REVISION			Date	10-04-2024	ROBIS		Motherson Automotive & Technology engineering	HMI INTERFACE		=
			Ed.	MANORAJ.SELVARAJ						+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4				FMSPM00863	Page 28
Modification	Date	Name	Original		Replacement of	Replaced by				Page 28 / 34

0	1	2	3	4	5	6	7	8	9

HMI TO SCANNER COMMUNICATION

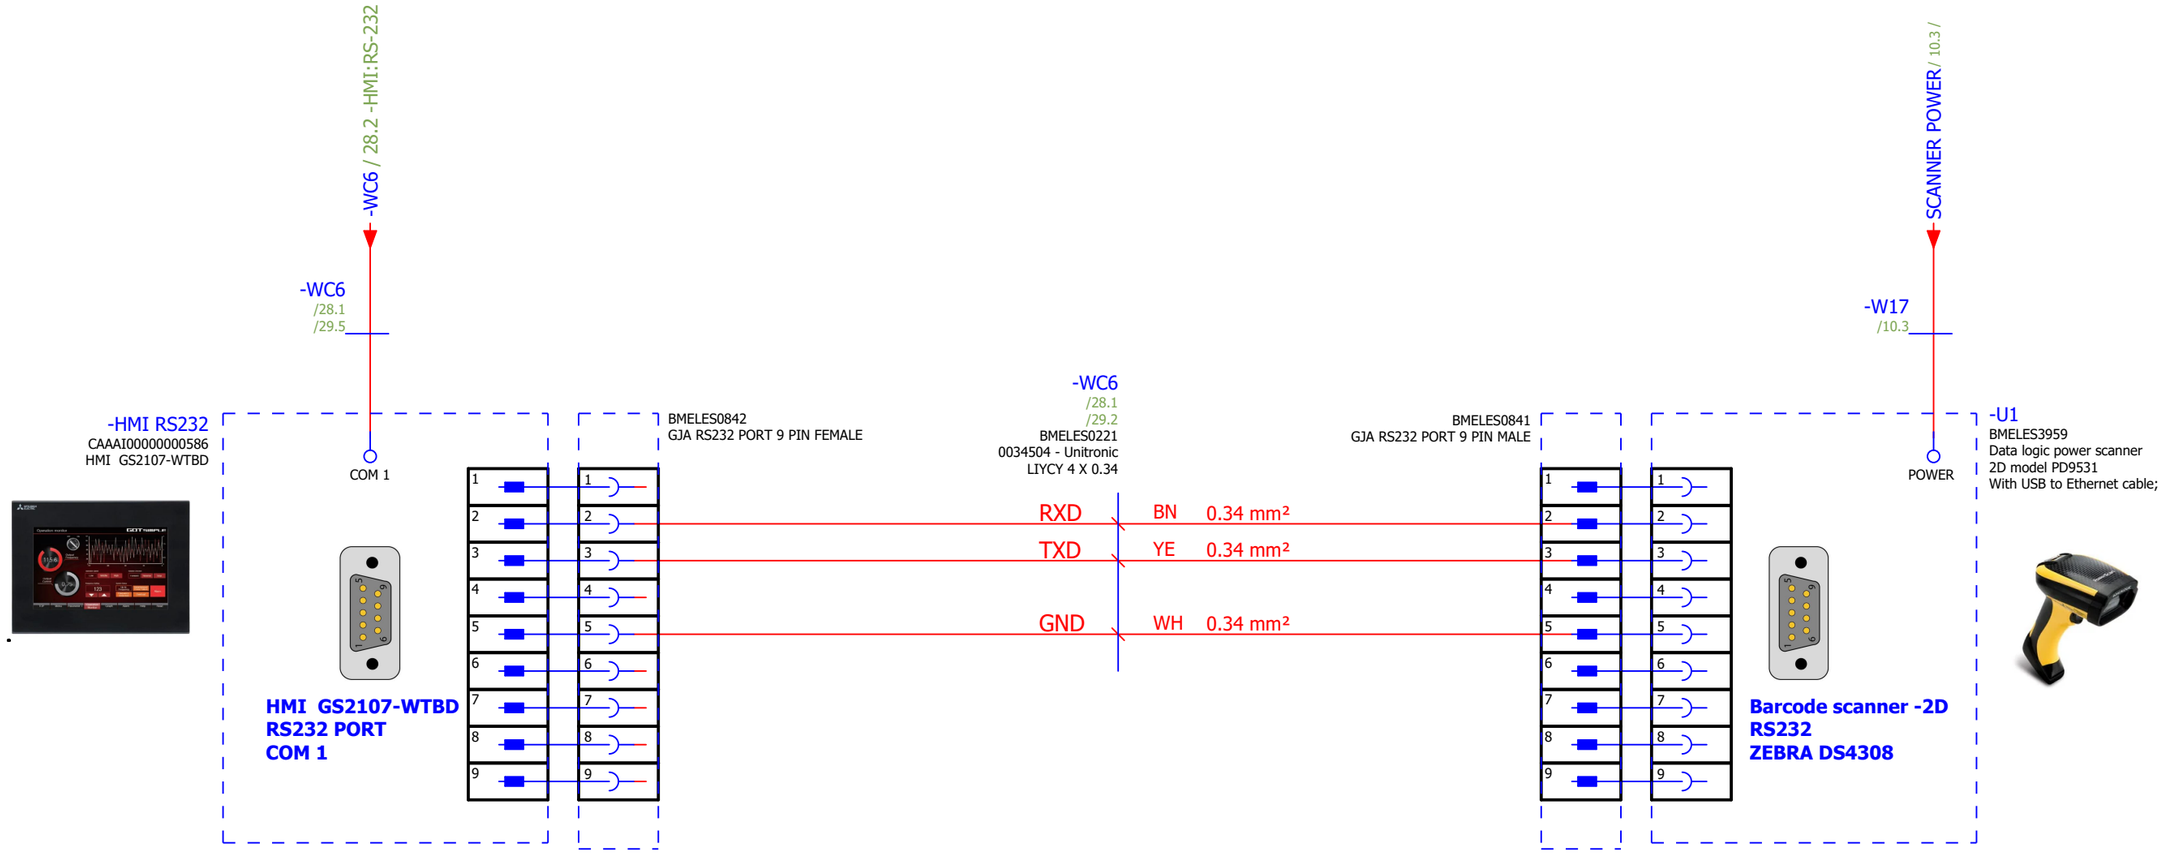





Screws to fix
RS-232C connector
#4-40UNC
(inch screw thread)


Pin No.	Signal	Name
1	CD (DCD)	Receive carrier detection
2	RD (RXD)	Receive data
3	SD (TXD)	Send data
4	ER (DTR)	Send request
5	SG (GND)	Signal ground
6	DR (DSR)	Send enabled
7, 8, 9		Not used

REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	HMI TO SCANNER COMMUNICATION		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 29
Modification	Date	Name	Original		Replacement of	Replaced by			Page 29 / 34

PUSHBUTTON & TOWER LAMP INTERFACE

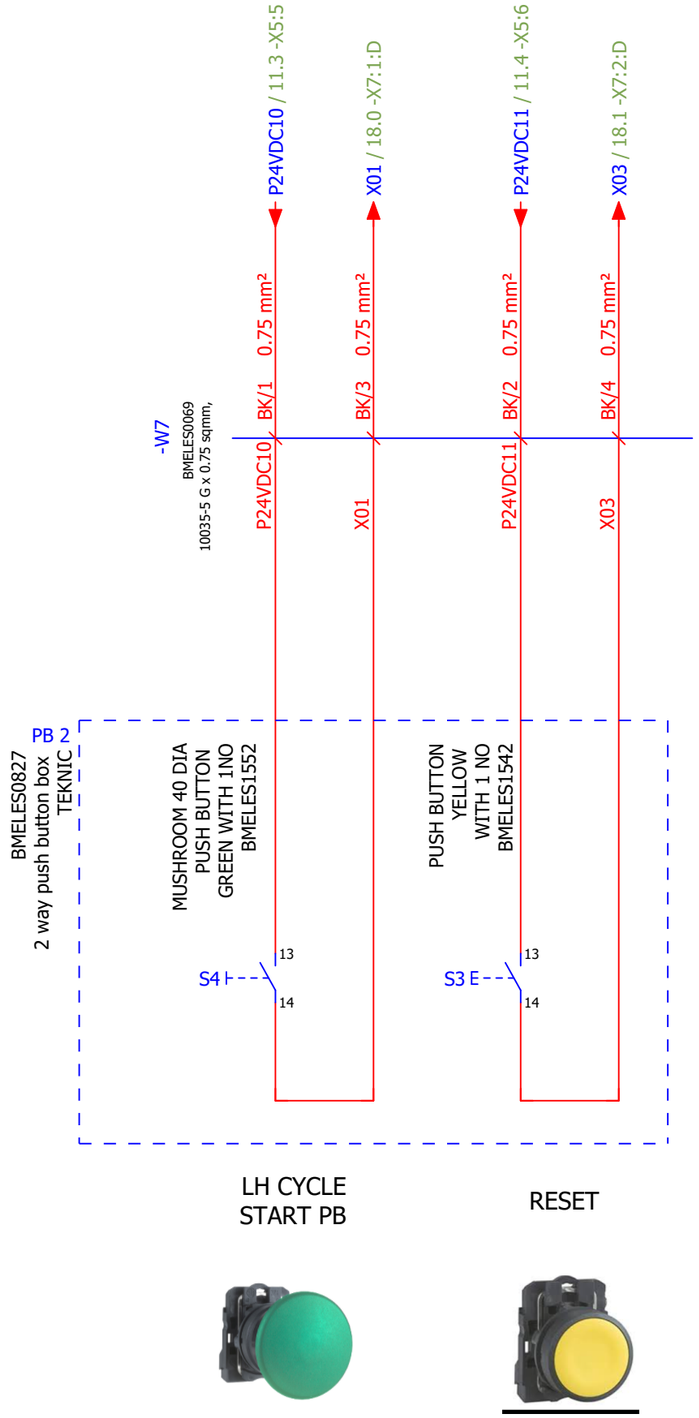


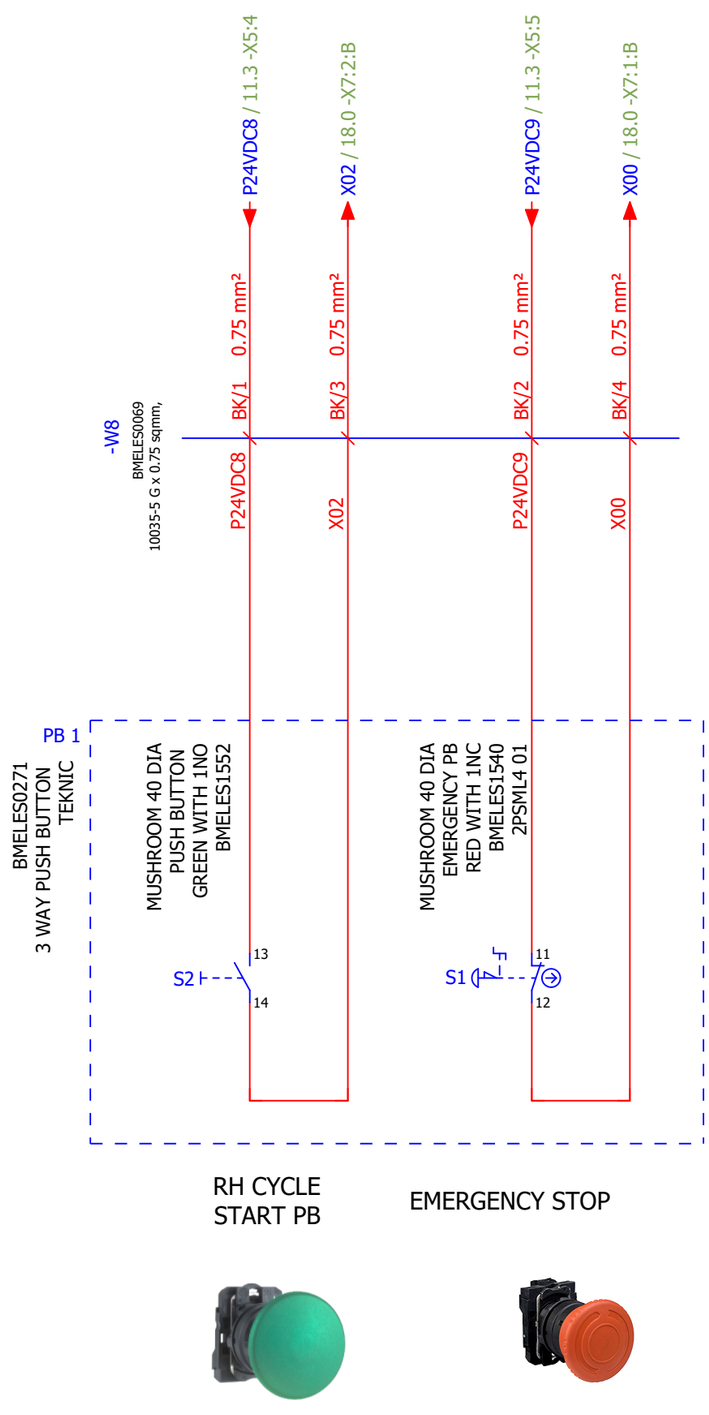

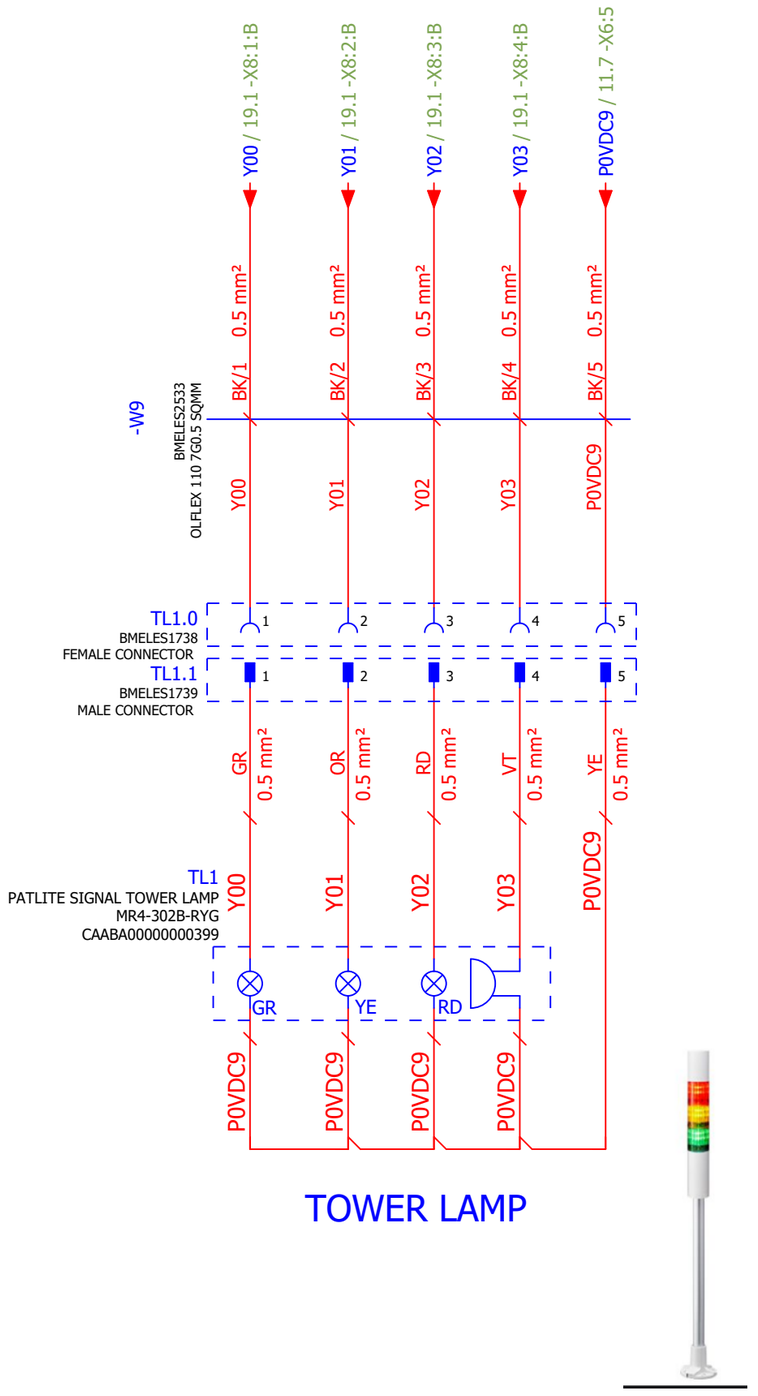


REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	PUSHBUTTON & TOWER LAMP INTERFACE		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 30
Modification	Date	Name	Original		Replacement of	Replaced by			Page 30 / 34

24 PIN I/O INTERFACE

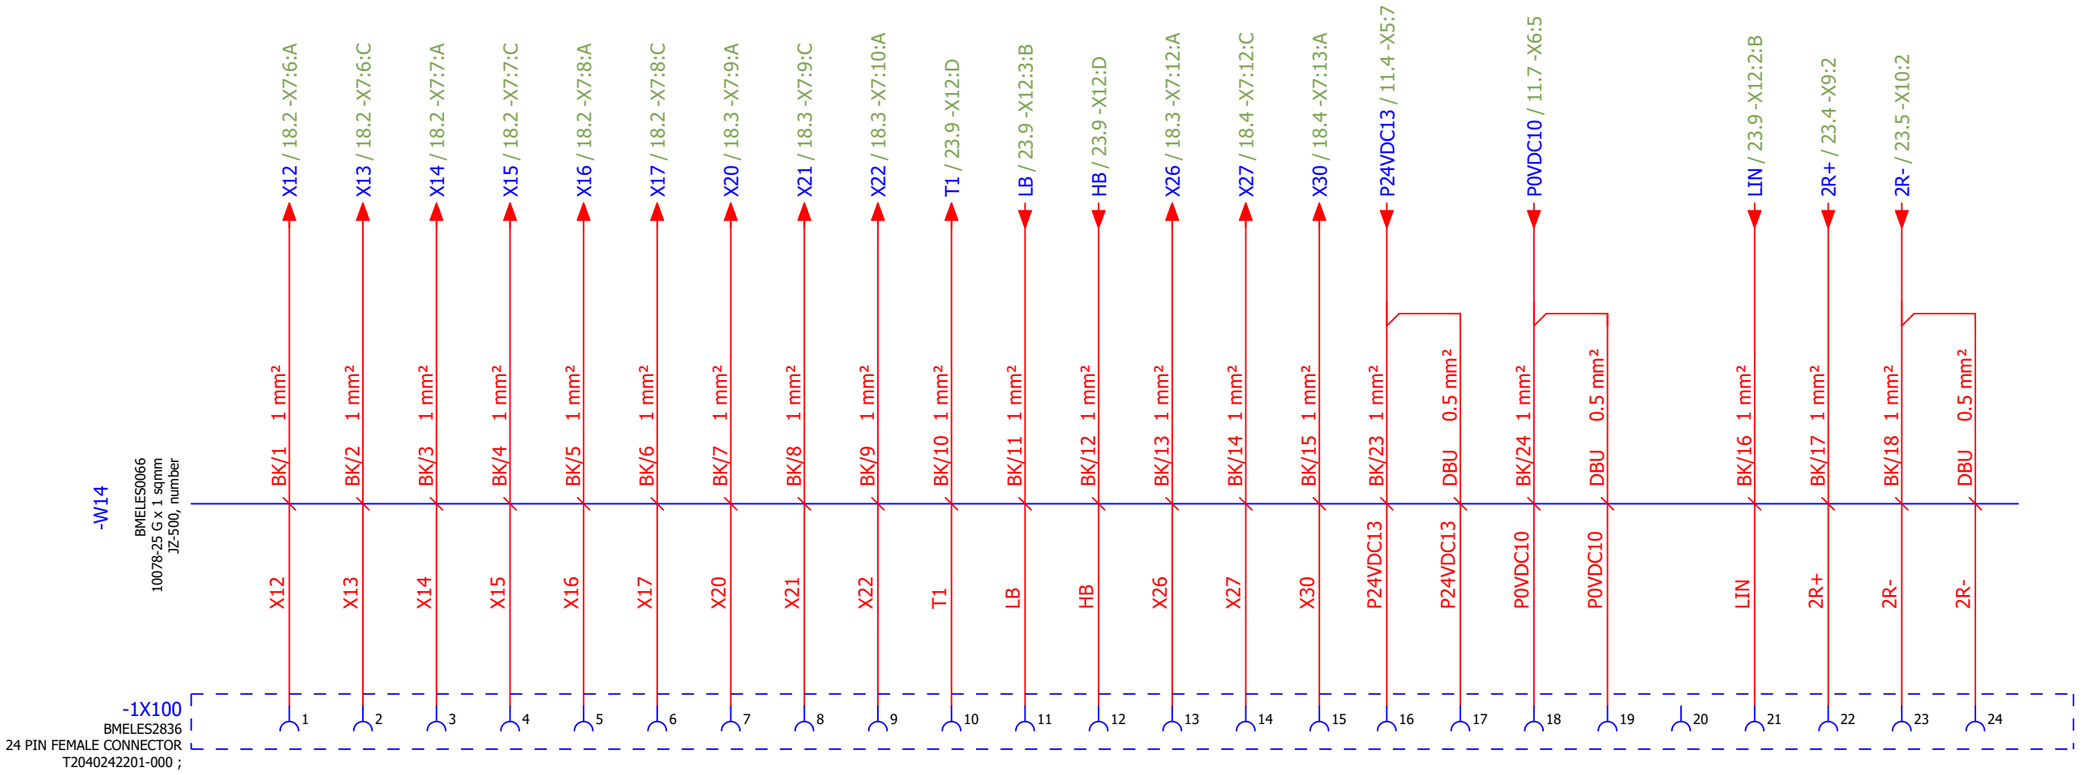


REVISION			Date	11-04-2024	ROBIS	Motherson Automotive & Technology engineering	24 PIN I/O INTERFACE		=
			Ed.	MANORAJ.SELVARAJ					+ CP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 31
Modification	Date	Name	Original		Replacement of	Replaced by			Page 31 / 34

CUSTOMIZE PANEL

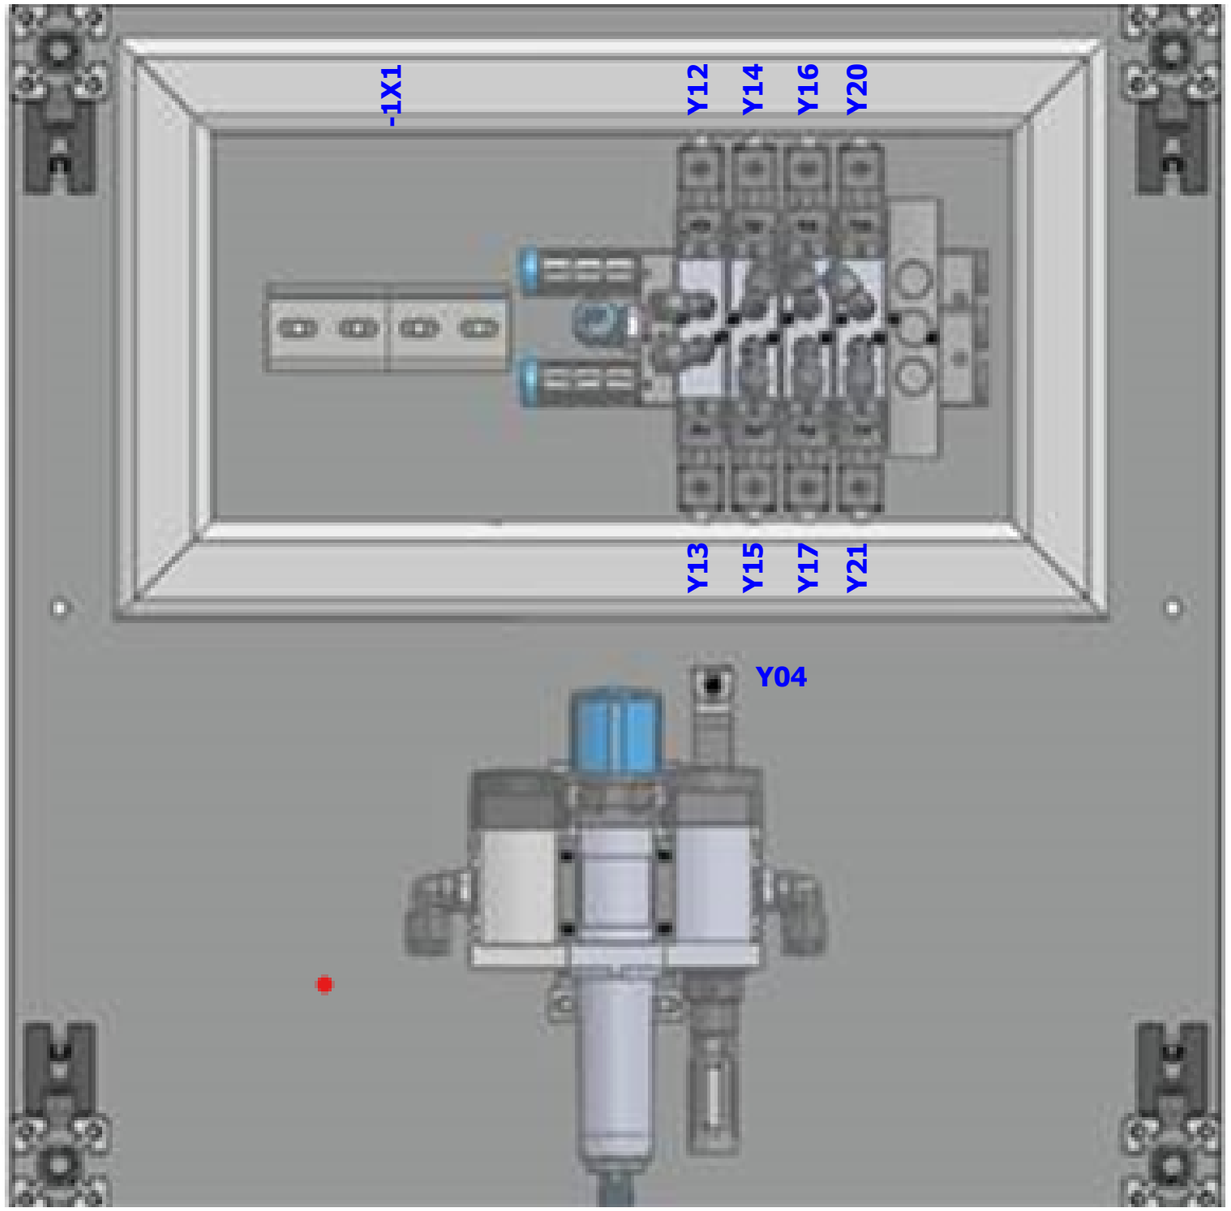


TAG NO	DESCRIPTION
Y04	SHUT OFF VALVE
Y12	CLAMPING CYL1 FWD SOL
Y13	CLAMPING CYL1 REV SOL
Y14	CLAMPING CYL2 FWD SOL
Y15	CLAMPING CYL2 REV SOL
Y16	SPARE VALVE
Y17	SPARE VALVE
Y20	SPARE VALVE
Y21	SPARE VALVE
-1X1	BMELES2970 TERMINAL BLOCK 2.5 SQ MM 2 IN 2 OUT CXDL2.5;

PNEUMATIC TERMINAL BLOCK

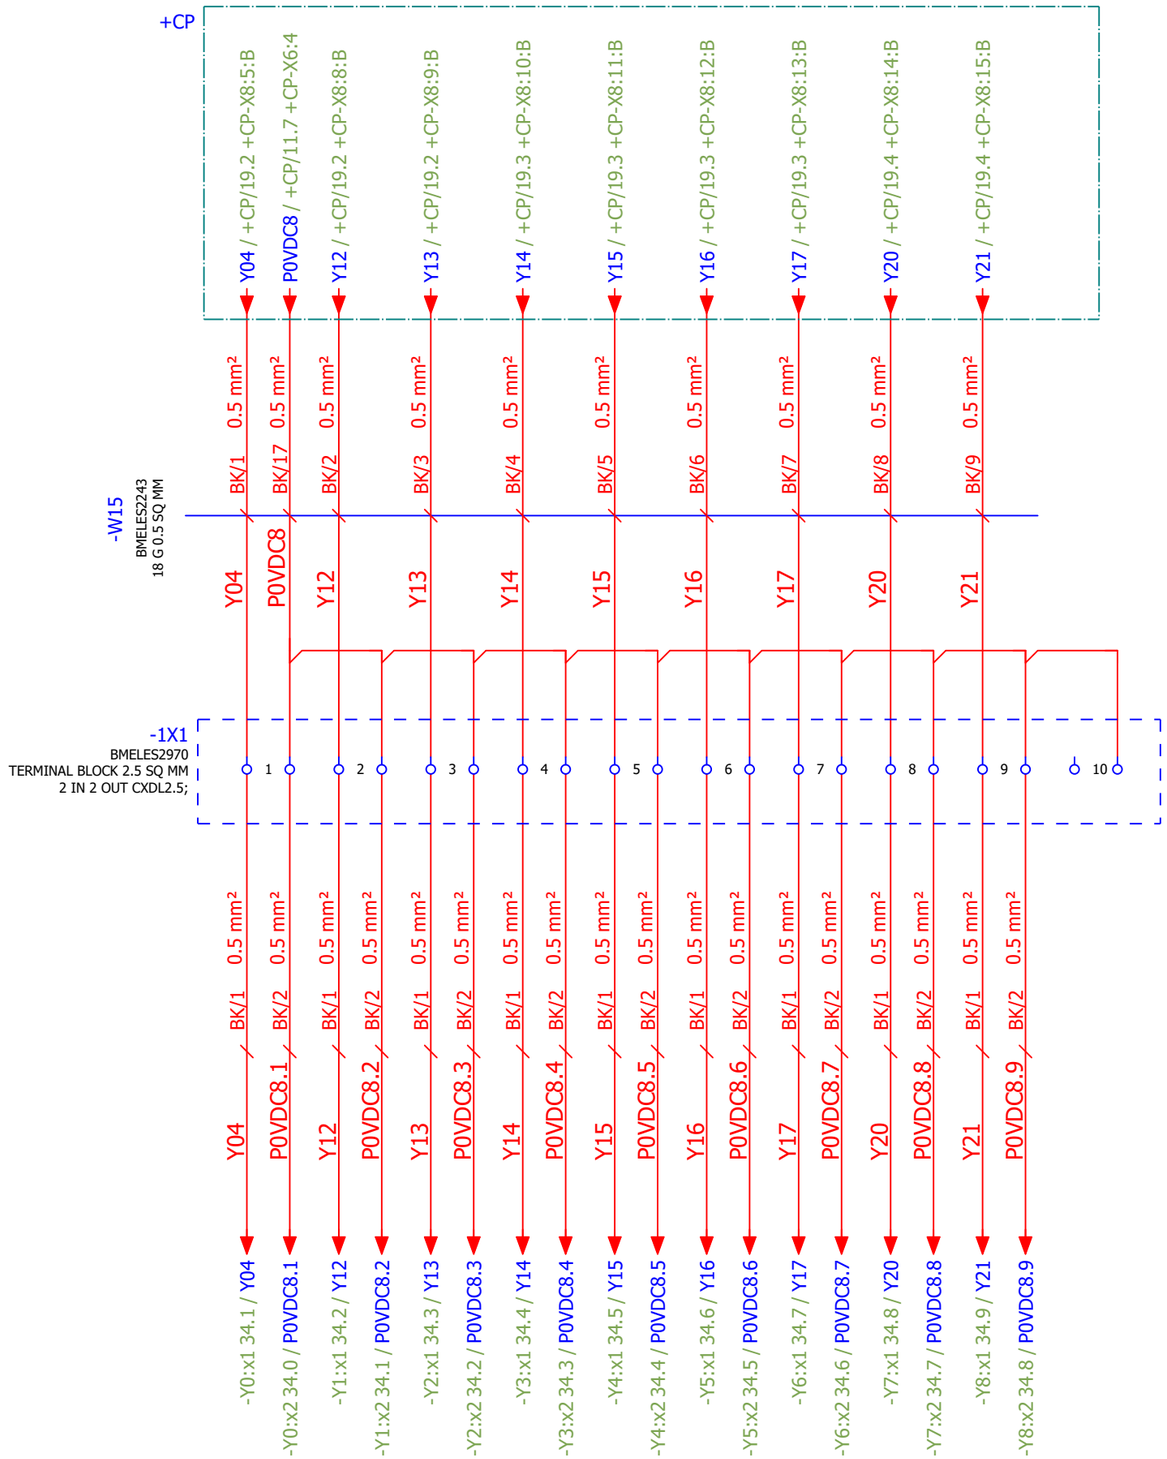


REVISION			Date	10-04-2024	ROBIS	Motherson Automotive & Technology engineering	PNEUMATIC TERMINAL BLOCK		=
			Ed.	MANORAJ.SELVARAJ					+ PP
			Appr.		S220 HL HV & LV TOP LG & BOTTOM LG ASSY WITH HOUSING ONLINE STATION-4			FMSPM00863	Page 33
Modification	Date	Name	Original		Replacement of	Replaced by			Page 33 / 34


SHUT OFF VALVE

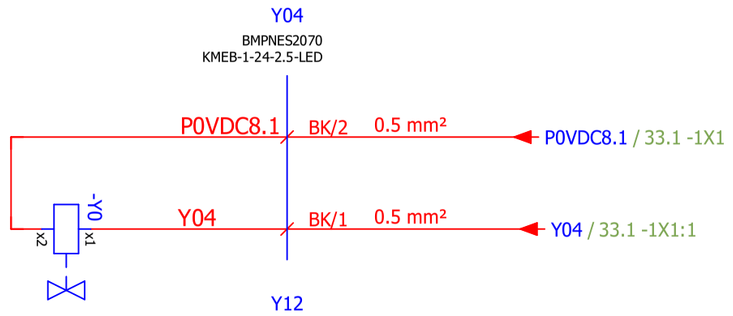


CLAMP CYL 1 FWD SOL

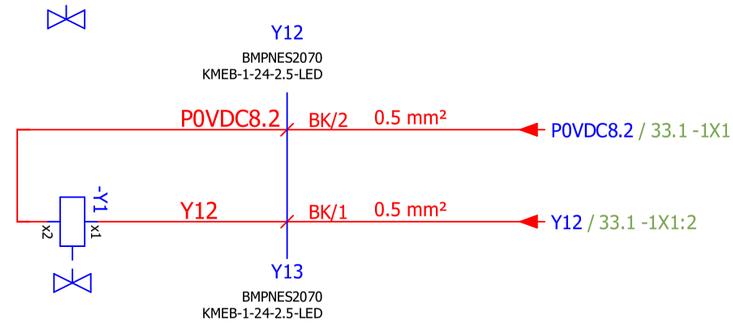


CLAMP CYL 1 REV SOL

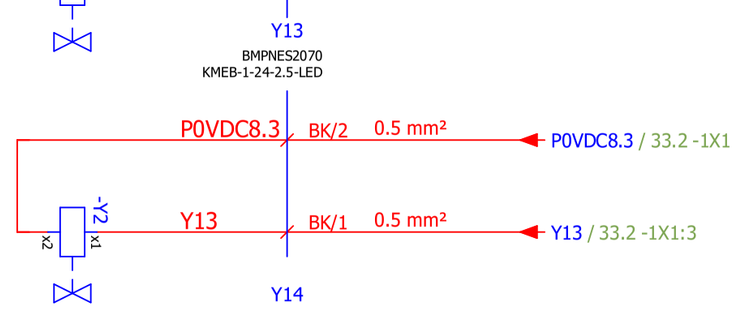


CLAMP CYL 2 FWD SOL

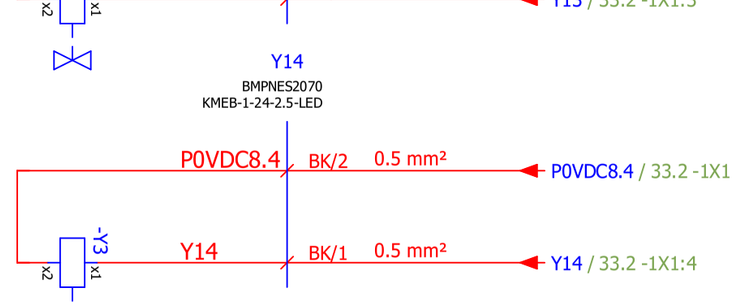


CLAMP CYL 2 REV SOL

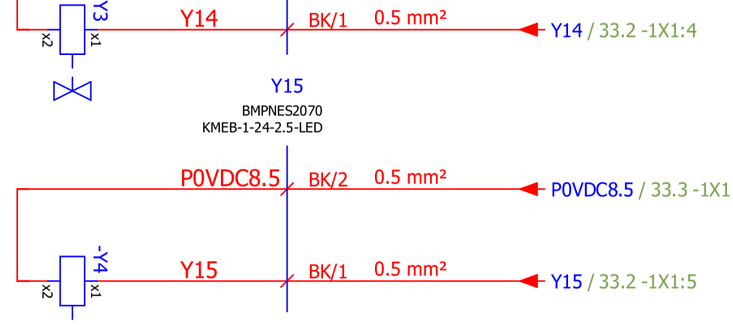


SPARE VALVE

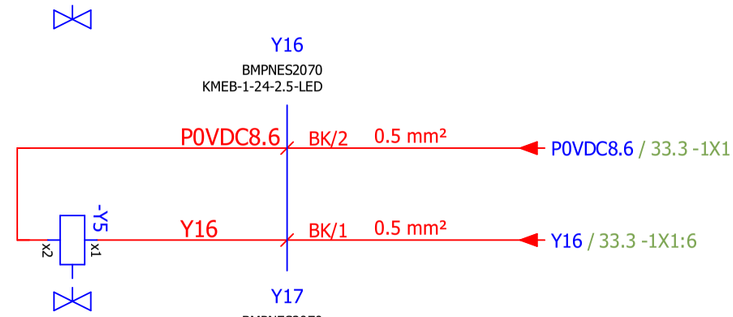


SPARE VALVE

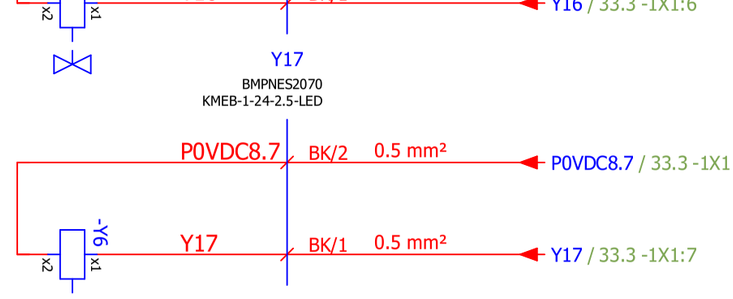

SPARE VALVE

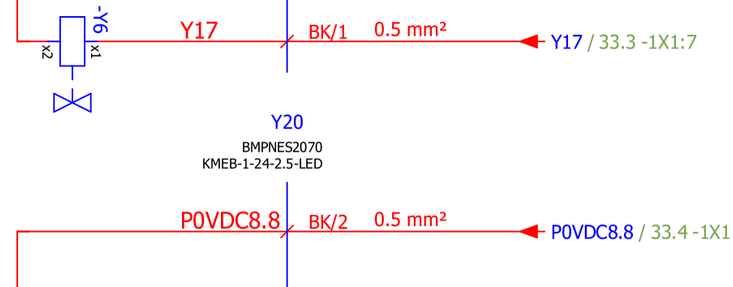

SPARE VALVE

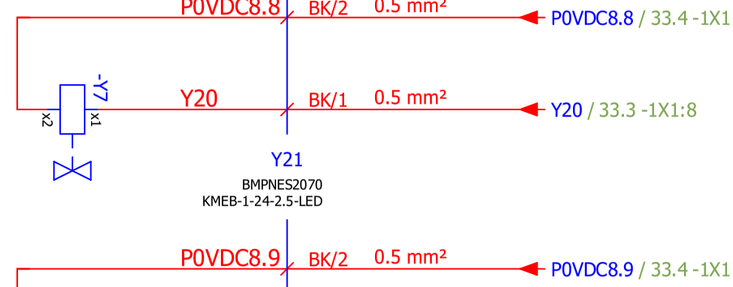

CYLINDER INTERFACE