Isolation Resistors for Critical Signals

PA.3- R1 0 DNC PA.3_LFXIN

PA.4- R2 0 DNC PA.4_LFXOUT


PA.5- R3 0 DNC PA.5_HFXIN

PA.6- R4 0 DNC PA.6_HFXOUT

3.3V pullup for open-drain IOs

PA.0 R7 2.20k 3V3

PA.1 R8 2.20k 3V3

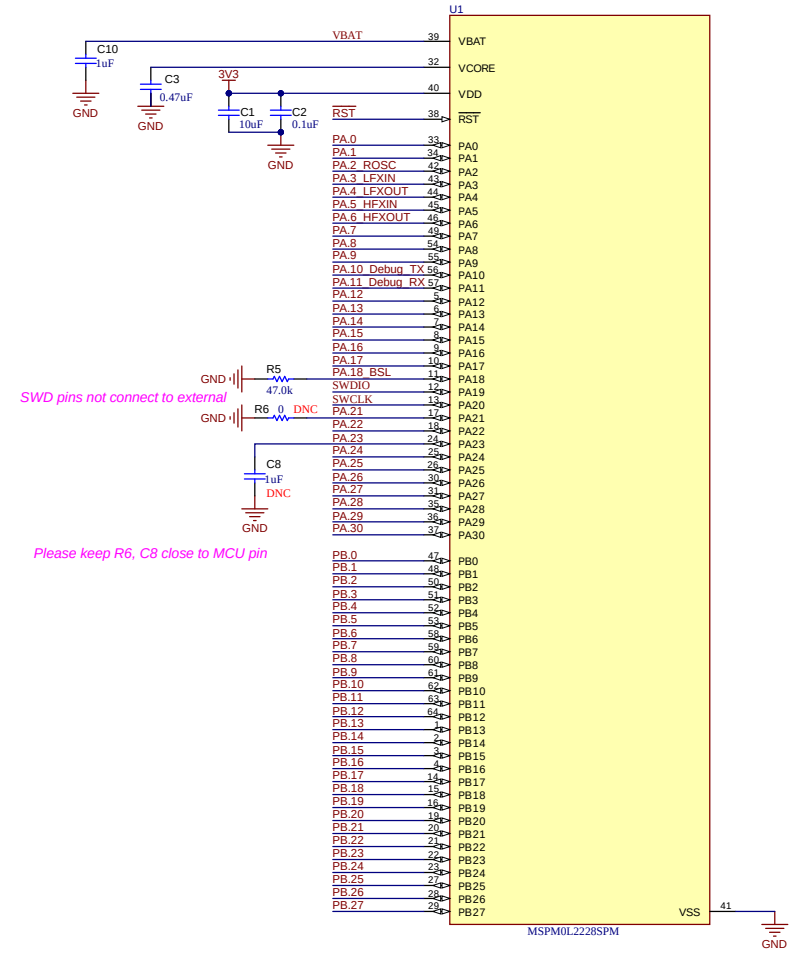

FID1 Fiducial FID2 Fiducial FID3 Fiducial

CE Mark

PCB LOGO Texas Instruments


PCB LOGO FCC disclaimer

PCB LOGO WEEE logo

PCB LOGO ESD Susceptible

SH-J1 VDD:VBAT

Crystals

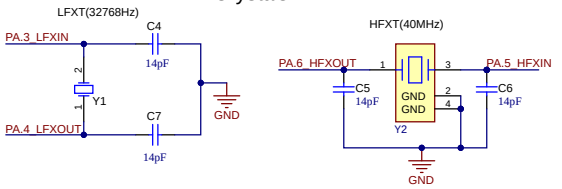

ROSC


PA.2_ROSC R9 100k GND

Please keep R9 close to MCU pin


Debugger connector




Pin connector

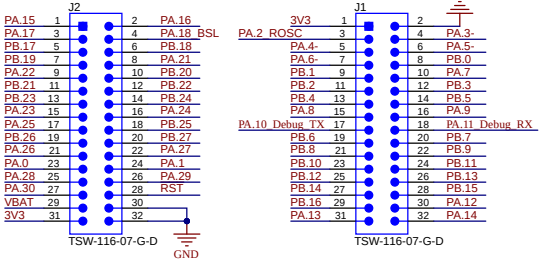


Reset switch



General purpose switch



LEDs



Orderable:		Designed for: Public Release	Mod. Date: 2025/8/4
TID #: N/A		Project Title: Change in menu Project|Project Options|Parameters	
Number: XXX###	Rev: E1	Sheet Title: MSPM0G3507	
SVN Rev: Not in version control		Assembly Variant: [No Variations]	Sheet: 1 of 1
Drawn By: Johnson He		File: MSP-LITO-MSPM0L2228.SchDoc	Size: B
Engineer: Enter name of project lead		Contact: http://www.ti.com/support	

Texas Instruments and/or its licensors do not warrant the accuracy or completeness of this specification or any information contained therein. Texas Instruments and/or its licensors do not warrant that this design will meet the specifications, will be suitable for your application or fit for any particular purpose, or will operate in an implementation. Texas Instruments and/or its licensors do not warrant that the design is production worthy. You should completely validate and test your design implementation to confirm the system functionality for your application.

TEXAS INSTRUMENTS
http://www.ti.com
© Texas Instruments 2018

Comment	Description	Designator	Footprint	LibRef	Quantity
GRM188R60J106ME84	CAP, CERM, 10 uF, 6.3 V, +/- 20%, X5R, 0603	C1	0603	CMP-0007304-5	1
GRM155R61H104ME14D	CAP, CERM, 0.1 uF, 50 V, +/- 20%, X5R, 0402	C2	0402	CMP-0006614-2	1
GRM155R60J474KE19D	CAP, CERM, 0.47 uF, 6.3 V, +/- 10%, X5R, 0402	C3	0402	CMP-0006551-2	1
GCQ1555C1H140JB01D	CAP, CERM, 14 pF, 50 V,+/- 5%, C0G/NP0, AEC-Q200 Grade 1, 0402	C4, C5, C6, C7	0402	CMP-0860834-1	4
GRM155R61E105KA12D	CAP, CERM, 1 uF, 25 V, +/- 10%, X5R, 0402	C8, C10	0402	CMP-0006608-2	2
GRM155R71E103KA01D	CAP, CERM, 0.01 uF, 25 V, +/- 10%, X7R, 0402	C9	0402	CMP-0006658-2	1
SML-D12U1WT86	LED, Red, SMD	D1, D2	LED_SMLD12_RED	CMP-0086209-1	2
Fiducial	Fiducial mark. There is nothing to buy or mount.	FID1, FID2, FID3	Fiducial10-20	CMP-0077181-1	3
TSW-116-07-G-D	Header, 100mil, 16x2, Gold, TH	J1, J2	TSW-116-07-G-D	CMP-0075429-1	2
PEC08SAAN	Header, 100mil, 8x1, Tin, TH	J3	SULLINS_PEC08SAAN	CMP-0054563-1	1
RC0402FR-0747KL	RES, 47.0 k, 1%, 0.0625 W, 0402	R5, R12	0402	CMP-0026737-1	2
RC0402FR-072K2L	RES, 2.20 k, 1%, 0.063 W, 0402	R7, R8	0402	CMP-0026729-1	2
RG1005P-104-B-T5	RES, 100 k, 0.1%, 0.063 W, 0402	R9	0402	CMP-0026815-1	1
RC0402FR-071KL	RES, 1.00 k, 1%, 0.0625 W, 0402	R10, R11	0402	CMP-0026725-1	2
TL1015AF160QG	Switch, Tactile, SPST-NO, 0.05A, 12V, SMT	S1, S2	SW_TL1015AF160QG	CMP-0002143-3	2
SNT-100-BK-G	Shunt, 100mil, Gold plated, Black	SH-J1	SNT-100-BK-G	CMP-0003623-3	1
MSPM0L2228SPM	Mixed-Signal Microcontroller, LQFP64	U1	PM0064A-MFG	CMP-0121756-1	1
X1A0001410014	Crystal, 32.768 KHz, 12.5 pF, SMD	Y1	Epson_FC-135	CMP-0004693-3	1
X1E0000210179	Crystal 40MHz ±10ppm (Tol) ±20ppm (Stability) 12pF FUND 40Ohm 4-Pin Mini-CSMD T/R	Y2	FP-X1E0000210179_TSX-3225-MFG	CMP-0098168-2	1