

Single Fiber Fusion Splicer 98S Core Alignment



Innovation at your fingertips

Core Alignment Fusion Splicer 98S

Faster, easier, changing the field

98S Specification

Item		Specification	
Fiber alignment method		Active core alignment	
Fiber count can be spliced		Single fiber	
Applicable fiber	Fiber type	Single mode optical fiber	
		Multi mode optical fiber	
	Cladding dia.	80 to 150μm	
Applicable coating	Sheath clamp	Coating dia.: Max. 3,000μm Cleave length : 5 to 16mm *1	
	Fiber holder	Coating dia. : Refer to options Cleave length : Approx. 10mm	
Fiber splice performance	Splice loss	ITU- T G.652 : Avg. 0.02dB	
		ITU- T G.651 : Avg. 0.01dB	
		ITU- T G.653 : Avg. 0.04dB	
		ITU- T G.654 : Avg. 0.04dB	
		ITU- T G.655 : Avg. 0.04dB	
		ITU- T G.657 : Avg. 0.02dB	
	Splice time	SM FAST mode : Avg. 7 sec	
Applicable protection sleeve	Sleeve type	Heat shrinkable sleeve	
	Sleeve length	Max. 66mm	
	Sleeve die	Max.6.0mm before shrinking	
Sleeve heat performance	Heat Time	60mm slim mode : Avg. 5 to 10sec. 60mm mode : Avg. 8 to 15sec.	
Fiber tensile test force		Approx. 2.0N	
Electrode life		Approx. 6,000 splices	
Physical discription	Dimensions	157mm (W) 178mm (D) 171mm (H)	
	Weight	Approx. 2.7kg including battery	
Environmental condition	Temperature	Operate : -10 to 50°C Storage : - 40 to 80°C	
	Humidity	Operate : 0 to 95% RH non - condensing Storage : 0 to 95% RH non - condensing	
		Altitude	Max. 5,000m
Display	LCD monitor	TFT 4.95 inches with touch screen	
	Magnification	Approx. 320x	
Illumination	V - grooves	LED lamp	
Interface	PC	USB2.0 Type C (USB PD is available) USB 3.0 is unavailable for communication Only Power receiving function is available for PD	
		External LED lamp	USB 2.0 A type Approx DC5V, 500mA
		Ribbon Stripper	Mini DIN 6pin DC12V,max 1A
	Wireless	Bluetooth 5.2 LE	
Data storage	Splice mode	100 splice modes	
	Heat mode	30 Heat modes	
	Splice result	20,000 splices	
	Splice image	100 images	
AC adaptor	Input	AC100 to 240V, 50/60Hz, Max. 1.5A	
	Output	Approx. DC 12V, Max. 5A	
External Input	Input	DC10-15V, Max. 7A	
Battery Pack	Type	Rechargeable Lithium Ion	
	Output	Approx. DC14.4V, 6,380mAh	
	Capacity	Approx. 300 splice and heat cycles	
	Recharge	4 to 6 hours from empty	
	Battery life	Approx. 500 recharge cycles	
Other features	Automatic functions	Fully Automatic cleaver blade mangement Wind protector : open and close Sheath clamp : open Heater lid : open and close	
		Special splice	Attenuation splice
		Electrode	Replaceable without tool
		Software update	Splice firmware update via internet

User-friendly features

GPS


Location information acquired via GPS at the time of splicing is saved in memory. It helps with daily workflow management.

Simultaneous Optical fiber preparation.




Stripping

The single fiber stripper SS05 can strip two optical fibers at the same time



Cleaving

The optical fiber cleaver CT60 can cleave two optical fibers simultaneously.




Setting

When setting the optical fibers, the clamp cover closes automatically, allowing two optical fibers to be set simultaneously.

Adjustable lever opening angles

By adjusting the lever opening angle, it is easy to use in various situations, whether on a tabletop or handheld.

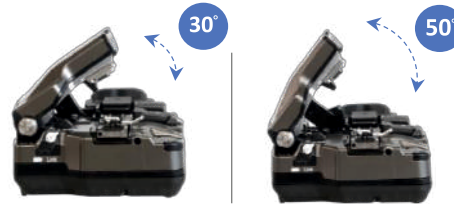

Optical fiber cleaver, CT60

Increased number of blade positions.

By increasing the number of blade positions from 16 to 28 compared to the previous model, no need for blade height adjustment anymore

28 Positions



Blade CB 10

Linked with smartphone app



With the app Splice+, you can view the location information and splice results.

Additionally, it equipped with a locking function to prevent theft.




DOWNLOAD ⇒

use with advanced fusion splicers.

Simplified optical fiber set using the finger placement guide


A V-shaped guide has been added to the optical fiber setting area. By aligning your finger with the guide, it has become easier to place the optical fiber accurately.

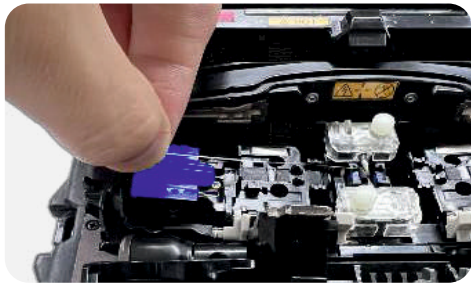

Finger placement guide

Expanded allowable range for optical fiber setting


It is possible to splice even when the optical fiber tip extend beyond the electrode.

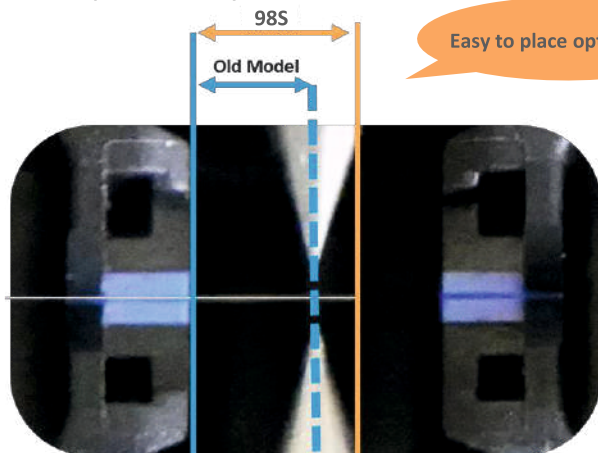

Easy to place optical fibers

Wind protector with automatic open and close function

After setting the optical fiber, the wind protector closes automatically and opens automatically once the splicing process finishes.

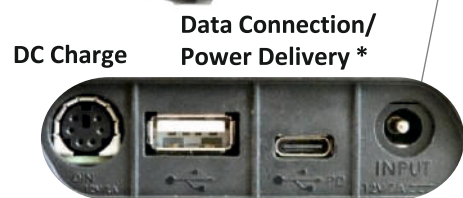


For external illumination

AC Adapter

Splice Coach function

Step-by-step instructions appear on the screen, allowing for seamless and confident work.



Compatible with mobile batteries*

Supports charging via standard mobile batteries, ensuring reliability even during sudden power loss.



Please confirm that any mobile battery connected to this product meets USB PD standards and adhere to the mobile battery's precautions. Do not use mobile batteries that are incompatible with this machine.


Not just ease of use.

Stable splicing quality with our standard features.



ACTIVE FUSION
CONTROL TECHNOLOGY

~For optimal arc conditions~

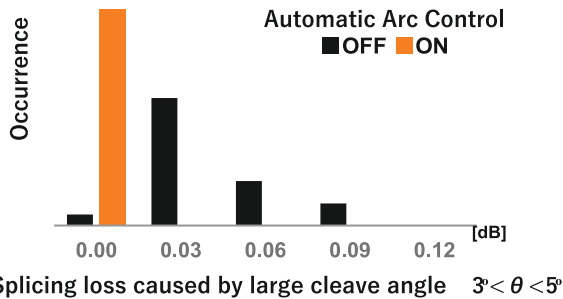


Optical fiber type and end-face condition are analyzed in real-time, and arc conditions are automatically adjusted for optimal performance. This ensures consistently low splice loss.



ACTIVE BLADE
MANAGEMENT TECHNOLOGY

~For optimal cleaving angle~

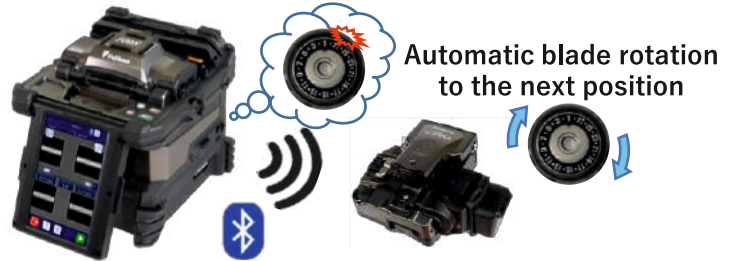

Detects blade worn position!

The blade condition is managed in real-time via Bluetooth. When worn position is detected, the blade automatically rotates to the next position, allowing work to be performed at the optimal position.


Standard Package

Item	Model	Qty
Core Alignment Fusion Splicer	98S	1pc
(1) Battery Pack *	BTR-19	1pc
(2) AC Adapter	ADC-22	1pc
(3) AC Power Cord	ACC-19	1pc
(4) USB Cable	USB-02	1pc
(5) Fusion Splicer Strap	ST-02	1pc
(6) Electrodes, for spare	ELCT2-16C	1pairs
(7) Fiber Holder Set Plate	SP-05	1pairs
(8) Carrying Case	CC-48	1pc
(9) Work Tray Left	WT-11L	1pc
(10) Work Tray Right	WT-11R	1pc
(11) Work Tray J-Plate	JP-11	1pc
(12) Tripod Screw (For splicer)	TS-04A	1pc
(13) Carrying Case Strap	ST-04	1pc
(14) Alcohol Dispenser	AP-02	1pc
(15) Instruction Manual	PDF file stored in Splicer	
Single Fiber Stripper	SS05	1pc
Optical Fiber Cleaver	CT60	1pc
(1) Fiber Scrap Collector	FDB-07	1pc
(2) Fiber Setting Plate	AD-60A	1pc
(3) Case, for cleaver	CC-49	1pc
(4) Hexagonal Wrench	HEX-01	1pc

*Please follow IATA regulation when shipping the battery by air.

Our after-sales service

Keith has a PAN India sales & service Network. We provide comprehensive after-sales services, this ensures our products maximum lifetime.

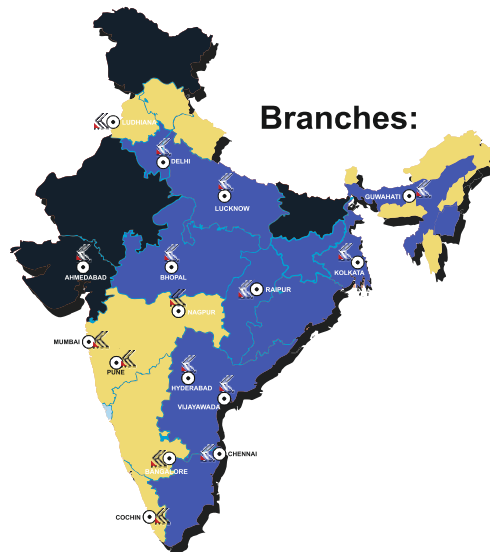

TOLL FREE NO. : 1800-1020-429

Keith Electronics Pvt. Ltd.

Arise Tower, C-117, 8th Floor, Naraina Industrial Area, Phase-I, New Delhi-110028, INDIA

Phone: +91-8800484008, 9312266960

E-mail: feedback@kepl.co.in, info@keithelectronics.com, Website: www.keithelectronics.com



BRANCHES:

Ahmedabad, Bangalore, Bhopal, Chennai, Cochin, Guwahati, Hyderabad, Kolkata, Lucknow, Ludhiana, Mumbai, Nagpur, Pune, Raipur, Vijayawada