61 Material™ Data Sheet

A high frequency NiZn ferrite developed for a range of inductive applications up to 25 MHz. This material is also used in EMI applications for suppression of noise frequencies above 200 MHz. Excellent stability characteristics.

Strong magnetic fields or excessive mechanical stresses may result in irreversible changes in permeability and losses.

Available in 61 material™:
EMI Suppression Beads
Beads On Leads
SM beads
Wound Beads
Multi-Aperture Cores
Round Cable Snap-Its
Toroids
Rods
Antenna/RFID
Rods
Round EMI Suppression Cores

61 Material™ Characteristics

We use cookies on our website to give you the most relevant experience by remembering your preferences and repeat visits. By clicking “Accept All”, you consent to the use of ALL the cookies. However, you may visit "Cookie Settings" to provide a controlled consent.

Cookie Settings Accept All


		mbol	Value
			125
			2500 15
			1000
			1.2
Loss Factor @ Frequency	10 MHz	Tan δ/ μ_i	90 10

Temperature Coefficient of Initial Permeability (20 -70°C)	%/°C		.10
Curie Temperature	°C	T_C	>300
Resistivity	ohm-cm	ρ	1×10^8


**** Characteristic curves are measured on standard Toroids (18/10/6 mm) at 25°C and 10 kHz unless otherwise indicated. Impedance characteristics are measured on standard shield beads (3.5/1.3/6.0 mm) unless otherwise indicated.

Material Safety Data Sheet (MSDS)


Click here to download Complex Permeability vs. Frequency (CSV)

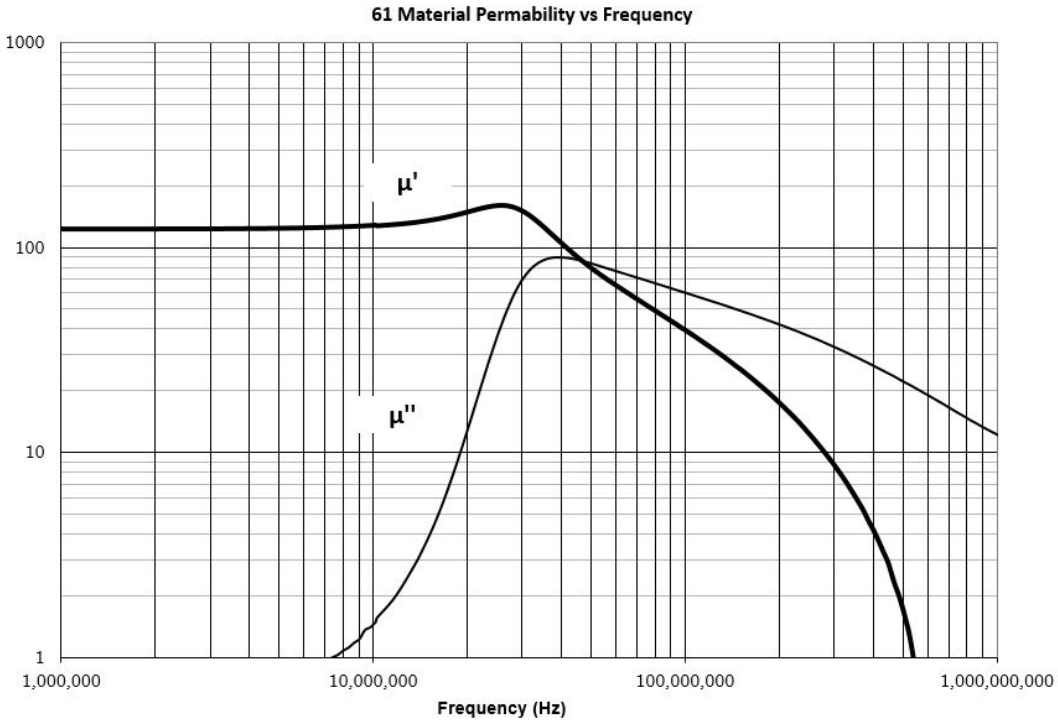

61 Material Permeability vs Temperature

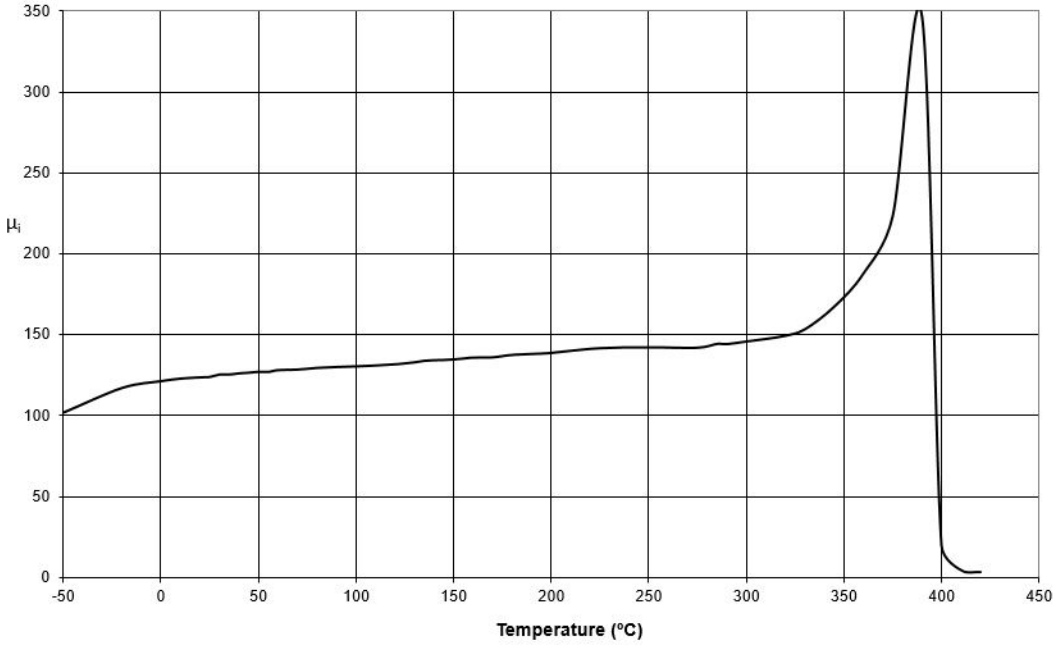


61 Material Hysterisis Loop

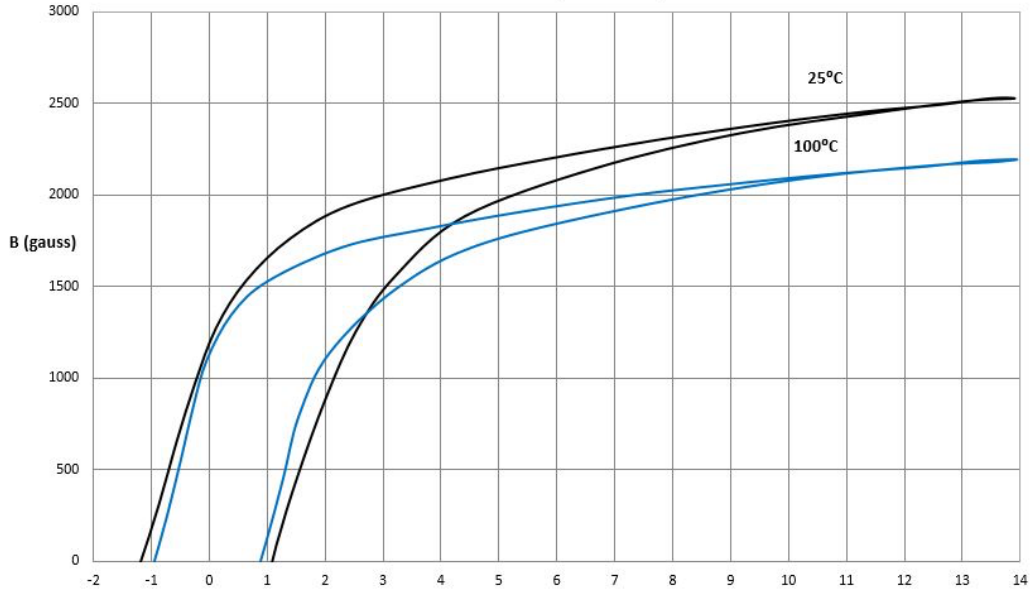


Measured on an 18/10/6mm toroid @10kHz


61 Material Flux Density vs Temperature

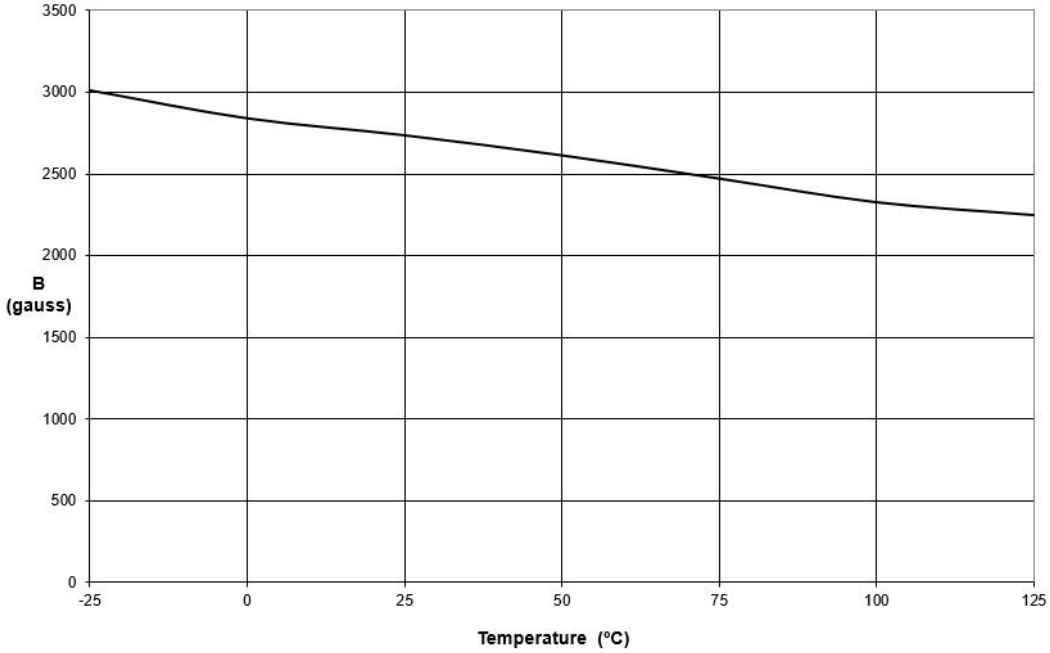



61 Material Incremental Permeability vs Field Strength

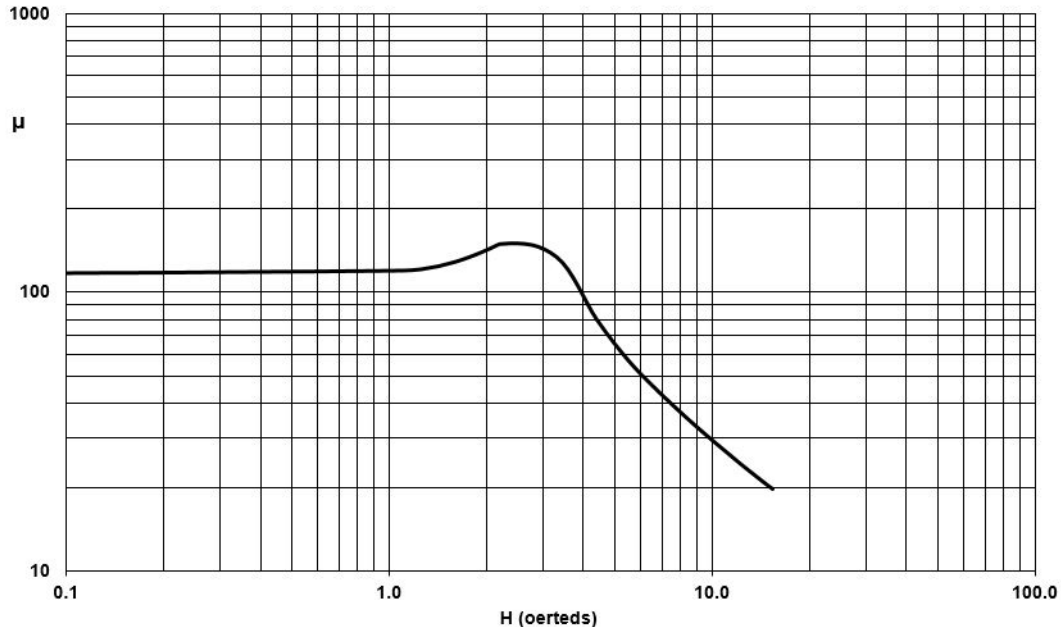



61 Material Amplitude Permeability at 10kHz

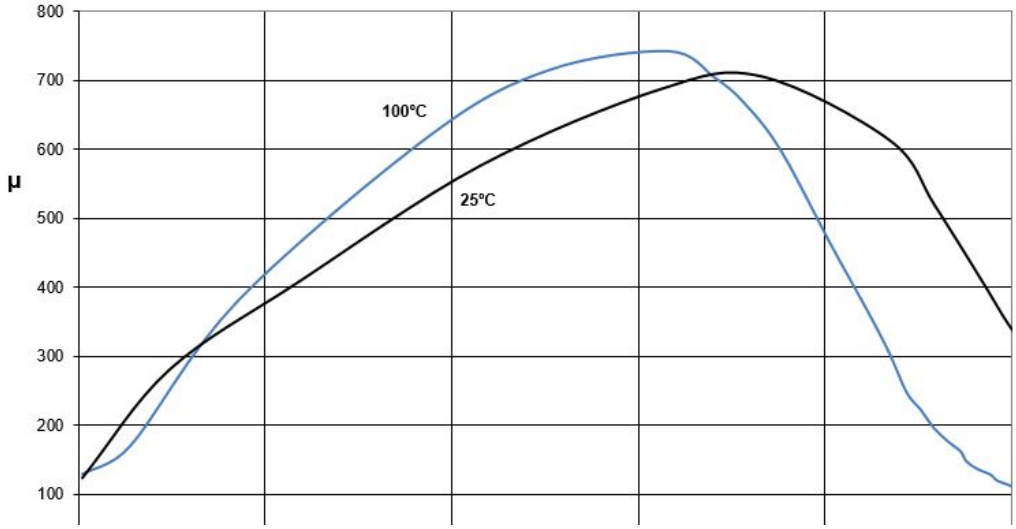




0
0
500
1000
1500
2000
2500
B (gauss)

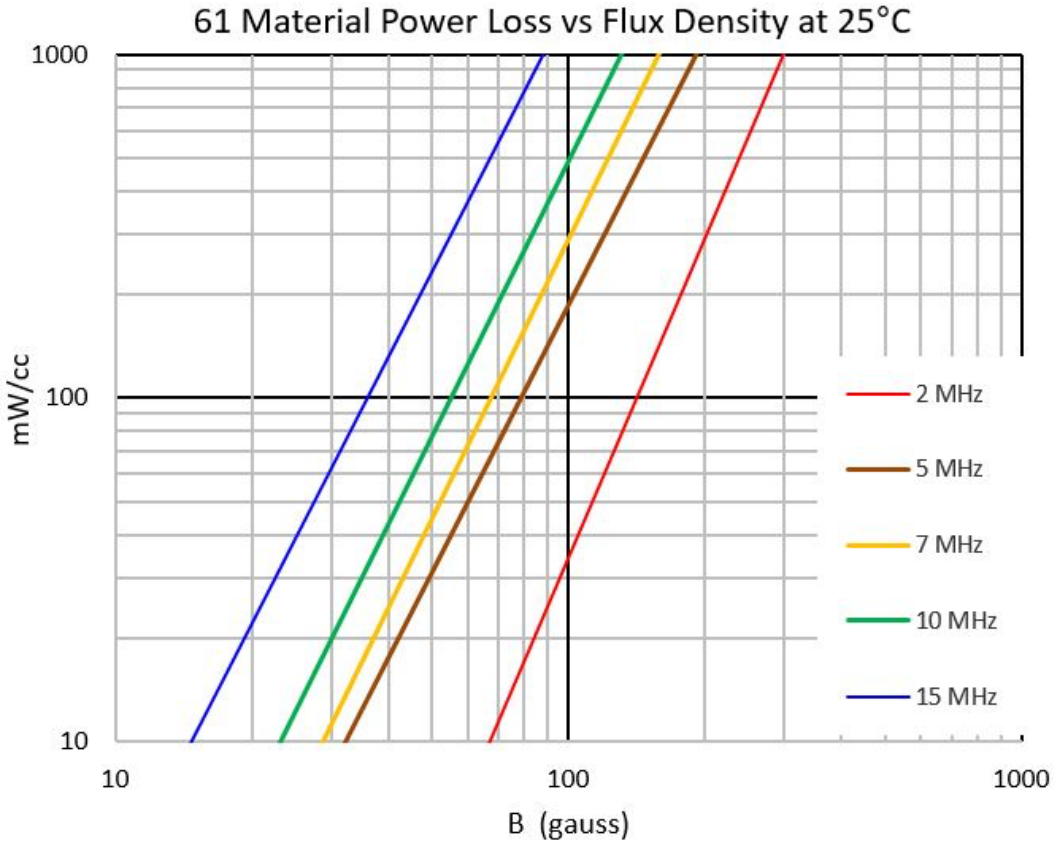

61 Material Power Loss vs Flux Density at 25°C
1000
100
10
mW/cc
10
100
1000
B (gauss)
2 MHz
5 MHz
7 MHz
10 MHz
15 MHz

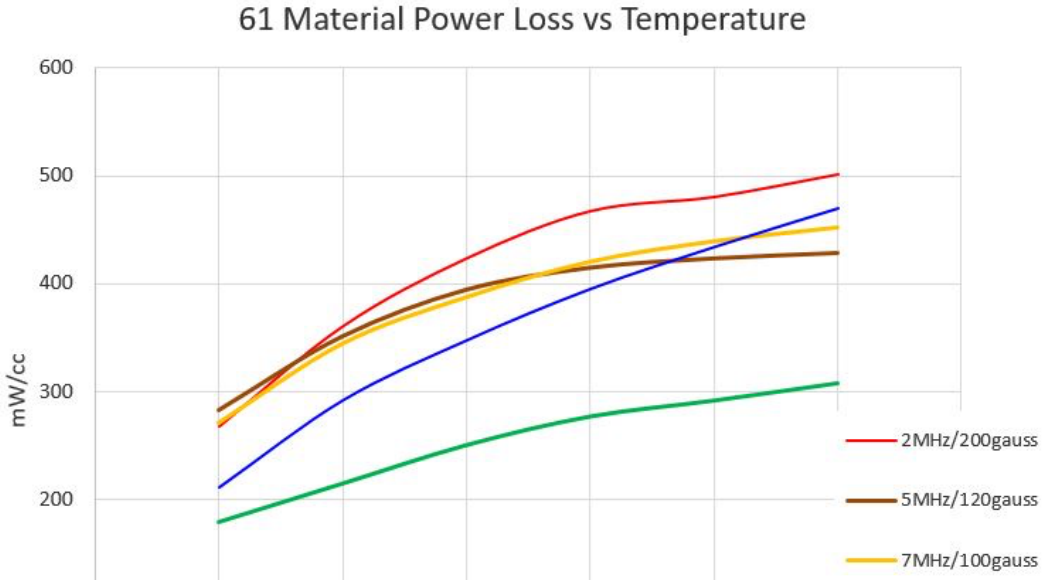
61 Material Power Loss vs Temperature
600
500
400
300
200
mW/cc
2MHz/200gauss
5MHz/120gauss
7MHz/100gauss

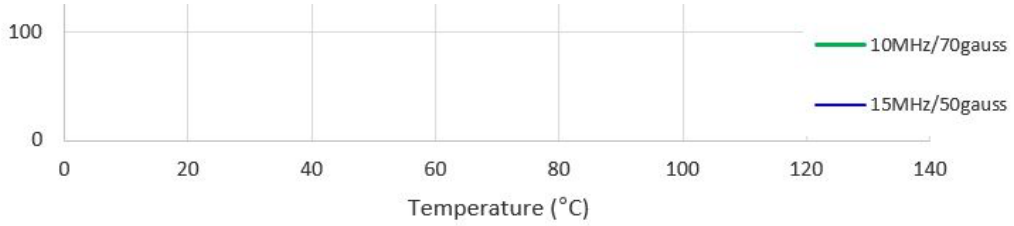
100
0
10MHz/70gauss
15MHz/50gauss
0
20
40
60
80
100
120
140
Temperature (°C)

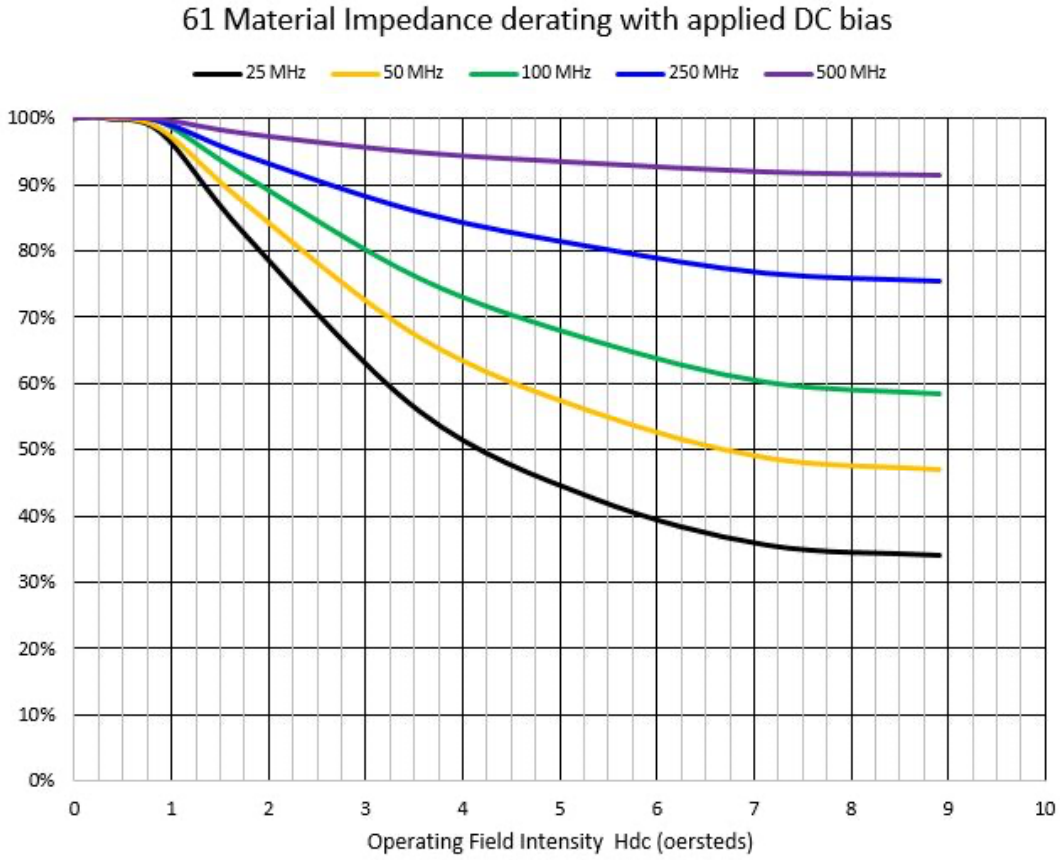
61 Material Impedance derating with applied DC bias
25 MHz
50 MHz
100 MHz
250 MHz
500 MHz
100%
90%
80%
70%
60%
50%
40%
30%
20%
10%
0%
0
1
2
3
4
5
6
7
8
9
10
Operating Field Intensity Hdc (oersteds)

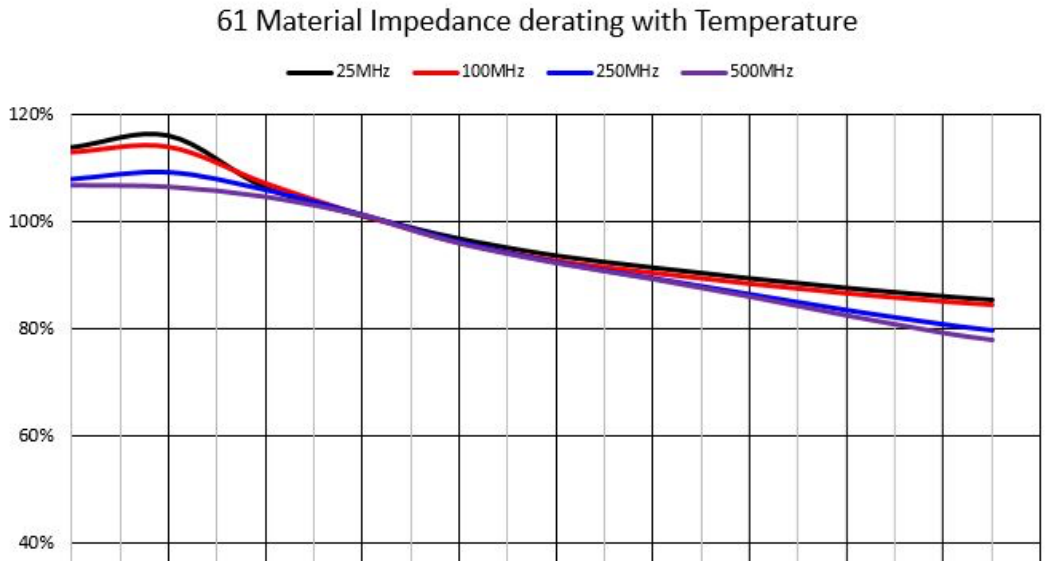
61 Material Impedance derating with Temperature
25MHz
100MHz
250MHz
500MHz
120%
100%
80%
60%
40%

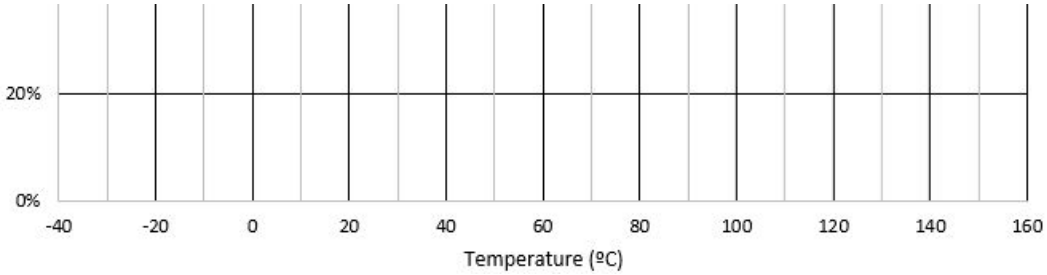

Click here to download 61 Material Power Loss Density vs. Flux Density at 25°C

PRODUCTS

Product Selection Tool

Engineering Kits

Check Stock

REQUEST INFORMATION

Request a Quote

Request a Sample

Request a Catalog

Ask the Advisor

CONTACT US

888.824.7748

ferrites@fair-rite.com

One Commercial Row

Wallkill, NY 12589-0288

CAPABILITIES

Production

Value Added Services

Prototyping

TECH RESOURCES

Calculators

Materials

USA Frequency Chart

FOLLOW US

©2026 Fair-Rite Products Corp. | 1.888.324.7748

Rep Login