
NTEK Testing Technology Co., Ltd.

Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an

Tel: (86)-0755-61156588 Fax: (86)-0755-61156599

## **Radiated Emission Measurement**

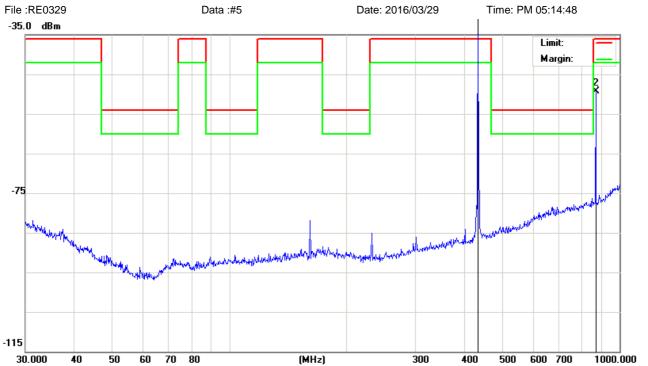

Site NTEK 9\*6\*6 Chamber #1

Limit: ETSI\_300328\_operating\_03M\_PK

EUT: 模块

M/N: LORA1278-433 Mode: WORKING

Note:

Polarization: Vertical

Power: AC 230V/50Hz

Distance: 3m

Temperature: 24

Humidity: 50 %

No.	Mk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree	Comment
1	*	434.0651	-30.06	15.21	-14.85	-36.00	21.15	peak			
2		869.1302	-72.95	23.63	-49.32	-36.00	-13.32	peak			

\*:Maximum data x:Over limit !:over margin


File: RE0329\Data: #5 Page: 1 Engineer Signature:

 $\label{eq:nterms} \textbf{NTEK Testing Technology Co., Ltd.}$ 

Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an

Tel: (86)-0755-61156588 Fax: (86)-0755-61156599



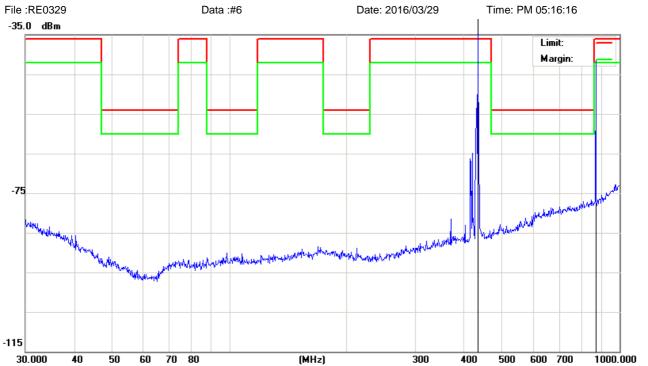

Site NTEK 9\*6\*6 Chamber #1

Limit: ETSI\_300328\_operating\_03M\_PK

EUT: 模块

M/N: LORA1278-433 Mode: WORKING

Note:

Polarization: *Horizontal*Power: AC 230V/50Hz

Distance: 3m

Temperature: 24

Humidity: 50 %

N	0.	MŁ	k. Fr	eq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
			M	Hz	dBm	dB	dBm	dBm	dB	Detector	cm	degree	Comment
	1	*	434.0	651	-30.03	15.21	-14.82	-36.00	21.18	peak			
	2	!	869.1	302	-65.17	23.63	-41.54	-36.00	-5.54	peak			

\*:Maximum data x:Over limit !:over margin


File: RE0329\Data:#6 Page: 1 Engineer Signature:

 $\label{eq:nterms} \textbf{NTEK Testing Technology Co., Ltd.}$ 

Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an

Tel: (86)-0755-61156588 Fax: (86)-0755-61156599

## **Radiated Emission Measurement**

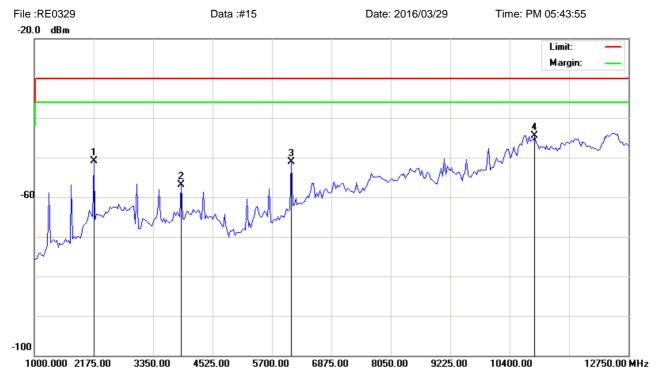

Site NTEK 9\*6\*6 Chamber #1

Limit: ETSI\_300328\_operating\_03M\_PK

EUT: 模块

M/N: LORA1278-433 Mode: WORKING

Note:

Polarization: *Horizontal* Temperature: 24

Power: AC 230V/50Hz Humidity: 50 %

Distance: 3m

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree	Comment
1	2	2175.000	-59.29	8.34	-50.95	-30.00	-20.95	peak			
2	(	3908.125	-64.65	7.84	-56.81	-30.00	-26.81	peak			
3	(	6081.875	-61.01	9.86	-51.15	-30.00	-21.15	peak			
4	* *	10899.37	-67.00	22.54	-44.46	-30.00	-14.46	peak			

\*:Maximum data x:Over limit !:over margin


File:RE0329\Data:#15 Page: 1 Engineer Signature:

NTEK Testing Technology Co., Ltd.

Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an

Tel: (86)-0755-61156588 Fax: (86)-0755-61156599

## **Radiated Emission Measurement**

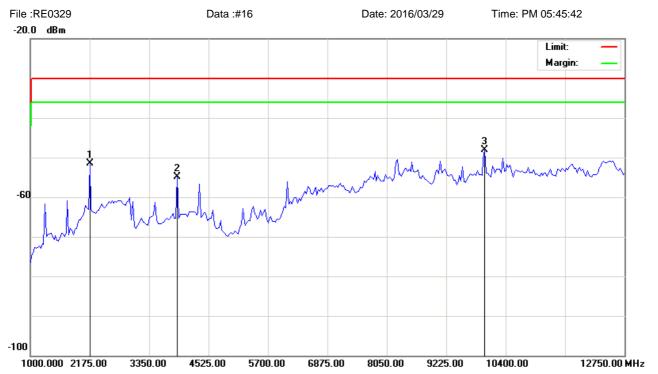

Site NTEK 9\*6\*6 Chamber #1

Limit: ETSI\_300328\_operating\_03M\_PK

EUT: 模块

M/N: LORA1278-433 Mode: WORKING

Note:

Polarization: Vertical Temperature: 24

Power: AC 230V/50Hz Humidity: 50 %

Distance: 3m

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree	Comment
1		2175.000	-59.71	8.30	-51.41	-30.00	-21.41	peak			
2		3908.125	-62.63	7.74	-54.89	-30.00	-24.89	peak			
3	*	9988.750	-63.08	15.02	-48.06	-30.00	-18.06	peak			

\*:Maximum data x:Over limit !:over margin

File: RE0329\Data:#16 Page: 1 Engineer Signature: