
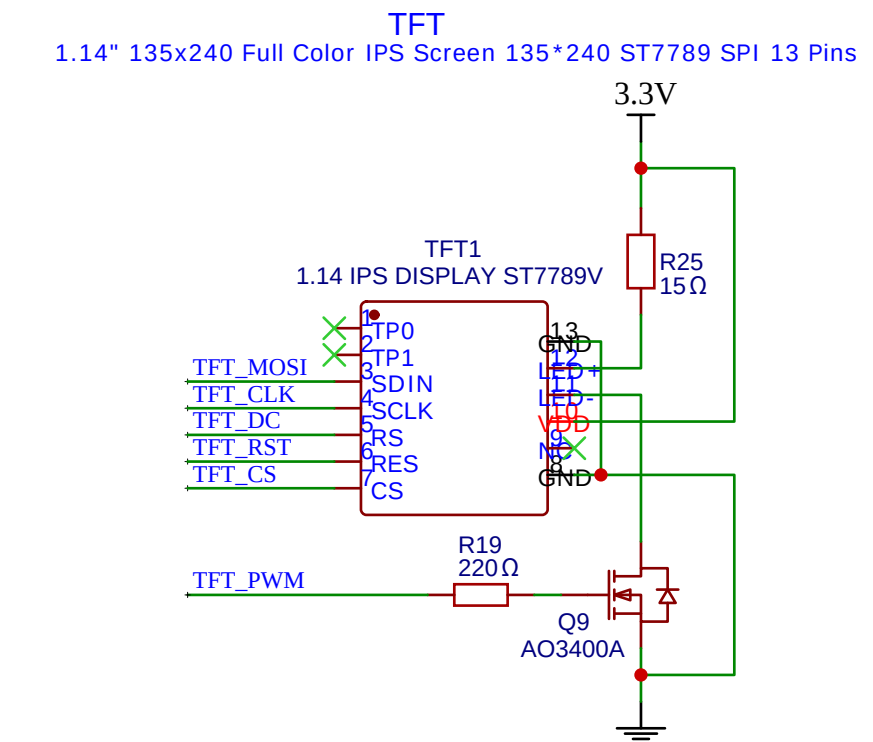
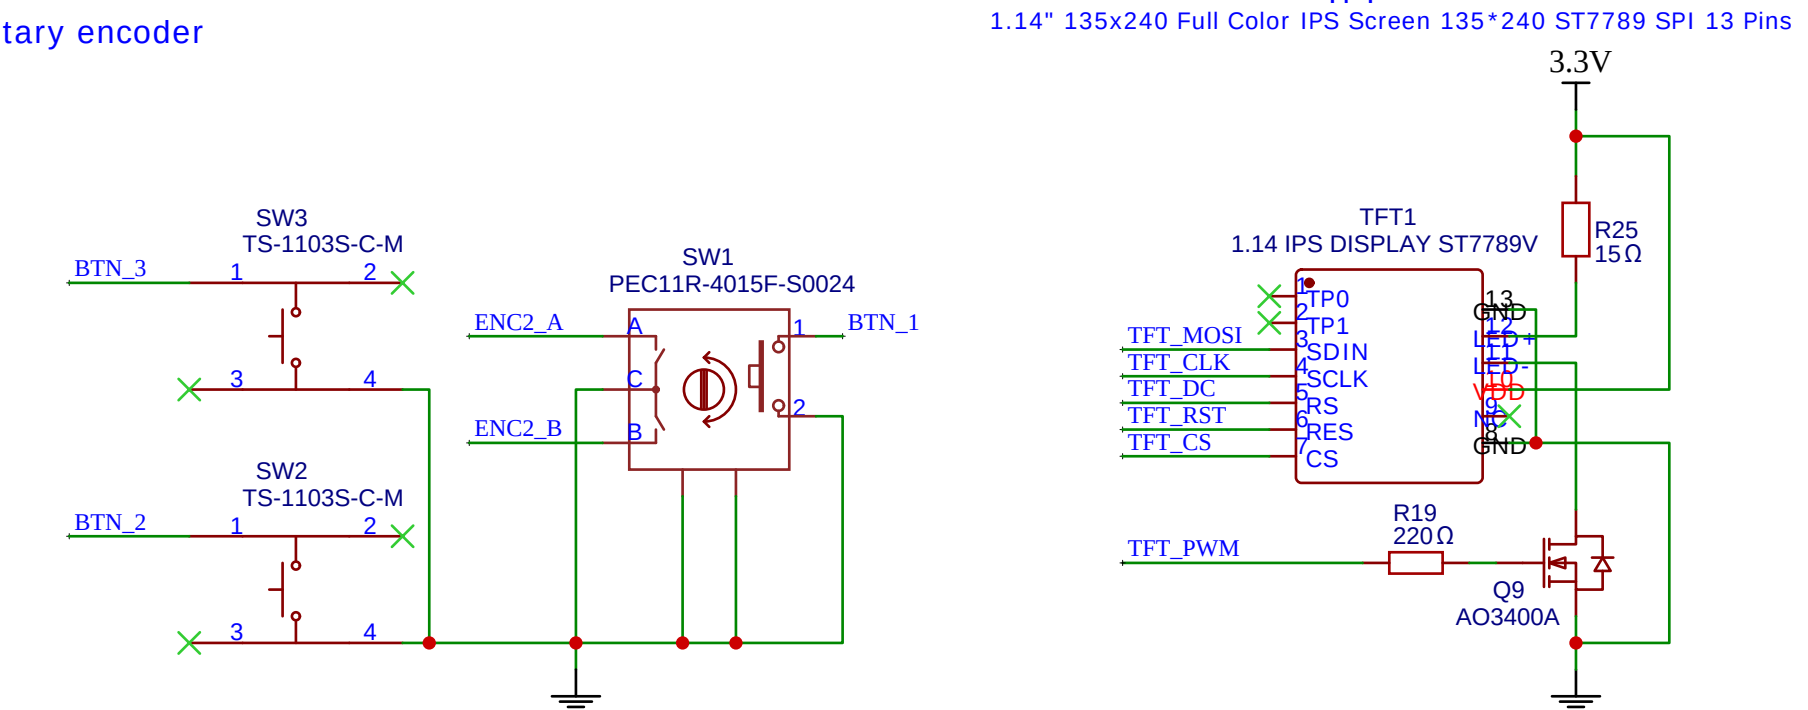
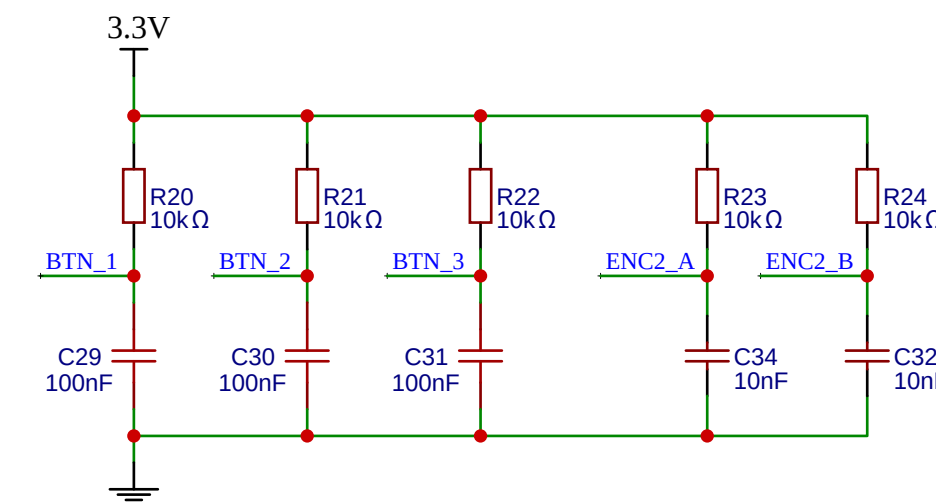
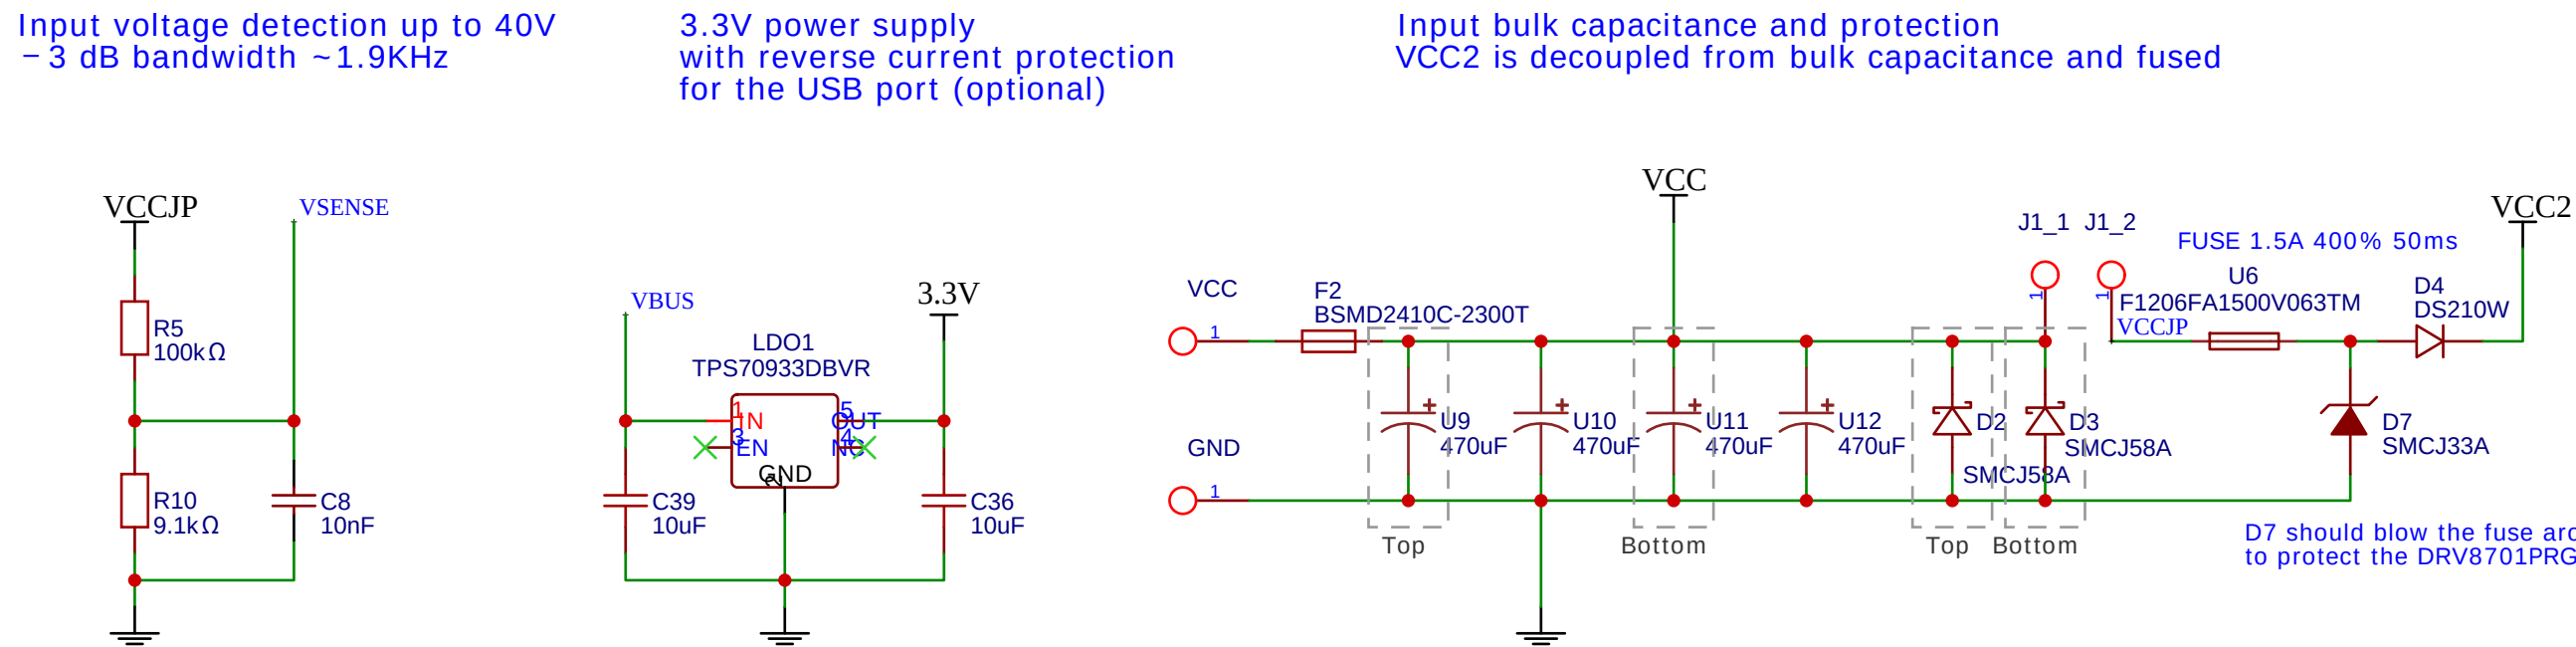
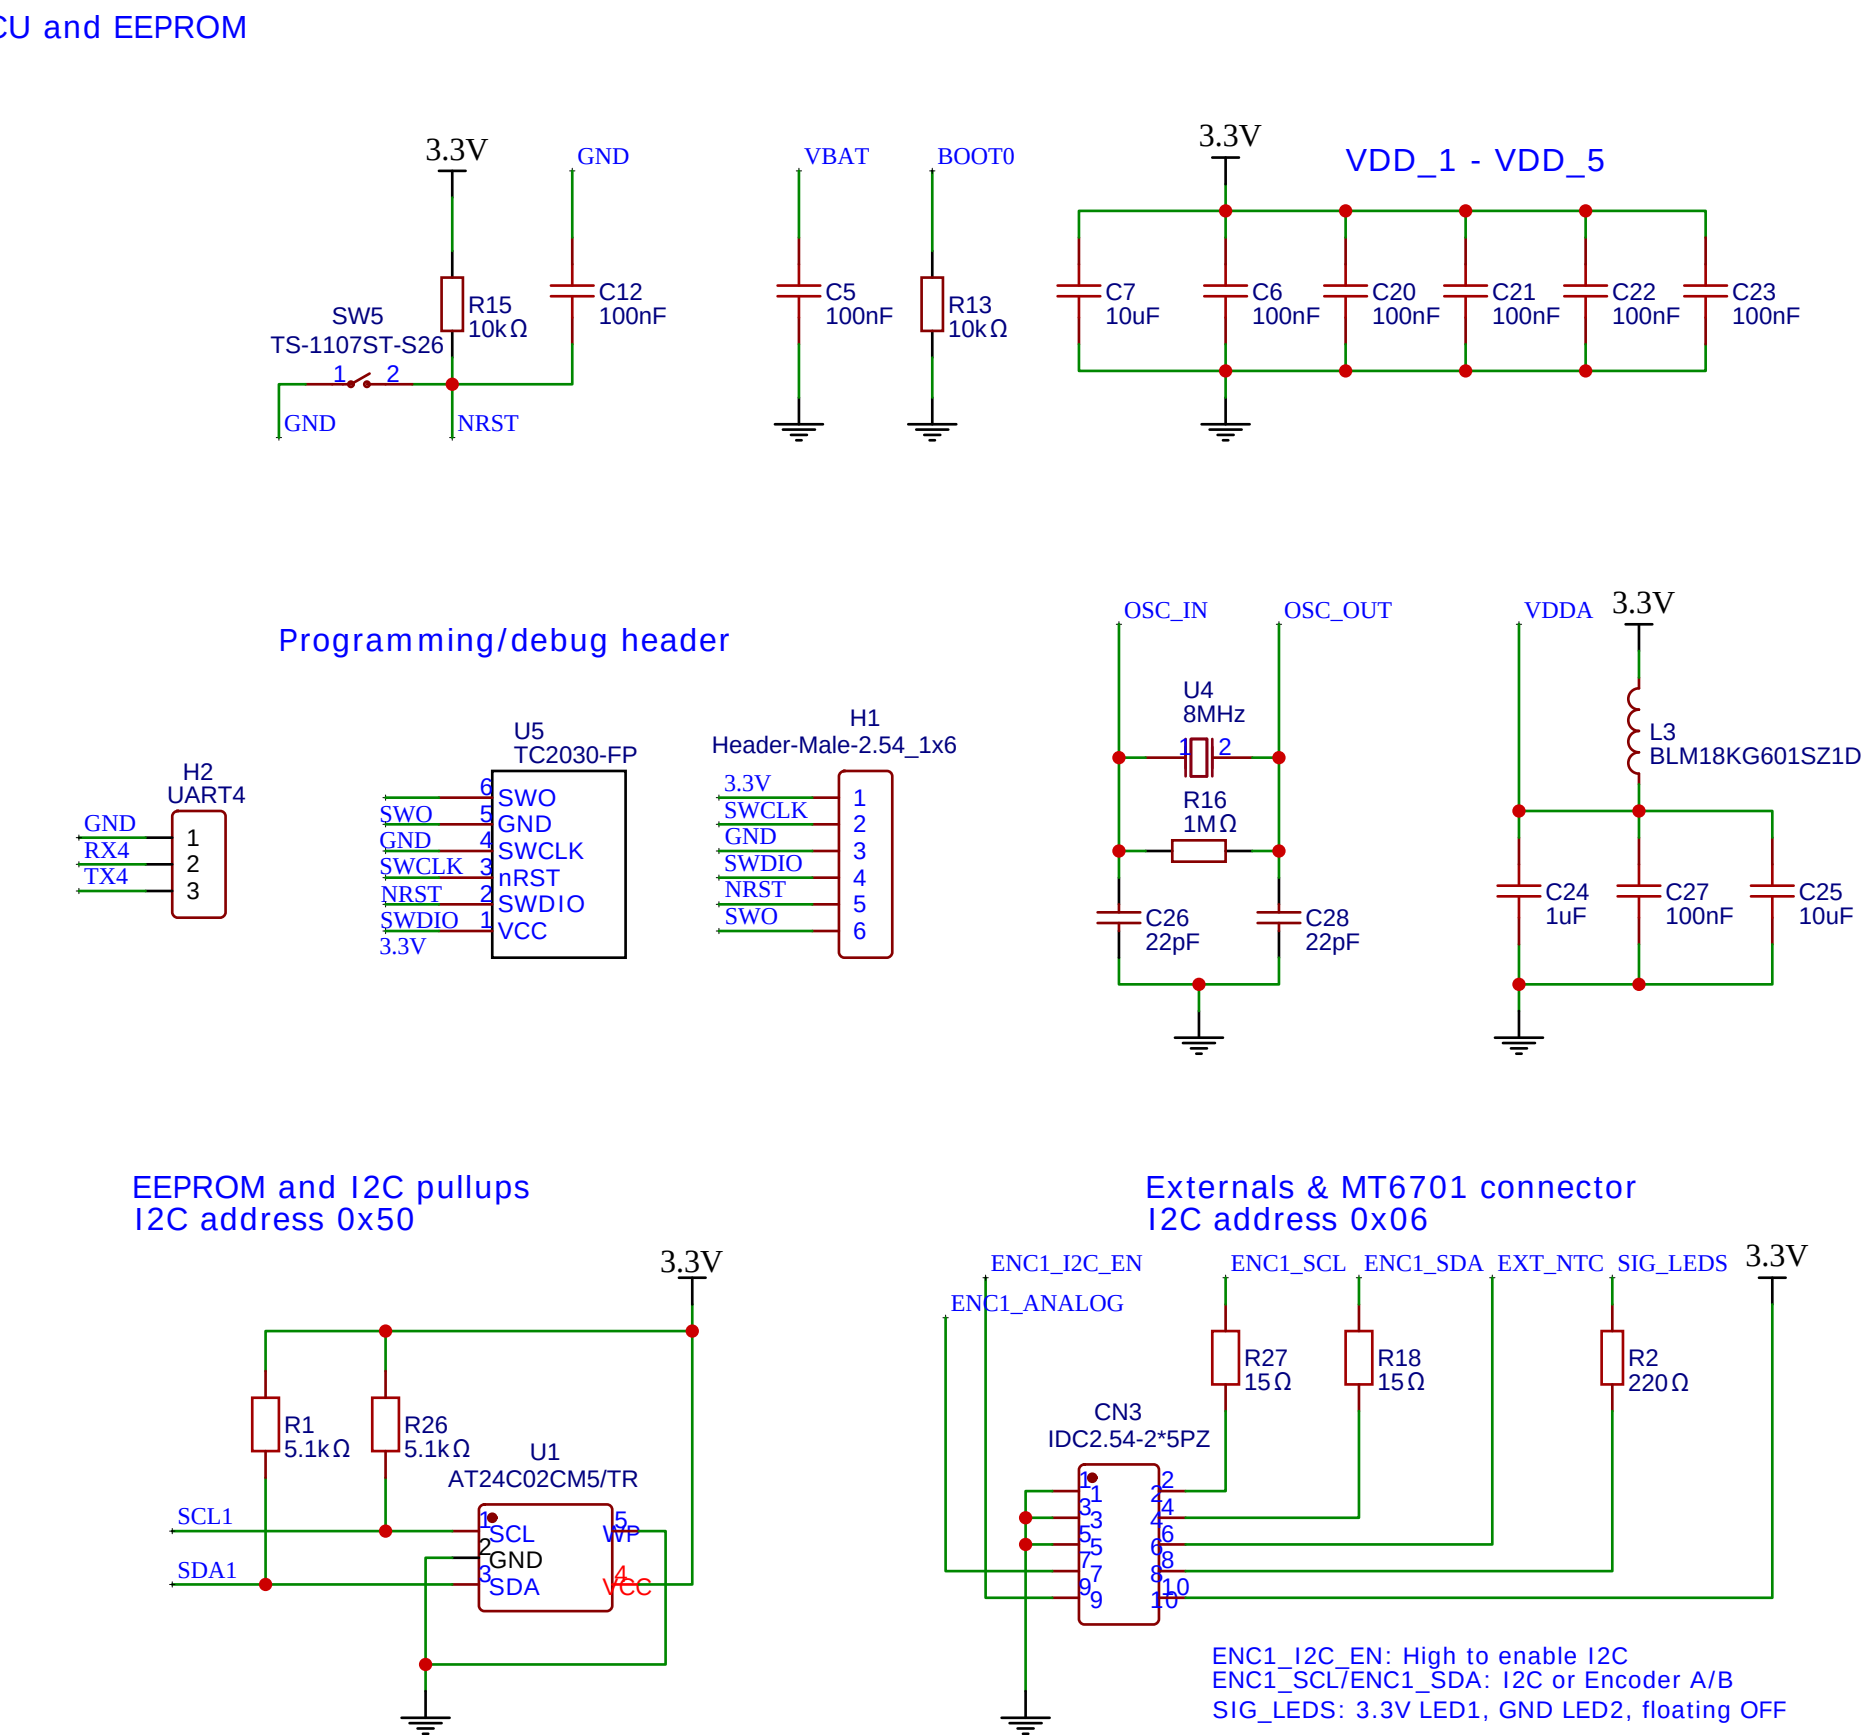
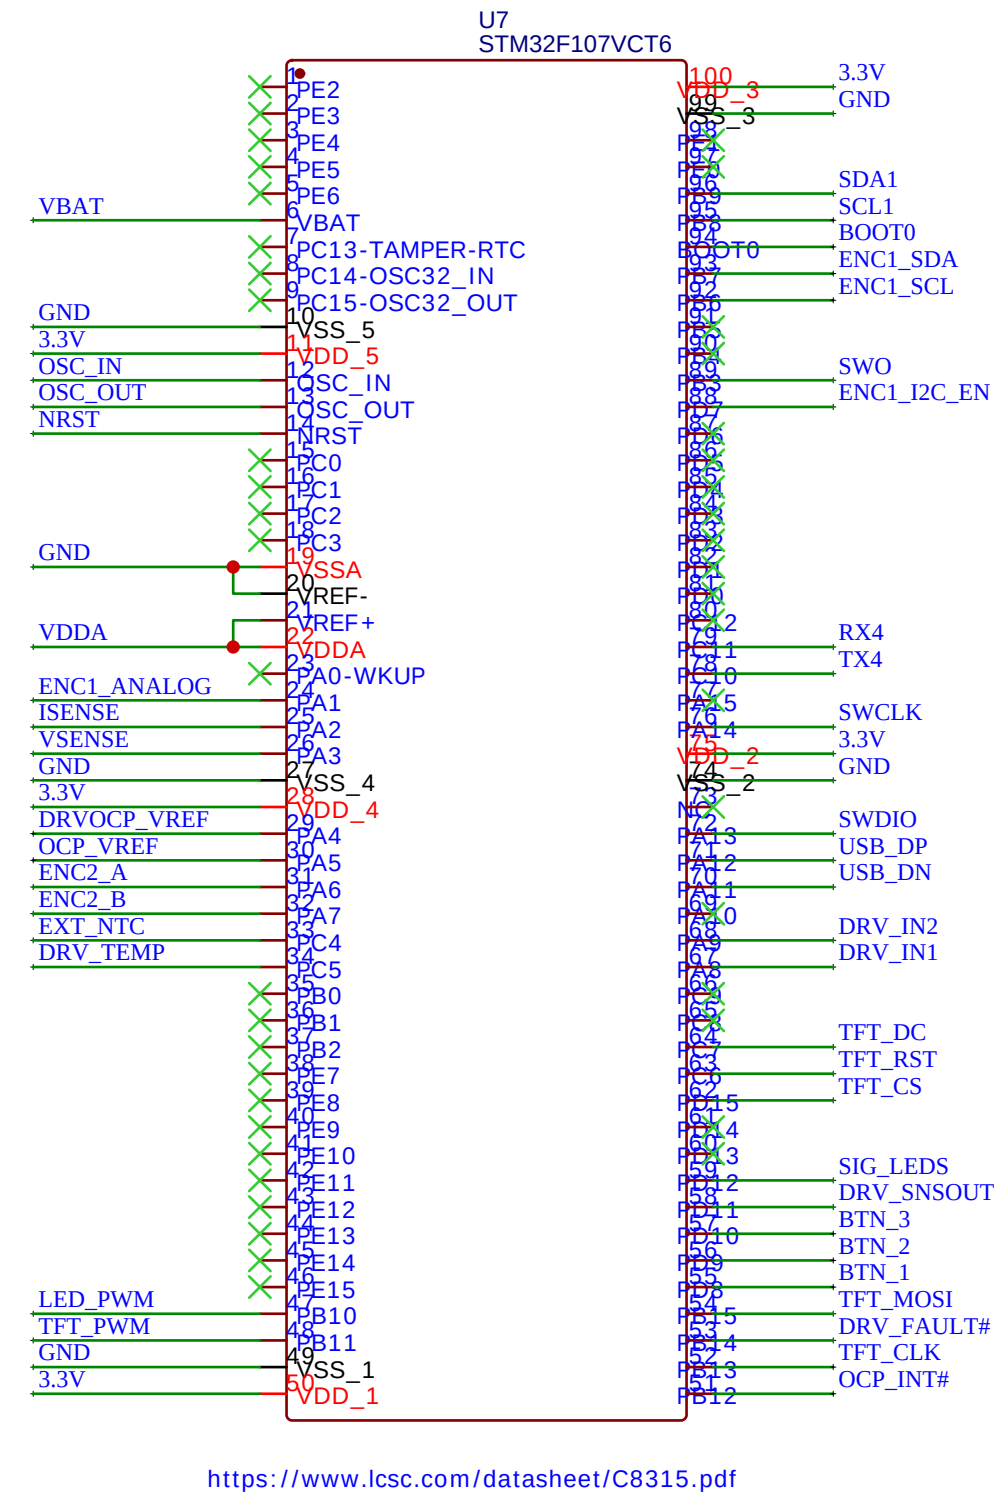



DC Motor Controller with Velocity and PWM Mode

- 8-36V, 20A continuous, 40A peak
- Adjustable cycle by cycle motor current limit (0.5-40A)
- Adjustable max. current with signal LED (0.5-40A)
- 1.14" 135x240 TFT display, rotary encoder and 3 buttons for easy navigation
- Support for magnetic encoder MT6701 in A/B mode up to 1024PPR (55000 RPM)
- Dimmable LED with CC driver 3-26V/350mA/5W
- Current, voltage and temperature monitoring

Firmware: https://github.com/sascha432/motor_controller_stm32

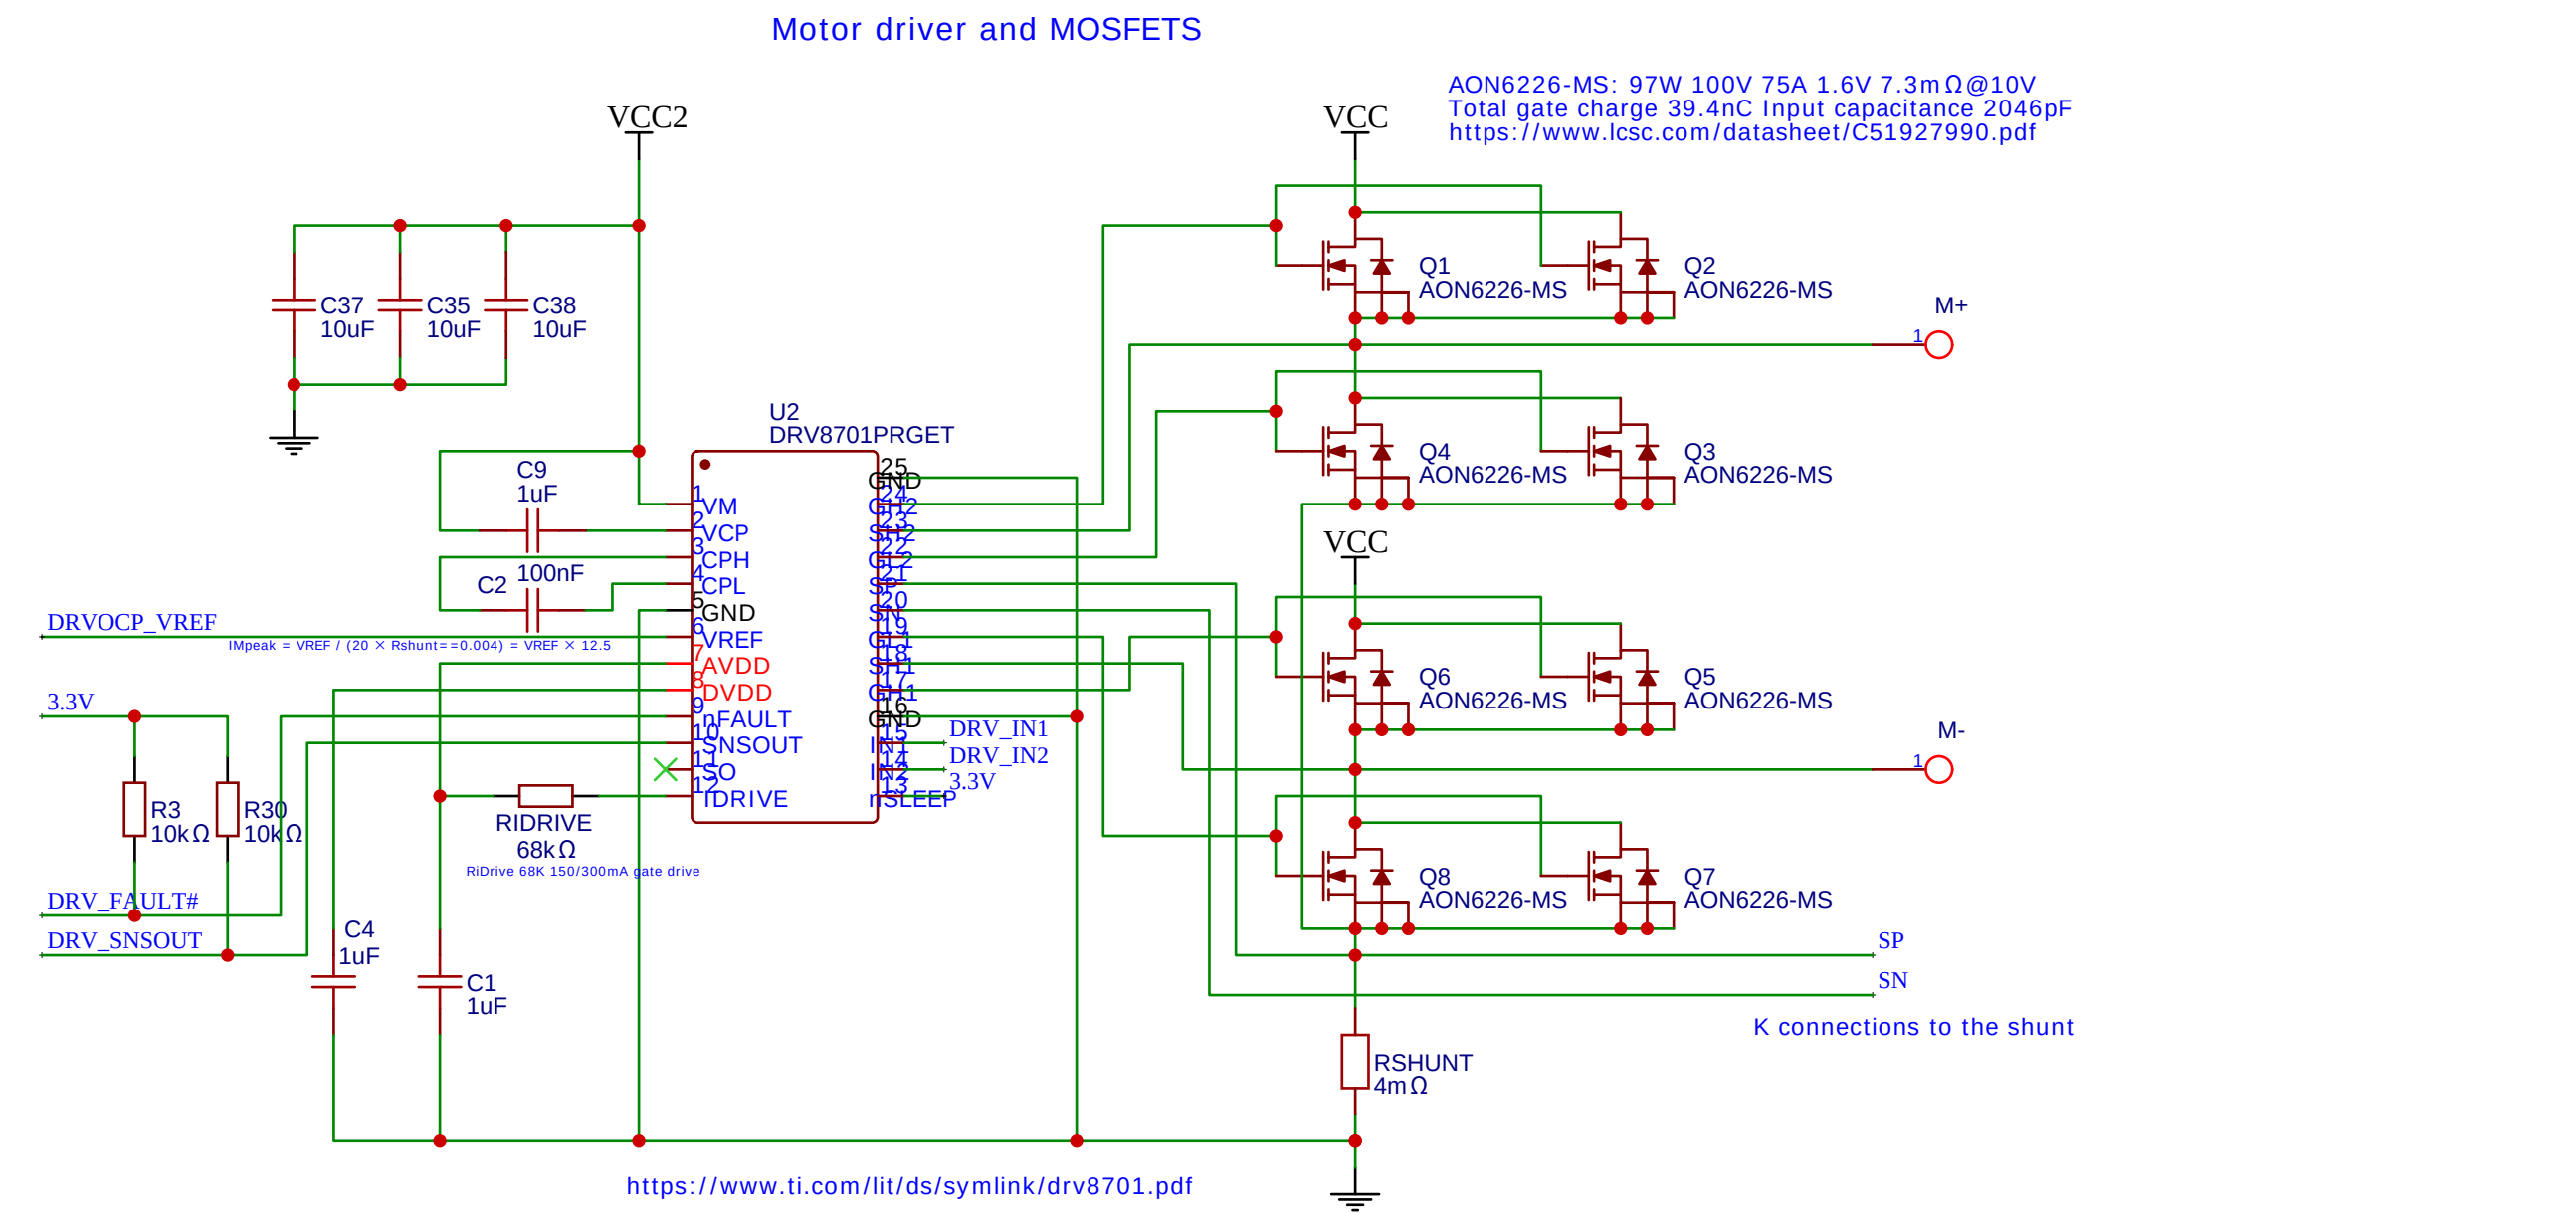


Power Supply 3.3V/0.6A

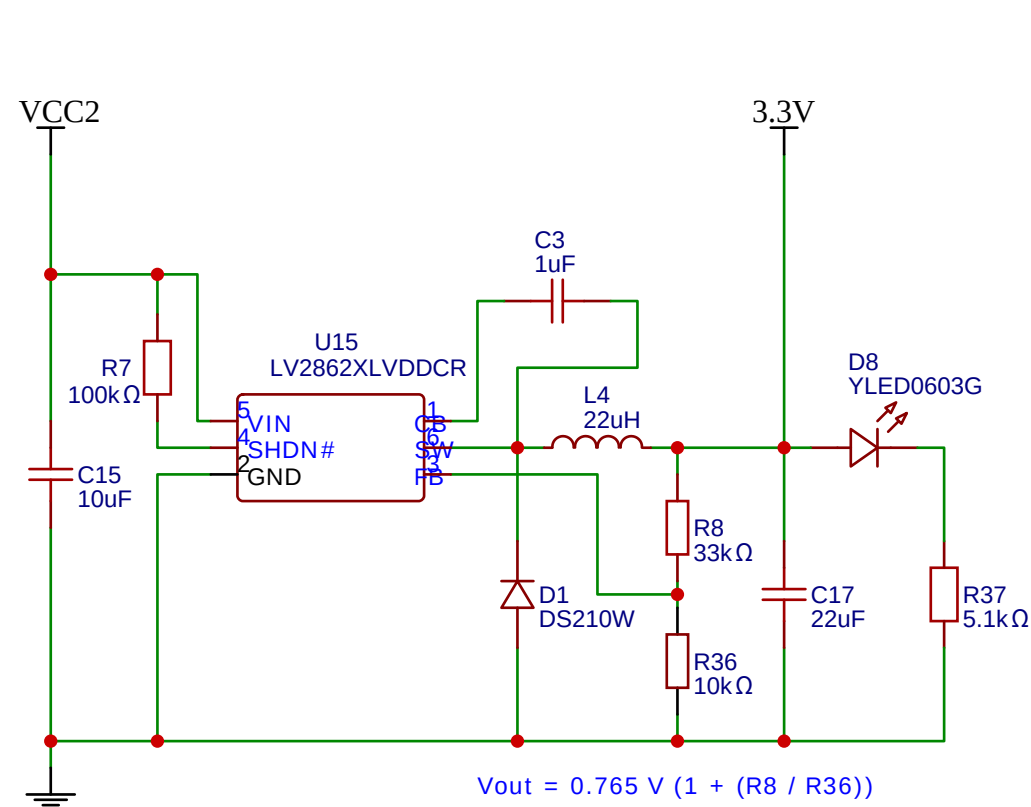


<https://www.lscs.com/datasheet/C3200285.pdf>

CC LED driver with PWM 2.5-26V/350mA

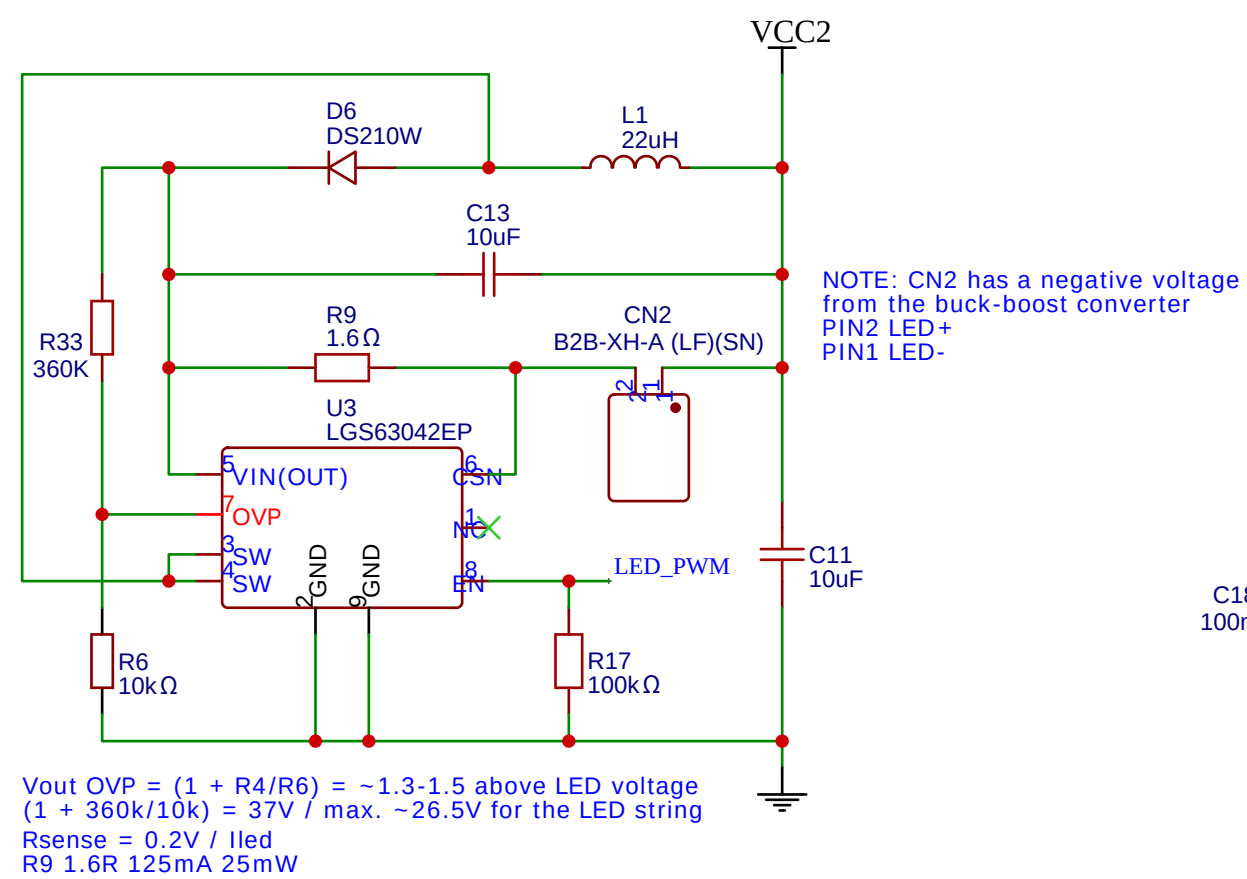


<https://www.lscs.com/datasheet/C5280696.pdf>

Input OCP
20x current amplifier with comparator
0.004R shunt = 1A/80mV - 40A/3200mV
Input filter R11, R12 and C19
Output filter R35/C16 for the MCU ADC

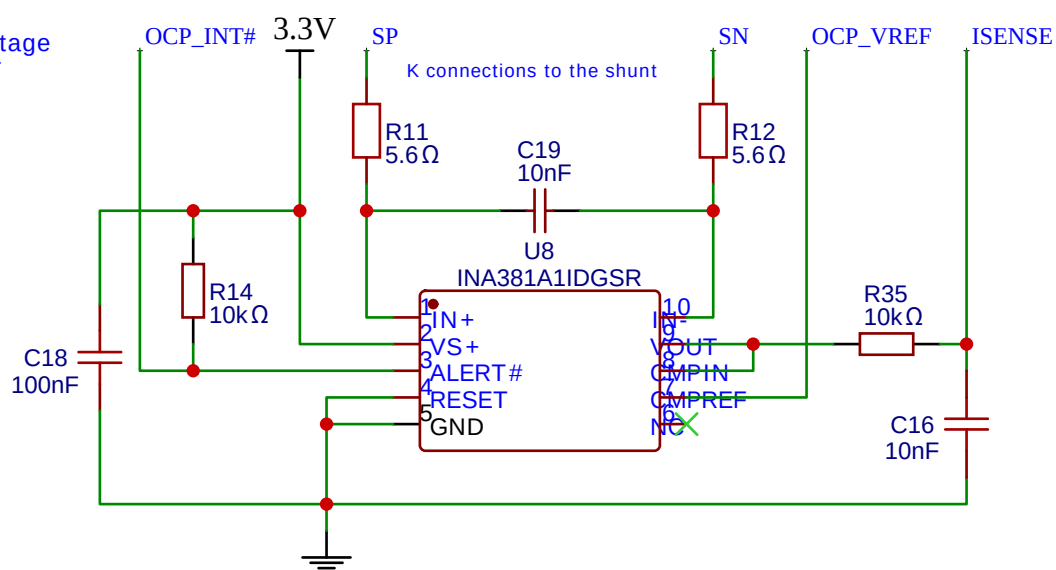

<https://www.ti.com/lit/ds/symlink/ina381.pdf>

Temperature monitoring

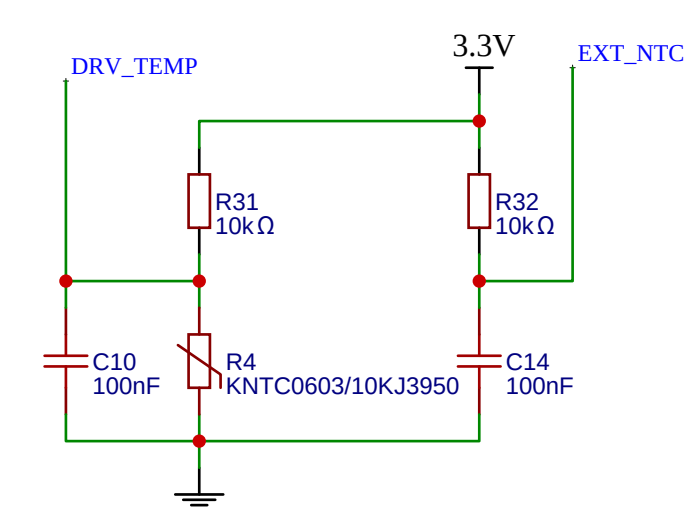

USB connector for programming

