

B.Sc.Eng. Thesis
Bachelor of Science in Engineering

| DTU Compute
Department of Applied Mathematics and Computer Science

Tether Control for Unmanned Aerial Vehicle

Using UAV's in industrial applications

Peter Juhl Savnik (s113556)

Kongens Lyngby 2015



DTU Automation and Control
Department of Electrical Engineering
Technical University of Denmark

Elektrovej
Building 326
2800 Kongens Lyngby, Denmark
Phone +45 4525 3031
elektro@elektro.dtu.dk
www.elektro.dtu.dk

Summary

Unmanned Ariel Vehicle or UAV is getting more common in everyday life, both as hobby project and industrial applications. The aim of this project is to address a solution to extend flight time for UAV's in an industrial application using a tether cable connection. It is desired to develop a platform that handles the mechanical part of winching and storing the cable and the electrical part of using the cable as position reference for the UAV and using the cable for communication with the UAV. Using a hexacopter(6 rotor UAV) with lifting capabilities of about 3kg and a 50m light weight cable ensures the UAV to be able to lift the cable. Two methods of winching and storing the cable is analysed, one selected for prototyping. Two electrical measurement devices are developed to measure position references for position control of UAV. This work does not deal with the position controller for the UAV. A Ethernet link from the Ground Control Station to the UAV is established through a regular Ethernet over power line adapter. Both Ground Control Station and the UAV are designed to run on Beaglebone Black, the actual flight controller are a PixHawk. The system design and prototype is analysed and discussed for further development on this project.

Preface

This bachelor thesis was prepared at the department of Automation and Control at the Technical University of Denmark in fulfilment of the requirements for acquiring a bachelor degree in Electrical Engineering.

Kongens Lyngby, January 13, 2015

A handwritten signature in blue ink, appearing to read "Peter Juhl Savnik". The signature is fluid and cursive, with "Peter" on the left and "Juhl Savnik" on the right.

Peter Juhl Savnik (s113556)

Acknowledgements

A special thanks to my two academic advisers, for always seeing the possibilities rather than the impossibilities in this project. Thanks to Søren for introducing me to "a real world problem" that is very relevant today. Thanks to Christian for always having time to help me problem solving or introduce me to programming concepts, even then it got late in the evening. It has been very supportive to see that you both share a huge personal interest in this project.

Thanks to all friends and family who has supported me though this project and helped me having time for this project to become a success.

Thanks to Martin from DTU Skylab team for helping out with the mechanical work and supplying materials for this project. Then ever our mechanic at the institute only saw problems Martin always saw possibilities and guided me towards a solutions. It has been a long battle for me without any mechanical experience to master such a underestimated expertise, both the manufacturing part and documentation.

Thanks to RS Components for sponsoring electrical and mechanical parts for this project.

Contents

Summary	i
Preface	iii
Acknowledgements	v
Contents	vii
Todo list	ix
1 Introduction	1
1.1 Previous work	1
1.2 Problem formulation	1
1.3 Problem limitation	2
1.4 Example of use case	2
2 Analysis	3
2.1 Background	3
2.2 Platform for Tethered UAV	3
2.3 Power line	4
2.4 Tension force in the Cable	6
Modelling the tension in the free hanging cable	7
Horizontal Angular Force Measurement	9
Loadcell	9
2.5 Design Requirement Specification	10
3 Prototype	11
3.1 Landing platform / Helipad	11
3.2 Messuring the horisontal angle	12
Testing	14
Summary	15
3.3 Winching and storing the cable	15
Storing cable on a drum	15
The Simple Winch	18
Comparison	18
3.4 Cable Connection to the UAV	19
3.5 Electrical Design	19

Ground Station	19
UAV System	19
3.6 Software design	19
Flight Control System	19
Ground Control Station	19
4 Beagle Bone Setup	21
4.1 usblib	21
4.2 libphidget	21
4.3 Networking	21
4.4 GPIO	22
4.5 PWM	23
4.6 SPI	24
4.7 Wire connections	24
4.8 General notes	25
5 Robot Hardware Daemon	27
5.1 Plugins	27
PhidgetsBridge2	27
TCUAV	28
FCS	28
RHDLLink	29
Joycontrol	30
6 Conclusion	33
6.1 Further Work	33
A Symbols and Acronyms	35
A.1 Symbols	35
A.2 Units	35
B CAD Design	37
B.1 Ground Station	37
Horizontal angle measurement device	37
The Simple Winch	45
The Cable Drum	59
Helipad	89
B.2 UAV	89
C Matlab	99
Bibliography	101

Todo list

■ 1.1 (1) Indsæt billede af 1 rotor forsøgsopstilling	1
■ 2.3 (2) Check udregning om den der dobbelt	6
■ 2.4 (3) definer udtryk	6
■ 2.4 (4) Lav diagram med pile	9
■ 3.2 (5) Lav data. ved 2 vinkler	14
■ 3.2 (6) Indsæt måle data	15
■ 3.2 (7) Kalibrer og find ud af hvor lidt trækket er	15
■ 3.3 (8) Lav matlab plot af data	18
■ 3.5 (9) Wire diagram der viser system overview	19
■ B.1 (10) ground station maskin tegning	37
■ B.1 (11) Helipad mekanisk tegning	89

x

CHAPTER 1

Introduction

Unmanned Aerial Vehicles, also commonly known as UAV's or drones, has for long time only been used for military, research and hobby purposes - but recently has a wide range of industrial applications seen the potential in using UAVs for industrial purposes. Flying UAV's have been implemented in a variety of applications such as monitoring, photography / filming, surveying the landscape and much more.

For some applications the system must be capable of operating for a long period of time there is a need for a constant power supply via a cable. This project is about developing a platform for tether control of UAV with a cable. A solution must not be limited to solving a single problem but as a platform for the implementation of tethered drones in a wide range of applications.

1.1 Previous work

Several attempts to build a tethered UAV has been seen before, several design concepts has been painted across the world - yet there is no commonly known commercial system available for sale. It is a great curiosity because most UAV systems has started to be tethered in some degree.

For this project a UAV from microcopter with a PixHawk is provided. The UAV and the PixHawk has in previous work been set up and are working.

While this thesis was written another student has designed a power supply system that attempts to meet the requirements described in the design requirement specification and another student is working on a position controller for the UAV.

1.1 (1)
sæt
billede
af 1
rotor
forsøg-
sopstill-
ing

1.2 Problem formulation

The objective for this project is to analyse and propose mechanical and electrical design for a platform for tether control of UAV. The designs has to be analysed and through the analysis one design must be selected to be prototyped and tested.

1.3 Problem limitation

- The UAV must be capable to be airborne through significantly longer time than a battery powered alternative.
- It is assumed the anchor point of the UAV has significantly greater mass than the UAV lifting capabilities.
- The power supply may bee optimized by using both a cable and a battery. The UAV do not use 100% of it's power at all time, but cable and power converters must be dimensioned so it can deliver 100% power when needed. Therefore it can be imagined that the UAV take off and land on the battery, and then the battery is recharged in air by the cable. This thesis only investigate the case without battery.
- This project will not cover the position control in the PixHawk.

1.4 Example of use case

In Denmark agriculture grain production constitute 35 % of Denmark's total area, or 1,495,000 hectares with a value of 29.4 billion. kr. Producing increasingly more with less resources. The Agricultural puts a strong focus on optimizing production through research and innovation[Fø13].

A well-known problem in cereal production is when the farmer harvests in the forest, there is often young wild and hiding in the grain. Their natural instinct of danger is to hide even more or pretend to be dead. This means that when the farmer harvests his field, the animal is not moving away from the machine. This results in a large number of young deer's which is hit by farmers machinery. It has economic consequences for the farmer, because the harvested grain is destroyed, that can happen materiel damage to the equipment and down time and, not least it is an unpleasant experience for the farmer.

A research group at DTU Automation has proposed a solution with a tether UAV flying in front of the vehicle and with a vision system can detect any obstacles such as animals or stones.

CHAPTER 2

Analysis

2.1 Background

It is desired to develop a platform for tether control of UAV. Such a platform can have many applications in the industrial world - which also raises a number of requirements for reliability and robust design.

The project has several issues which needs to be addressed in the analysis in order to make a design requirement specification. This analysis will cover the issues and the solutions on the issues will be addressed in the Prototype chapter

2.2 Platform for Tethered UAV

A platform for tether control of UAV must have 3 basic elements; the UAV, a power line and a ground station. The ground station supply the power line with power and keeps track of the cable. The UAV must be able to land and take-off from the ground station. The power line must be light enough for the UAV to lift it. The ground station must assure that the power line is not touching the ground by releasing or pulling cable.

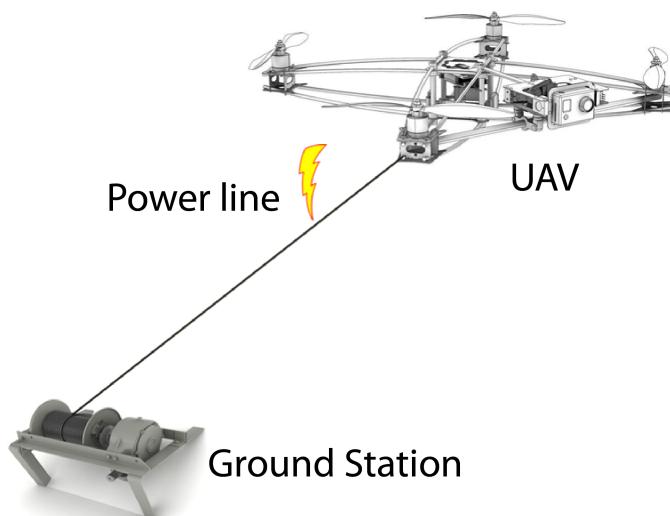


Figure 2.1: Illustration of key elements for a platform for tethered UAV

2.3 Power line

Every cable has an electrical loss, and this factor contributes significantly when the cable is long and has a low cross-sectional area. It is wanted to have a cable that is as long as possible, but the UAV can only lift a limited amount of payload. The cross-sectional area and the length has a big impact on the weight. But how thin and how long can the cable be?

We assume that UAV requires 500W at 12V when using maximal thrust. To be on the safe side we put in a tolerance on 10%, ending up with supplying the UAV with 550W. The loss in the cable can now be calculated as following. P is the power in Watt, U is the voltage in Volt, l is the cable distance in meter, ρ is the electrical resistivity in $\Omega \cdot m$ and A is the cross sectional area in m^2 . The current $I[A]$ through the wires is given by the power divided with the voltage.

$$I = P/U \quad (2.1)$$

The resistance $R[\Omega]$ per unit length is to be determined by the electrical resistivity $\rho[\Omega \cdot m]$ divided by the conductors cross sectional area, A .

$$R = \frac{\rho}{A} \quad (2.2)$$

The voltage drop $U_{drop}[V]$ per unit length is to be determined by the current times the resistance.

$$U_{drop} = I \cdot R \quad (2.3)$$

The voltage drop depends heavily on the current going through the wire. It is favourably to have a high voltage and low current to minimize the voltage drop. It is a commonly known method used in power supply systems all over the world. For a low voltage the percent of voltage drop is very high, as illustrated on figure 2.2.

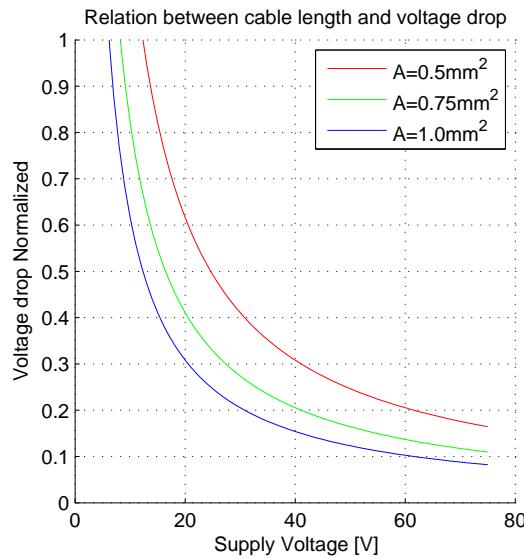


Figure 2.2: Relationship between Voltage drop and cable length per Ampere over a 50m cable. A is the cross-sectional area of the conductor.

In order to avoid the Low Voltage Directive [PCTU06] the DC voltage must be less or equal to 75 volt. For this application 75 volt DC is easily achieved with standard components and therefore set as the power transmission voltage.

The cable loss $P_{loss}[W]$ per unit length is now given by

$$P_{loss} = I^2 \cdot R \quad (2.4)$$

The loss in the cable needs to be minimal. A known method to minimize the loss on the cable is to step up the voltage. This is because of the fact the loss depends on the current squared times resistivity and independent of the voltage.

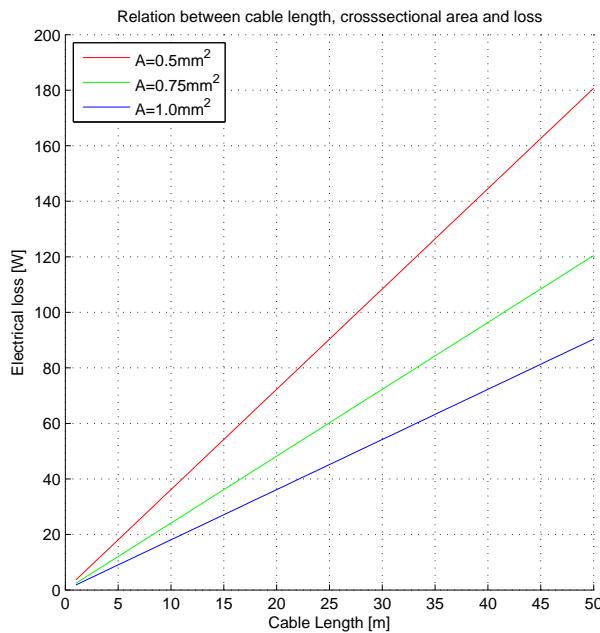


Figure 2.3: Relationship between cable length, cross-sectional area and loss. Calculated with copper resistivity and for both + and GND conductor cores.

2.3 (2) Check
udregning om
len der
dobbelt

From figure 2.3 it is seen that electrical loss is the conductor also depends on length and cross-sectional area of the conductor.

2.4 Tension force in the Cable

In a simplified model the weight of the cable will only drag the UAV on one axis, towards the ground station. On the UAV there is one loadcell mounted, measuring the force in the direction of the tension. The output of the loadcell will enable the ground station to decide whether it should roll cable out or in. However this simplified model assumes the UAV to be perpendicular to the cable at all times. That will in the real world only be true when it hovers directly over the ground station. As the UAV goes to one of the sides it will try to maintain horizontal pitch/tilt. The cable will try to drag it in the direction of the ground station, making giving the UAV a steady force to work against. Because of aerodynamics the UAV will tilt in some extent to work against the tension. If this tilt gets too large the UAV will lose its lifting capability and therefore stall and crash towards the ground.

2.4 (3) de-
finer
udtryk

Modelling the tension in the free hanging cable

Modelling the cable in the real world has a great complexity and in order to make a robust design we must assume the surrounds are not ideal. The ideal case is the cable is hanging as a direct line, as seen on figure 2.4. Only at the anchor point the cable touches the ground. Worst case scenario is all cable is lying on the ground, except what is directly underneath the UAV. It can be assumed that the cable will be in between the direct line and worst case. The maximal position error will be the difference between the direct line and worst case line, calculated to approximately 14.65 meters or 29.3%.

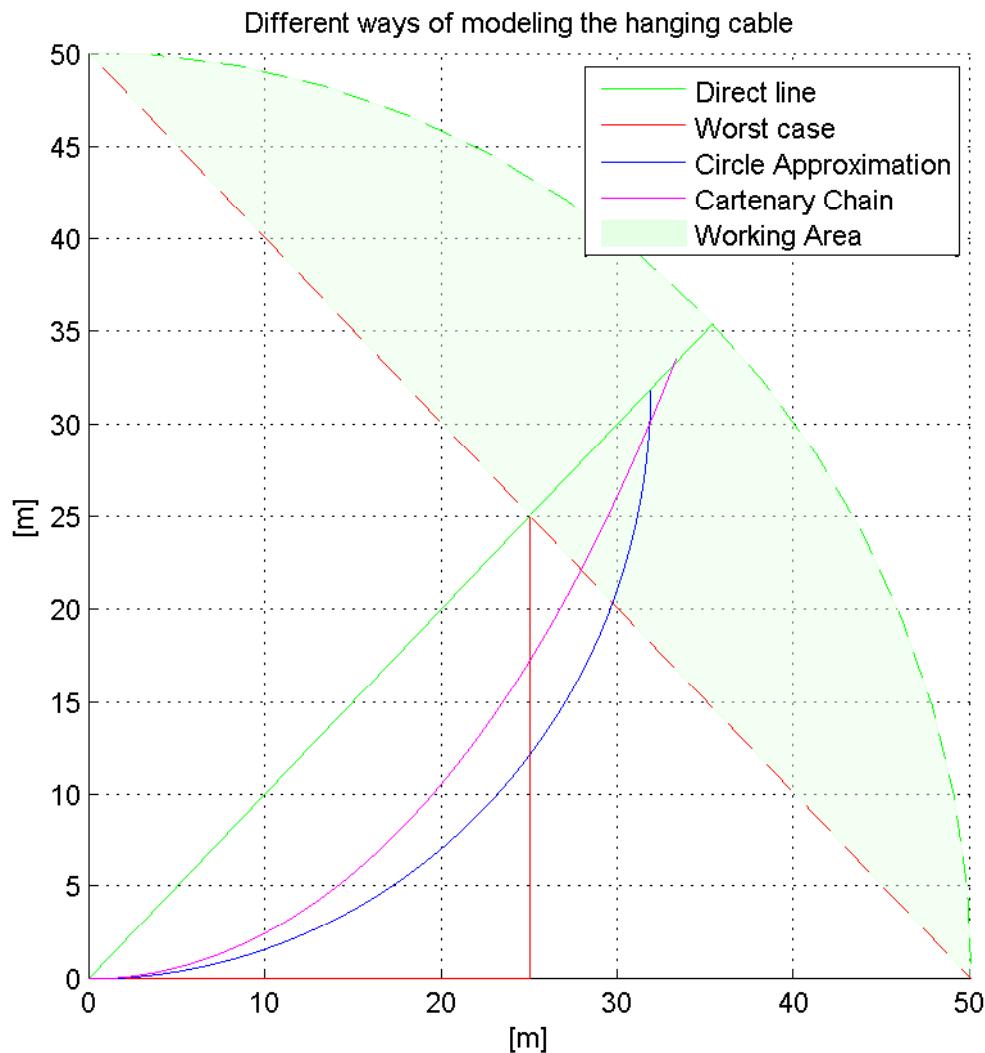


Figure 2.4: Diagram showing 4 ways of approximate the cables position. The direct line the the ideal case. The area between the ideal and worst case is the actual working area where it's assumed the position of the UAV to be. Position estimation using a circular shape and catenary chain to approximate the position.

Both the direct line and worst case is possible, but highly unlikely in the real world. A cable hanging between two point will have a curved shape from the sag. If the curve from the sag can be described as an circle, the cable will curve uniformly over the hole length. This assumes the cable has no mass, but in the real world it has. The catenary chain is close to an parabolic shape but describes the curve of a freely hanging chain with the weight uniformly distributed[Whe33]. The catenary equation has the form

$$y = a \cdot \cosh\left(\frac{x}{a}\right) \quad (2.5)$$

The catenary chain assumes the cable is so flexible that any force exerted by the chain is parallel to the chain. This set a requirement for the bending radius for the cable to be much less than the length of the cable. The weight of the cable pull the UAV down and towards the anchor point. Let the point c be the anchor point to the ground and r be a force vector at the anchor point on the UAV. r must be at a higher point than c . The force T_0 at point c is tangential to the curvature thus only has a x component. The force T at point r is tangential to the curvature at point r and can be described as

$$T = T \cos(\phi) + \sin(\phi) \quad (2.6)$$

ϕ is the angle between the x axis and the force vector and T is the magnitude of the force. The cable weight is represented as λ per unit length. g is the gravitational force and s is the length of the cable. The downward force is therefore $-y\lambda gs$

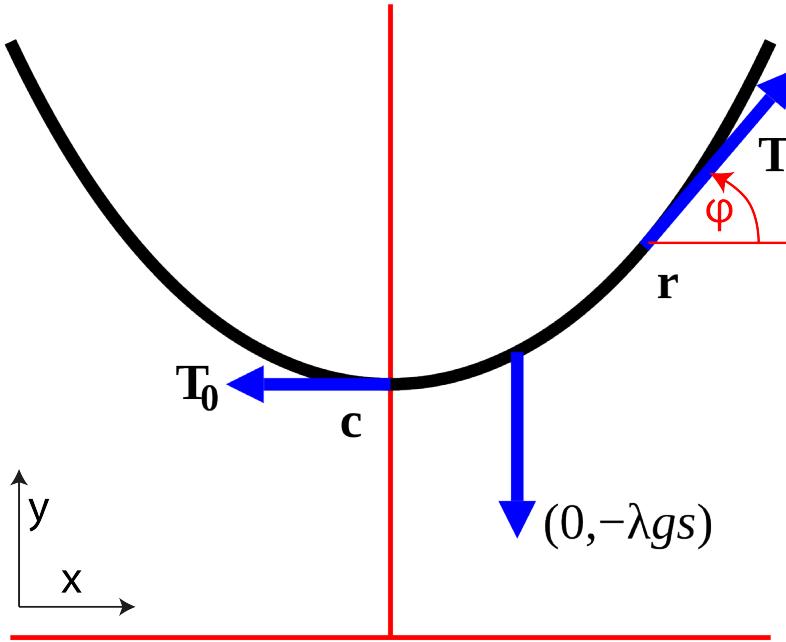


Figure 2.5: Catenary Chain Force diagram displaying forces acting from anchor point c to point r . T_0 is the tension at anchor point c and T is the tension at point r . Note that the y axis in this diagram will correspond to the height later denoted as z .

In this analysis the cable is in equilibrium thus the sum of the tree forces is zero. Splitting up the sum in x and y components gives

$$T \cos(\phi) = T_0 \quad (2.7)$$

$$T \sin(\phi) = \lambda g s \quad (2.8)$$

This gives the expected force at T as a function of either the force at the anchor point or the cable length and ϕ .

$$T = \frac{T_0}{\cos(\phi)} = \frac{\lambda g s}{\sin(\phi)} \quad (2.9)$$

To be able to model the cable using the catenary chain 4 parameters must be available; The tension at anchor point T_0 , the angle at the UAV ϕ and the length of the cable.

This model excludes all cases where either the UAV is below the anchor point or the cable partially is below the anchor point.

Horizontal Angular Force Messurement

For measuring the horizontal angle, ϕ , relative to the Ground Control Station and the UAV; a 2-axis measuring device is needed. The two axis must be perpendicular to each other. In that way a scalar of two unit vectors \hat{x} and \hat{y} can represent the tension from the cable in a combination of each direction. From the length scaled of the scaled vectors \overline{X} and \overline{Y} the angle *phi* can be found.

$$\phi = \text{atan}2(Y, X) = 2 \cdot \arctan \frac{\sqrt{X^2 + Y^2} - X}{Y} \quad (2.10)$$

ϕ is the angle from the positive \hat{x} -direction and increases counter clockwise.
The length of \overline{XY} is given by:

$$\overline{XY} = \sqrt{X^2 + Y^2} \quad (2.11)$$

The length og \overline{XY} corresponds to the total tension in the cable in ϕ direction.

2.4 (4)
diagram
med
pile

Loadcell

The loadcells used in this project is a single-point loadcell. The choice of loadcell was determined by the availability/flexibility to easily create multidimensional measurements and the cost. A loadcell is basic a strain gauge(flexibly resistor pattern) that will change resistance when bended, mountet on a flexible material. In this case a block of Aluminium is cut out and a strain gauge is mounted. When the Aluminium is exerted with a force or weight it will bend slightly, causing a small change of resistance in the straingauge. The change of resistance can be measured by a Wheatstone bridge, as the one on the Phidget bridge.

The calibration of the loadcell is very important to obtain a value that fits the theory. The calibration converts the measured voltage to the measured force.

$$F = K_f \cdot (V_{in} - b) \quad (2.12)$$

$$W = K_w \cdot (V_{in} - b) \quad (2.13)$$

F and W is the expected force and weight. K is a gain value depending on weather the output unit is force or weight. The offset b will vary between individual loadcell, even from the same batch. V_{in} is the voltage reading from the Phidget bridge.

When dealing with multiple loadcells there are two ways of configure them electrical wise. First is to measure each loadcell individual and second to measure all together. The first one has the advantage of being able to messenger each loadcell individually, but the disadvantage of using many inputs and each loadcell needs to be calibrated individually. Second one has the advantage of only using 1 input on the bridge and all cells can be calibrated together, but the disadvantage of all loadcells need to be of same type and size and not being able to measure each loadcell individually. In this project the information of direction of tension is important and because of that measuring each loadcell individually is the best solution. [Phi12]

2.5 Design Requirement Specification

- Supply the UAV with 120V DC and 500W
- The weight of the cable must not be greater than the lifting capability of approximate 3kg.
- The system must not be subject to the Electrical Safety: Low Voltage Directive, and therefore keep any voltage under 75 volt DC [PCTU06].
- Given the cheap cost of UAVs today, the solution must keep a low material cost.
- Measuring the total horizontal force at the anchor point.
- Measuring the total force and angle at the UAV.
- Measuring the length of the free hanging cable.

CHAPTER 3

Prototype

The ground control platform has some physical dimension given due to the size of the UAV used in this project. The dimension of the UAV used will effect the dimension and choice of construction of the ground station. In dimensioning and designing the ground station the primary focus is on making an industrial and robust prototype.

3.1 Landing platform / Helipad

The landing platform or helipad is a 60cm x 60cm wide plate with a hole in the middle. Dimensioning of the size mainly relies on tolerance on the presision of landing the UAV. The UAV only needs 30cm x 30cm space for the landing gear, but in case a big wind gust comes in just before landing/take-off, the UAV can slide off the platform if the platform is too small. On figure 3.1 the helipad is seen from the top.

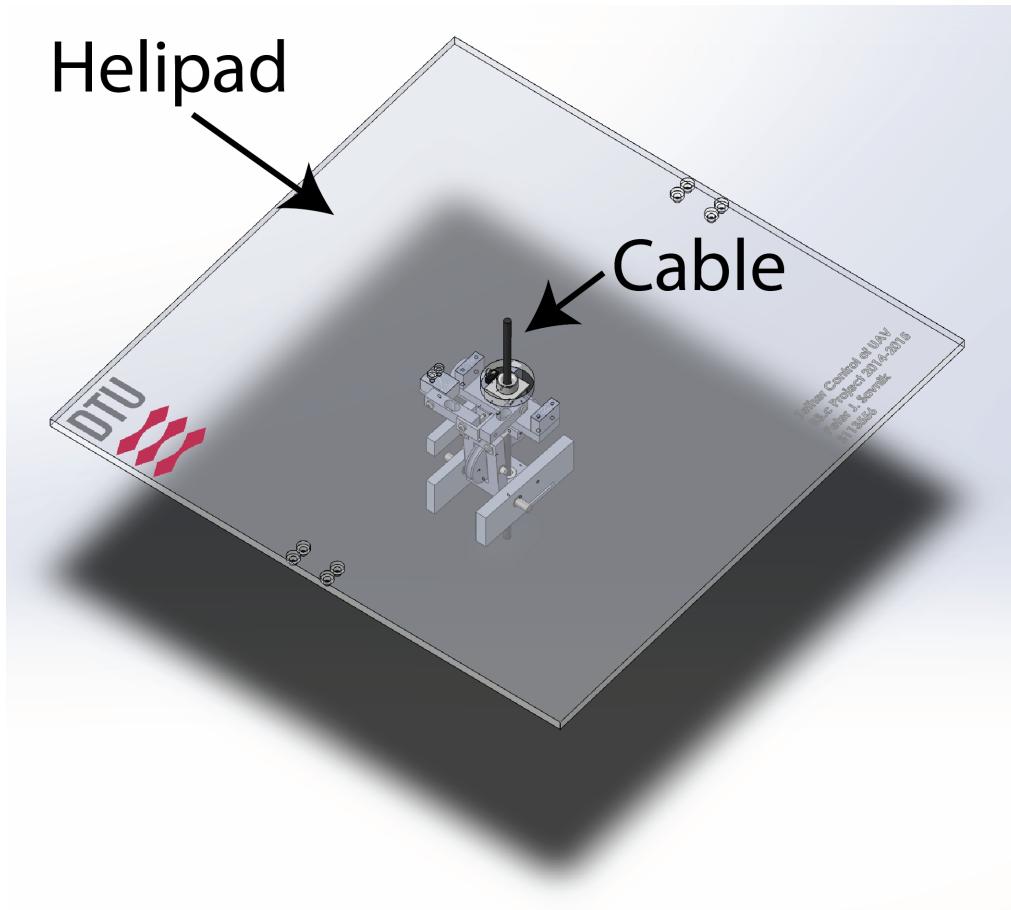


Figure 3.1: Illustration of Helipad with a hole in the middle for the cable.

3.2 Messuring the horizontal angle

In order to precisely determinate where the UAV are positioned relative to the helipad on a horizontal plane a coordinate system on figure 3.2 is introduced. x and y are cartesian coordinates corresponding to the measurements of loadcell 1 and loadcell 2 from figure 3.3. ϕ is the angle, starting at the positive x direction and increases in positive direction of rotation.

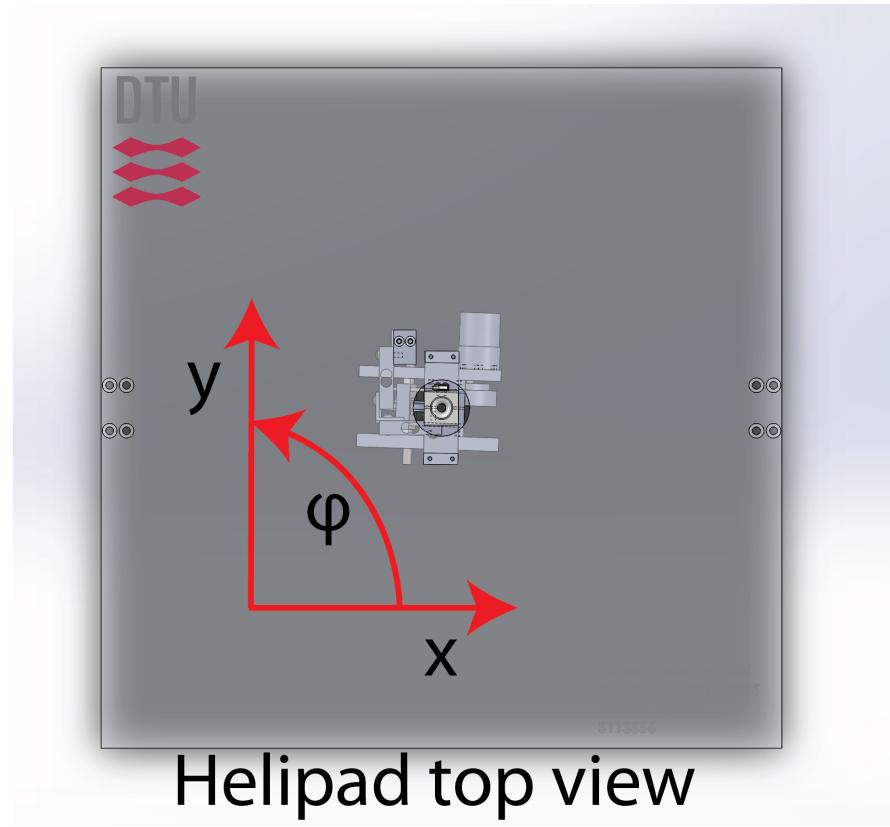


Figure 3.2: Helipad seen from top view with coordinate system.

To measure the horizontal angle between the ground station and the UAV to loadcells are used, perpendicular to each other. One end attached to the ground station and the other end attached to a cable though hole made in Teflon. Then the UAV is exactly direct over the hole, no force will be measured, but at the UAV moves to one of the sides it will create a cable tension that results in a force in x- and y- direction. Combining the x and y force can be translated to an angle.

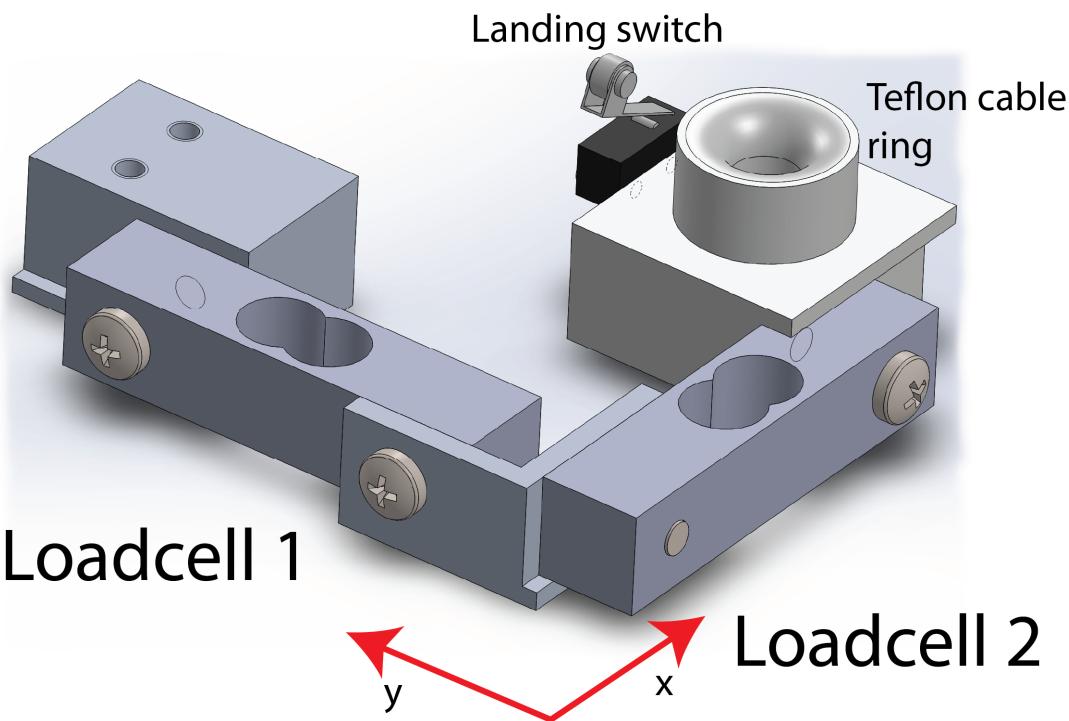


Figure 3.3: Configuration of 2 loadcells, for measuring the cable drag in x and y direction. Loadcell 1 measures in x-direction and loadcell 2 in y-direction.

The UAV can lift about 3kg payload and therefore exert 3kg thrust to the cable and the measuring device must be able to withstand such a force without permanently bending. Two 5kg loadcells from Phidget Inc is assessed to be the best match for the job with regard to what's available in the projects price range.

Testing

The initial testing of the measurement device was done using a spring weight attached to the Teflon ring. Applying a steady tension between 250g and 1000g in different directions (horizontal) and comparing the measured ϕ to the actual angle.

Second test was done keeping the ϕ angle and the tension constant and varying the θ angle. Is is expected as θ approach 90 degrees the measured force will be approaching 0.

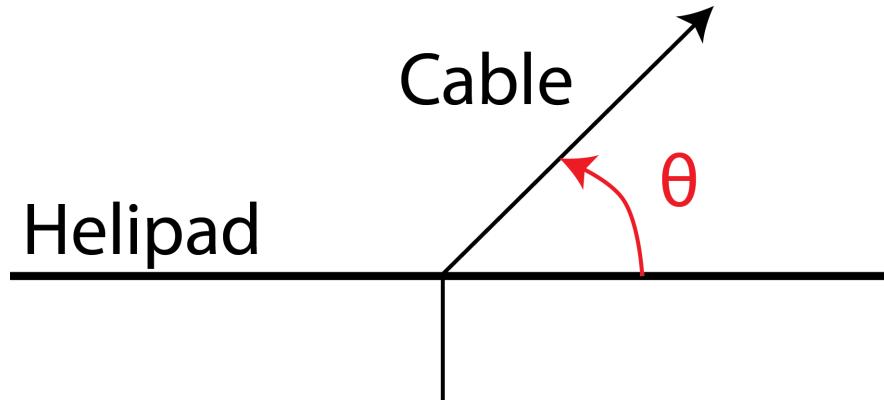


Figure 3.4: Testing the horizontal measuring device by keeping ϕ constant and varying θ .

Third test was done in the final assembly and with a real cable. In this test the cable was anchored to the winch below instead of the Teflon ring. This test may vary both ϕ and θ .

3.2 (6)
sæt
måle
data

Summary

The prototype is able to measure the force in x- and y-direction and ϕ can be calculated. It turns out that the force applied to both loadcells is much less than expected and is out of range for a 5kg loadcell. The 5kg loadcell has a zero balance at $\pm 75g$. If the force is greater the loadcell measurement is out of the zero balance range the device works. Thus, it can reasonably be assumed the devices will work well with a loadcell with a less operating range and higher precision.

3.2 (7)
brer og
find ud
af hvor
lidt
trækker

3.3 Winching and storing the cable

There is several ways to keep the cable when it's not rolled out, 2 commonly used methods are on a cable drum or in a wound pile. The critical parameter here is the flexibility of the cable, diameter of the cable and heat tolerances. Because the cable is stored tightly together, heating from the cable resistance has to be given a thought in the cable storing design.

Storing cable on a drum

Storing cable on a drum is a very practical and commonly known method to store cables in an organised way. The benefits of this design is that the drum itself can be used as a winch to winch in the cable. But the minimum diameter of the drum is given by the cable minimum bending radius for flexible installation and that sets a physical minimum

for the drums outer diameter. The larger the diameter the greater the force needed for rotating the drum. To assure smooth windings the drum can move from side to side. Physics says the movement from side to side will come natural, if the friction is low enough; in practise this concept works often but is not robust and that is why motorized guidance is needed. In theory the rotation of the drum can be used as a feedback for how much cable is rolled out, but in practice this will be a source to a great error. Furthermore this design is very dependent on the cable all ways has tension. If there is no or too little tension on the cable it will loosen from the drum.

On figure 3.5 a cable drum is put under the helipad and the horizontal measurement device.

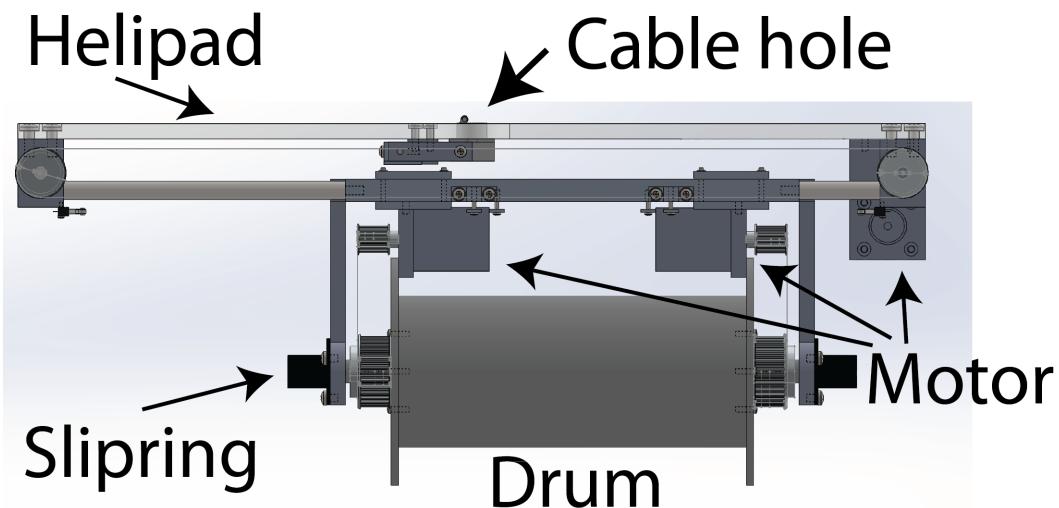


Figure 3.5: Cable drum design. The drum can rotate to winch in/out the cable, and also move from side-to-side to assure smooth windings.

With all wire wined in and the UAV on maximum throttle there is assumed to be 500W running through the cable with a electrical loss of around 120 Watt, which is transformed into heat. 120 Watt of heat will give rise to heating up the cable drum. This is a known cause of electrical fire, when a cable drum gets too hot and melts. Therefore a series of pretests where performed to address how big a problem this would bee and too incorporate the result in the design of the system.

The worst-case test with full load over long time was performed at indoor environment with room temperature on 24 degree Celsius. The coil was excited with 75V DC and 30A just over an hour. The inner diameter of the coil is 10cm and is made of 2mm thick PVC pipe.

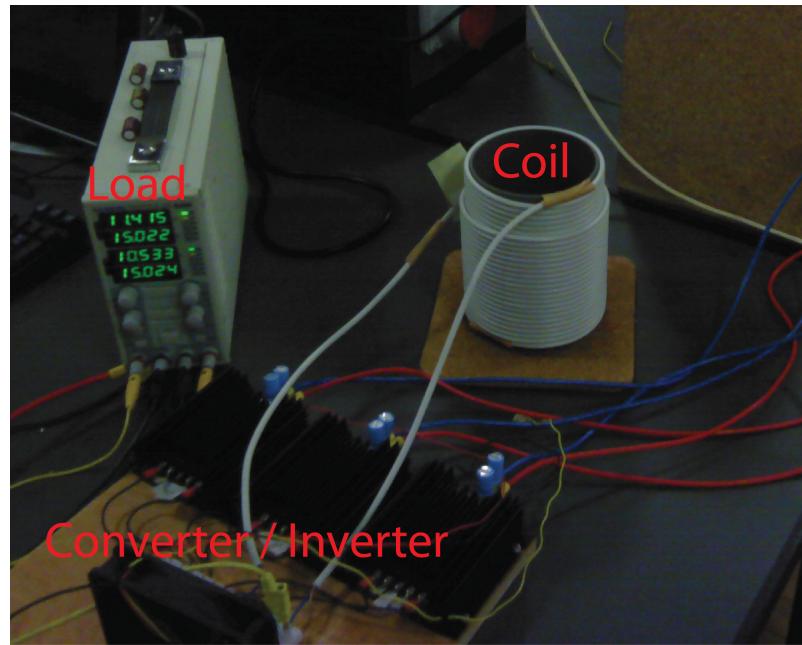


Figure 3.6: Heat test setup showing the coil, the test load and power Converters.

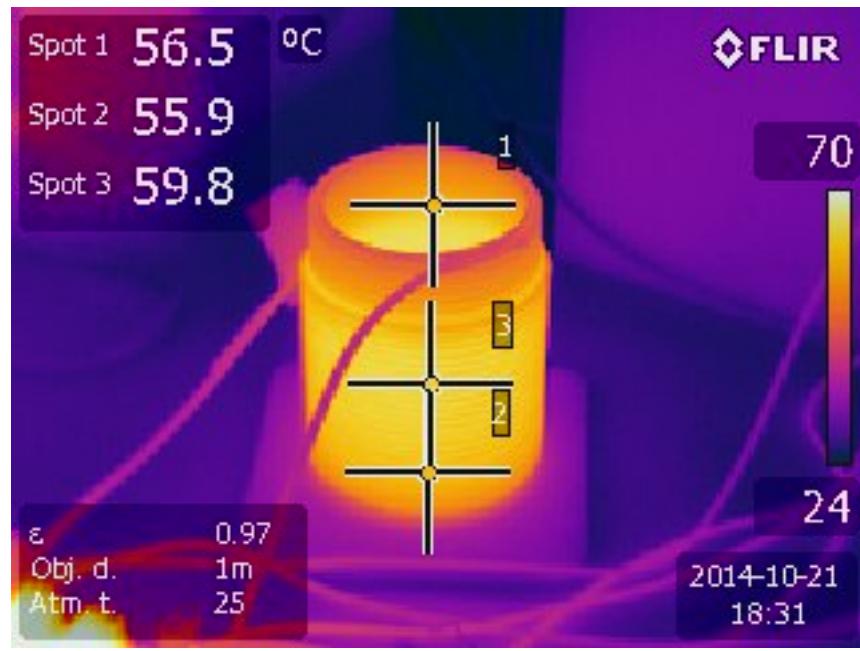


Figure 3.7: Heat test of 20m standard household cable¹winded in 2 layers with 75V DC and 30A. Spot 1 is inside the coil, spot 2 is the lower side of the outer coil and spot 3 i at center of the outer coil. On the lower left corner thermometer calibration constants is displayed.

3.3 (8) Lay
matlab
plot af
data

The Simple Winch

Sometimes simple is better. The simple design has a motorized toothed wheel and an encoder wheel pushing the cable against the motorized wheel. The encoder wheel turns only when the cable is moving, and the slip is minimal making it a very robust feedback for the motor controller. The encoder wheel is pushing the cable toward the motor wheel with a spring, that assures small imperfections in the cable does not make it slip. two simple screws adjust the spring tension. For storing the cable a box underneath collects the cable.

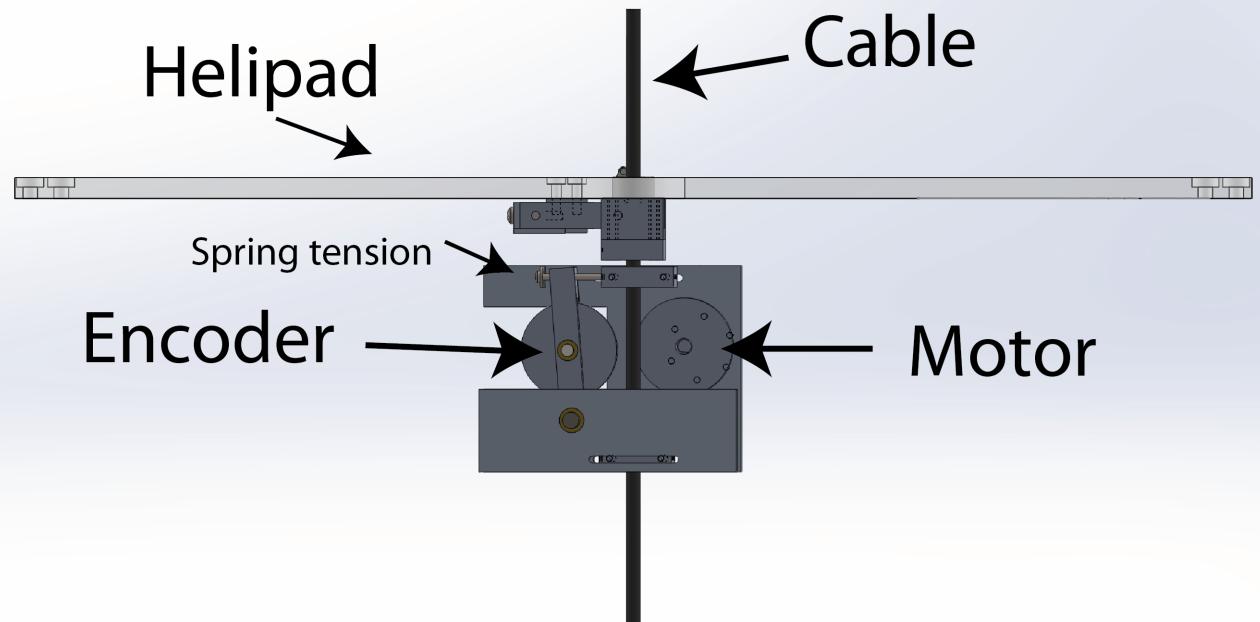


Figure 3.8: The Simple Winch only has one motor and an encoder wheel pushing the cable towards the motor wheel. Two springs adjust the tension.

Comparison

Both concepts are mature enough to be prototyped and tested, but due to the time frame of this work there is only time for manufacturing and testing one design. Based

¹House hold cable with unknown origin, cross-sectional area 0.75mm², Max voltage 230 AC, Max current 10A

on the lower mechanical complexity of the simple winch, the simple winch is the chosen design.

3.4 Cable Connection to the UAV

Connecting the cable to the UAV has several issues to address. First a 3-axis measurement device is needed to measure how much the cable tension is and in which direction. Second a connector

3.5 Electrical Design

From an electrical view there are 2 separate systems, Flight Control System on the UAV and Ground Control Station. The system reading the sensor data on the Ground Control Station has to feed the UAV with the measured data hence the UAV's possession controller is running on the UAV.

Ground Station

The ground station sends data to the UAV system and decides whether to roll cable in or out based on the wanted position. The control of feeding the cable is done by comparing the load on the UAV system to what is expected by the weight of the rolled out amount of cable. If the load is higher than expected more cable are rolled out and vice versa.

UAV System

The system on the UAV measures a 3-axis loadcell connected to a Phidget Bridge. The Phidget Bridge are interfaced via a Beaglebone Black.

3.6 Software design

Flight Control System

Ground Control Station

3.5 (9)
diagram
der
viser
system
overview

CHAPTER 4

Beagle Bone Setup

This project used a BeagleBone Black edition revision C with Debian distribution from 2014-05-14 running.

Setting up is done by cloning the git repository at <https://github.com/savnik/rhd> that contains all code needed¹.

```
1 git clone https://github.com/savnik/rhd
```

Inside the folder rhd/ a setup file found basic containing all setup that is needed. The setup is explained in parts below.

```
1 cd rhd/  
2 ./setup
```

4.1 usblib

For communication with the Phidget bridge the usblib are needed and in this project version 1.0.9 is used. The library can be downloaded from <http://www.libusb.org/>.

4.2 libphidget

The Phidget bridge comes with a library for interfacing the Phidget bridge easy. For this project version 2.1.8.2014 is used. The library can be downloaded from Phidgets website <http://www.phidget.com/>.

It is very important to setup the rules using the 99-phidgets.rules file, otherwise the RHD plugins can't connect.

4.3 Networking

Connecting the Beaglebone to the Ethernet is straight forward using the RJ45 plug, but in this setup the RJ45 plug is already used in connection to the UAV. There fore it is needed to bridge the network connection via USB. Beaglebone natively support a network connection through USB, but needs some configuration to connect to the internet through the USB cable².

¹In order to bridge the usb network connection see Networking below.

²<https://github.com/anujdeshpande/BBB-workshop>

On the Beaglebone run following command:

```
1 /sbin/route add default gw 192.168.7.1
2 echo "nameserver 8.8.8.8" >> /etc/resolv.conf
```

First line tells the Beaglebone to go through 192.168.7.1 when trying to connect to the internet and second line tell the Beaglebone to use google name-server.

On the host computer (Ubuntu):

```
1 sudo iptables -A POSTROUTING -t nat -j MASQUERADE
2 sudo echo 1 | sudo tee /proc/sys/net/ipv4/ip_forward > /dev/null
```

4.4 GPIO

Setting up the GPIO is done through the device tree source file. This file shows an example on 4 GPIO pins that is setup to Output or Input, and the internal pullup/pulldown settings.

```
1 /dts-v1/;
2 /plugin/;
3
4 /{
5     compatible = "ti,beaglebone", "ti,beaglebone-black";
6     part-number = "DM-GPIO-Test";
7     version = "00A0";
8
9     fragment@0 {
10         target = <&am33xx_pinmux>;
11
12         __overlay__ {
13             pinctrl_test: DM_GPIO_Test_Pins {
14                 pinctrl-single,pins = <
15
16                     0x070 0x07 /* P9_11 OUTPUT MODE7 - M1EN */
17                     0x078 0x07 /* P9_12 OUTPUT MODE7 - M1NA */
18                     0x031 0x07 /* P9_13 OUTPUT MODE7 - M1NB */
19                     /* No PWM */
20                     0x040 0x27 /* P9_15 INPUT MODE7 - M1CS */
21
22                         /* OUTPUT GPIO(mode7) 0x07 pulldown, 0x17
23                         pullup, 0x?f no pullup/down */
24                     /* INPUT   GPIO(mode7) 0x27 pulldown, 0x37 pullup, 0x?f no
25                     pullup/down */
26
27                 >;
28             };
29         };
30     };
31 }
```

```

31     target = <&ocp>;
32     __overlay__ {
33         test_helper: helper {
34             compatible = "bone-pinmux-helper";
35             pinctrl-names = "default";
36             pinctrl-0 = <&pinctrl_test>;
37             status = "okay";
38         };
39     };
40 };
41 };

```

Compiling a Device Tree Source file (.dts files) can be done like this:

```
1 dtc -O dtb -o DM-GPIO-Test-00A0.dtbo -b 0 -@ DM-GPIO-Test.dts
```

It is a little tricky because ”-O” is for output format, dtb is for Blob format, ”-o” is output file DM-GPIO-Test-VERSION.dtbo, ”-b” physical boot cpu 0 and the input file DM-GPIO-Test.dts³.

The device tree blob object can be loaded on boot or by

```
1 echo DM-GPIO-Test > /sys/devices/bone_capemgr.9/slots
```

A list over active device tree blob object is obtained by

```
1 cat /sys/devices/bone_capemgr.9/slots
```

Writing, reading and some level of configuration is done by normal unix input/output method, writing/reading to/from a virtual file located at /sys/devices/gpio/.

```

gpioXX
└── active_low
└── direction
└── value

```

4.5 PWM


Using the PWM output from the Beaglebone is not ”out-of-the-box”. In order to enable the PWM module a Device Tree Blob Object (.dtbo file) needs to be loaded is the cape slots. Beaglebone comes with a default Device Tree Blob Object file that supports the PWM module. The Device Tree Blob Object files can be found in /lib/firmware/. For this project the default Device Tree Blob Object file for pin 14 was used⁴.

Accessing the PWM module is like normal unix input/output method, writing to a virtual file. The PWM modules virtual files is at /sys/devices/ocp.3/

```
pwm_p9_14
```

³<http://web.mit.edu/freebsd/head/contrib/dtc/Documentation/manual.txt>

⁴/lib/firmware/bone_pwm_P9_14-00A0.dtbo



4.6 SPI

To enable the SPI interface on the beaglebone follow instructions from http://elinux.org/BeagleBone_Black_Enable_SPIDEV. Using the SPI interface can only be done by disabling the HDMI interface because they use the same pins. Because of the long cable connection (over about 10cm) the communication speed needs to be slowed down.

4.7 Wire connections

Encoder wiring:

Encoder Cable Pin	AMS AS5045B Pin	Beaglebone Pin
1	16 VDD 5V	5/6 P9
2	7 VSS	1/2 P9
3	12 PWM	
4	11 CSN (Chip Select)	
5	6 Index	
6	10 CLK	31 P9
7		
8	9 DO (data out)	29 P9
9	8 PDIO	
10	1 MagIn	
11	2 MagDec	

Motor Driver wiring:

Cable pin	Motor Driver Pin	Beaglebone pin
Blue	Green GND	P8 1 GND
Green	Blue VSS 5V	SYS 5V
Yellow	Yellow Encoder Channel A	P8 7
Orange	Orange Encoder Channel B	P8 8
Red	Red Motor 12V	Motor Driver M1+
Black	Black GND	Motor Driver M1-

4.8 General notes

The Device tree blob object can be loaded at boot in the uEnc file, but it seems to be root of many booting problems loading the Device tree blob object at boot, therefore it is a better solution to run a shell script after bootup that loads the device tree blob objects. This way the Beaglebone is always able to boot, and in case of bad device tree blob object files it does not prevent the system from booting.

The Beaglebone Debian distribution does unfortunately not include a compiled version of xpad. Xpad is the driver for the joystick and is needed for using the gamepad plugin. The raw files for the xpad driver is available several places on the internet and even through available at the Beaglebone Debian Distribution, but is somehow not included in the latest build from 2014-15-14. In order to compile xpad the header files placed in /usr/src is needed but in they does not come with the distribution. So to use xpad a new debian image is needed to be compiled. The distribution image size is 2Gb and the Beaglebone Back memory size is only 4Gb. The distribution image must be compiled on same type of processor in order to work properly or compiled using a cross compiler. Thus the joystick plugin will be disabled by default in the setup, but can be activated in rhdconfig.xml.

The Beaglebone community is rather small compared to the Arduino or Raspberry Pi community, therefore searching for patches or solutions is generally extensive work and requires a high level of unix skills.

CHAPTER 5

Robot Hardware Daemon

RHD (Robot Hardware Daemon) is the real-time hardware abstraction layer for the Mobotware platform, developed at DTU. RHD is a plugin-based platform that allows easy integration with sensors and actuators. RHD creates a synchronized database with read/write variables that can be shared between plugins and/or accessed by other software applications. RHD uses a real-time scheduler to ensure a fixed sample rate. All setup of RHD is done based on a XML configuration file, containing all parameters and plugins specific to the robot. Plugins are intended to be general and works across robots, and all "magic" variables are placed in the configuration file.

This project has been implemented as a configuration in RHD and plugins for hardware has been developed. To run the program type in:

```
1 rhd trunk/plugins/tcuav/rhdconfig.xml
```

This runs the RHD program and loads the configuration for the Ground Control Station.

5.1 Plugins

PhidgetBridge2

PhidgetBridge2 is build on the initial Phidgets Bridge plugin, only made more flexible by allowing the configuration file to contain all of Phidgets Bridge configuration settings. The Phidget Bridge is a 4 channel amplifier, and is intended for measuring small voltages for example in loadcells.

Configuring the bridge is done by first enabling the wanted channels. The default amplifier gain is 128V/V. The minimum sample time is 10 milliseconds. Calibration constant offset and gain is found by $F_{Expected} = K * (Measured - Offset)$.

```
1 <!-- Phidget Bridge -->
2   <phidgetsbridge2
3     enable = "true"
4     lib="phidgetsbridge2.so.1"
5     debug = "1"
6     interval = "0"
7     updateTimeMs = "10"
8     gain = "128 128 128 0"
9     enableCh = "1 1 1 0"
10    offset = "-290 6050 -90 0"
11    k = "876 870 360 1"
12  >
```

```

13</phidgetsbridge2>
14
15<!-- Flight Control System - Tether Control of UAV -->
16<fcs
17    enable= "true"
18    lib="fcs.so.1"
19    debug = "true"
20    >
21</fcs>
```

This plugin depends on Phidgets Linux Library. Special installation notes are found in the readme file.

Files:

```

plugins
└── phidgetsbridge2
    ├── 99-phidgets.rules
    ├── Makefile
    ├── README
    ├── libphidget_2.1.8.20140319.tar.gz
    ├── phidgetsbridge2.c
    ├── phidgetsbridge2.h
    └── rhdconfig.xml
```

TCUAV

TCUAV or Tether Control of UAV is the Ground Station.

FCS

FCS or Flight Control System is a part of the Tether Control of UAV project. This plugin establish contact to Ground Station via a Socket connection, and exchange information(references) from the ground stations measurements and control parameters, and then sends control parameters in to a PixHawk. It also reads 3 loadcell from a Phidget Bridge to determine the yaw and the force from the cable in x,y and z direction.

It is intended the PixHawk runs it's own position estimator in hard real time, and the control parameters from this plugin in soft real time, because of the variable delay in the feedback from the Ground Station.

Setting up this plugin requires the PhidgetBridge2 to be configured first.

```

1<!-- Phidget Bridge -->
2<phidgetsbridge2
3    enable = "true"
4    lib="phidgetsbridge2.so.1"
5    debug = "1"
```

```

6      interval = "0"
7      updateTimeMs = "10"
8      gain = "128 128 128 0"
9      enableCh = "1 1 1 0"
10     offset = "-290 6050 -90 0"
11     k = "876 870 360 1"
12   >
13 </phidgetsbridge2>
14
15 <!-- Flight Control System - Tether Control of UAV -->
16 <fcs
17   enable= "true"
18   lib="fcs.so.1"
19   debug = "true"
20 >
21 </fcs>
```

This plugin depends on the phidgetsbridge2 plugin.

Files:

```

plugins
└── fcs
    ├── Makefile
    ├── fcs.c
    └── fcs.h
```

RHDLink

This plugin creates a socket connection to another RHD server(Server) and makes a copy of the variable database on the local machine(Client). The client with this plugin installed can access read and write variables on the other RHD server it is connected to, but the server can not read or write in the clients variable database. The Plugin is based on a copy of librhd.c, with a few alternations in the function and variable names to avoid name conflict. Only one RHD link per RHD server can run without conflicts.

The configuration of the plugin is done in the XML file "rhdconfig.xml" and adding following to the plugin configuration. Substitutting host and port to the corresponding RHD server will access another server weather it's on the local machine or on the network. The access rights can be set as read(r) or write(w), if write both read and write are possible.

```

1 <!-- *** RHD Link - creates a link to another RHD server *** -->
2 <rhdlink enable="true"
3   lib="rhdlink.so.1"
4   host="192.168.7.2"
5   port="24902"
6   access="w"
7   debug="true">
```

8 | </rhdlink>

This plugin requires the RHD component of Mobotware version 3.583.

Files:

```
plugins
└── rhdlink
    ├── Makefile
    ├── librhdlink.c
    ├── librhdlink.h
    ├── rhdconfig.xml
    ├── rhdlink.c
    └── rhdlink.h
```

Joycontrol

This plugin provides remote override control possibilities using a standard HID Joystick. The plugin is developed by Anders Billso Beck and automatic detect the vehicle steering configuration for wheel based robots. For this project the plugin was modified to be able to detect UAV steering parameters. The plugin detect the steering configuration on which unique control variables it can find in the variable database. UAV steering has unique control variables like yaw, pitch, roll and height.



Figure 5.1: Implementation of joystick control for UAV control.

Files:

```
plugins
└── joycontrol
    ├── Makefile
    ├── joycontrol.c
    └── joycontrol.h
```


CHAPTER 6

Conclusion

Morbi pharetra ligula integer mollis mi nec neque ultrices vitae volutpat leo ullamcorper. In at tellus magna. Curabitur quis posuere purus. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Suspendisse tristique placerat feugiat. Aliquam vitae est at enim auctor ultrices eleifend a urna. Donec non tincidunt felis. Maecenas at suscipit orci.

6.1 Further Work

There is no doubt this work can be improved and develop further.

Rearrange loadcells on UAV

The loadcells on the UAV can be rearranged to ensure the center of gravity and the cable connection coming closer to eachother, and thus improves the UAV's stability.

Measuring the horizontal angle on Ground Control Station

The loadcells on Ground Control Station is designed with too large loadcells and thus the measurement precision can be improved with finding more suitable loadcells.

Power system

At the moment the powersupply system are only able to deliver 400W instead of 500W over only 20m of cable. The limiting factor is in the converters/inverters system developed by another student project. A way of solving this problem is to combine the powersupply from the cable with a on board battery. When the UAV is not using all the power it can recharge the battery and when extra power is needed it can be delivered in combination with the battery.

APPENDIX A

Symbols and Acronyms

A.1 Symbols

BBB	Beaglebone Black
DTU	Danish Technical University
FCS	Flight Control System
GTS	Ground Control Station
RHD	Robot Hardware Daemon
UAV	Unmanned Aeriel Vehcile
XML	Extensible Markup Language
CAD	Computer Aided Design

A.2 Units

U	Voltage
I	Current
R	Resistance
ρ	Electrical resistivity
A	Surface area
P	Power
W	Watt
F	Force
K	Constant
b	Offset
T	Tension force
λ	Cable Weight per unit length
g	Gravitational constant
ϕ	The angle fra x axis in positive rotational direction.

APPENDIX B



CAD Design

All tolerances are 1/100mm unless other is stated.



B.1 Ground Station

Horizontal angle measurement device

B.1 (10)
station
maskin
tegning

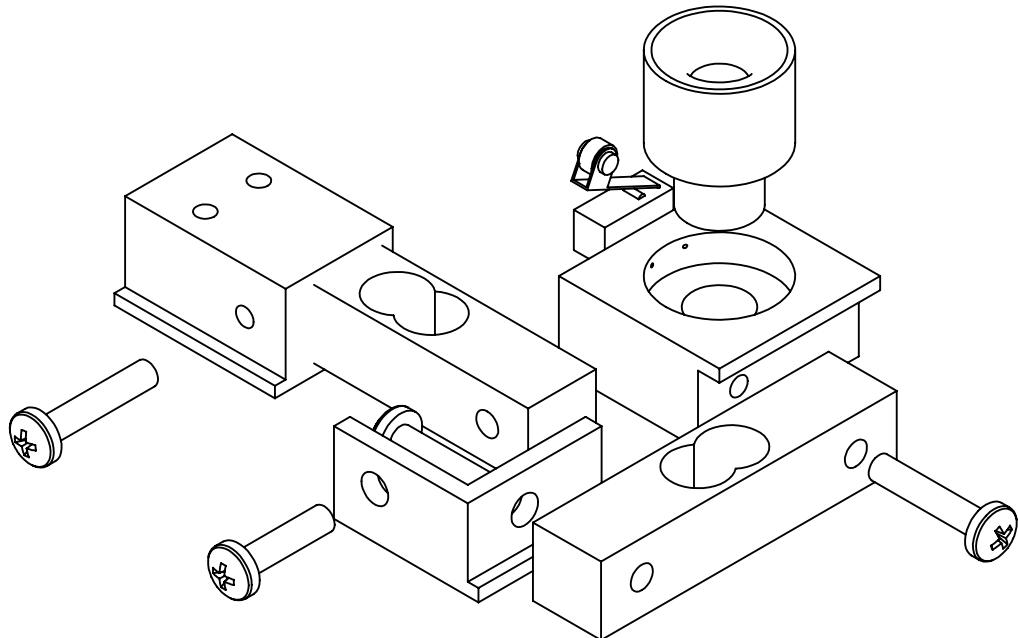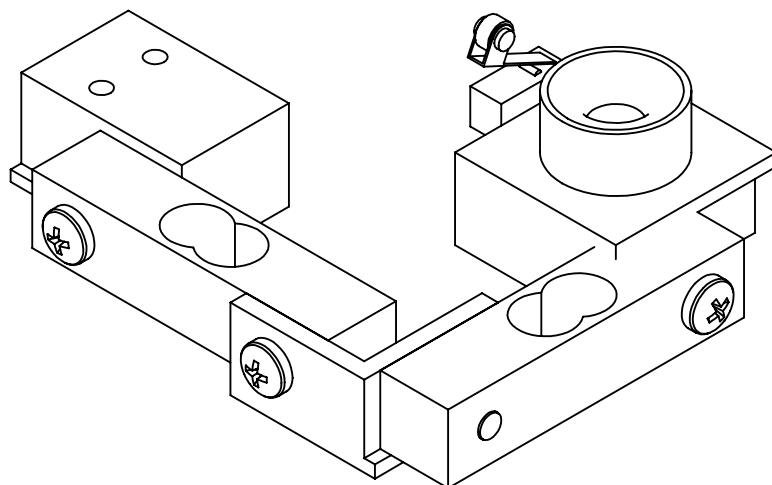

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION 4.2
					Peter J. Savnik	
DRAWN	NAME	SIGNATURE	DATE			
CHK'D				TITLE:		
APP'V'D				TCUAV		
MFG	SolidWorks Student Edition. For Academic Use Only.			DWG NO. loadcell-assembly		A4
Q.A.				WEIGHT:	SCALE:1:2	
					SHEET 1 OF 3	


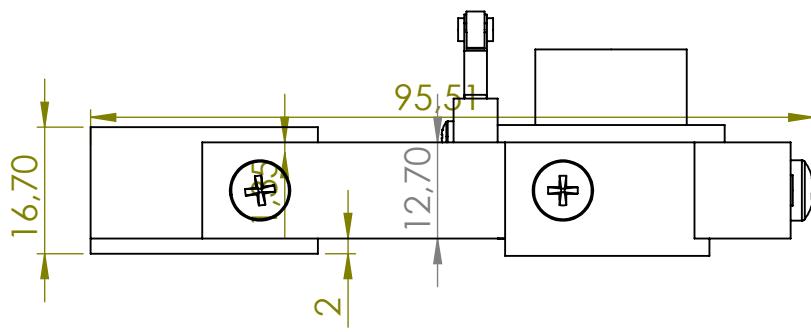
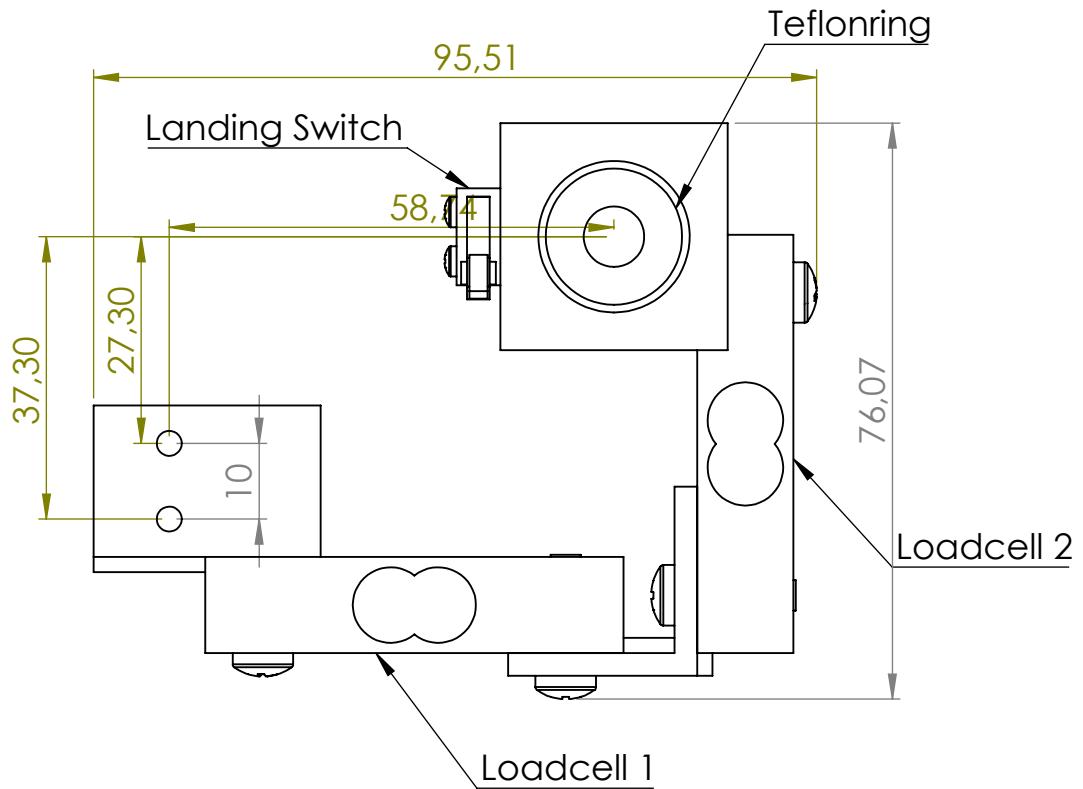


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION 4.2
DRAWN	NAME	SIGNATURE	DATE		TITLE:	
CHK'D						
APP'D						
MFG	SolidWorks Student Edition. For Academic Use Only.		MATERIAL:	DWG NO.	loadcell-assembly	
Q.A				SCALE:1:2		A4
			WEIGHT:		SHEET 2 OF 3	




Material List

ITEM NO.	PART NUMBER	DESCRIPTION	exploded/QTY.
1	cable_hole		1
2	loadcell-vinkel-fitting		1
3	loadcell-to-toplevel-fitting_V2		1
4	loadcell-5kg		2
5	B18.6.7M - M4 x 0.7 x 20 Type I Cross Recessed PHMS --20N		2
6	B18.6.7M - M4 x 0.7 x 16 Type I Cross Recessed PHMS --16N		2
7	teflon-ring-insert		1
8	switch		1
9	B18.6.7M - M2 x 0.4 x 10 Type I Cross Recessed PHMS --10N		2

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION			
DRAWN	NAME	SIGNATURE	DATE								
CHK'D					TITLE:						
APP'V'D											
MFG	SolidWorks Student Edition. For Academic Use Only.										
Q.A.								DWG NO.	loadcell-assembly		
						WEIGHT:	SCALE:1:2	SHEET 3 OF 3			
								A4			

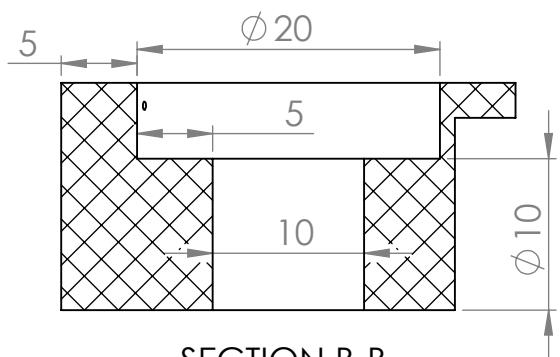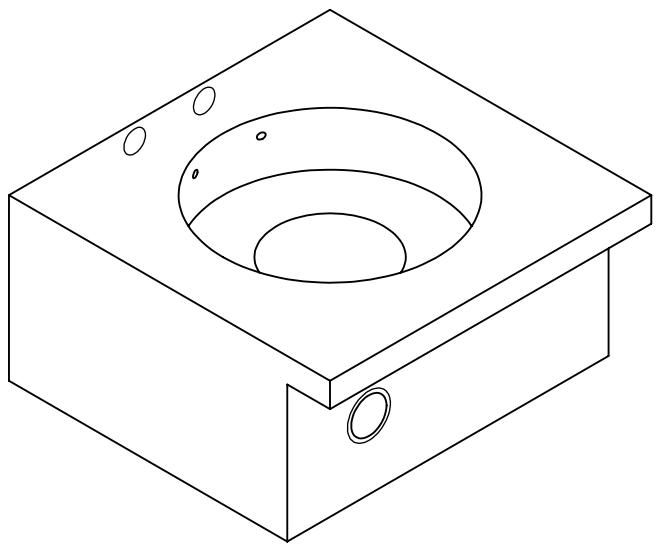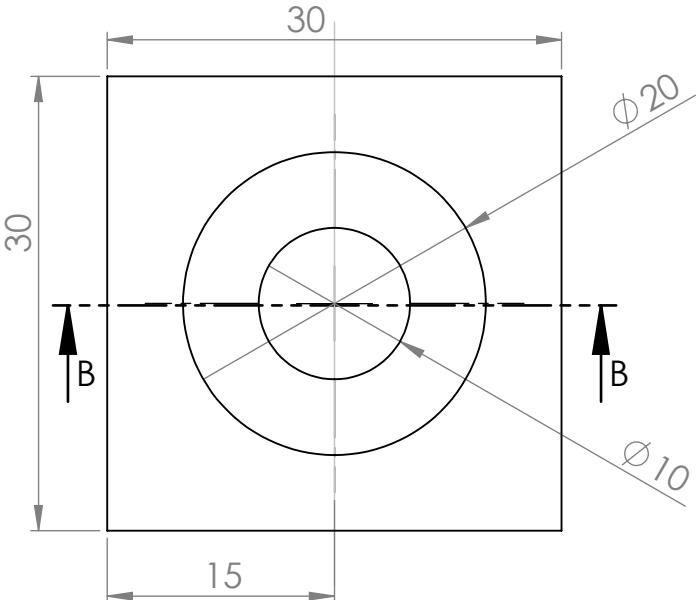

SECTION B-B
SCALE 2 : 1

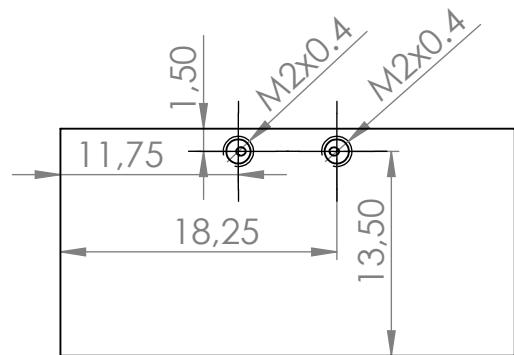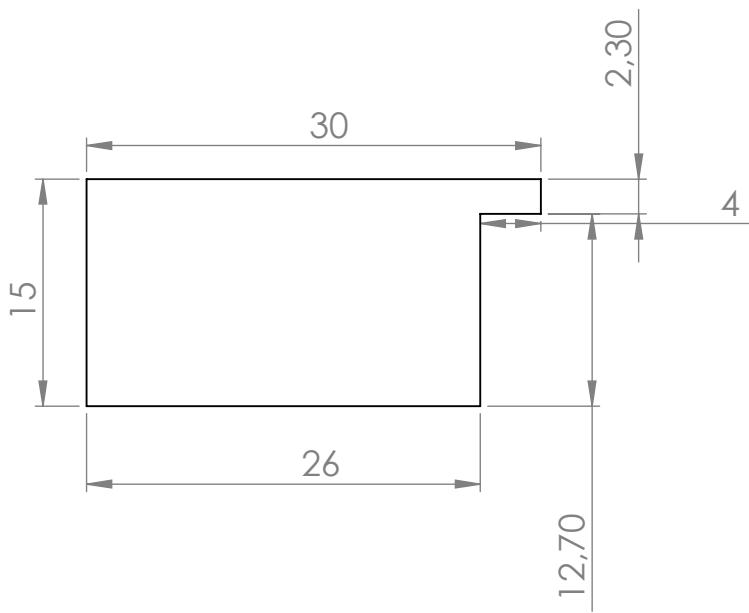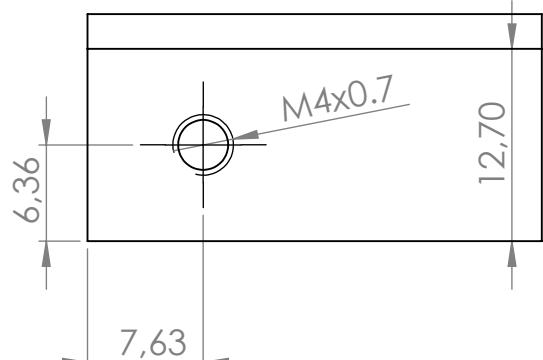

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION 4.2

DRAWN

NAME

SIGNATURE

DATE

CHK'D

APP'D

MFG

Q.A

TITLE:

SolidWorks Student Edition.
For Academic Use Only.

MATERIAL:

DWG NO.





cable_hole

A4

WEIGHT:

SCALE:1:1

SHEET 1 OF 1

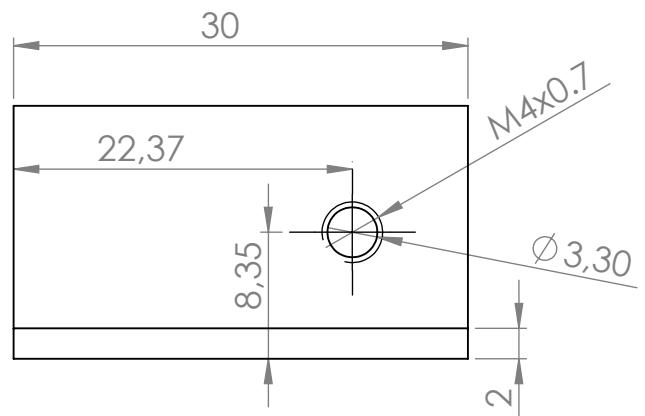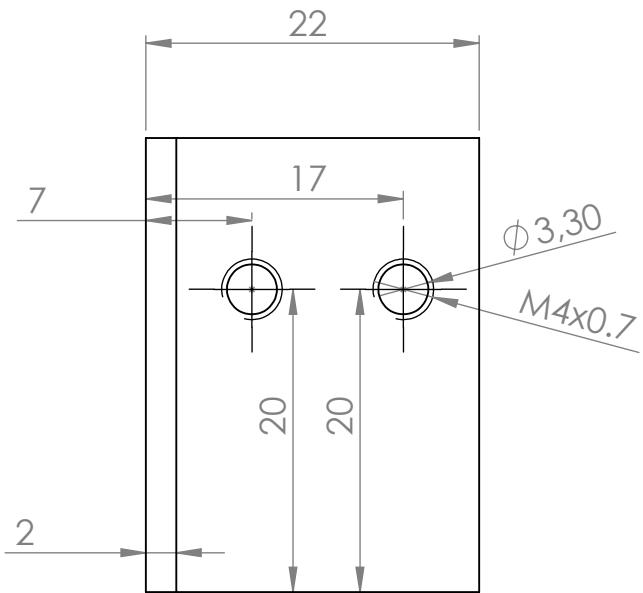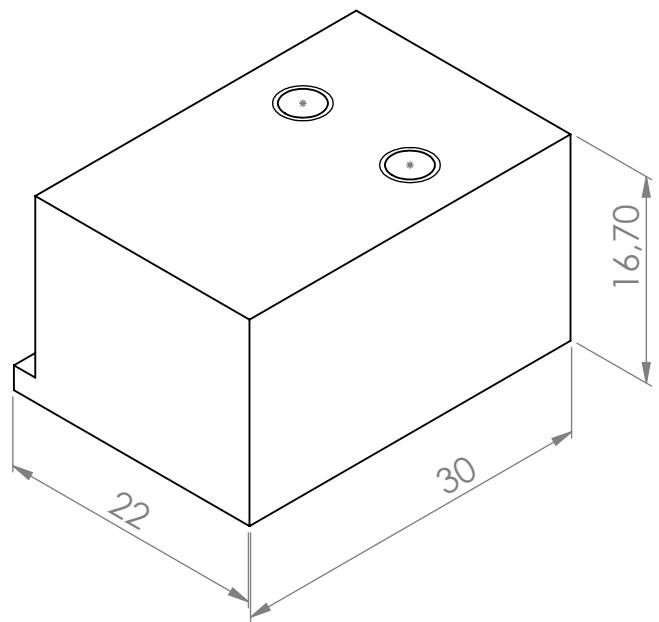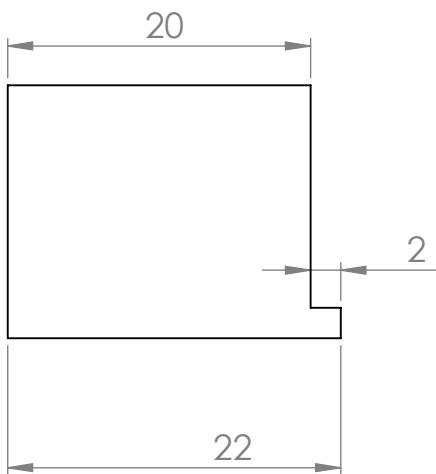

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:

LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

3

DRAWN

NAME

SIGNATURE

DATE

CHK'D

APP'D

MFG

Q.A

SolidWorks Student Edition.
For Academic Use Only.

MATERIAL:
Alu






TITLE:

DWG NO.





SCALE:2:1

SHEET 1 OF 1

loadcell-to-toplevel-fitting

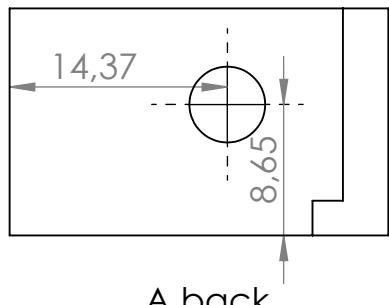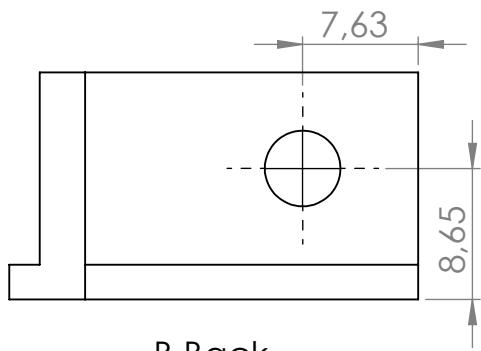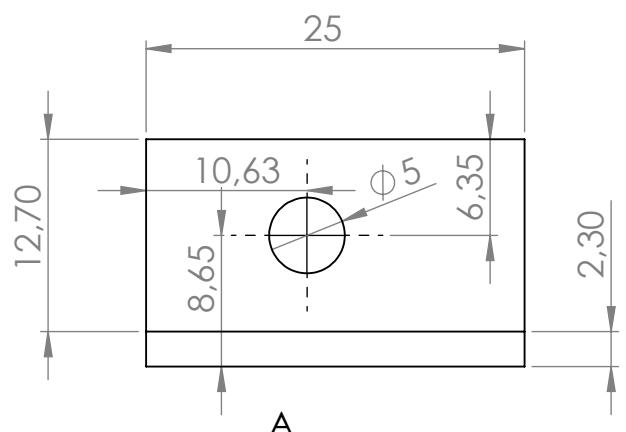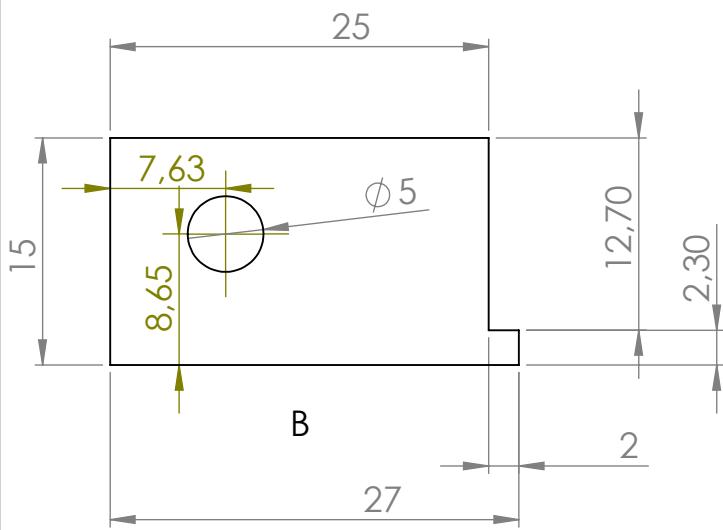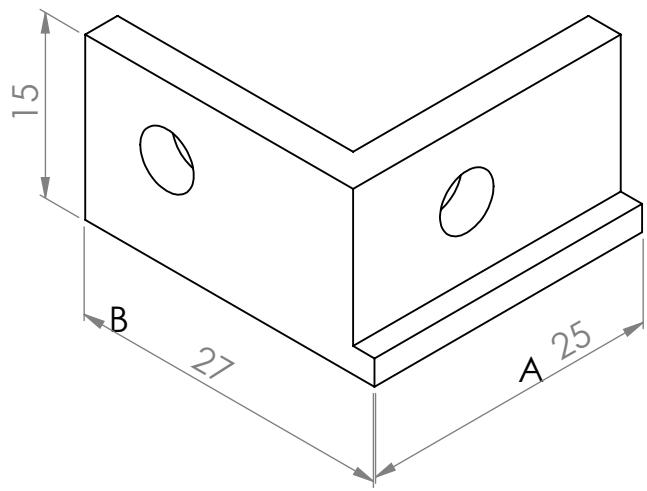

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	3
DRAWN	NAME	SIGNATURE	DATE			TITLE:		
CHK'D								
APP'D								
MFG	SolidWorks Student Edition. For Academic Use Only.							
Q.A	MATERIAL: Alu					DWG NO. loadcell-vinkel-fitting	A4	
						WEIGHT:	SCALE:2:1	
							SHEET 1 OF 1	

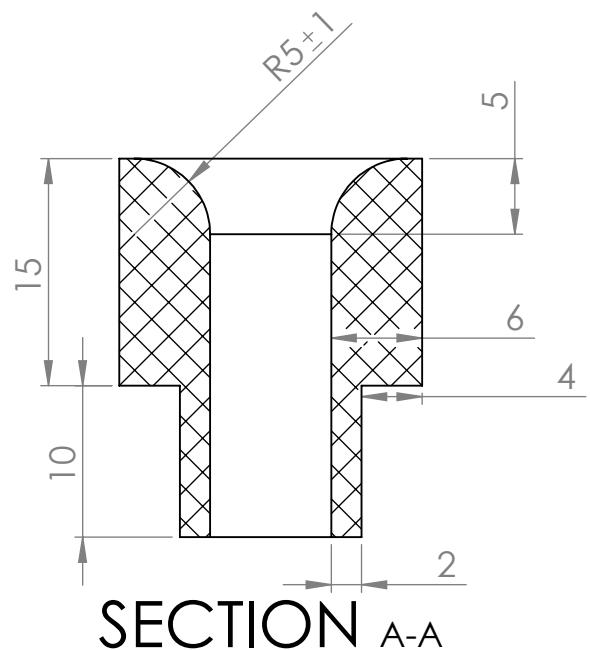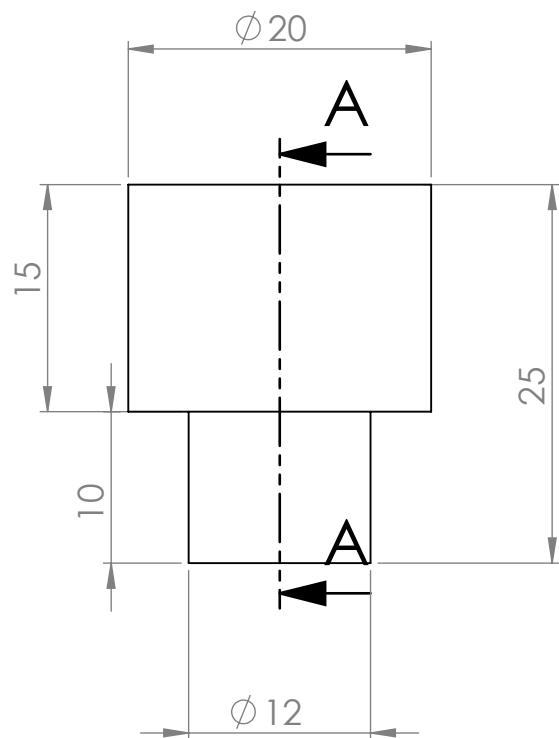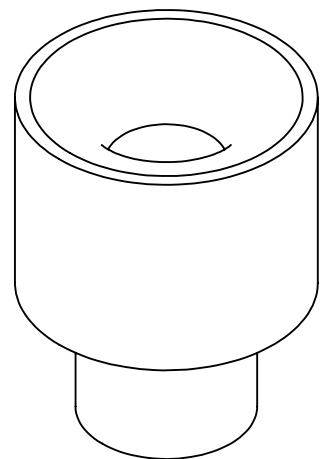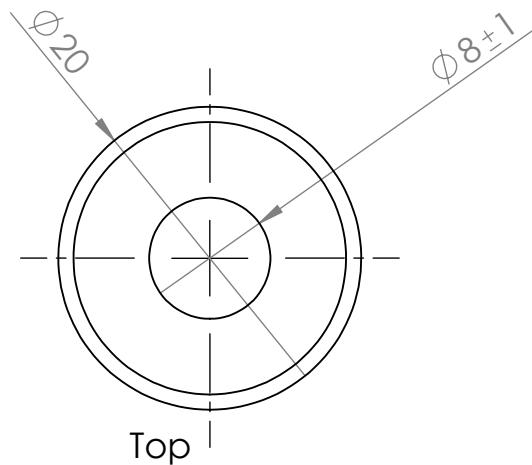


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
TOLERANCES: LINEAR: ANGULAR:						
DRAWN	NAME	SIGNATURE	DATE			
CHK'D						
APP'D						
MFG	SolidWorks Student Edition. For Academic Use Only.					
Q.A					DWG NO.	
					teflon-ring-insert	A4
				WEIGHT:	SCALE:2:1	SHEET 1 OF 1


The Simple Winch

The simple winch is inspired from 3D printer extruder mechanism. The is pushed between two wheels. One wheel is motorized and fixed in position and second is pushing towards the motor wheel with a spring tension. The spring assures the second wheel always have contact with the cable, even if there is small variations in cable thickness. Second wheel also includes an encoder. Having the encoder on the second wheel, instead of the motor wheel, assures the rotation is actually from the cable and not because the motor wheel slips on the cable. The springs in this prototype is normal ballpoint pen springs taken from two arbitrary ballpoint pens.

The encoder is a magnetic encoder with a magnet attached at the end of the shaft. The shaft is made of steel, so the magnet will stick.

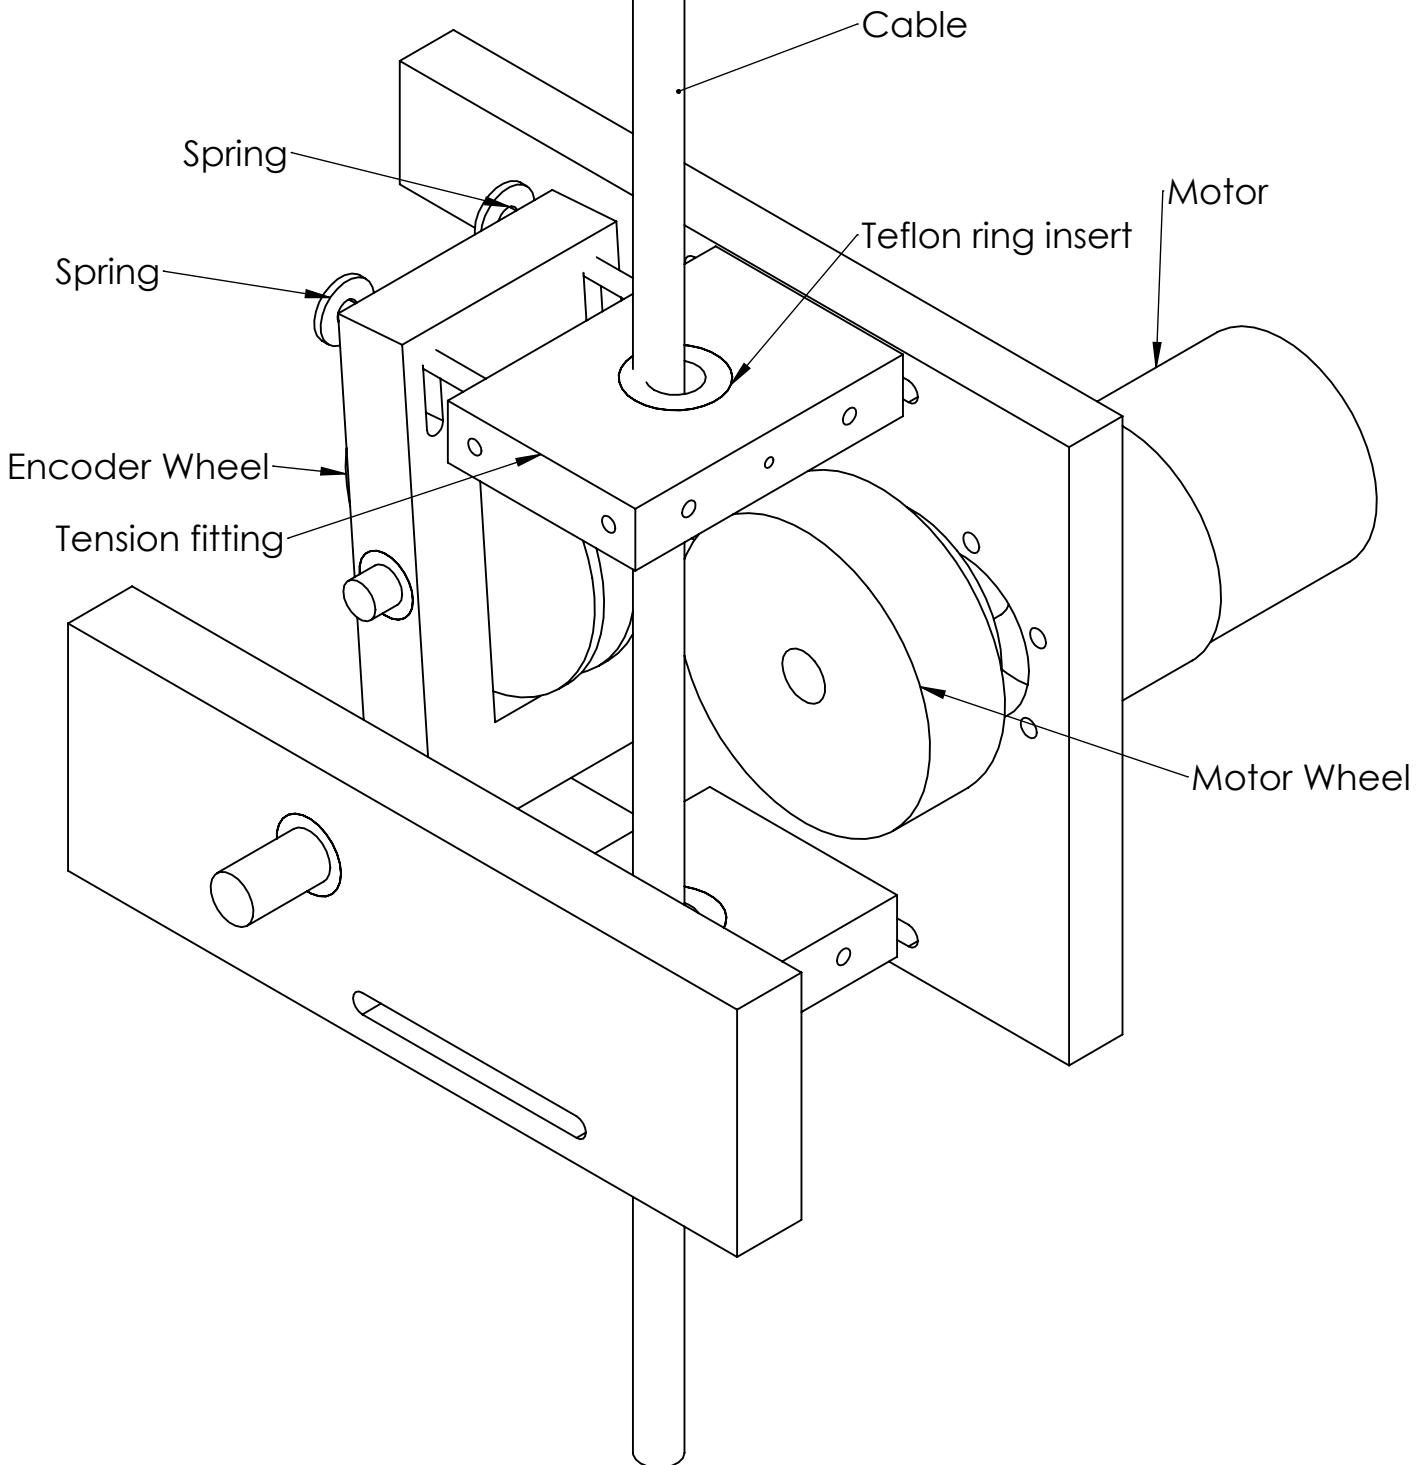


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION 4.2
					Peter J. Savnik	
DRAWN	NAME	SIGNATURE	DATE			
CHK'D						
APP'D						
MFG	SolidWorks Student Edition. For Academic Use Only.					
Q.A.				DWG NO.	winch-assembly	
				WEIGHT:	SCALE:1:5	
					SHEET 1 OF 4	
					A4	

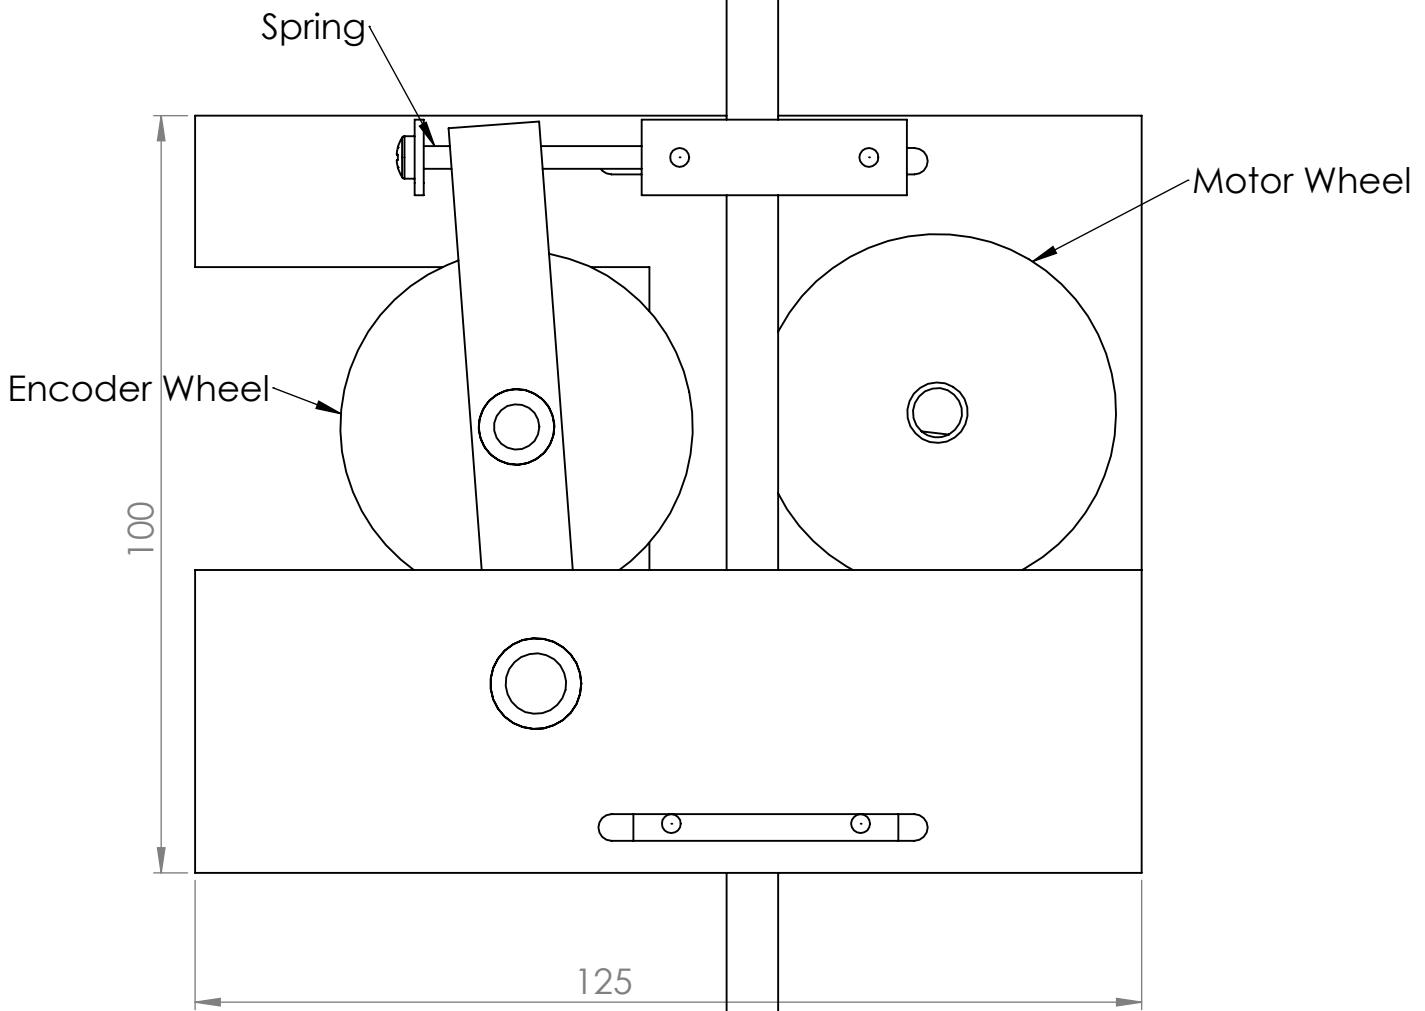

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE		TITLE:		
CHK'D							
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.					DWG NO. winch-assembly	
Q.A						SCALE:1:5	SHEET 2 OF 4
						WEIGHT:	A4

Milled track for adjusting cable position


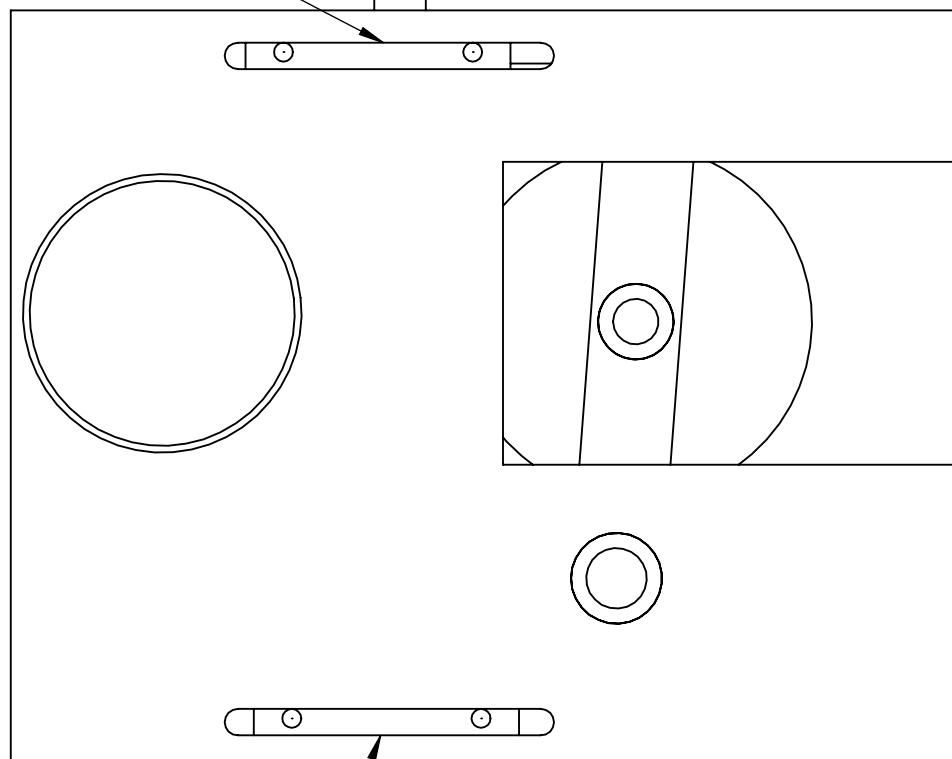


Milled track for adjusting cable position

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE			TITLE:	
CHK'D							
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.			LATERAL	DWG NO.	winch-assembly	
Q.A				WEIGHT:	SCALE:1:5	A4	
						SHEET 3 OF 4	


ITEM NO.	PART NUMBER	DESCRIPTION	Default/ QTY.
1	winch-side-plate-motor		1
2	cable		1
3	winch-side-plate		1
4	wheal-1		1
5	T2-5-60		1
6	tension-fitting		2
7	B18.6.7M - M3 x 0.5 x 30 Type I Cross Recessed PHMS --30N		2
8	axis-holder		1
9	brass-bearing		2
10	smooth-rod-6mm		1
11	smooth-rod-8mm-winch		1
12	brass-bearing-8-12		2
13	B18.22M - Plain washer, 3 mm, regular		2
14	teflon-ring		2
15	Pololu motor		1

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION	
DRAWN	NAME	SIGNATURE	DATE						
CHK'D					TITLE:				
APP'D									
MFG	SolidWorks Student Edition. For Academic Use Only.					DWG NO.			
Q.A.						SCALE:1:5		SHEET 4 OF 4	
						WEIGHT:			A4

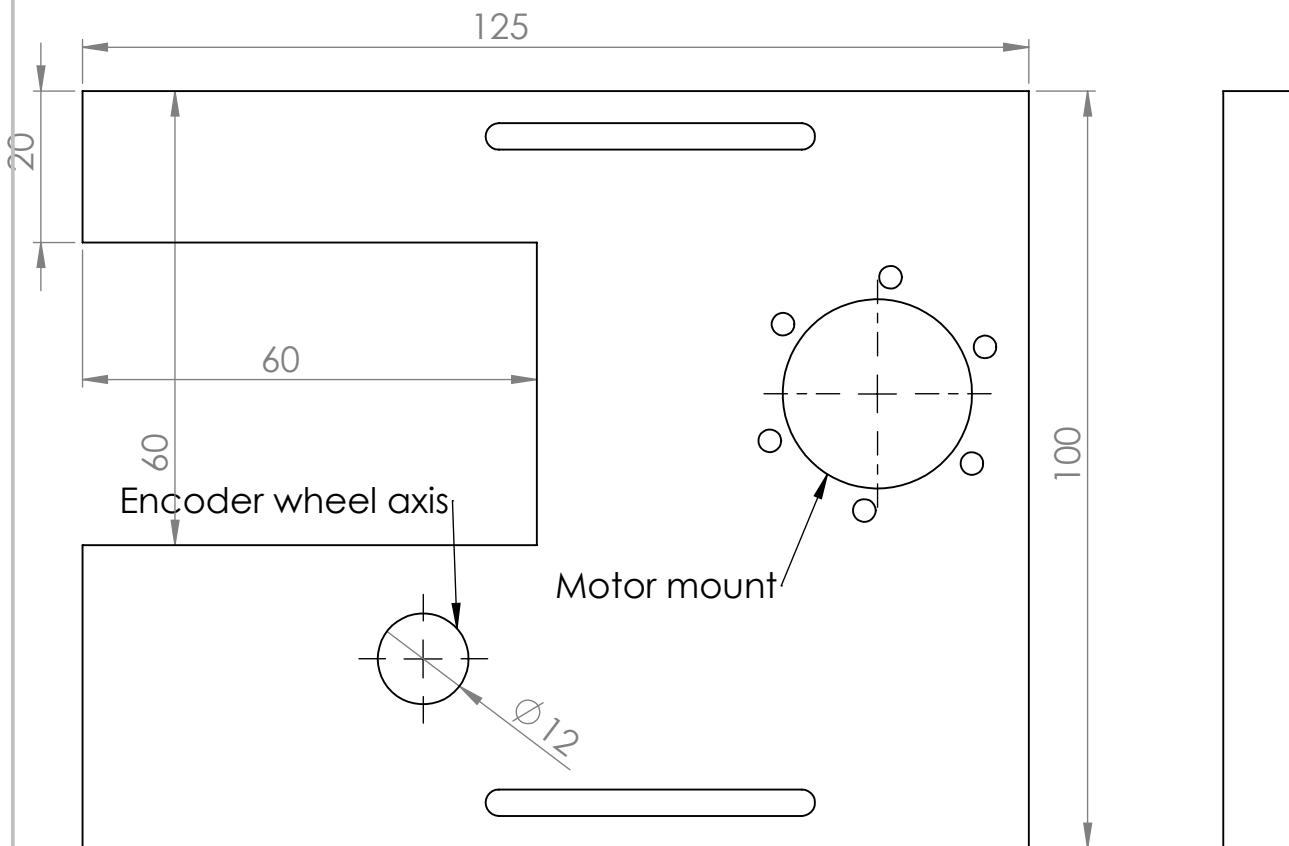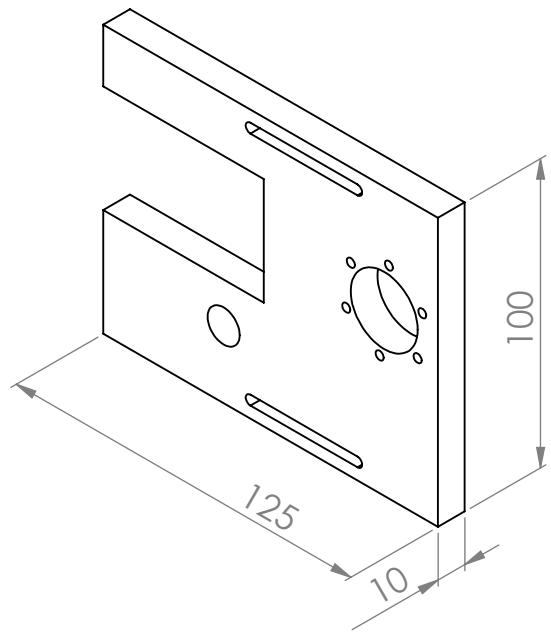

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	NAME	SIGNATURE	DATE			TITLE:		
CHK'D								
APP'D								
MFG								
Q.A								
SolidWorks Student Edition. For Academic Use Only.					DWG NO.	winch-side-plate-motor		
					SCALE:1:2	SHEET 1 OF 4		
				WEIGHT:				

Milled track for cable position adjustment

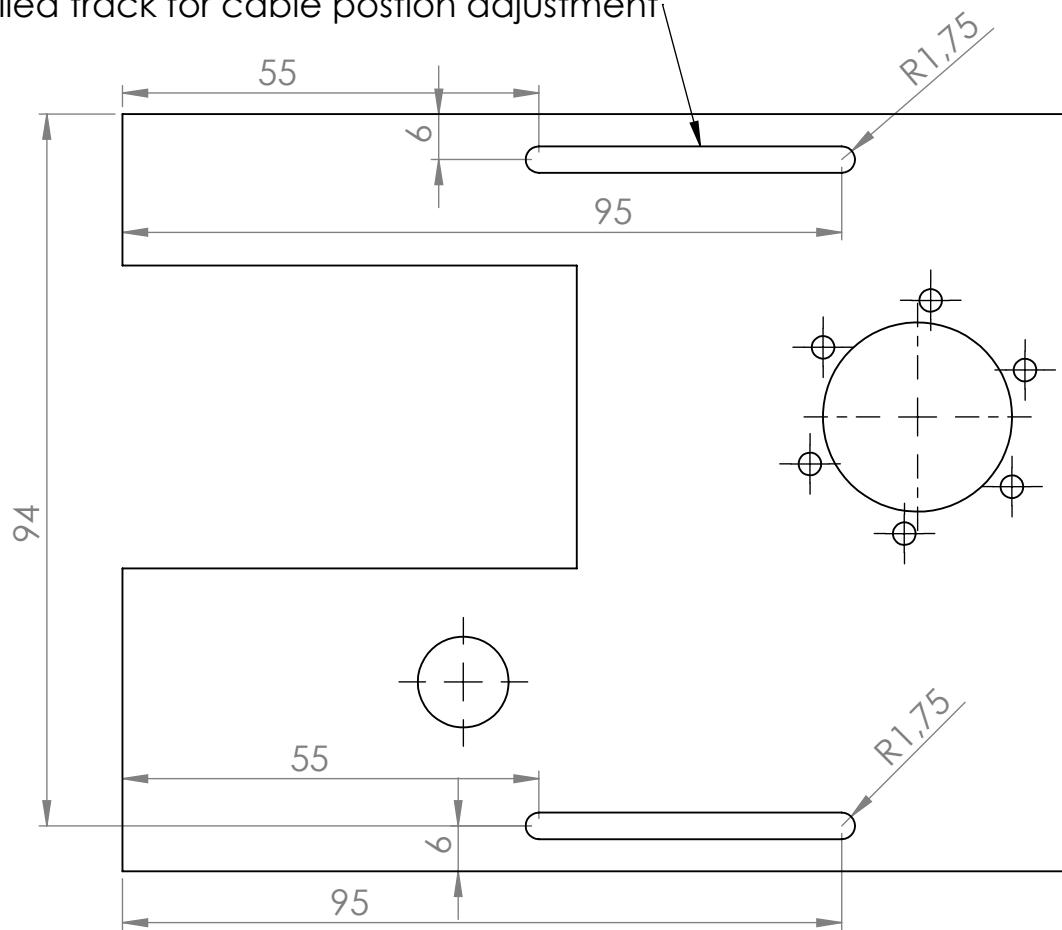

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

DRAWN

NAME

SIGNATURE

DATE

TITLE:

CHK'D

APP'D

MFG

Q.A

**SolidWorks Student Edition.
For Academic Use Only.**


DWG NO.

winch-side-plate-motor

WEIGHT:

SCALE:1:2

SHEET 2 OF 4

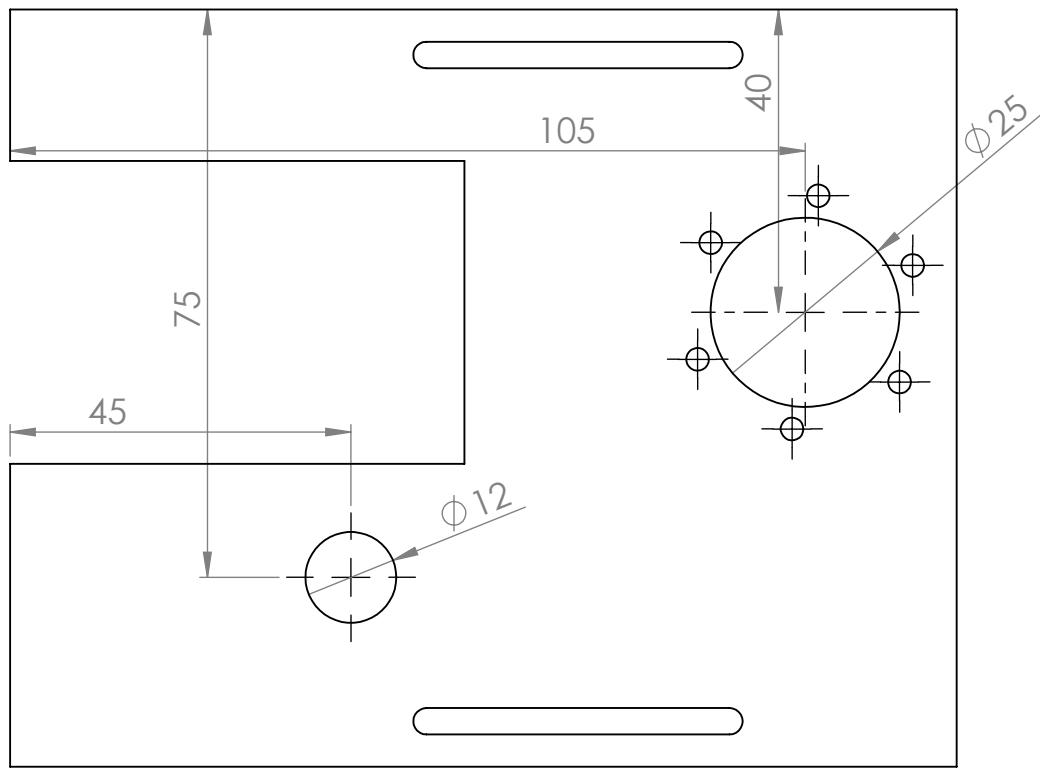

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:

LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

DRAWN

NAME

SIGNATURE

DATE

TITLE:

CHK'D

APP'D

MFG

Q.A

SolidWorks Student Edition.
For Academic Use Only.


DWG NO.

winch-side-plate-motor



WEIGHT:

SCALE:1:2


SHEET 3 OF 4

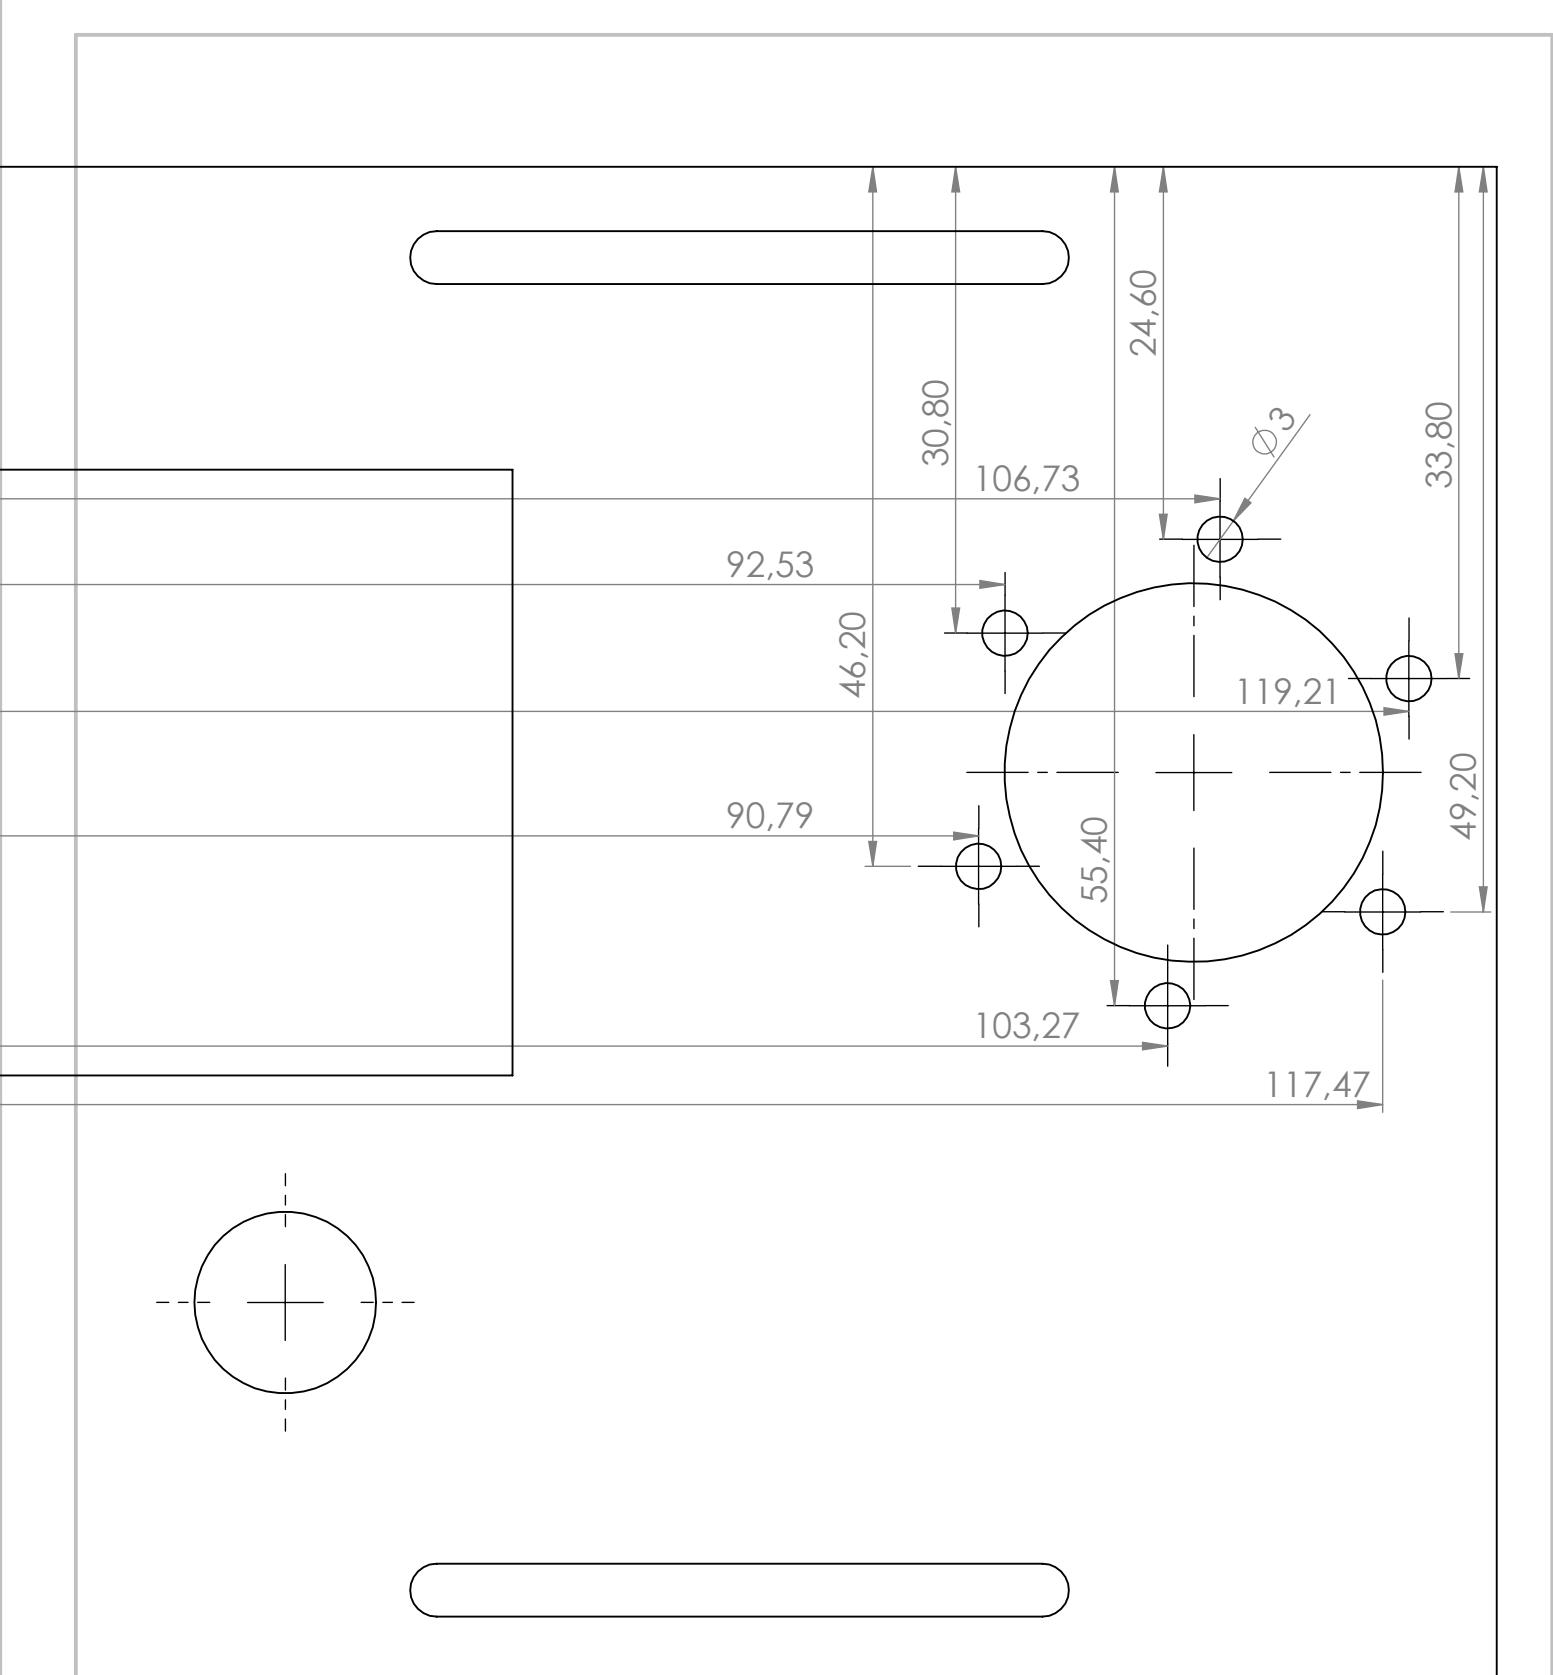





UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	NAME	SIGNATURE	DATE					
CHK'D						TITLE:		
APP'D								
MFG								
Q.A.								
SolidWorks Student Edition. For Academic Use Only.					DWG NO.	winch-side-plate-motor		A4
					WEIGHT:	SCALE:1:2		SHEET 4 OF 4

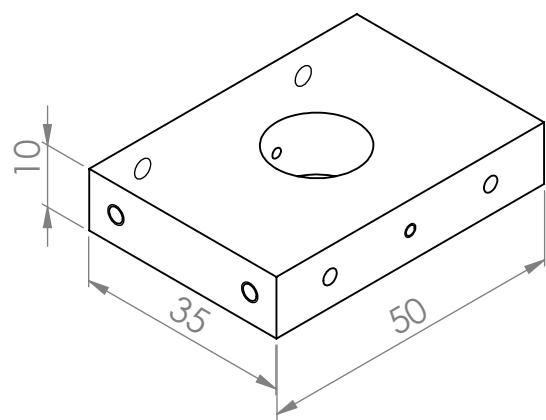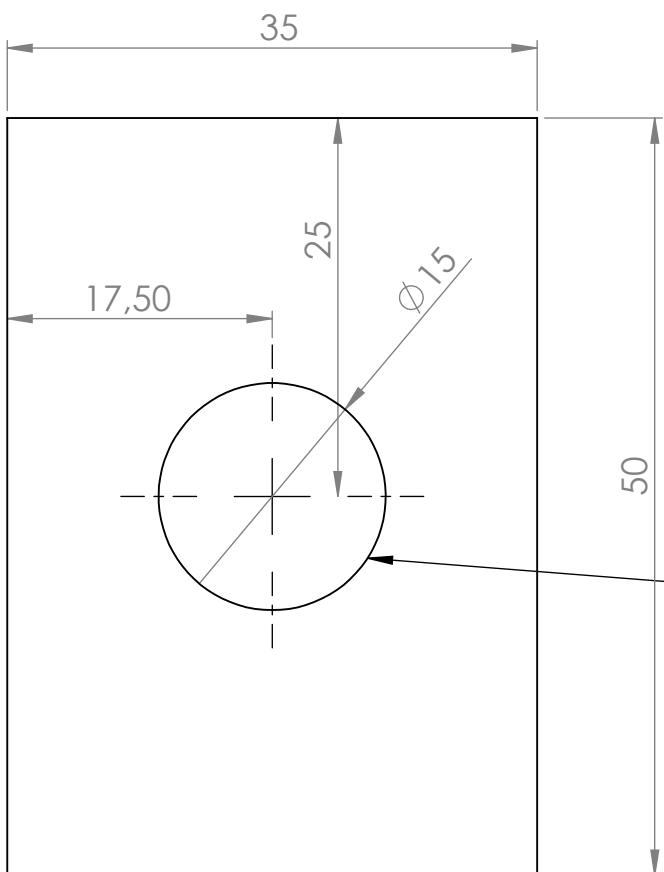

Hole for Teflon insert

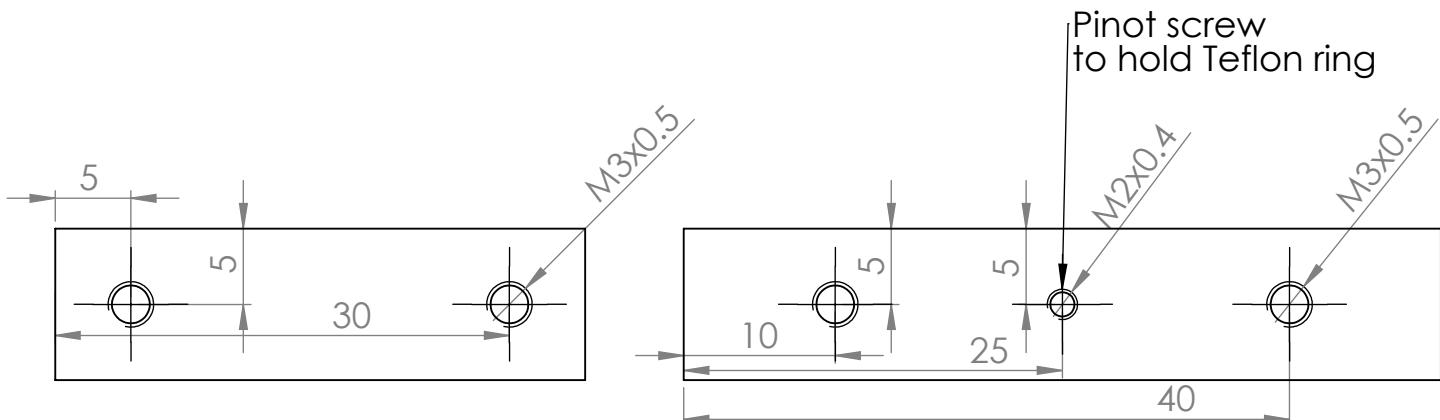

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE			
CHK'D				TITLE:		
APP'D						
MFG	SolidWorks Student Edition. For Academic Use Only.			DWG NO.		
Q.A				WEIGHT:	SCALE:1:1	SHEET 1 OF 1
					A4	

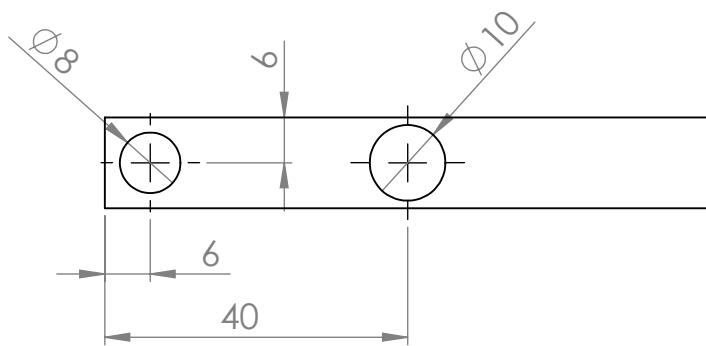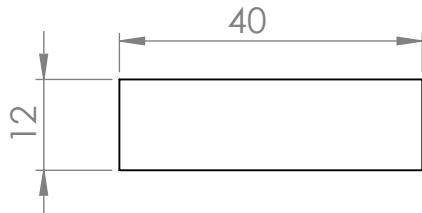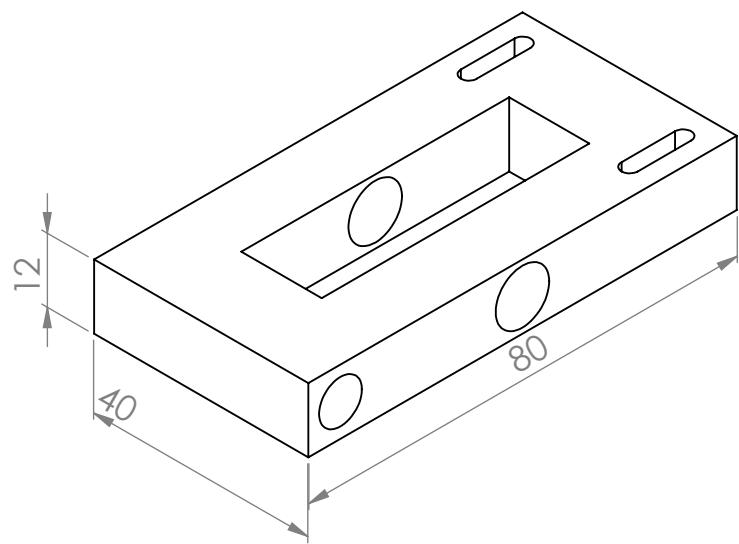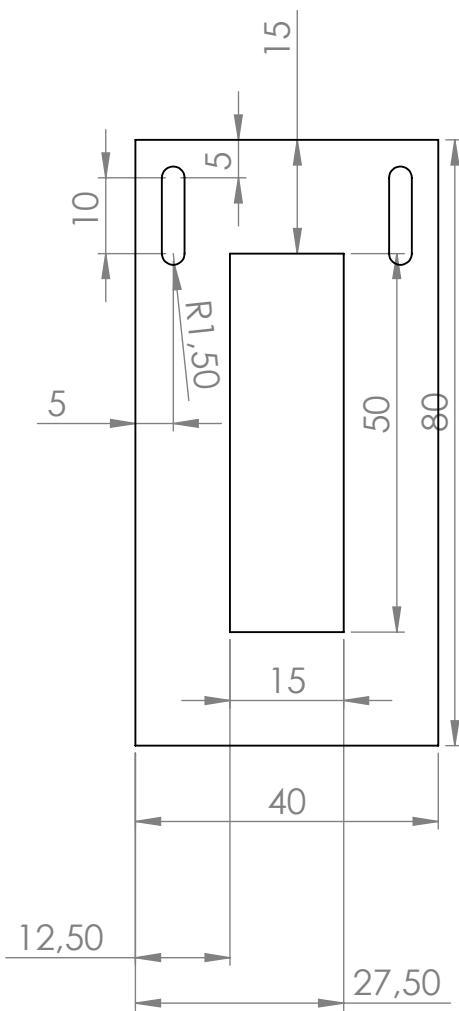

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

DRAWN

NAME

SIGNATURE

DATE

TITLE:

CHK'D

APP'D

MFG

Q.A

SolidWorks Student Edition.
For Academic Use Only.

DWG NO.




axis-holder

A4





WEIGHT:

SCALE:1:2

SHEET 1 OF 1


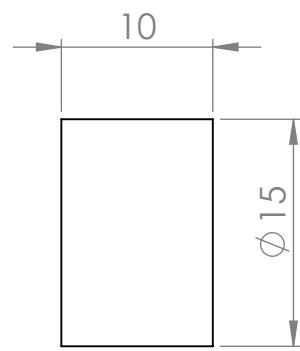
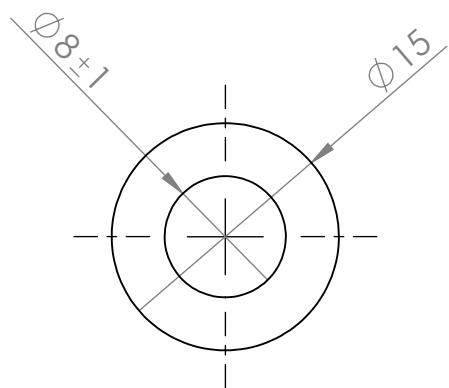
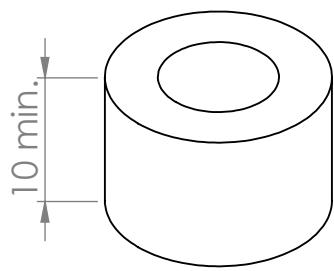


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	NAME	SIGNATURE	DATE					
CHK'D						TITLE:		
APP'D								
MFG								
Q.A.	SolidWorks Student Edition. For Academic Use Only.					DWG NO.	teflon-ring	
						SCALE:2:1	SHEET 1 OF 1	
				WEIGHT:				A4

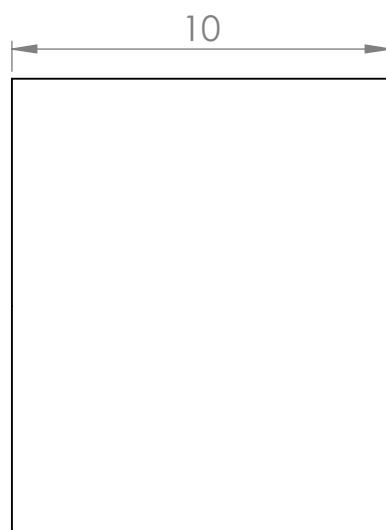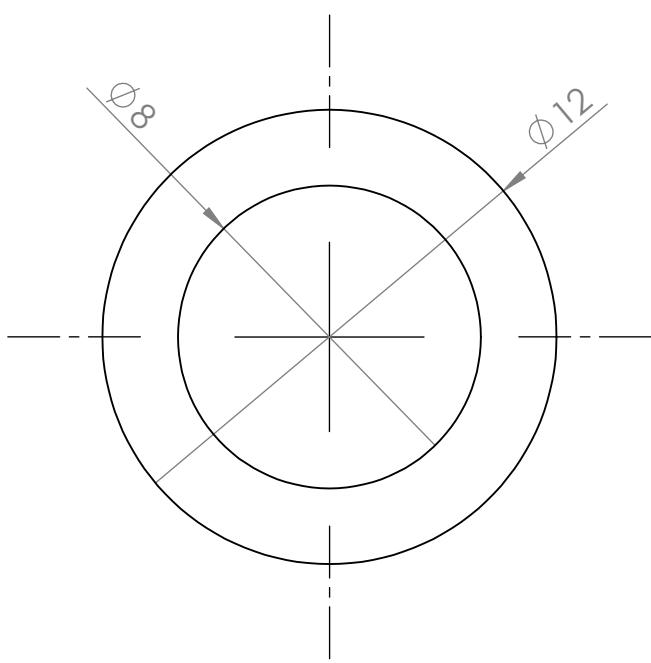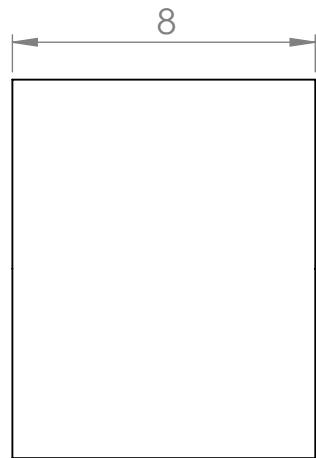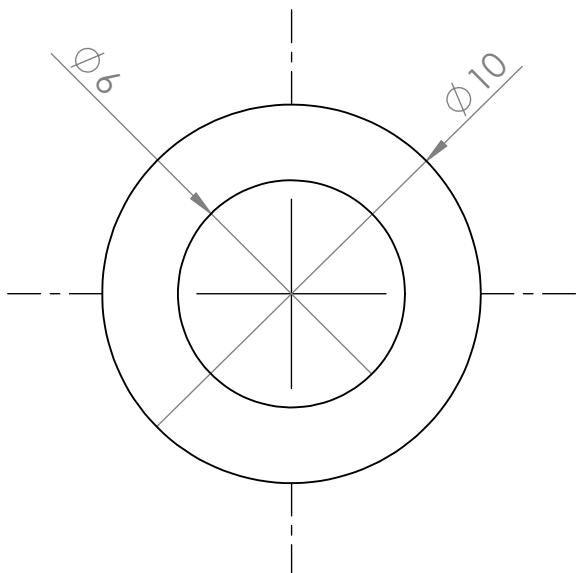

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	NAME	SIGNATURE	DATE					
CHK'D					TITLE:			
APP'D								
MFG	SolidWorks Student Edition. For Academic Use Only.				MATERIAL: Brass		DWG NO.	
Q.A					WEIGHT:		SCALE:5:1	SHEET 1 OF 1
								A4

Smooth rods

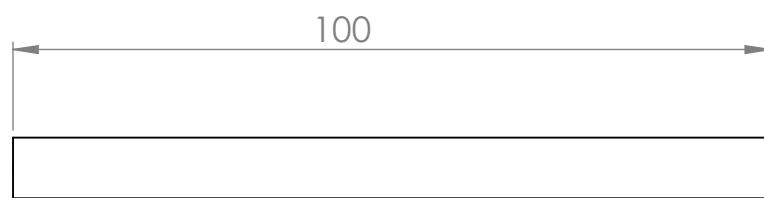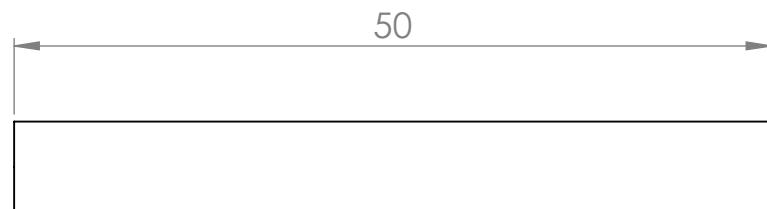

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH: Polished			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE				
CHK'D							
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.			LATERAL			
Q.A					DWG NO.	smooth-rods	
				WEIGHT:	SCALE:2:1	SHEET 1 OF 1	
						A4	



The Cable Drum

The Cable Drum is the most developed and complex prototype of the two winching methods. It has 3 motors, 2 to turn the drum around and 1 to move the carrier from side to side. Again it is very much inspired of open source 3d printers¹. Every thing can be mounted to the bottom of the helipad.

The power is connected to the drum through 2 slips rings. The slip rings can't carry any payload since they are made of thin plastic.

The drum has 4 big holes in the vertical direction to help passive heat dissipation from the cable.

¹Reprep open source 3d printers, www.reprap.org.

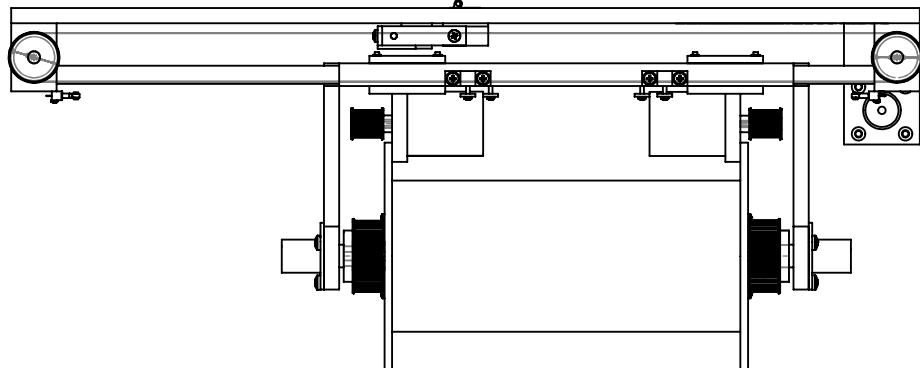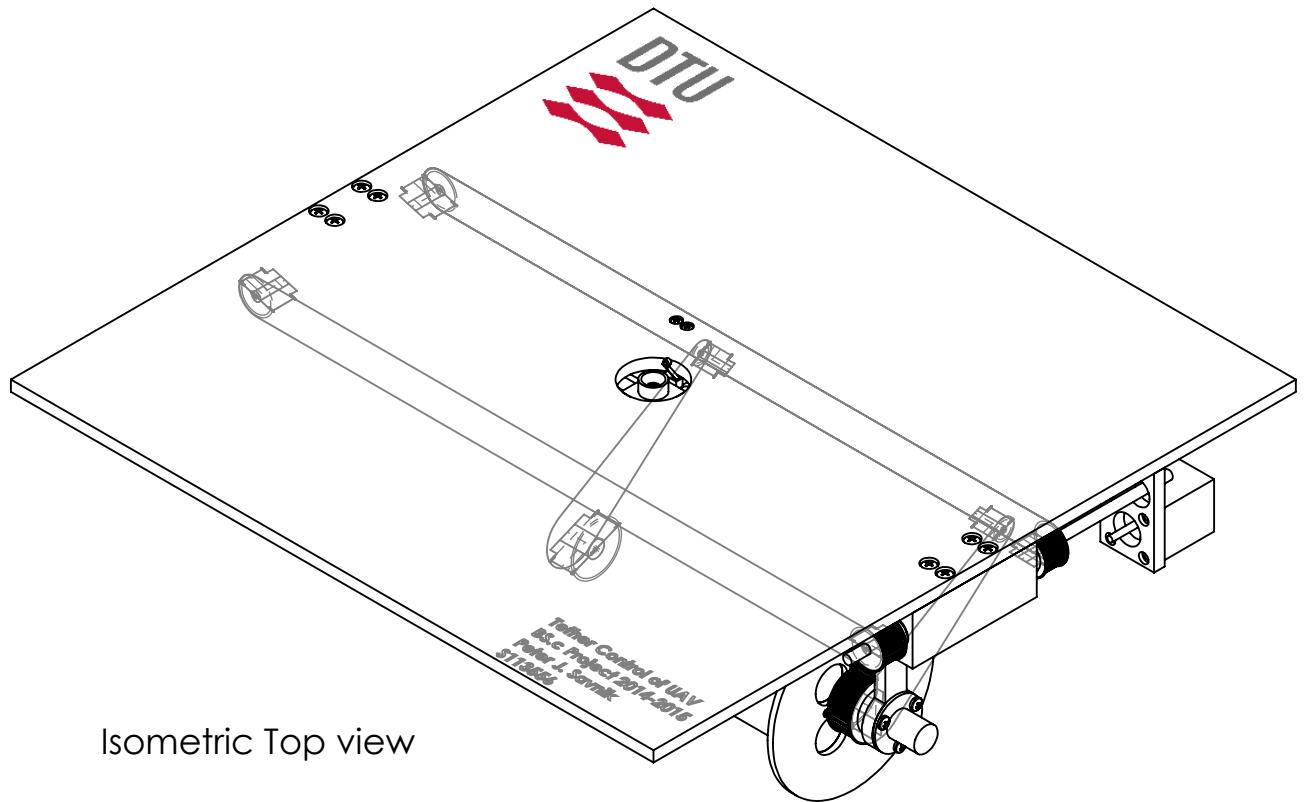

Front view



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	SIGNATURE	DATE						
CHK'D						TITLE:		
APP'D								
MFG								
Q.A.						DWG NO. main_assembly		
						SCALE:1:20		
						SHEET 1 OF 4		
						A4		

**SolidWorks Student Edition.
For Academic Use Only.**

WEIGHT:


SCALE:1:20

SHEET 1 OF 4




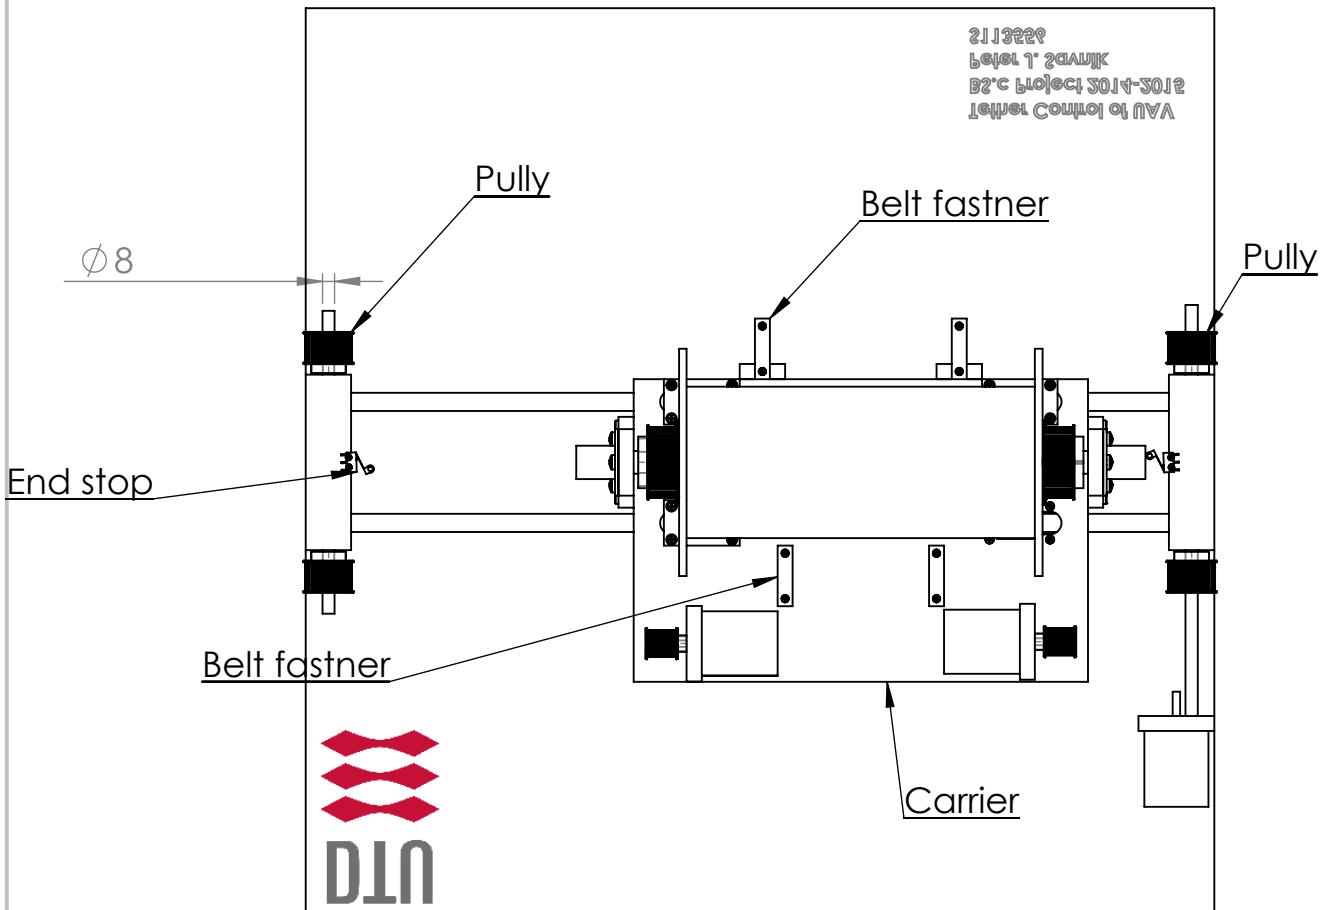
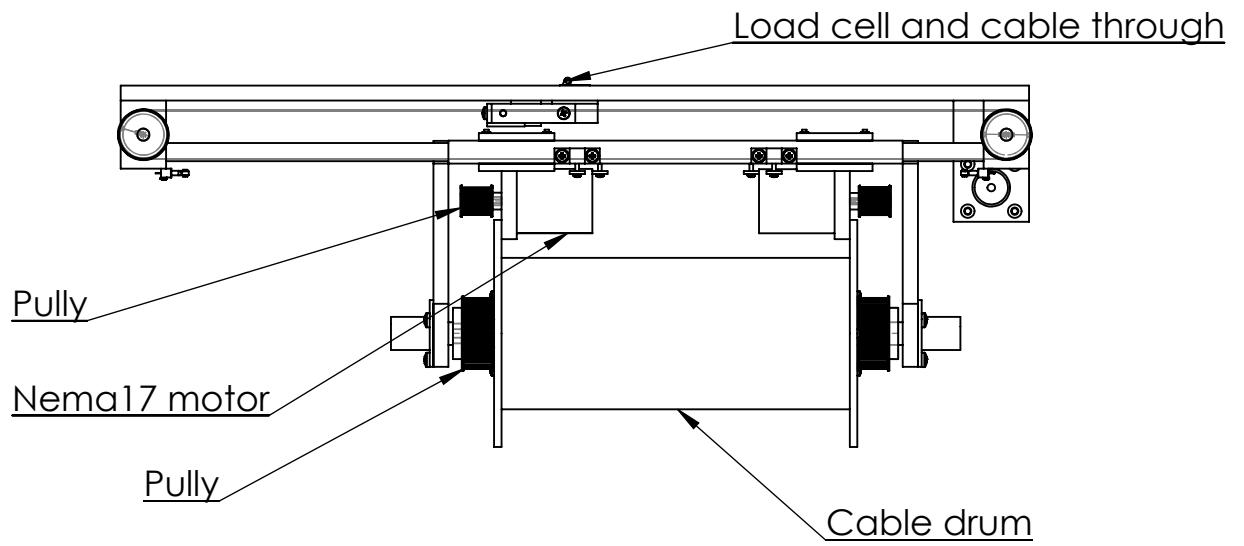


Bottom view

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE			
CHK'D						
APP'D						
MFG	SolidWorks Student Edition. For Academic Use Only.					
Q.A					DWG NO.	
					main_assembly	A4
				WEIGHT:	SCALE:1:20	SHEET 2 OF 4

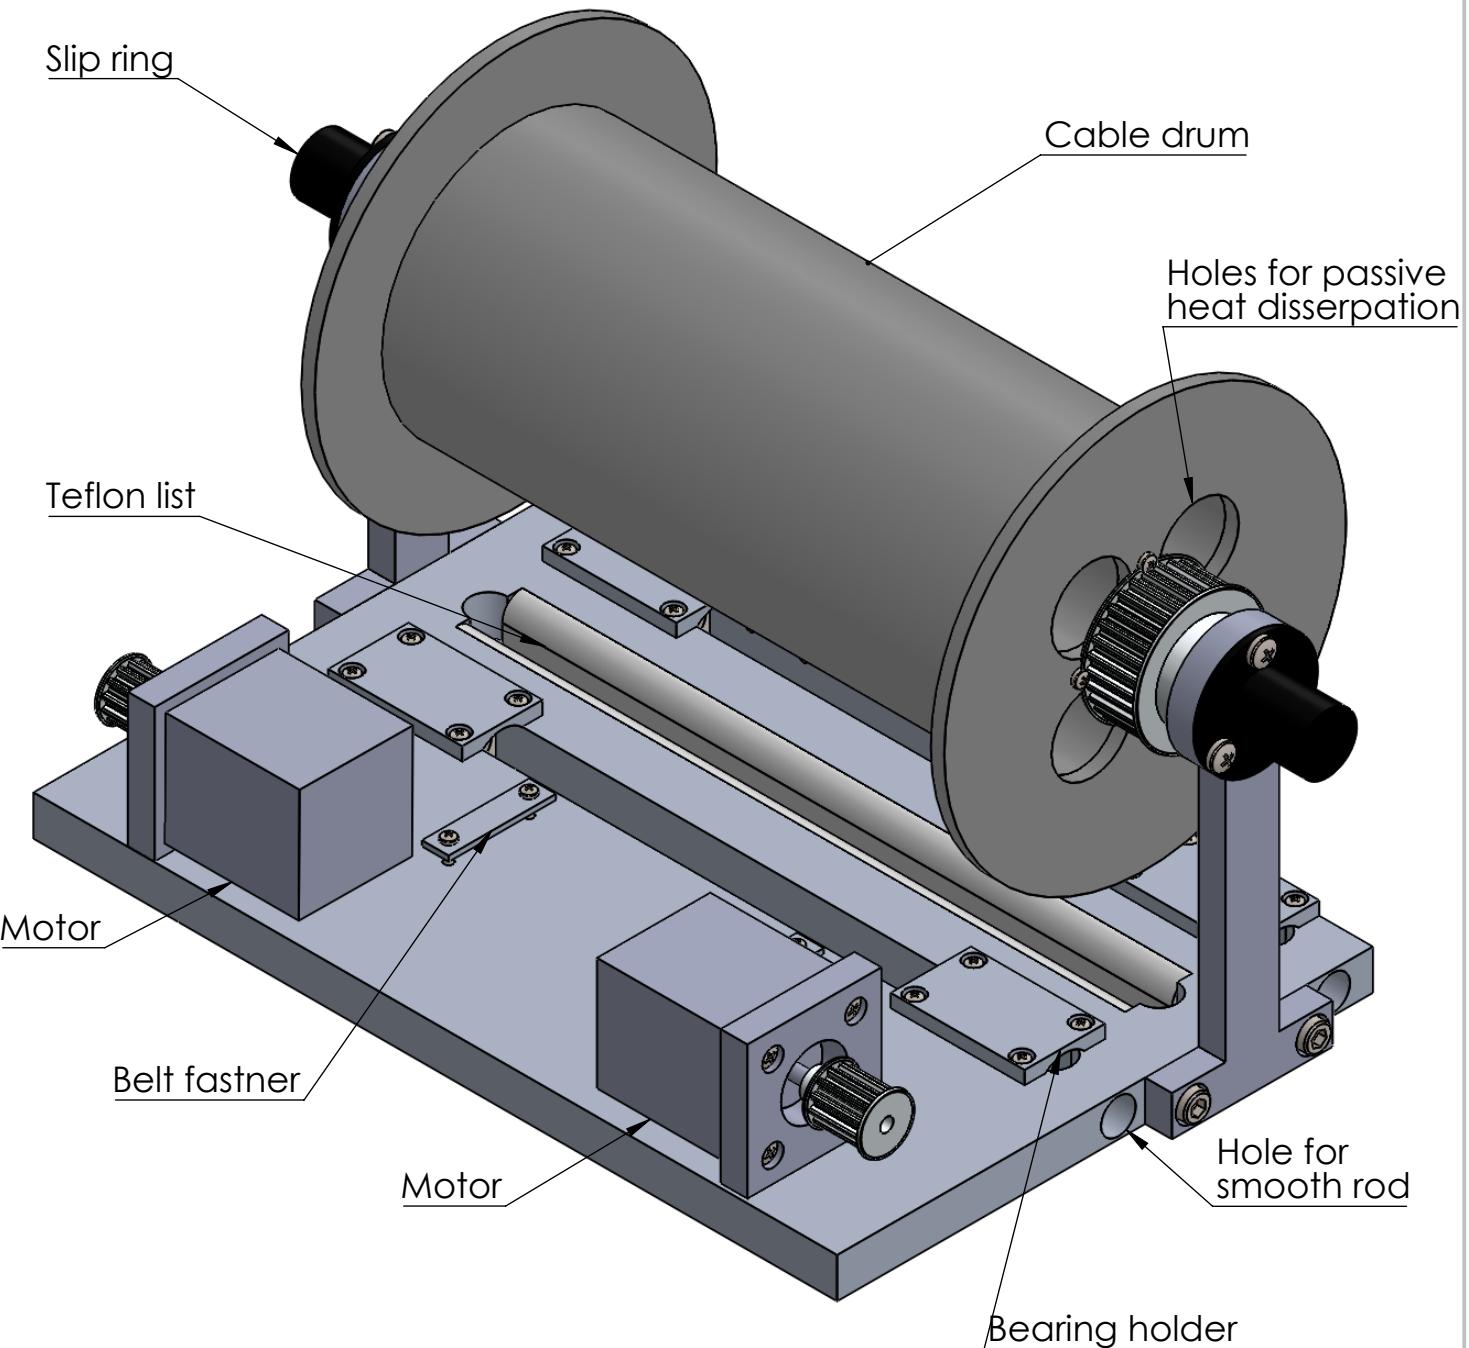

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION 3
Peter J. Savnik						
DRAWN	NAME Peter J. Savnik	SIGNATURE	DATE		TITLE:	
CHK'D						
APP'D						
MFG	SolidWorks Student Edition. For Academic Use Only.					
Q.A.						DWG NO. drum-carrier-assembly
						WEIGHT:
						SCALE:1:10
						SHEET 1 OF 10

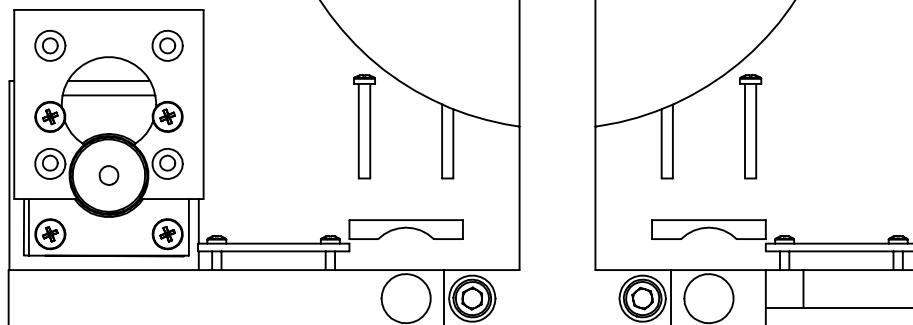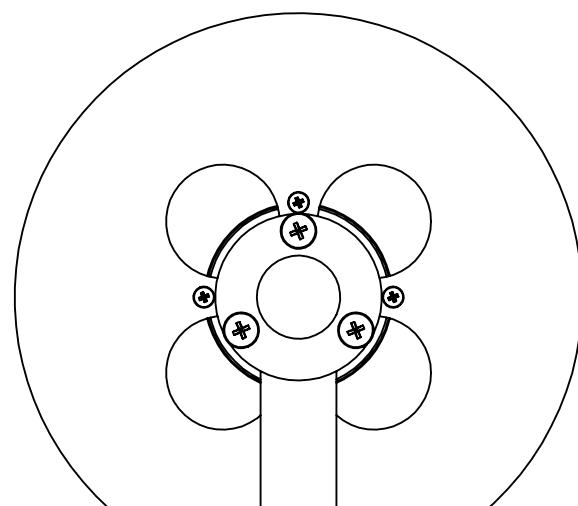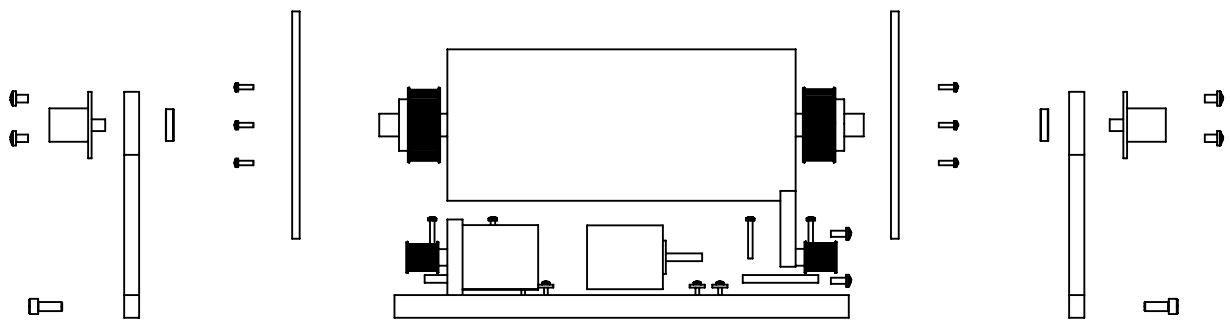

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

DRAWN Peter J. Savnik

CHK'D

APP'D

MFG SolidWorks Student Edition.
For Academic Use Only.

Q.A.

TITLE:

DWG NO.



drum-carrier-assembly

M4

WEIGHT:




SCALE:1:10

SHEET 3 OF 10

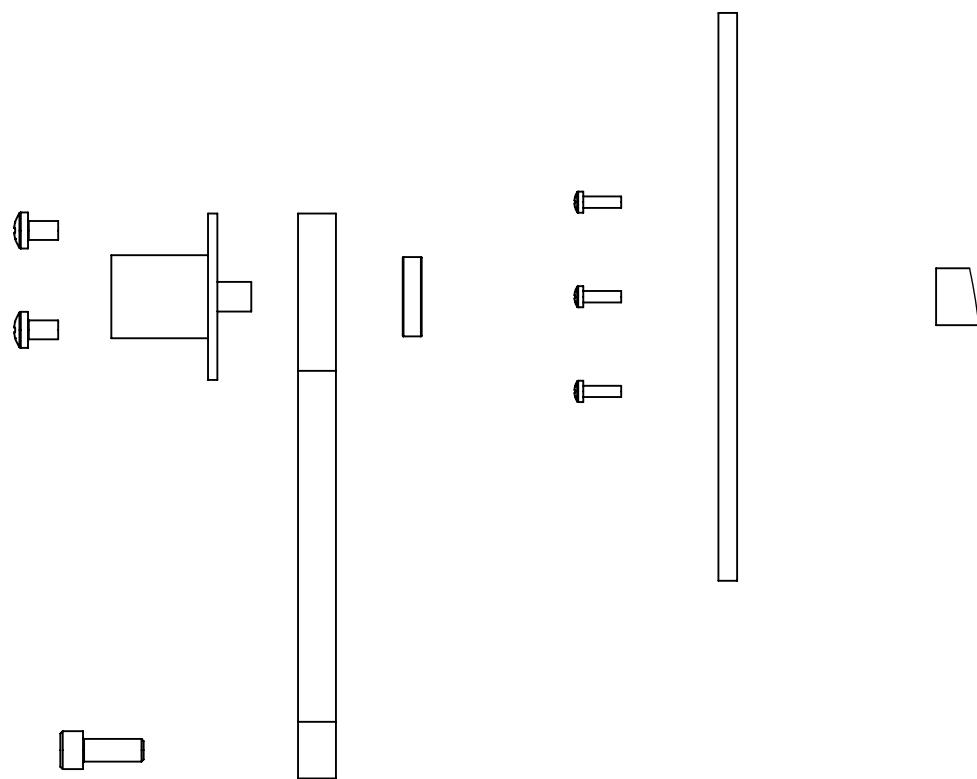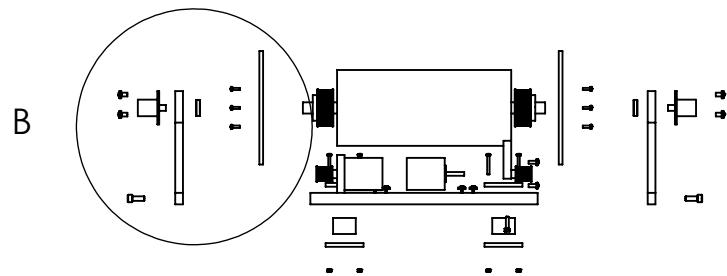


DETAIL B
SCALE 1 : 2

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	Peter J. Savnik	SIGNATURE	DATE			TITLE: SolidWorks Student Edition. For Academic Use Only.	
CHK'D							
APPV'D							
MFG							
Q.A					DWG NO.: drum-carrier-assembly	SCALE:1:10	SHEET 4 OF 10

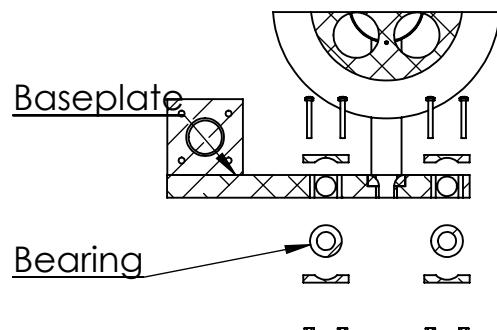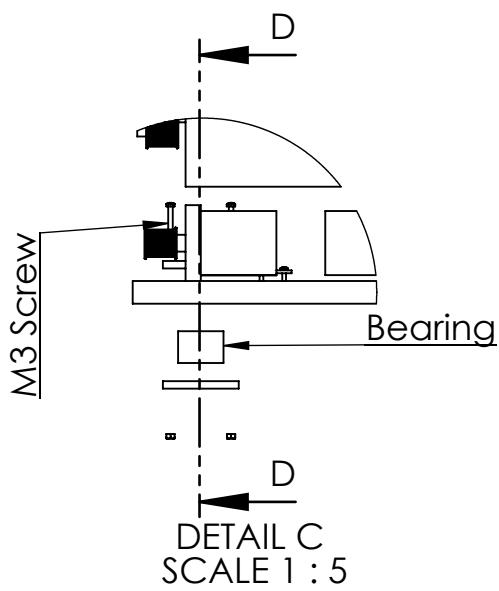
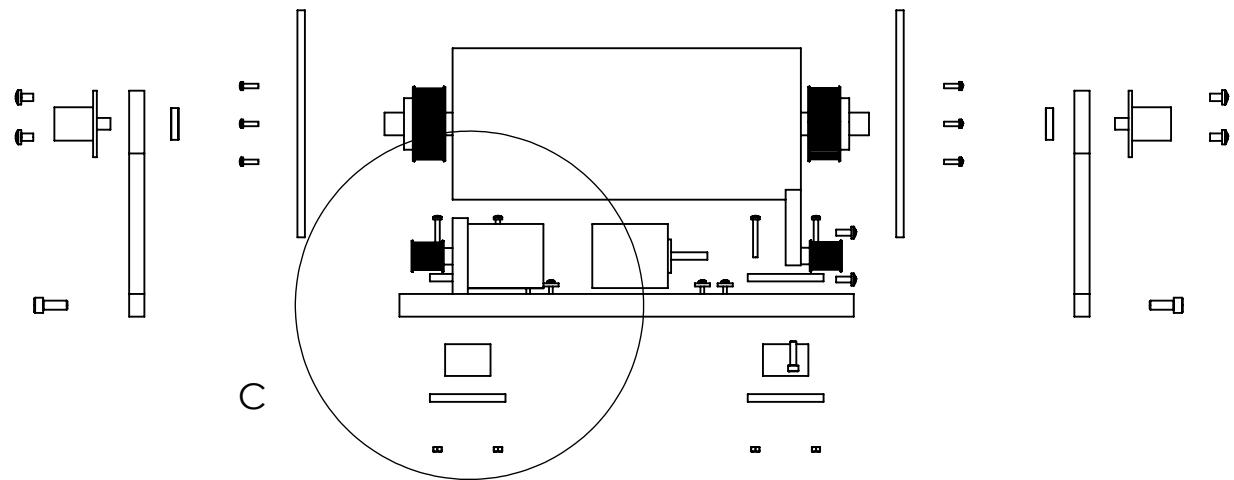


SECTION D-D

SCALE 1 : 5


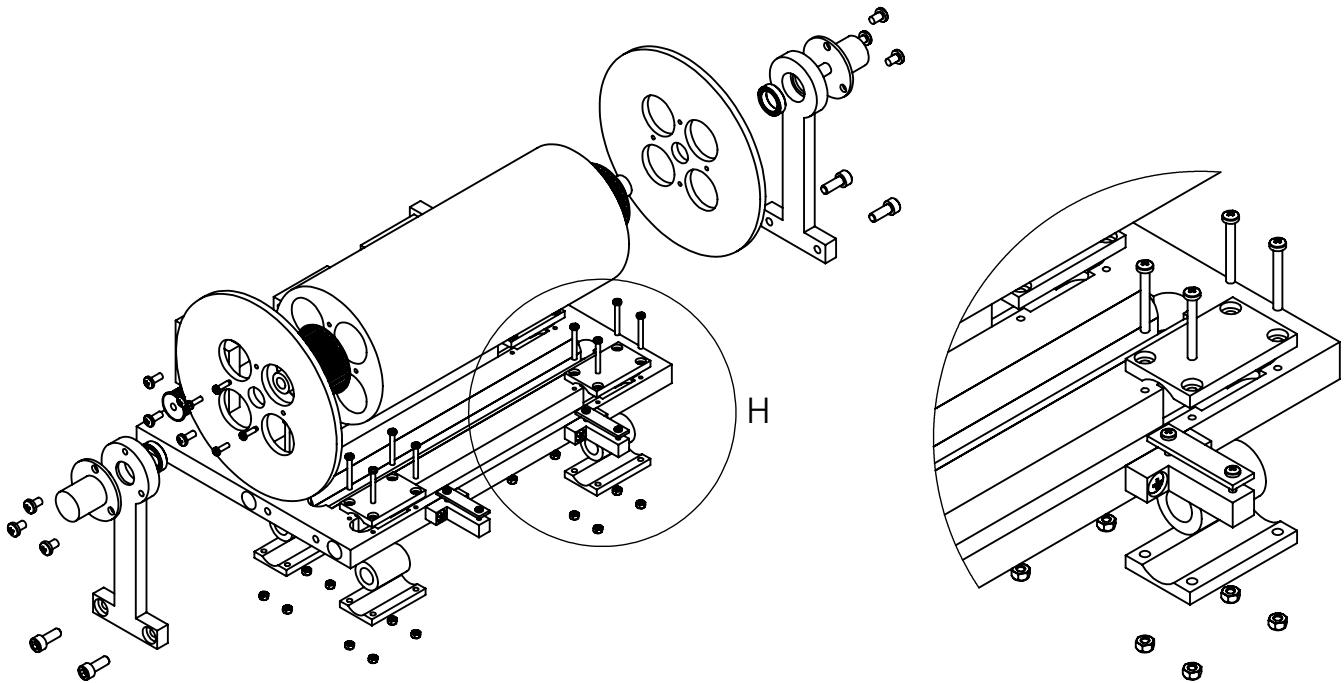


DETAIL H
SCALE 2:5

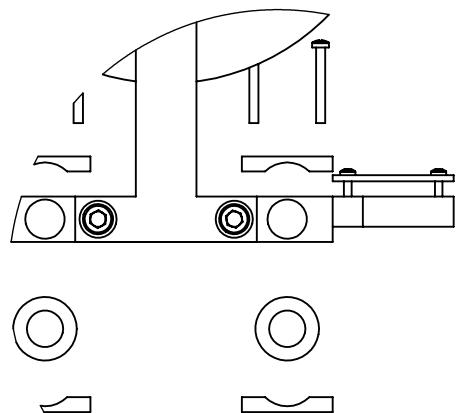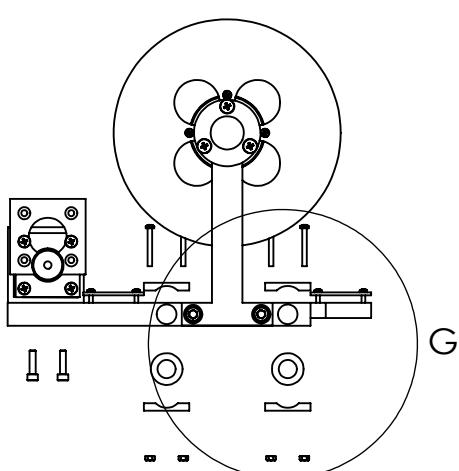


DETAIL G
SCALE 2:5

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	Peter J. Savnik	SIGNATURE	DATE			TITLE:	
CHK'D							
APPV'D							
MFG							
Q.A.	SolidWorks Student Edition. For Academic Use Only.					DWG NO.	drum-carrier-assembly
						SCALE:1:10	SHEET 7 OF 10

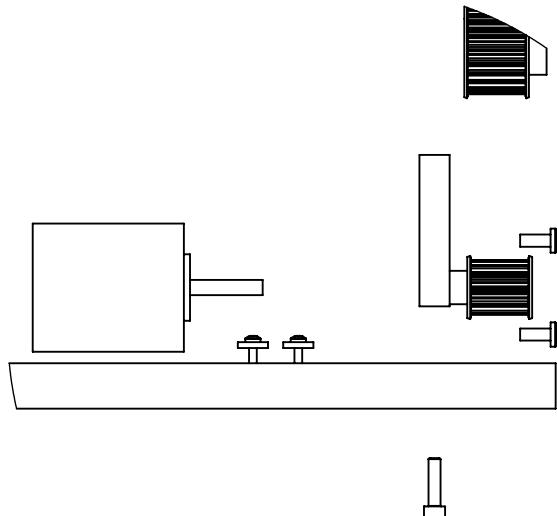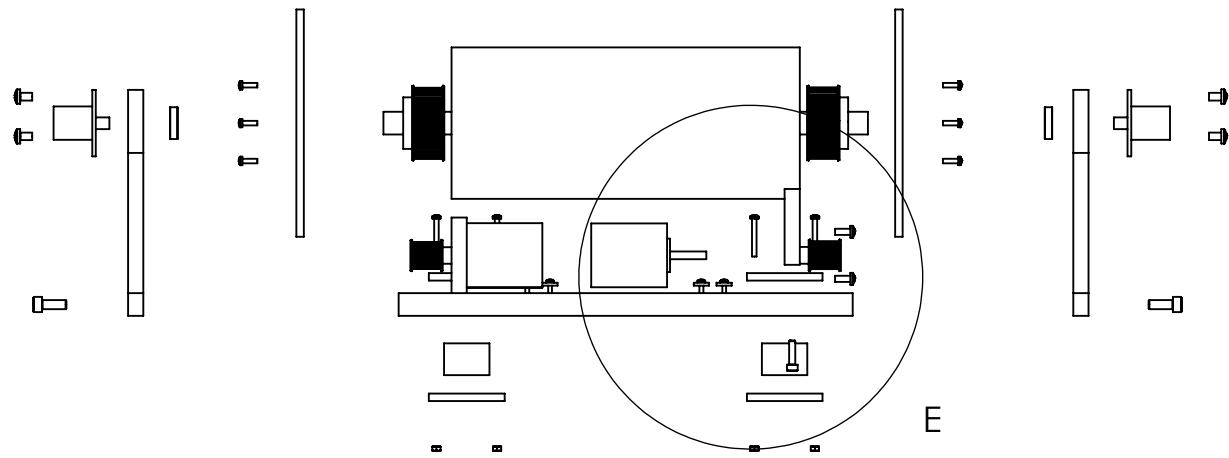

DETAIL E
SCALE 2:5





UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	Peter J. Savnik	SIGNATURE	DATE			TITLE:	Motor assembly
CHK'D							
APP'VD							
MFG	SolidWorks Student Edition. For Academic Use Only.						
Q.A						DWG NO.	drum-carrier-assembly ^{A4}
						SCALE:1:10	
						SHEET 8 OF 10	

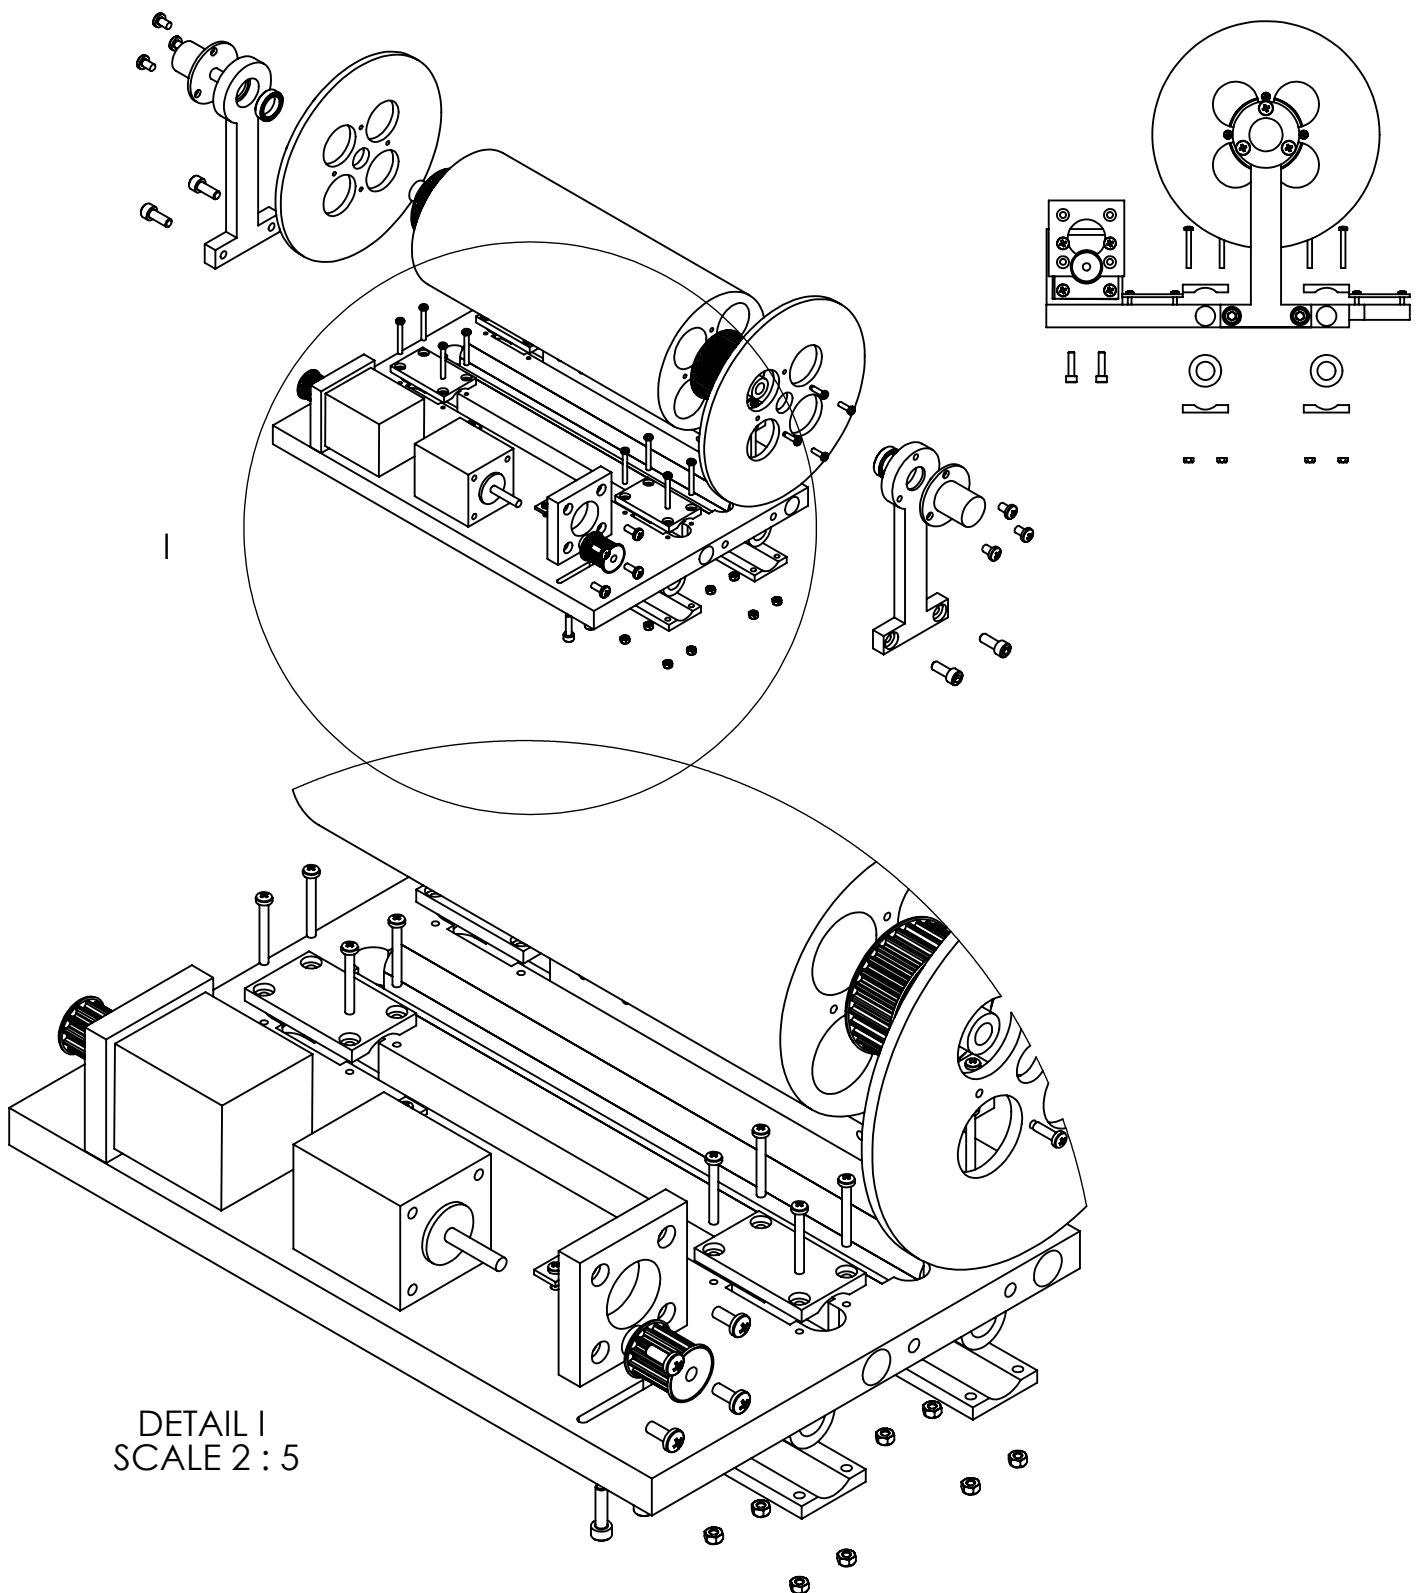



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	Peter J. Savnik	SIGNATURE	DATE				
CHK'D						TITLE:	
APPV'D							
MFG	SolidWorks Student Edition. For Academic Use Only.						
Q.A.						DWG NO. M4	
MATERIAL:						drum-carrier-assembly	
WEIGHT:						SCALE:1:10	
						SHEET 9 OF 10	

ITEM NO.	PART NUMBER	Default/QTY.
1	baseplate	1
2	teflon-insert-2	2
3	end	2
4	B18.3.1M - 6 x 1.0 x 16 Hex SHCS -- 16Nhx	4
5	B18.3.1M - 4 x 0.7 x 16 Hex SHCS -- 16Nhx	2
6	AFBMA 12.1.4.1 - 0150-21 - Full,DE,NC,Full_68	2
7	rod	1
8	side	2
9	B18.6.7M - M3 x 0.5 x 10 Type I Cross Recessed PHMS --10N	8
10	B18.6.7M - M5 x 0.8 x 8 Type I Cross Recessed PHMS --8N	3
11	B18.6.7M - M4 x 0.7 x 10 Type I Cross Recessed PHMS --10N	4
12	B18.6.7M - M3 x 0.5 x 25 Type I Cross Recessed PHMS --25N	16
13	slip_ring_with_flange	2
14	ISO 7045 - M5 x 8 - Z --- 8N	3
15	motor-holder	2
16	Nema17motor	2
17	LM12UU	4
18	LM12UU-holder	8
19	AM-M3-N	16
20	teflon-insert	2
21	Pulley-27T5_30-2-Aratron	2
22	Pulley-27T5_12-2-Aratron	2
23	B18.6.7M - M4 x 0.7 x 25 Type I Cross Recessed PHMS --25N	2
24	belt-fastner-bracket	2
25	B18.6.7M - M4 x 0.7 x 13 Type I Cross Recessed PHMS --13N	4
26	belt-fastner-plate	4
27	B18.6.7M - M2.5 x 0.45 x 16 Type I Cross Recessed PHMS --16N	8


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE				
CHK'D						TITLE:	
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.					DWG NO.	
Q.A.						drum-carrier-assembly	
						M4	
						WEIGHT:	
						SCALE:1:10	
						SHEET 10 OF 10	

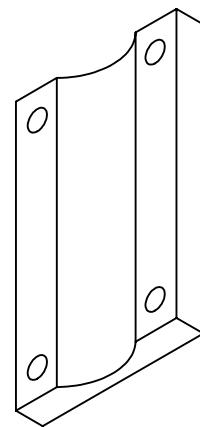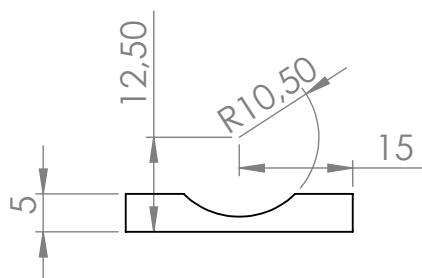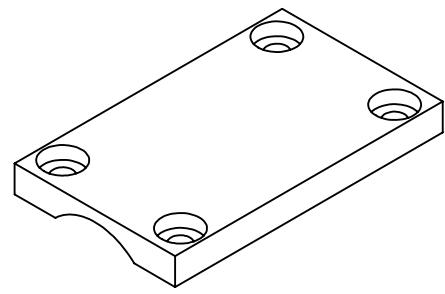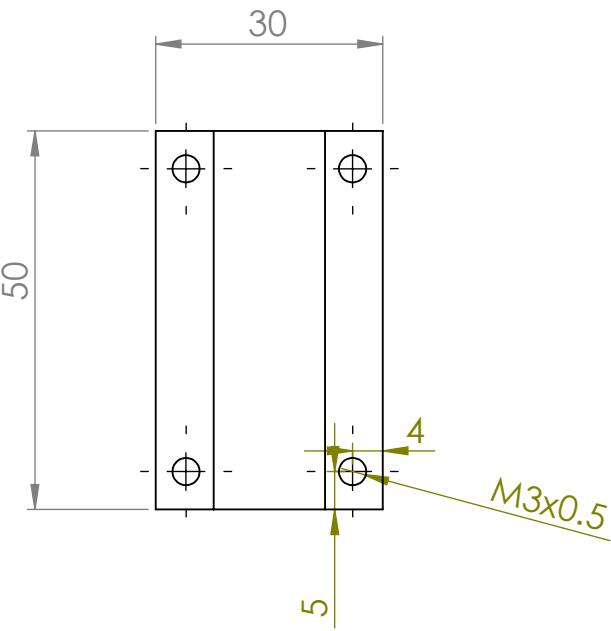


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	3
DRAWN	NAME	SIGNATURE	DATE					
CHK'D	Peter J. Savnik							
APP'D								
MFG	SolidWorks Student Edition. For Academic Use Only.					TITLE:		
Q.A						DWG NO.	LM12UU-holder	
						WEIGHT:	A4	
						SCALE:1:1	SHEET 1 OF 1	

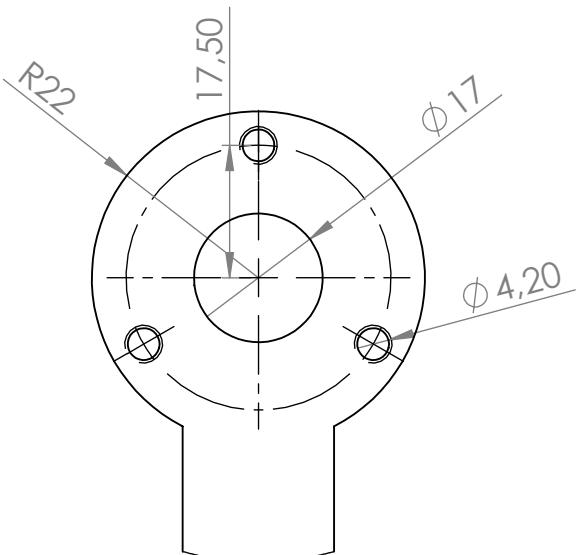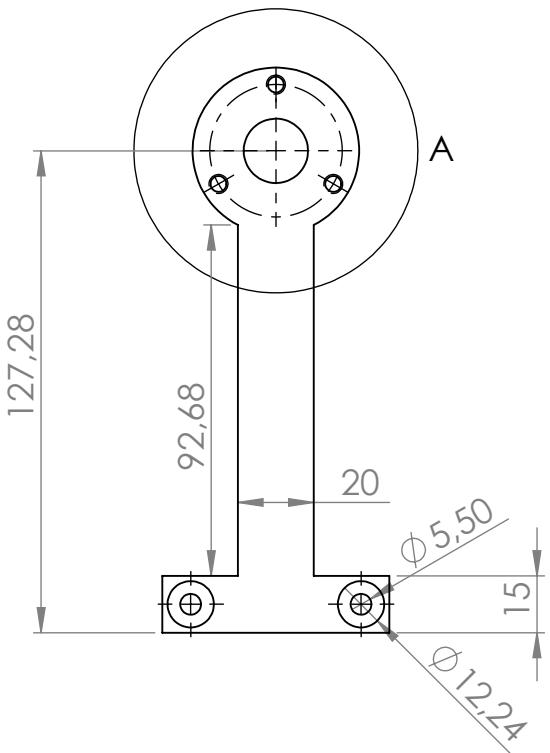

DETAIL A
SCALE 1 : 1

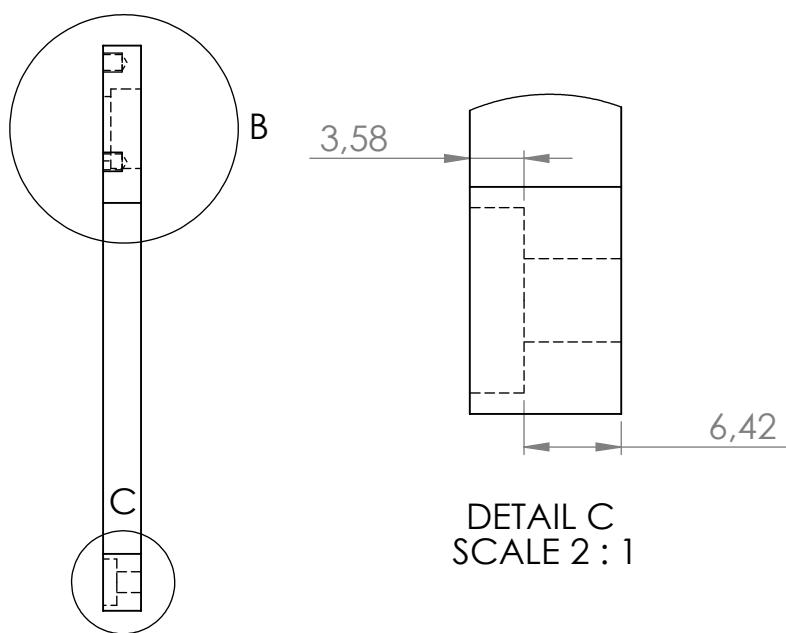


DETAIL C
SCALE 2 : 1

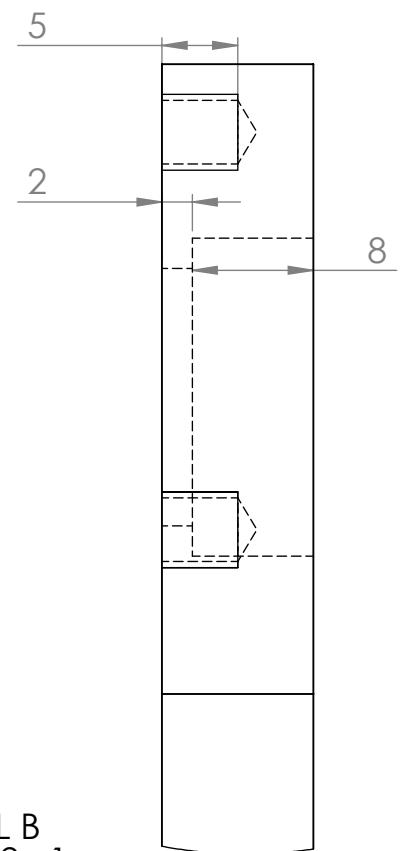

DETAIL B
SCALE 2 : 1

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS				FINISH:	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	3
TOLERANCES: LINEAR: ANGULAR:								
DRAWN	NAME Peter J. Savnik	SIGNATURE	DATE					
CHK'D								
APP'D								
MFG	SolidWorks Student Edition. For Academic Use Only.							
Q.A	LATERIAL Alu					DWG NO. end		A4
		WEIGHT:			SCALE:1:2		SHEET 1 OF 1	


(-)
A

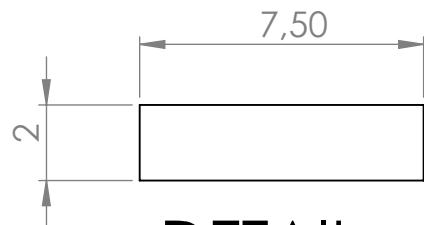

DETAIL A

SCALE 5 : 1

(D)
B

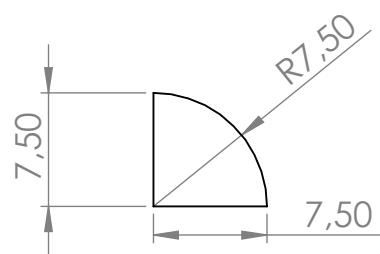

DETAIL B

SCALE 2 : 1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

DRAWN

NAME

SIGNATURE

DATE

TITLE:

CHK'D

APP'D

MFG

Q.A

**SolidWorks Student Edition.
For Academic Use Only.**
MATERIAL:
Teflon

DWG NO.



teflon-inserts

A4



WEIGHT:

SCALE:1:5

SHEET 1 OF 1

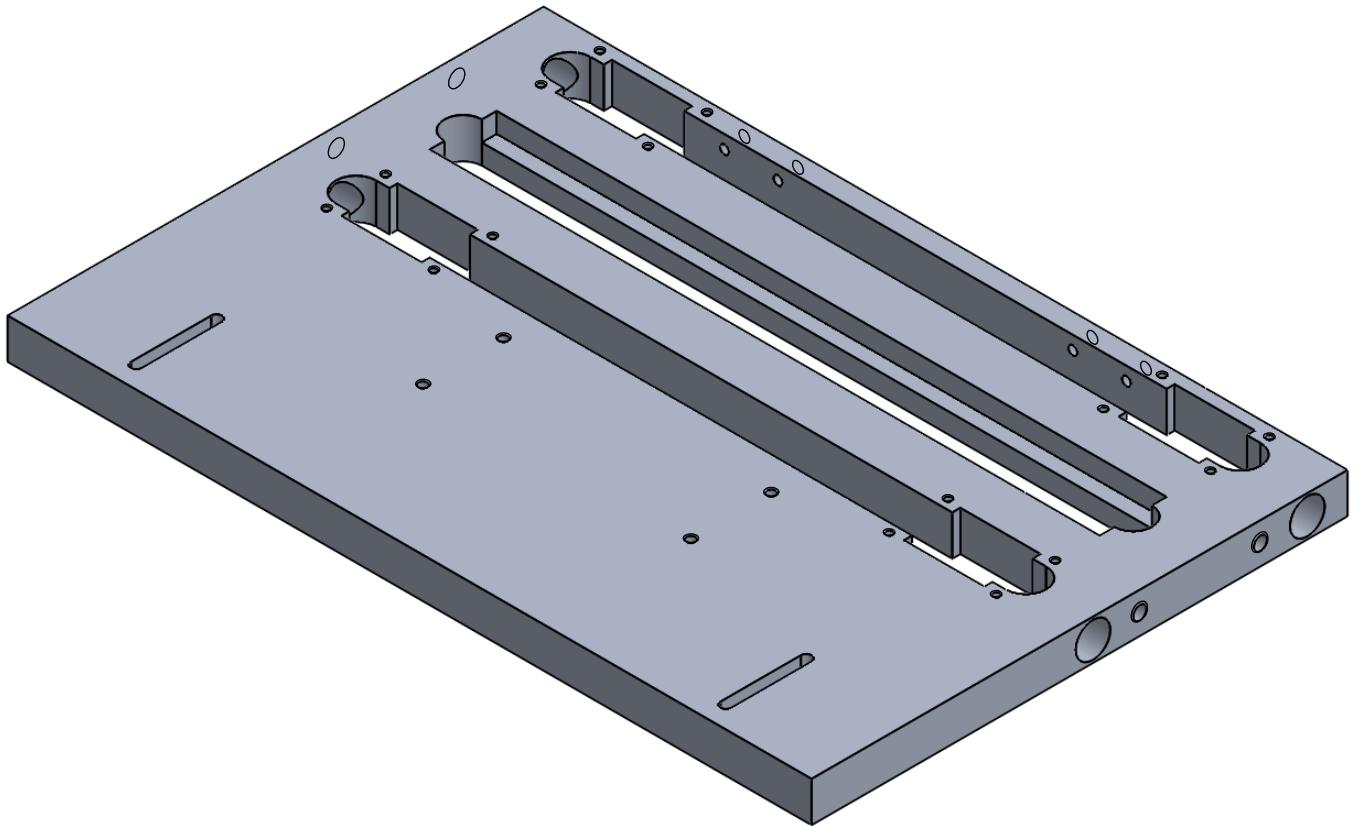


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	3
DRAWN	Peter J. Savnik	SIGNATURE	DATE			TITLE: Baseplate for carrier		
CHK'D								
APPV'D								
MFG	SolidWorks Student Edition. For Academic Use Only.							
Q.A	MATERIAL: Alu					DWG NO.	baseplate	
						SCALE:1:5	SHEET 1 OF 5	
							A4	

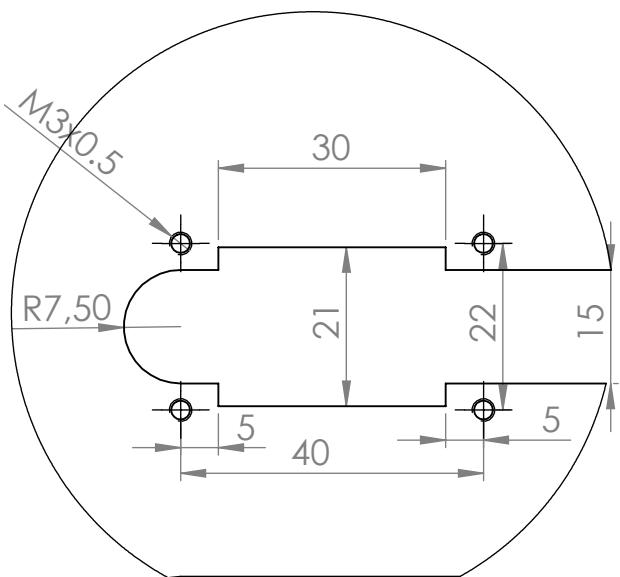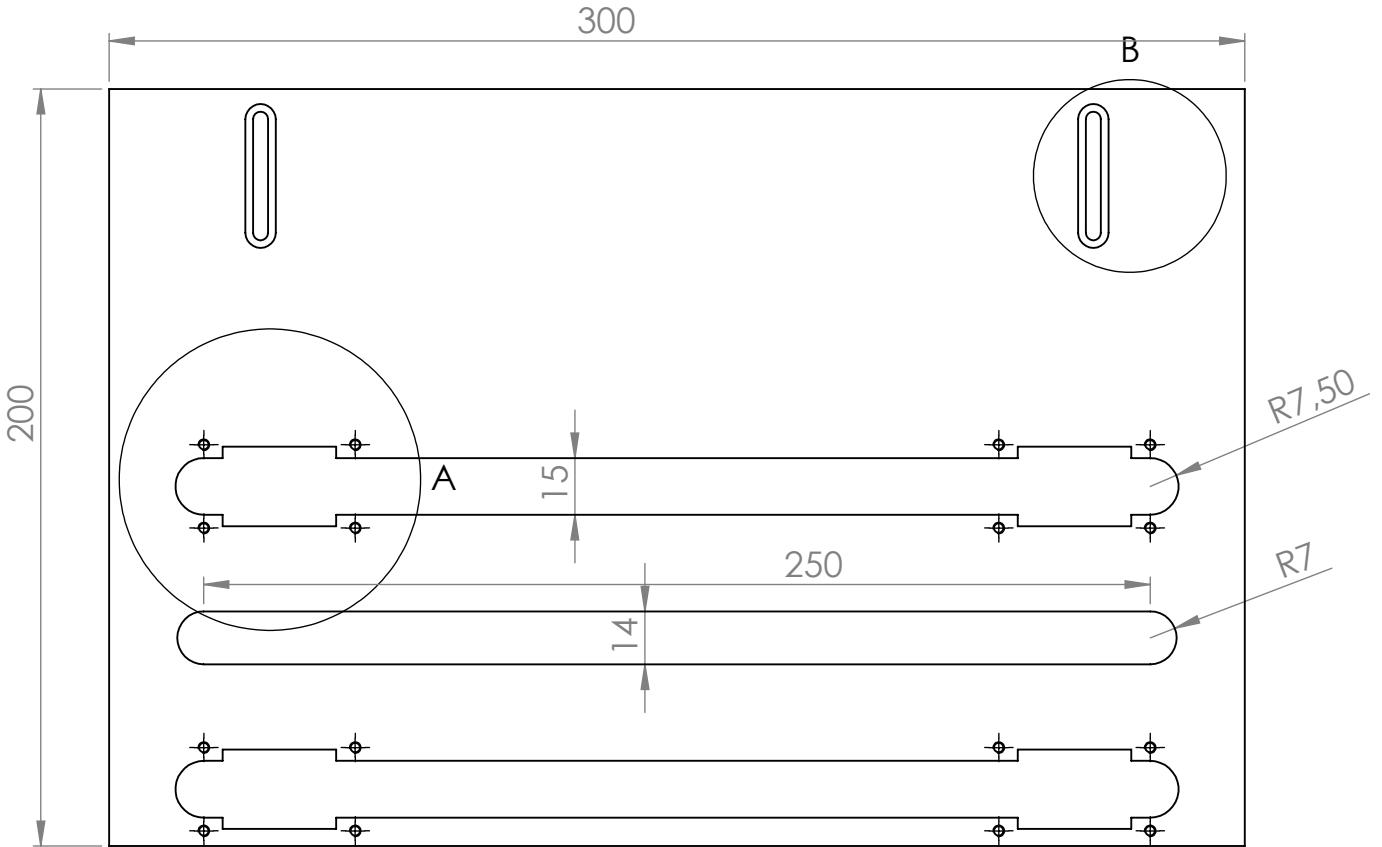


DETAIL A
SCALE 1 : 1

Bottom view


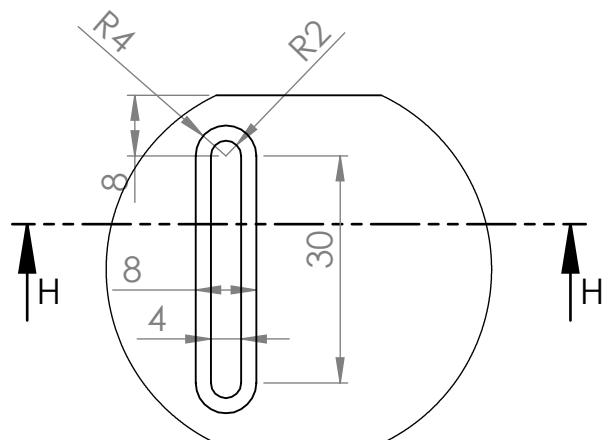


DETAIL B
SCALE 1 : 1


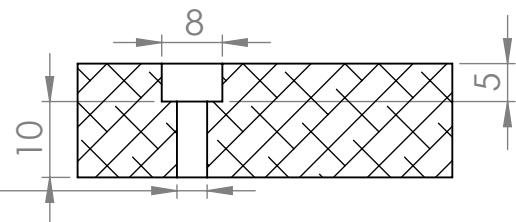


SECTION H-H
SCALE 1 : 1


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
SURFACE FINISH:						3
TOLES:						
LINEAR:						
ANGULAR:						
DRAWN	NAME	SIGNATURE	DATE		TITLE:	
Peter J. Savnik						
CHK'D						
APP'D						
MFG	SolidWorks Student Edition. For Academic Use Only.				DWG NO.	
Q.A					baseplate	A4
					SCALE:1:5	
					WEIGHT:	
					SHEET 2 OF 5	

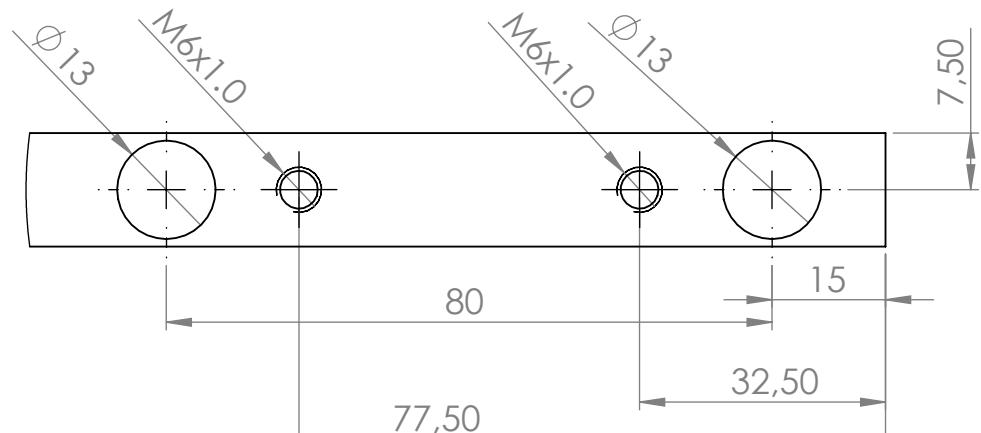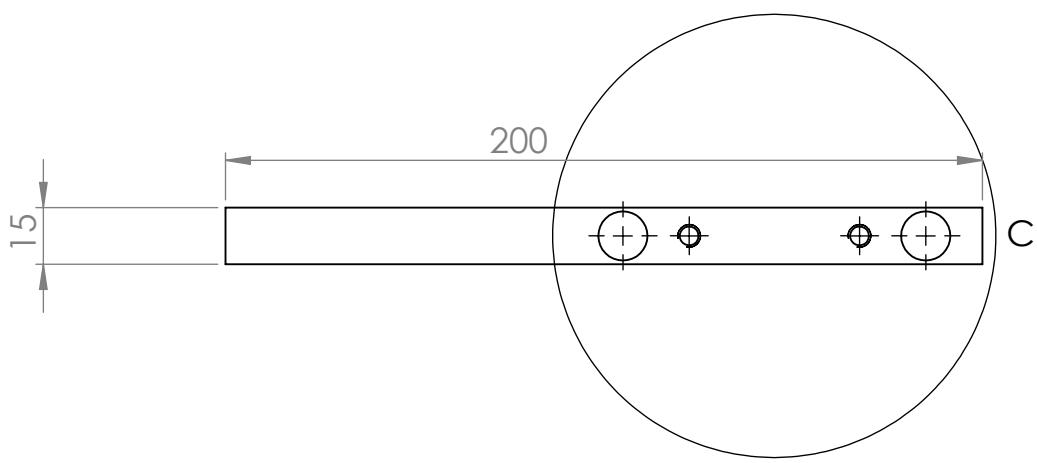


DETAIL C
SCALE 1 : 1

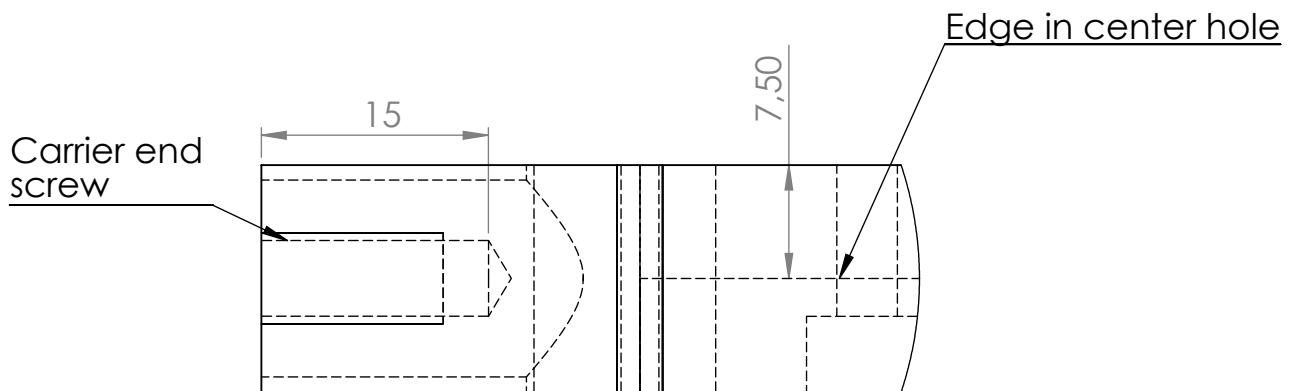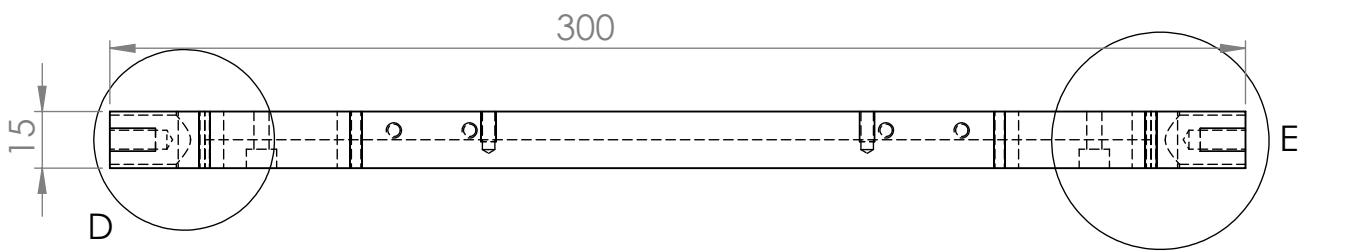


DETAIL D
SCALE 2 : 1

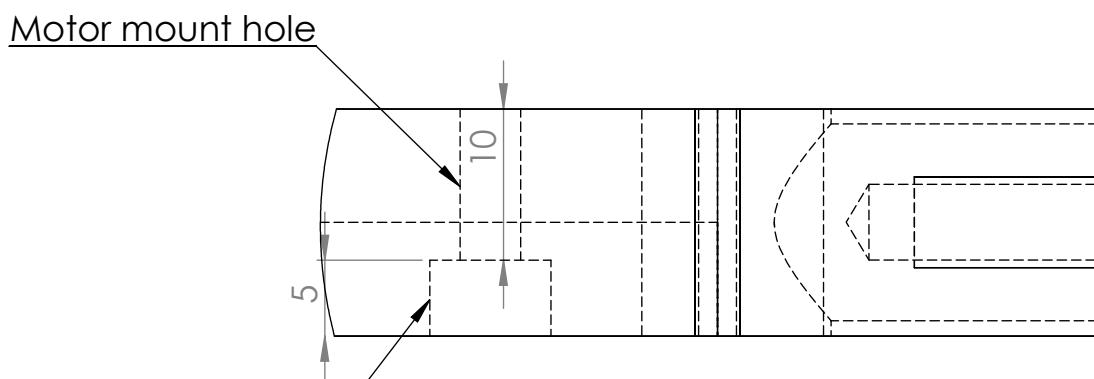

Motor mount screw sink DETAIL E
SCALE 2 : 1

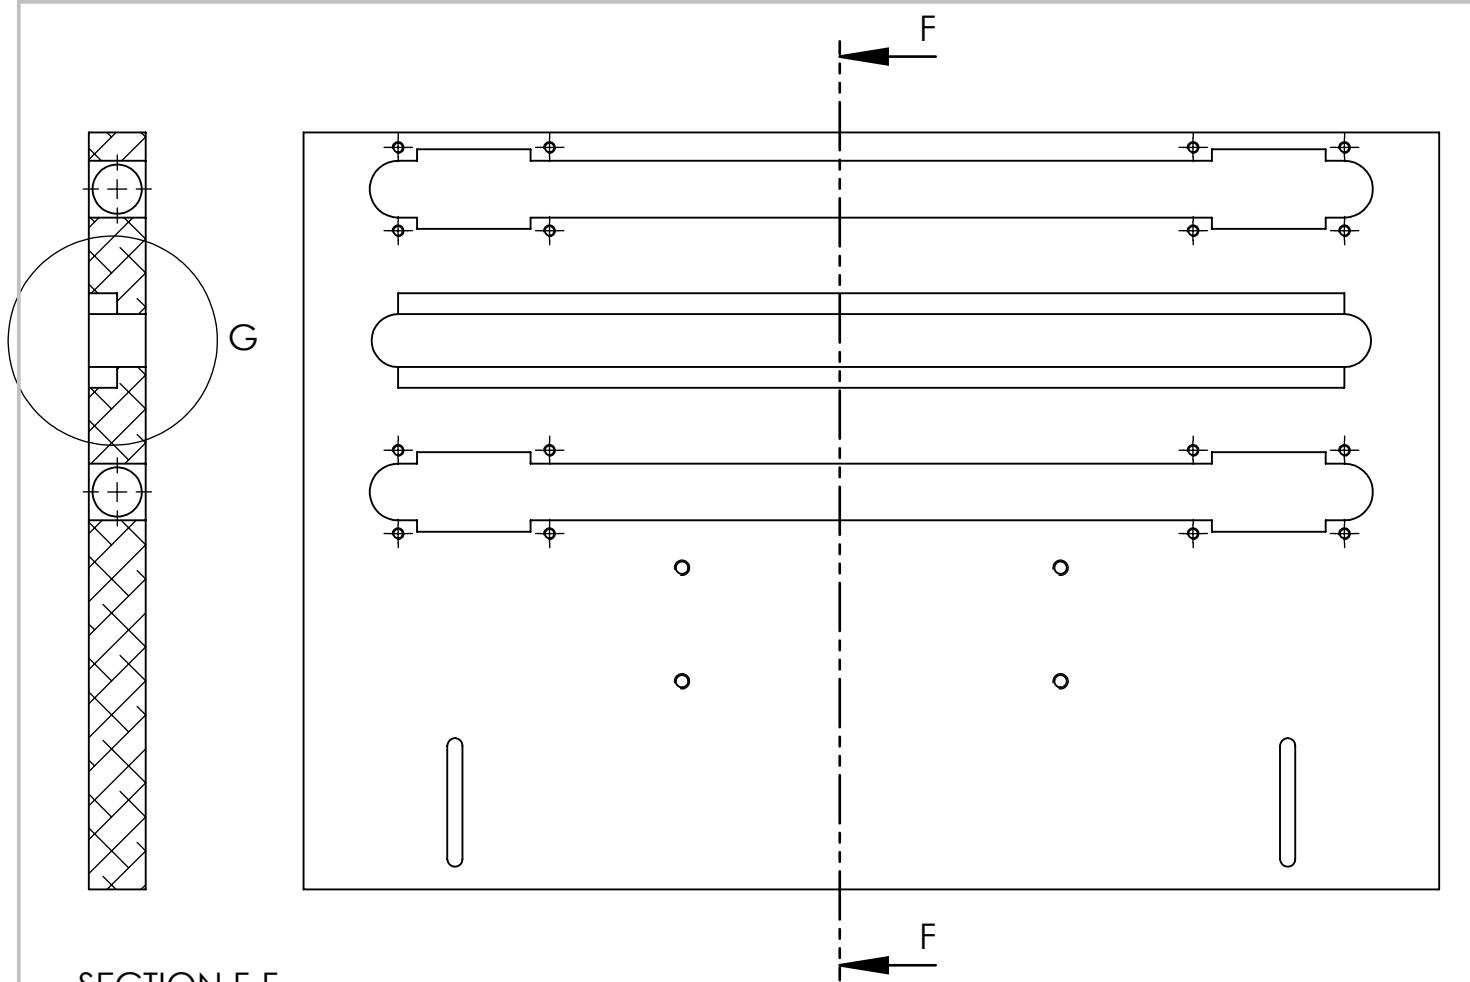


SECTION F-F
SCALE 1 : 2

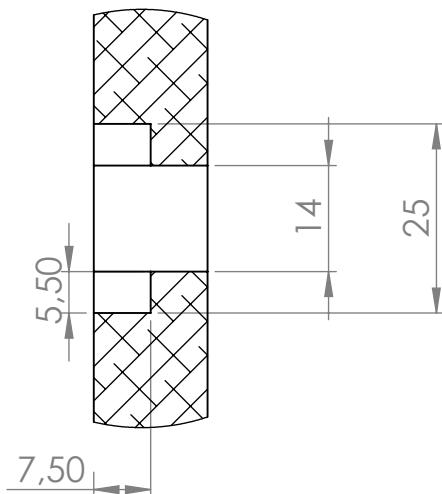


DETAIL G
SCALE 1 : 1

Center hole



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	3
DRAWN	NAME	SIGNATURE	DATE				
DRAWN	Peter J. Savnik						
CHK'D							
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.						
Q.A					DWG NO.	baseplate	
							A4
					WEIGHT:	SCALE:1:5	
						SHEET 5 OF 5	

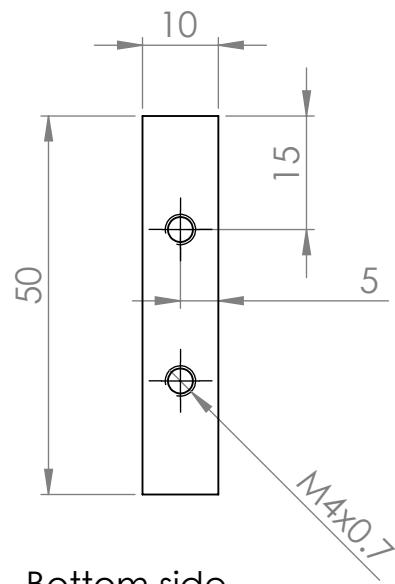

Bottom side

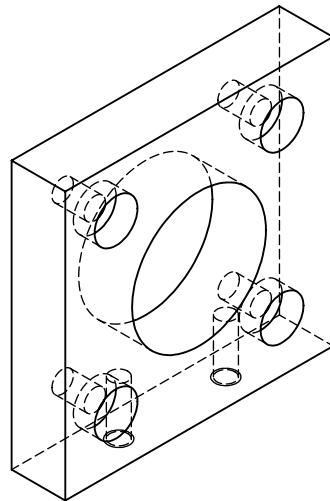

Front View

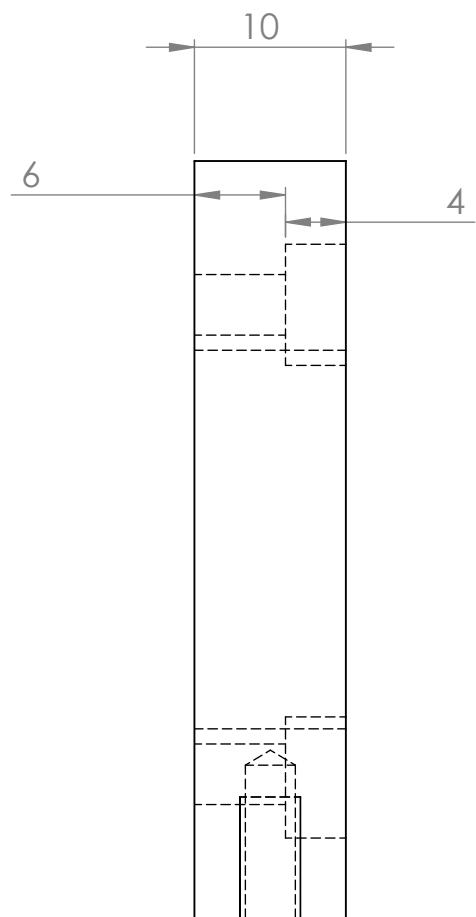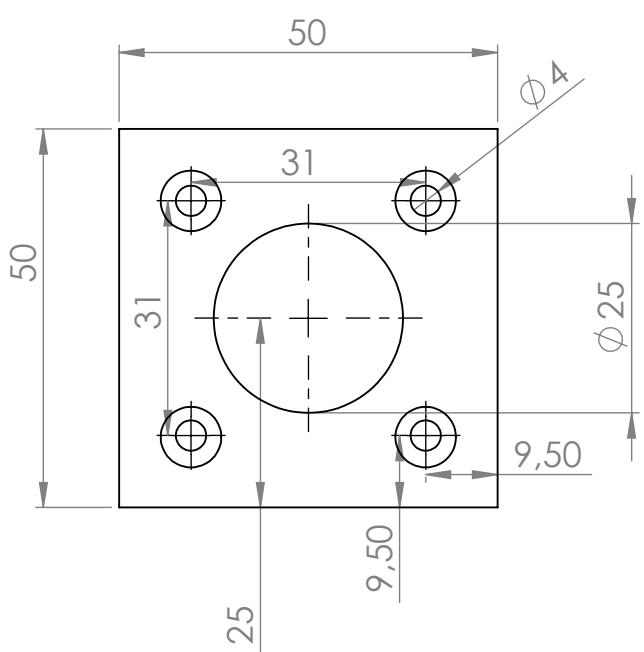

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

3.1

Motor holder for Nema 17 stepmotor

DRAWN

Peter J. Savnik

SIGNATURE

DATE

TITLE:

CHK'D

APP'D

MFG

Q.A

SolidWorks Student Edition.
For Academic Use Only.
MATERIAL:
AlU

DWG NO.



motor-holder

A4



WEIGHT:

SCALE:1:1

SHEET 1 OF 1

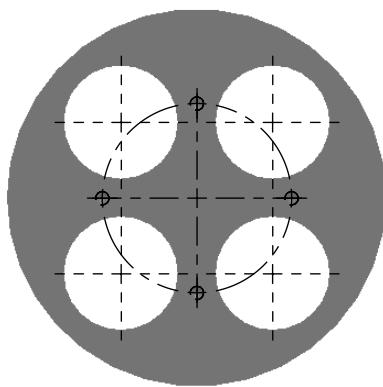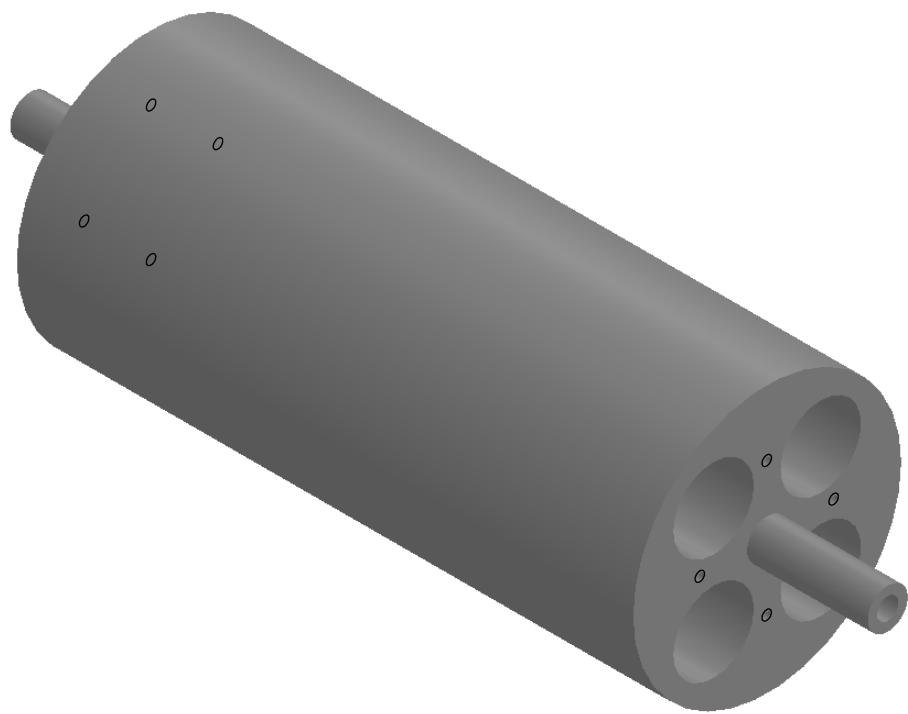


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	3
DRAWN	Peter J. Savnik	SIGNATURE	DATE			TITLE: Drumroll rod		
CHK'D								
APPV'D								
MFG	SolidWorks Student Edition. For Academic Use Only. POM					DWG NO.	rod	
Q.A						SCALE:1:5	A4	
						SHEET 1 OF 3		

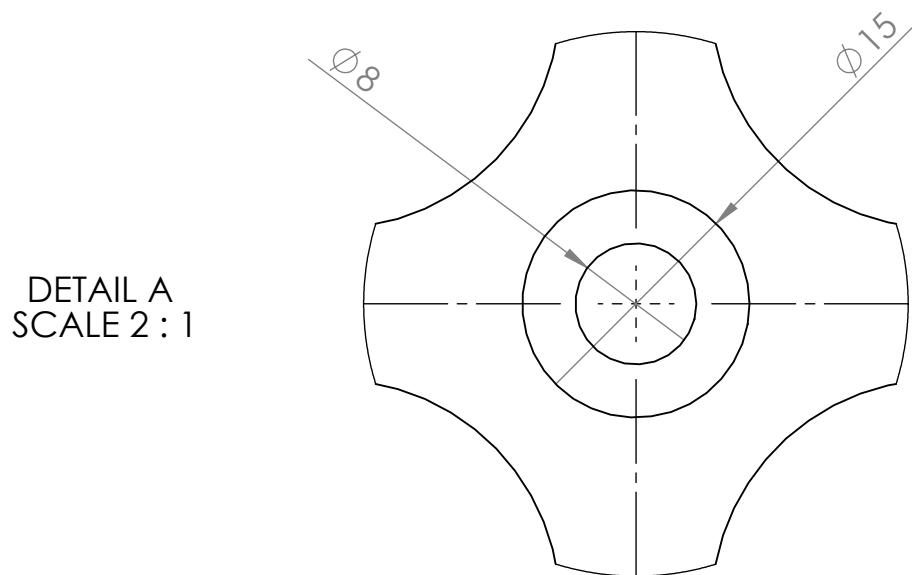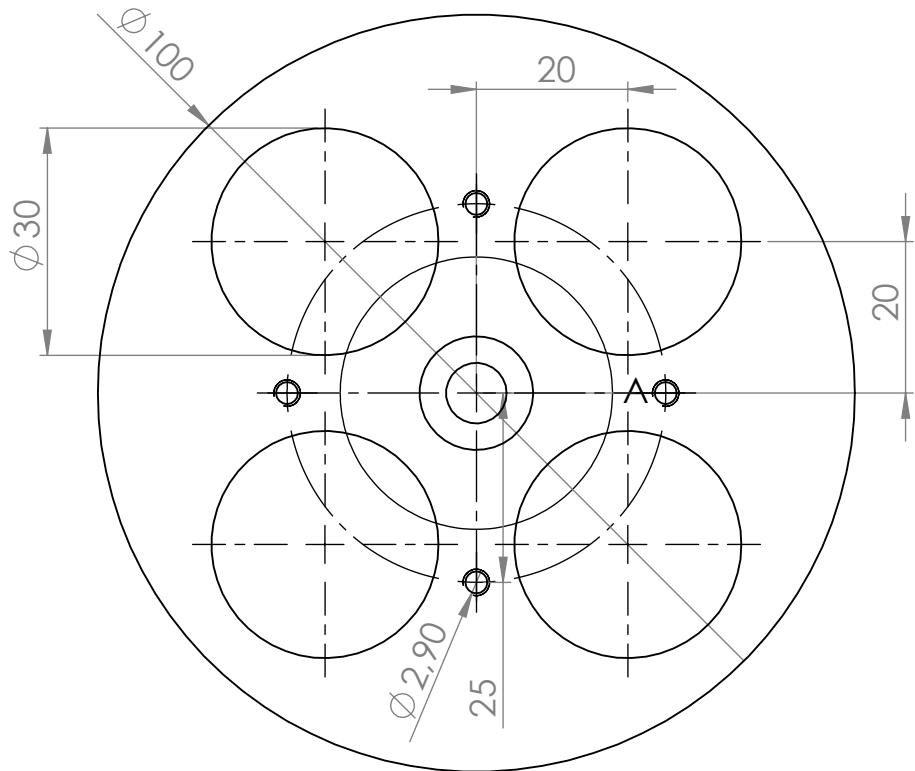

Side view




UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	3
DRAWN	Peter J. Savnik	SIGNATURE	DATE			TITLE:	DWG NO.	A4
CHK'D								
APP'D								
MFG								
Q.A	SolidWorks Student Edition. For Academic Use Only.							
						rod		
						WEIGHT:	SCALE:1:5	SHEET 2 OF 3

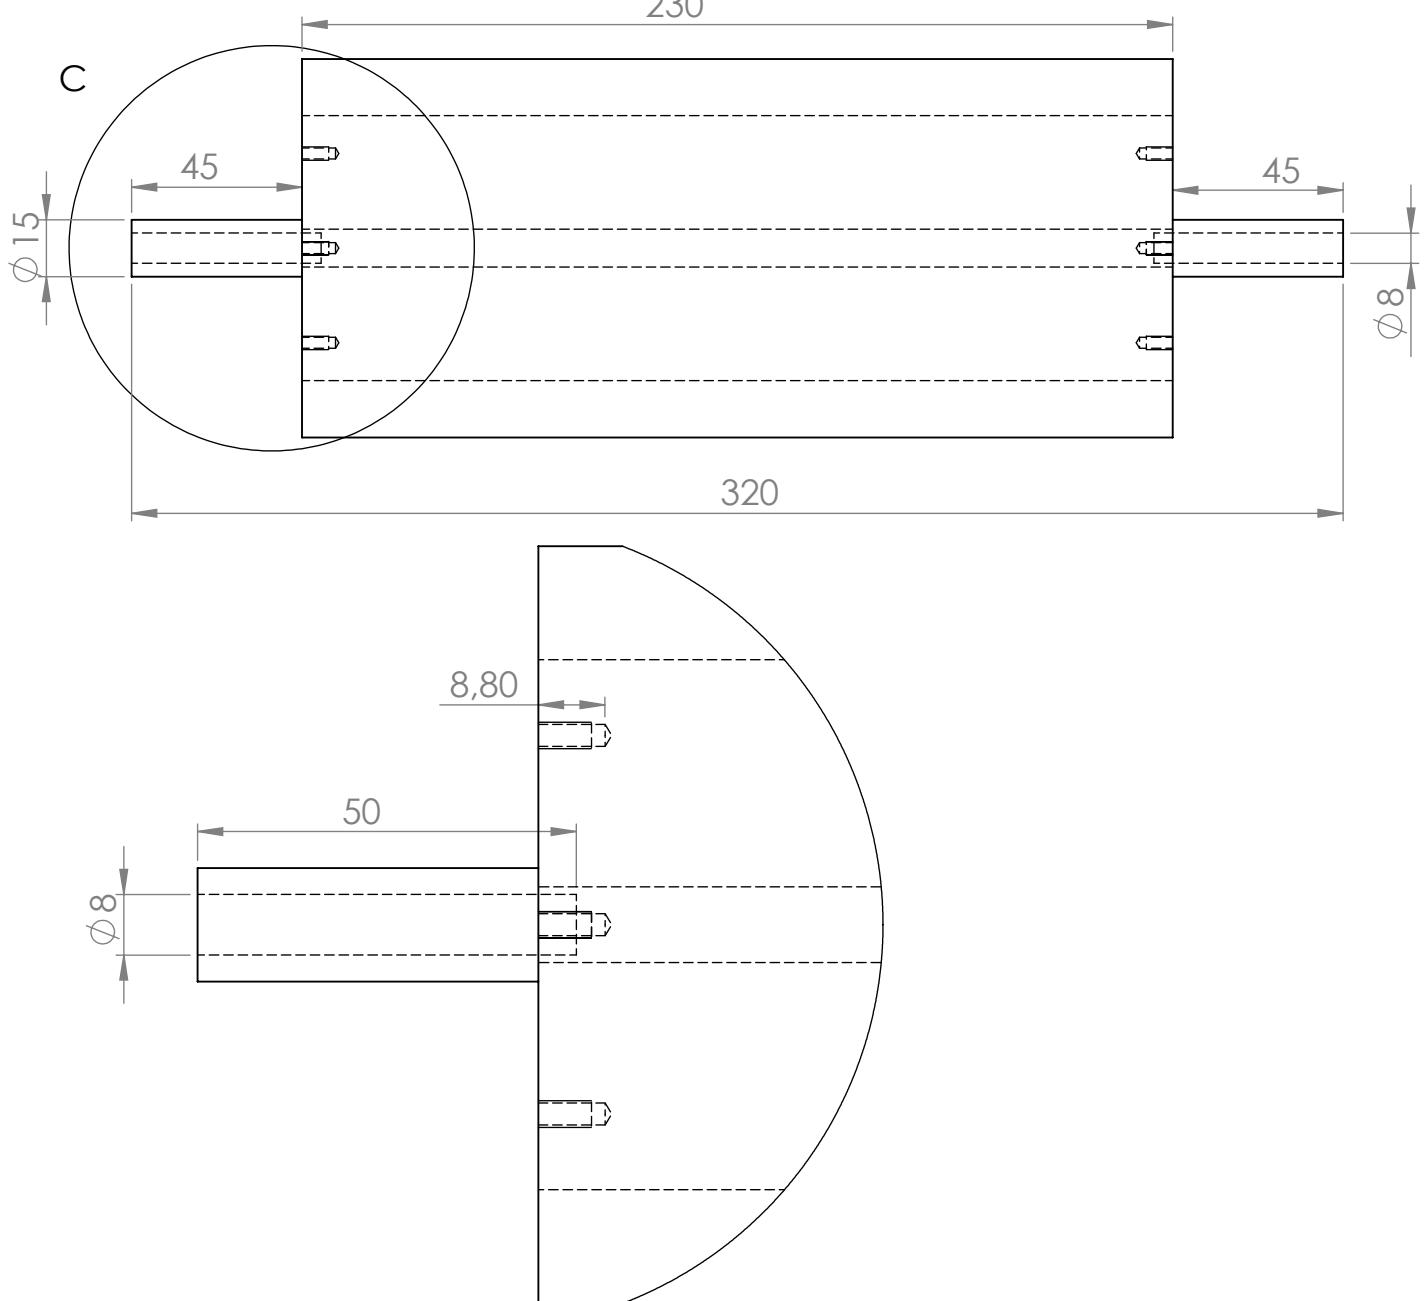

DETAIL C
SCALE 1 : 1




Front view

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	3
DRAWN	NAME	SIGNATURE	DATE					
CHK'D								
APP'D								
MFG	SolidWorks Student Edition. For Academic Use Only.							
Q.A						DWG NO.		
						POM	rod	A4
						WEIGHT:	SCALE:1:5	SHEET 3 OF 3


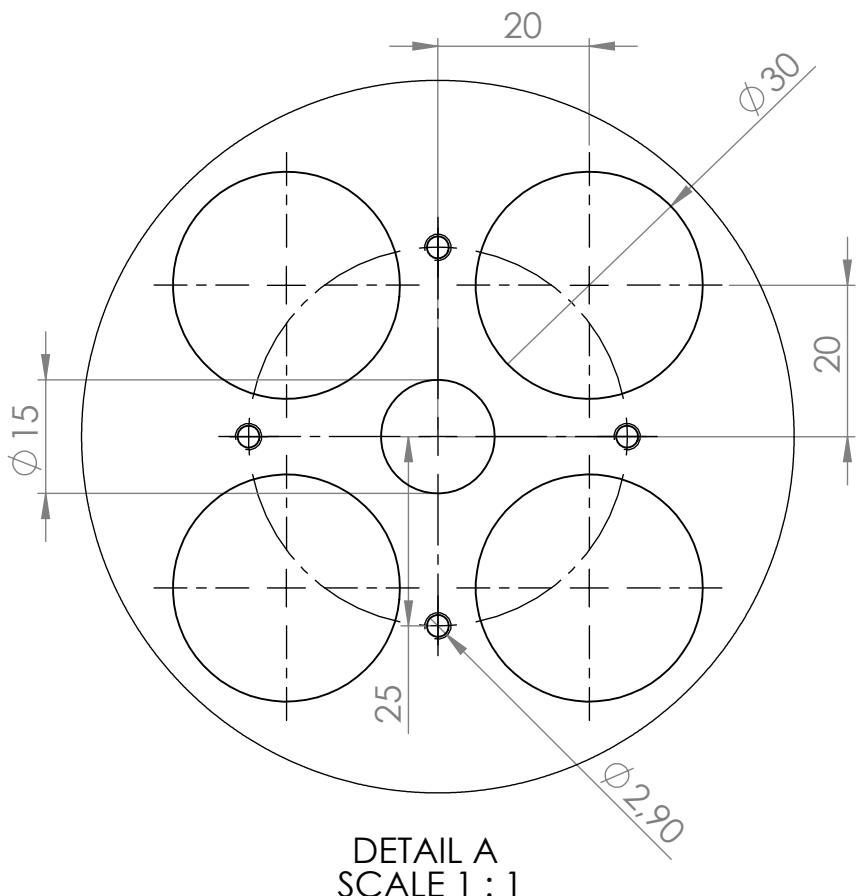
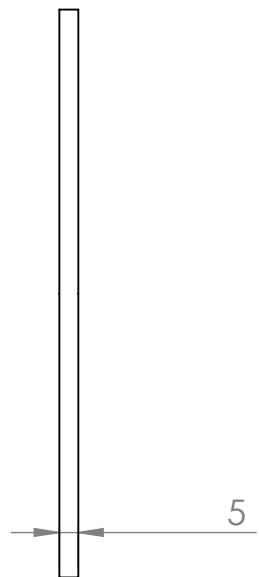
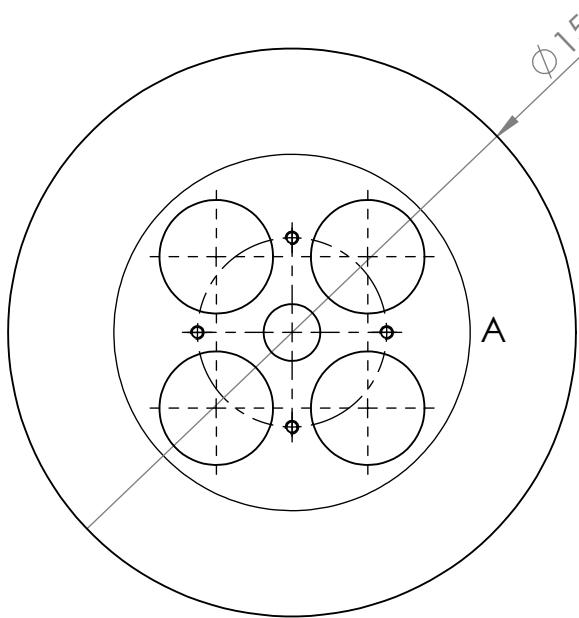


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	3
DRAWN	NAME	SIGNATURE	DATE				
CHK'D	Peter Savnik						
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.		LATERAL MATERIAL Acryl				
Q.A					DWG NO.	side	A4
					WEIGHT:	SCALE:1:2	SHEET 1 OF 1

Side Dish for drumroll

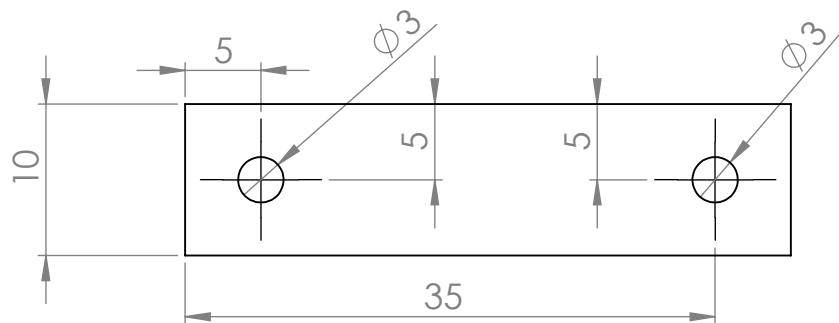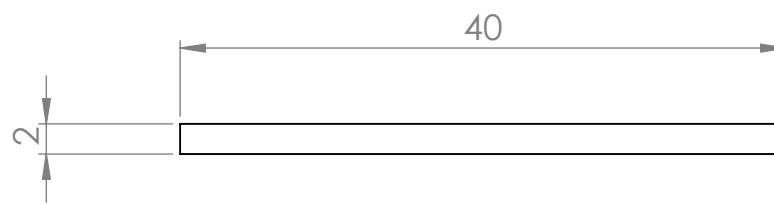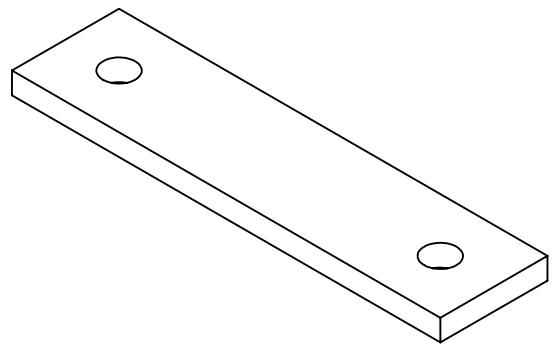

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE				
CHK'D							
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.			LATERAL MATERIAL Alu	TITLE:		
Q.A					DWG NO.	belt-fastner-plate	A4
				WEIGHT:	SCALE:2:1	SHEET 1 OF 1	

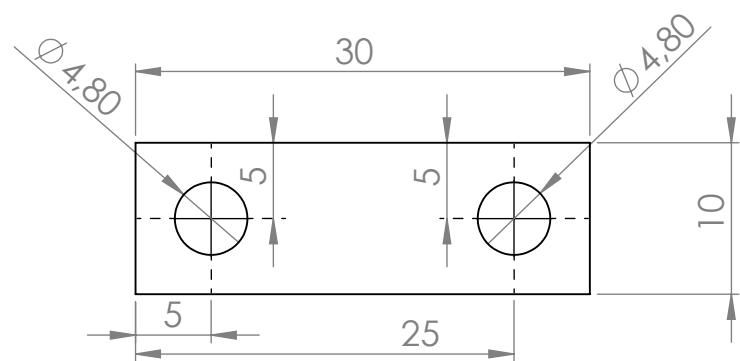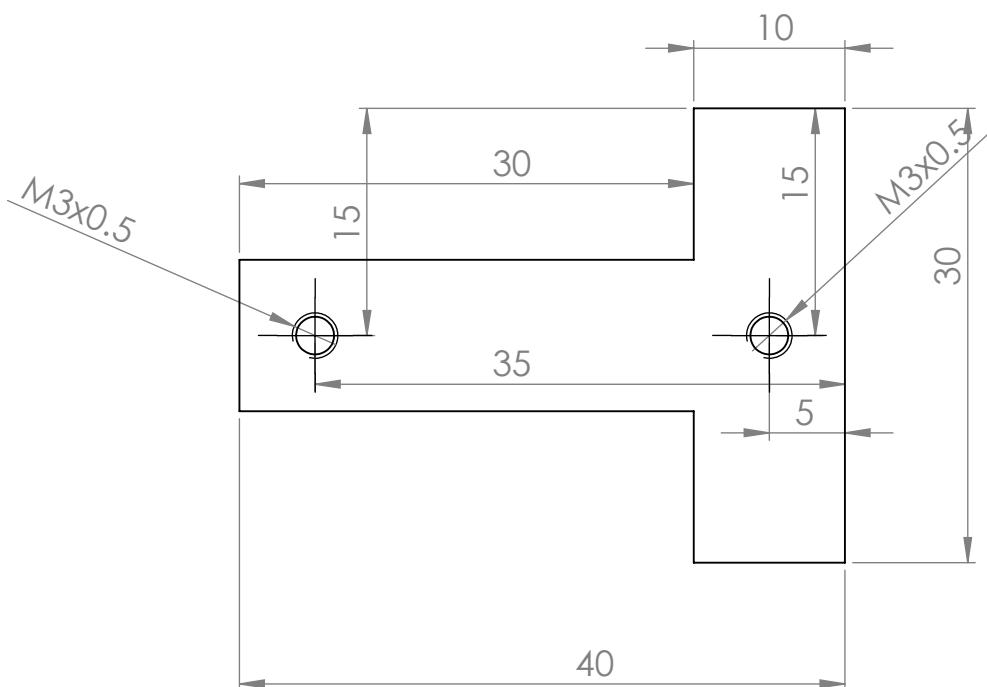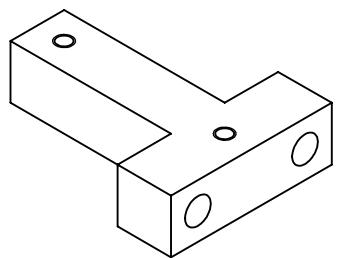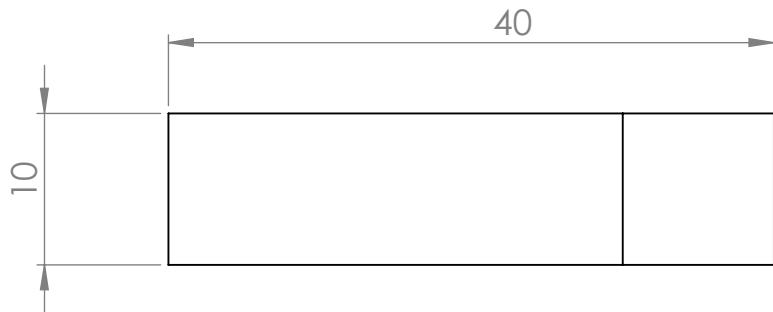

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

DRAWN

NAME

SIGNATURE

DATE

TITLE:

CHK'D

APP'D

MFG

Q.A

SolidWorks Student Edition.
For Academic Use Only.

DWG NO.


belt-fastner-bracket^{A4}

WEIGHT:


SCALE:1:1

SHEET 1 OF 1


27T5 12-2

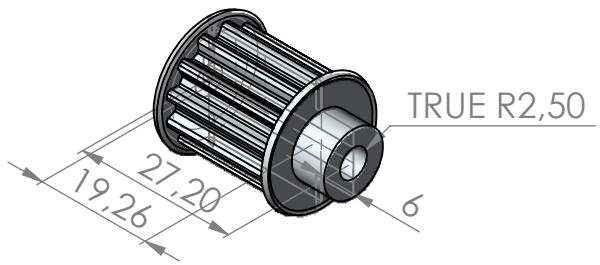


27T5 30-2

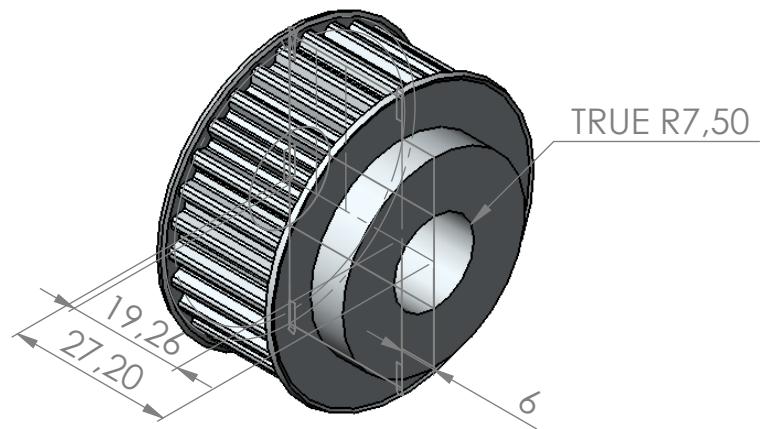

27T5 20-2

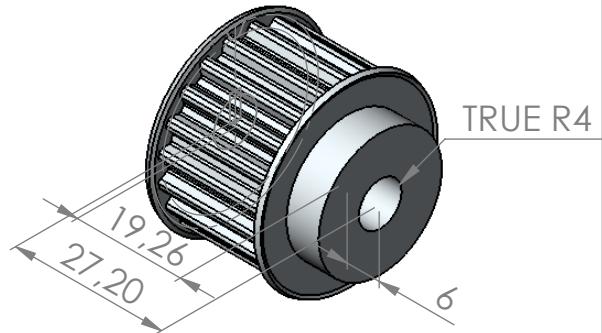

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	NAME	SIGNATURE	DATE			TITLE:		
CHK'D								
APP'D								
MFG	SolidWorks Student Edition. For Academic Use Only.							
Q.A	MATERIAL:					DWG NO.	pullys	
				WEIGHT:		SCALE:1:1	SHEET 1 OF 1	
								A4

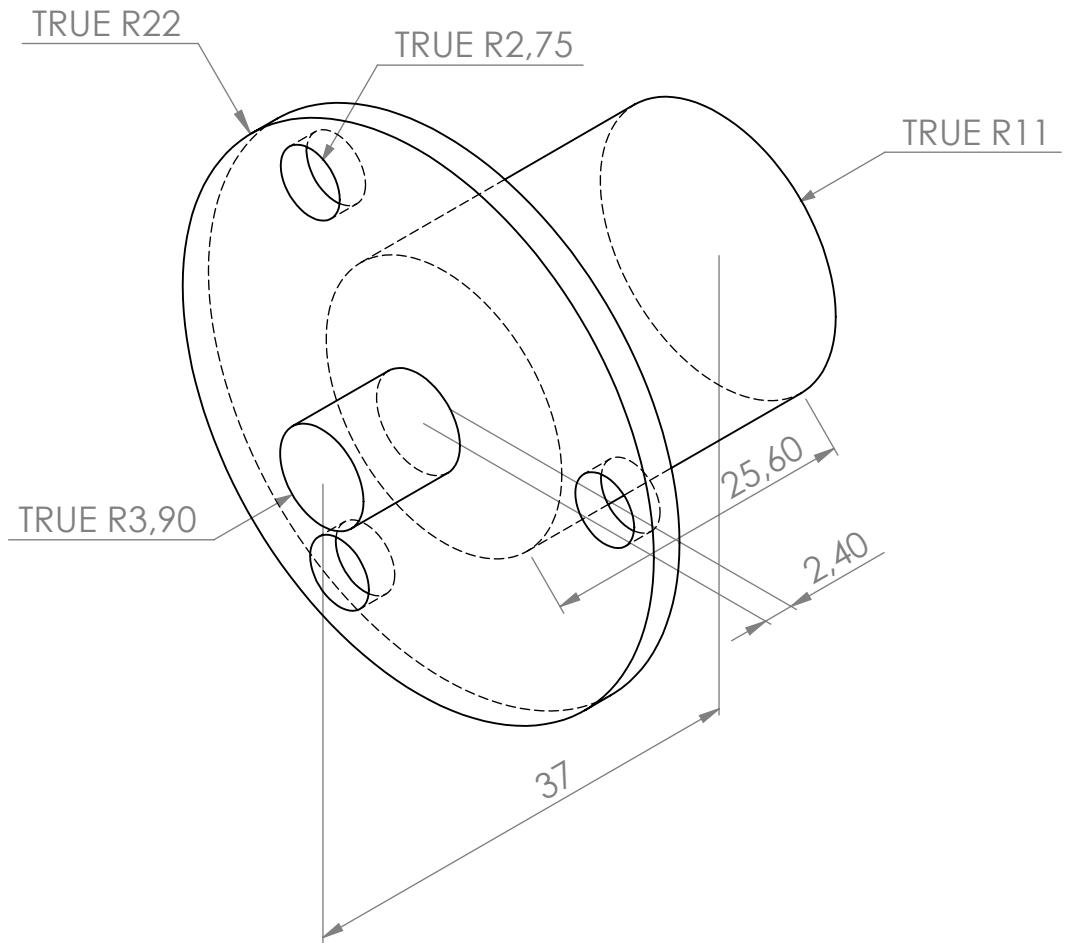

Slipring with flange from Adafruit


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN						TITLE:	
CHK'D							
APPV'D							
MFG							
Q.A	SolidWorks Student Edition. For Academic Use Only.					DWG NO.	slip_ring_with_flange^{A4}
					SCALE:1:1	SHEET 1 OF 1	

Helipad


B.2 UAV

The mechanical configuration on the UAV was partially made from a previous project, but was rebuild to fit a Neutrix powercon true connector and slightly adjusted in the configuration height.



B.1 (11)
lipad
mekanis
tegning

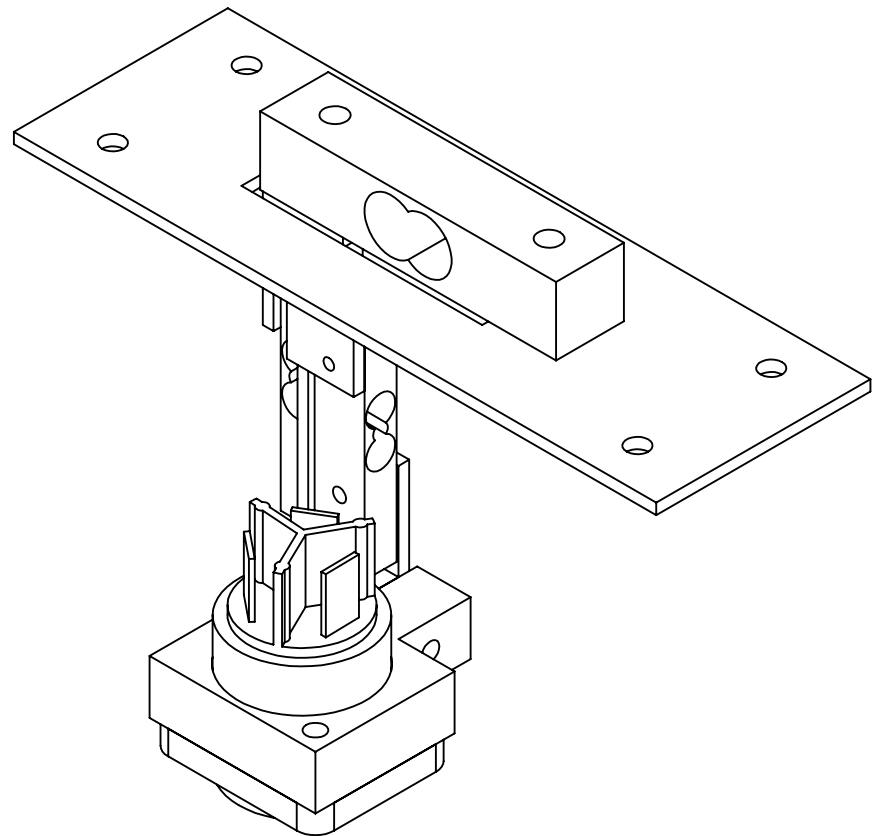

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION 4.2
						Peter J. Savnik	
DRAWN	NAME	SIGNATURE	DATE		TITLE: TCUAV		
CHK'D							
APP'V'D							
MFG	SolidWorks Student Edition. For Academic Use Only.			MATERIAL:	DWG NO. hexa-assembly		
Q.A							
		WEIGHT:		SCALE:1:2	SHEET 1 OF 4		
					A4		

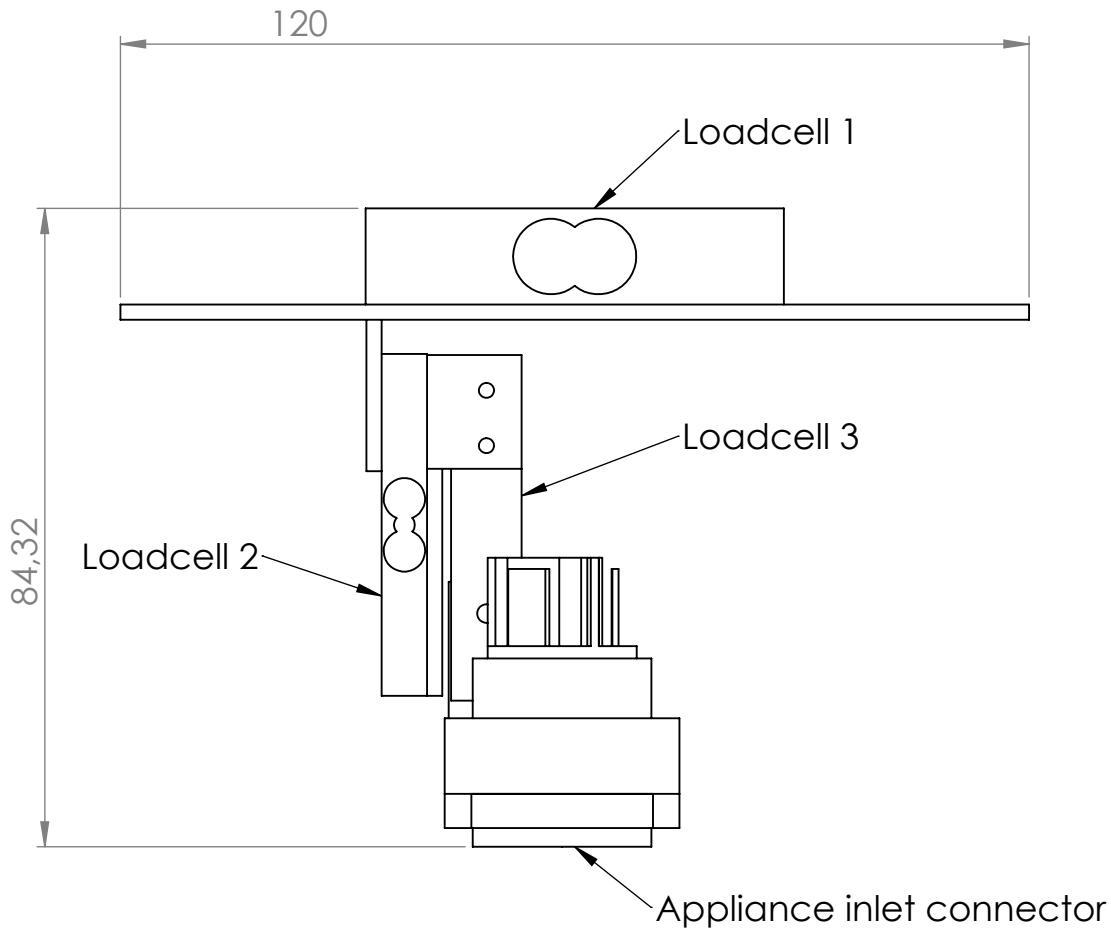

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	NAME	SIGNATURE	DATE					
CHK'D					TITLE:			
APP'V'D								
MFG	SolidWorks Student Edition. For Academic Use Only.				DWG NO.		hexa-assembly	
Q.A					SCALE:1:2		A4	
					WEIGHT:		SHEET 2 OF 4	


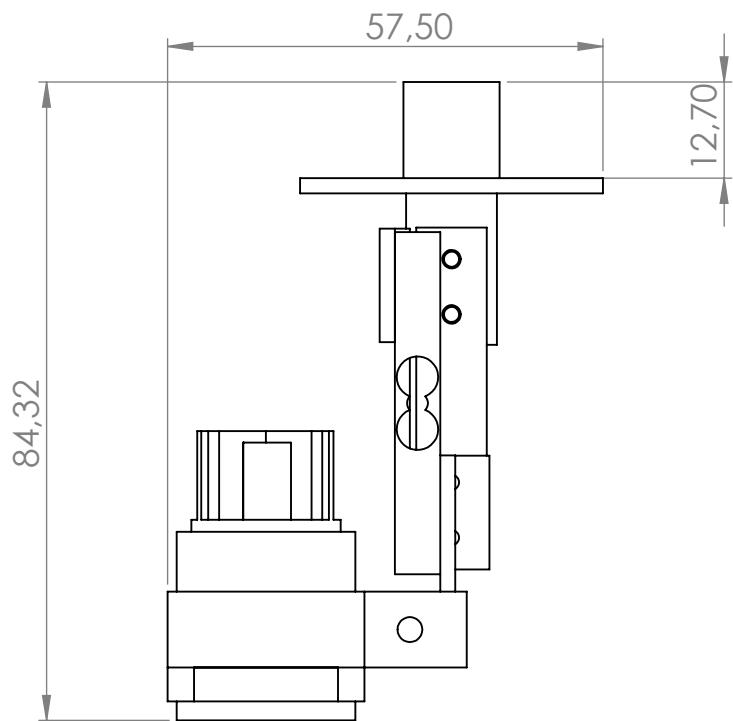
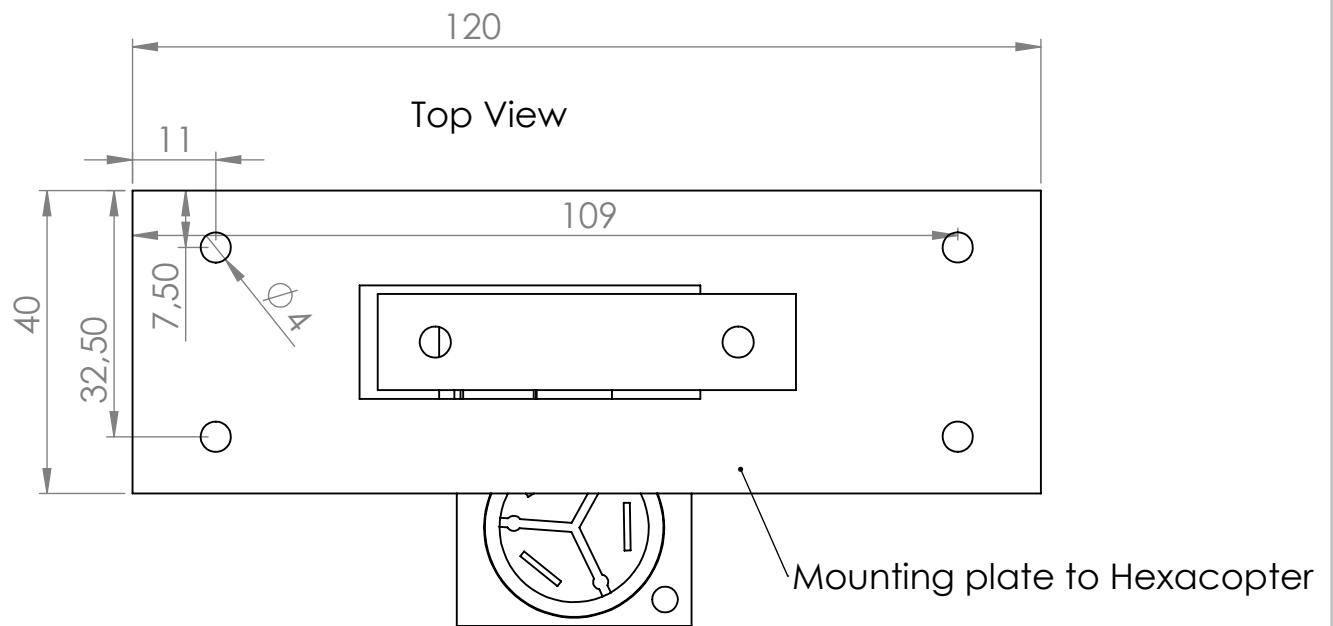


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE				
CHK'D							
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.			MATERIAL:		TITLE:	
Q.A					DWG NO.	hexa-assembly	
				WEIGHT:	SCALE:1:2	SHEET 3 OF 4	
						A4	






Bill of Materials

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	mount-plate		1
2	loadcell-5kg		1
3	fitting-5kg-to-075kg		1
4	loadcell		2
5	fitting-075-to-075		1
6	Neutrix-powercon-true		1
7	powercon-fitting		1
8	powercon-to-loadcell		1





UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	NAME	SIGNATURE	DATE					
CHK'D					TITLE:			
APP'D								
MFG	SolidWorks Student Edition. For Academic Use Only.					DWG NO.		A4
Q.A						hexa-assembly		
			WEIGHT:			SCALE:1:2	SHEET 4 OF 4	

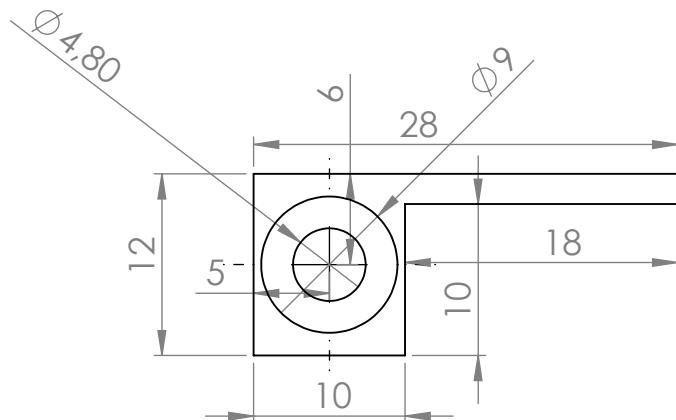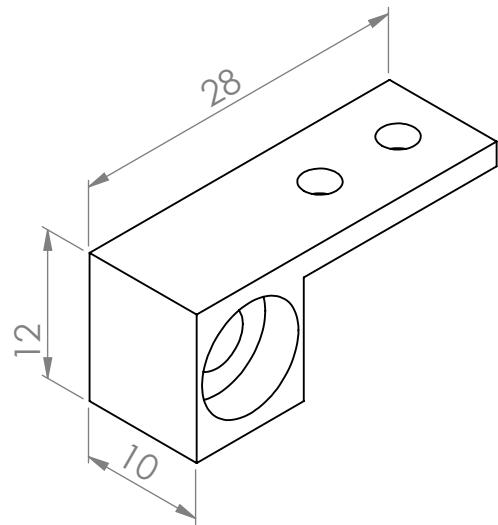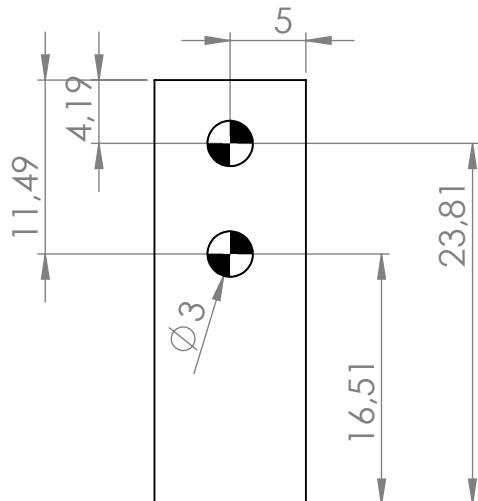





UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	NAME	SIGNATURE	DATE					
CHK'D						TITLE:		
APP'D								
MFG								
Q.A								
SolidWorks Student Edition. For Academic Use Only.					DWG NO.	powercon-to-loadcell		A1
					WEIGHT:	SCALE:2:1		SHEET 1 OF 1

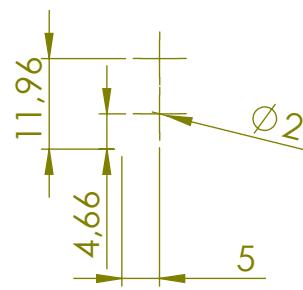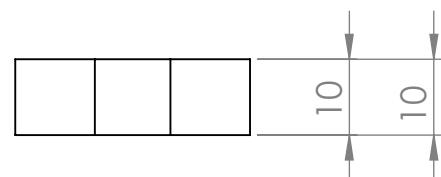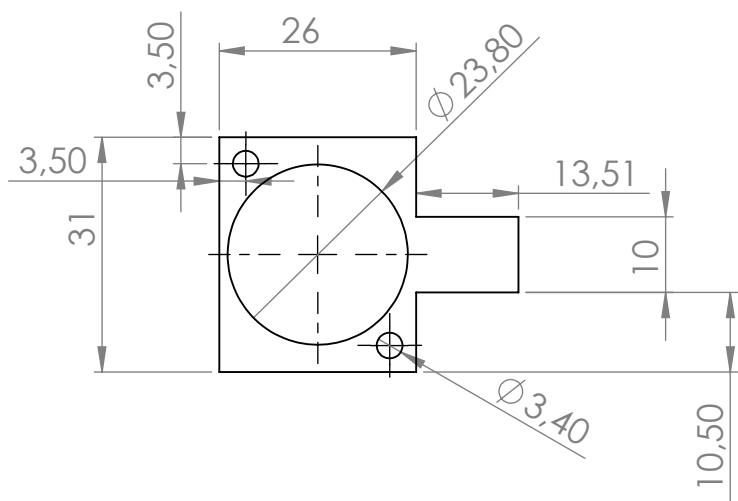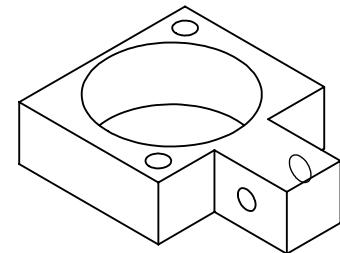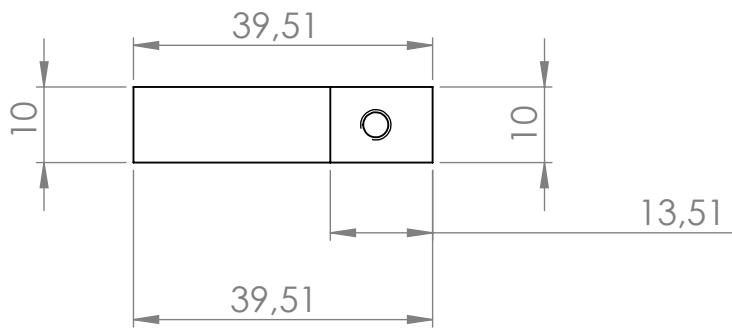

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		FINISH:		DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	SIGNATURE	DATE			TITLE:		
DRAWN							
CHK'D							
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.						
Q.A					DWG NO.		
					powercon-fitting		A4
					SCALE:1:1	SHEET 1 OF 1	
			WEIGHT:				

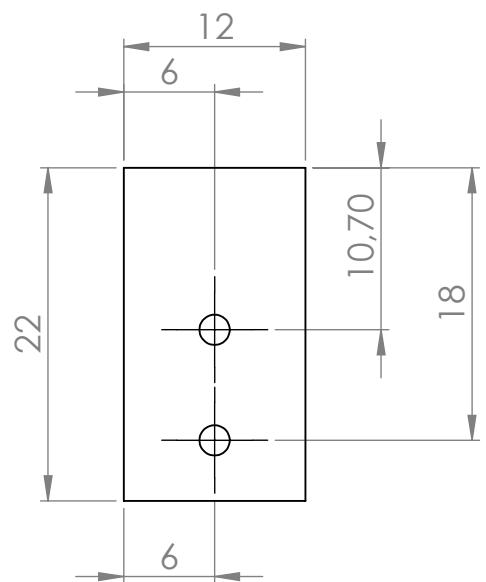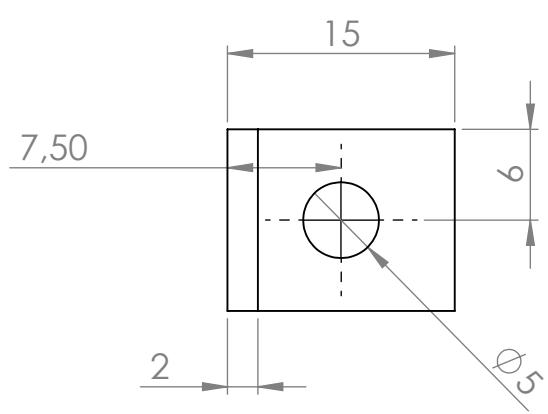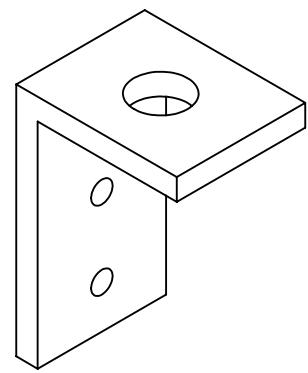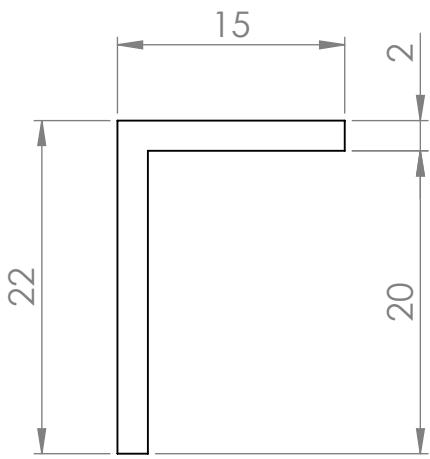

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE		TITLE:		
CHK'D							
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.				DWG NO. fitting-5kg-to-075kg ^{A4}		
Q.A	MATERIAL:				SCALE:2:1		
	WEIGHT:				SHEET 1 OF 1		

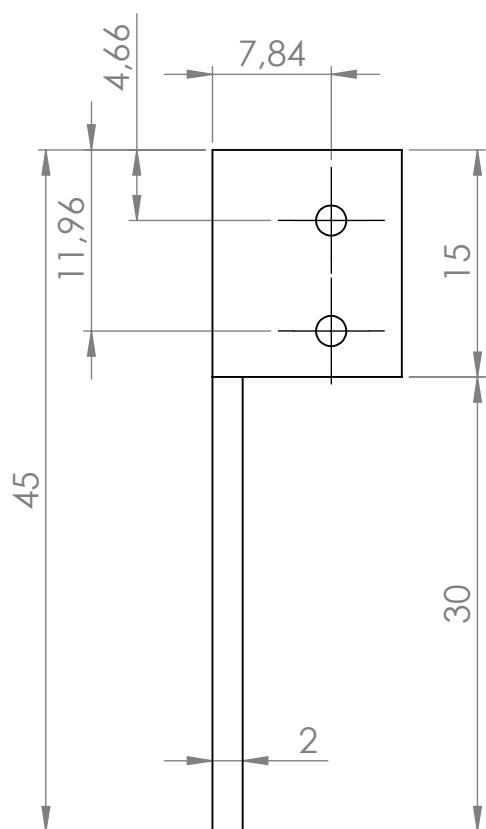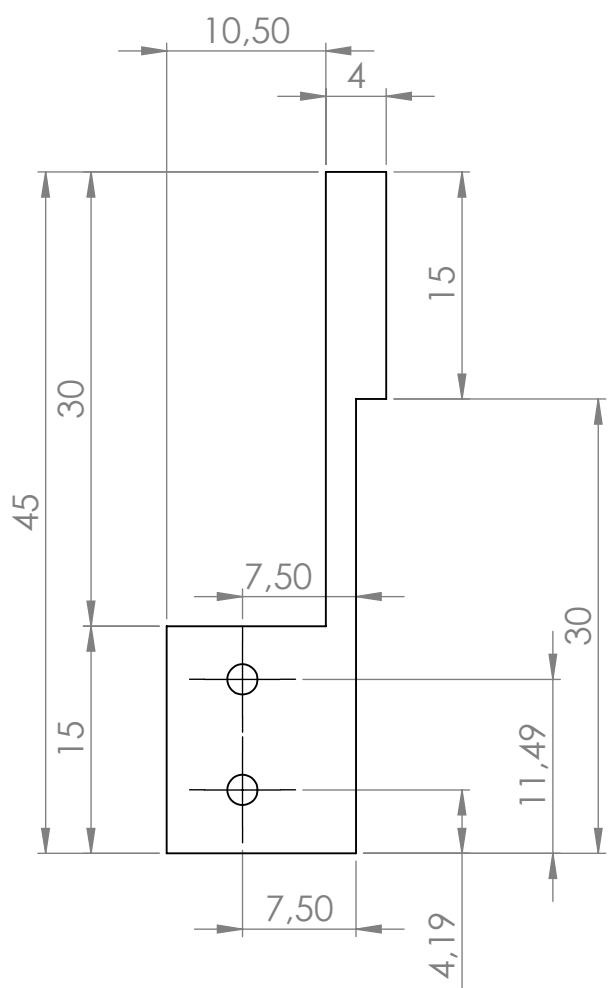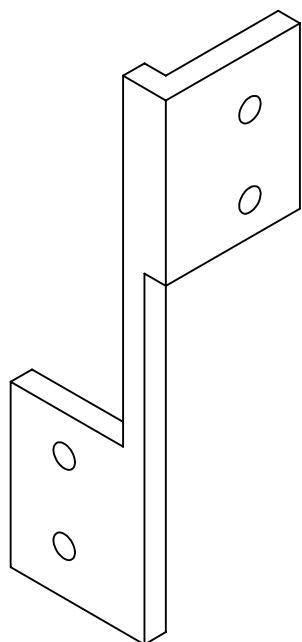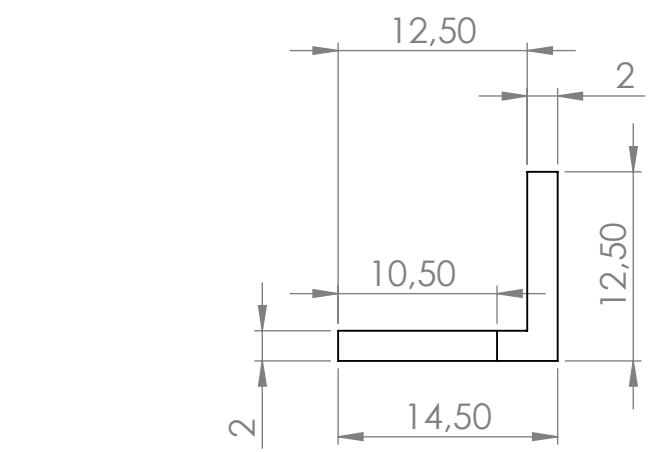

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

DRAWN

NAME

SIGNATURE

DATE

CHK'D

APP'D

MFG

Q.A

TITLE:

SolidWorks Student Edition.
For Academic Use Only.

DWG NO.


fitting-075-to-075

A4

WEIGHT:

SCALE:2:1

SHEET 1 OF 1

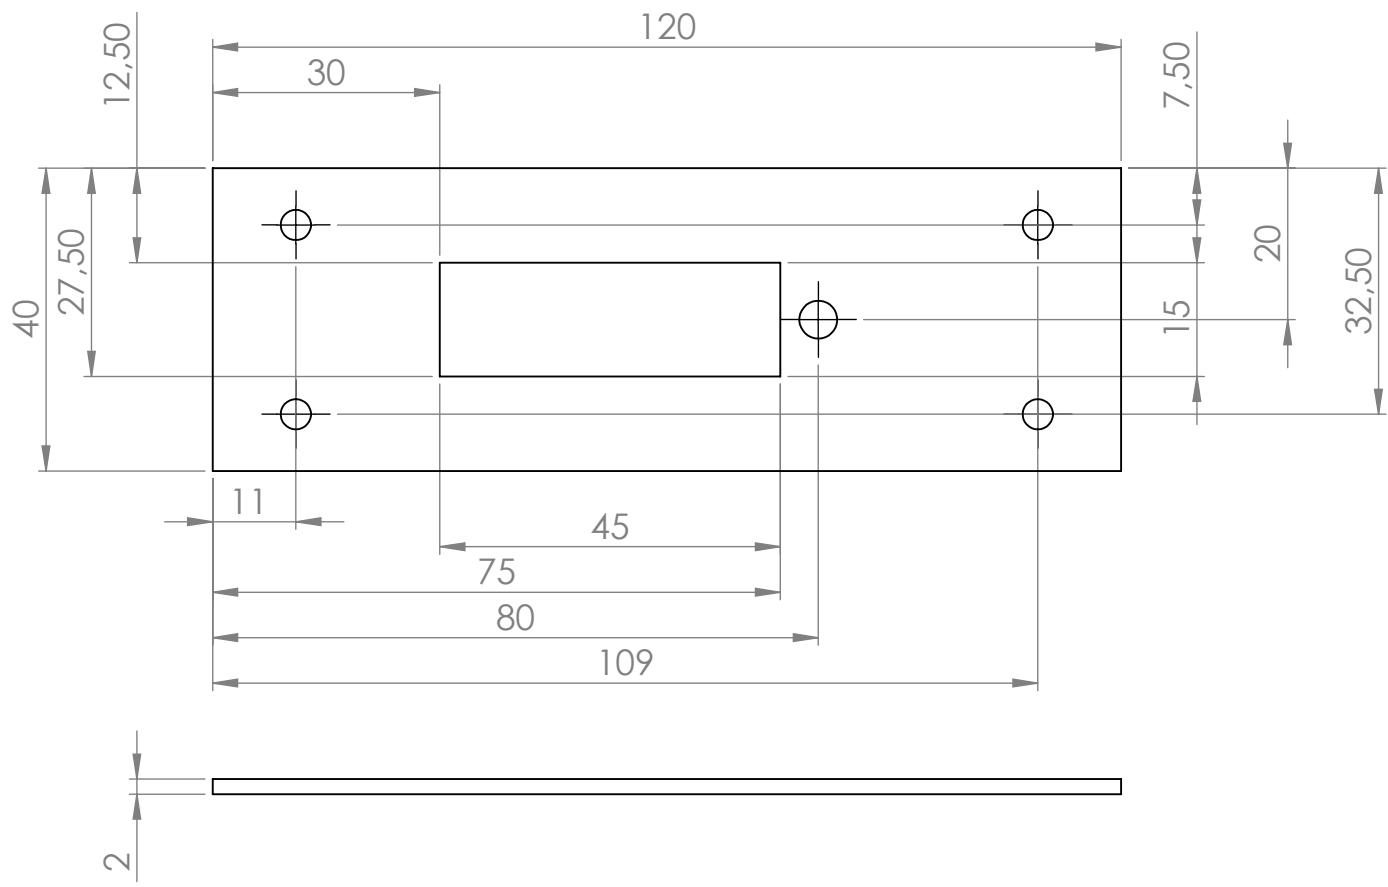

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN	NAME	SIGNATURE	DATE		TITLE:		
CHK'D							
APP'D							
MFG	SolidWorks Student Edition. For Academic Use Only.			LATERAL	DWG NO.	mount-plate	
Q.A				WEIGHT:	SCALE:1:1	SHEET 1 OF 1	
						A4	

APPENDIX C

Matlab

Bibliography

- [Fø13] FødevarerLandbrug. Fakta om erhvervet, 2013.
- [PCTU06] T H E European Parliament, T H E Council, O F The, and European Union. It is possible that electrical equipment may be placed in free circulation even though it does not comply with the safety requirements, and it is therefore desirable to lay down suitable provisions to minimise this danger., 2006.
- [Phi12] Phidgets Inc. Load Cell Primer, 2012.
- [Whe33] W. Whewelll. *Analytical Statics*. 4 edition, 1833.

