




Specifications

- Input voltage: 2–12 VDC
- Maximum load: 2 A
- Off-state current: < 1 μ A (typ.)
- HOLD input: Active HIGH, 2 V – VIN
- SW input: Active LOW, connect to GND
- SENS output: Active LOW switch sense, requires external/MCU pull-up
- PCB size: 15.8 × 11.2 mm
- Pin pitch: 2.54 mm

Features

- High-side P-channel MOSFET switching
- MCU-controlled soft power latch
- Onboard power/start button
- External button or switch input
- Independent switch-state sensing
- Supports delayed/graceful MCU shutdown
- Input and output status LEDs
- Breadboard compatible
- Open-source hardware

BOM				
Reference	Qty	Value	Package	Description
D1,D2	2	Red	0603	Status LED
D3,D4	2	1N4148	SOD-323	FEEDBACK VOLTAGE PROTECTION
J1	1	1x6 Header	2.54 mm	Pin header
Q1	1	A03400A	SOT-23	P-channel MOSFET
Q2	1	A03401A	SOT-23	N-channel MOSFET
R1	1	4.7 k Ω	0402	Gate series resistor
R2	1	100 k Ω	0603	Gate pull-down resistor
R3	1	47 k Ω	0402	Gate series resistor
R4	1	15 k Ω	0402	Input LED resistor
R5	1	10 k Ω	0402	Output LED resistor
SW1	1	TACTILE SW	SMD 4x3mm	START BUTTON SWITCH

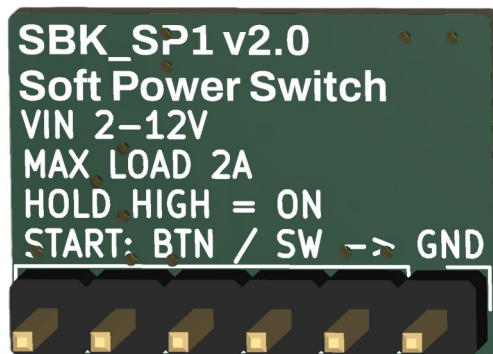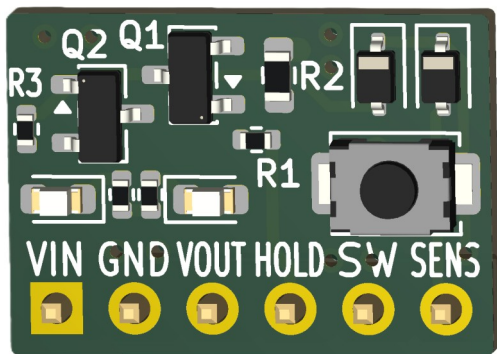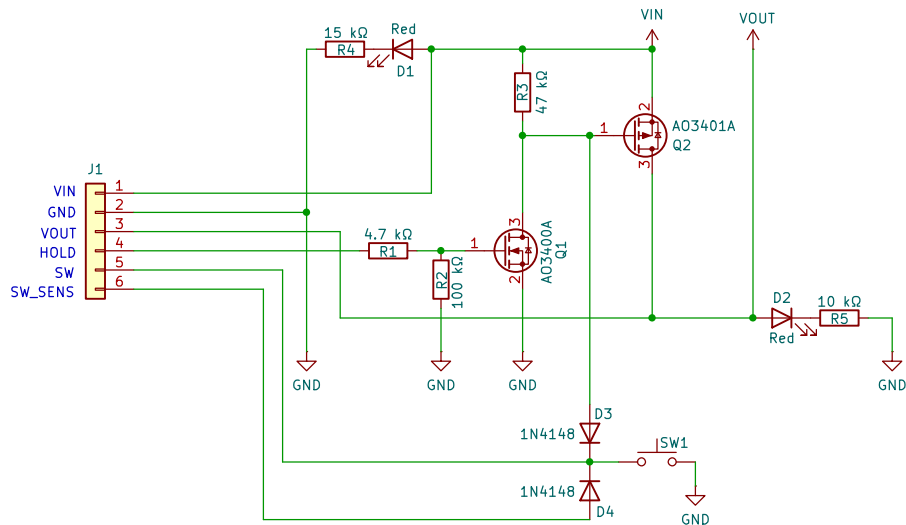

SBK_SP1 – Soft Power Switch

Licensed under CERN-OHL-P-2.0

Smarts Builds & Kits

Sheet: /
File: SBK_SP1.kicad_sch

Title: SBK_SP1 – Soft Power Switch

Size: USLetter Date: 2026-08-15
KiCad E.D.A. 10.0.3

Rev: v2.0
Id: 1/1