STARZ ELECTRONICS

F101 — FEED ROTOR SHAFT / R4

ENGINEERING DRAWING — RELEASE HOLD

Units mm · A3 · Do not scale dimensions

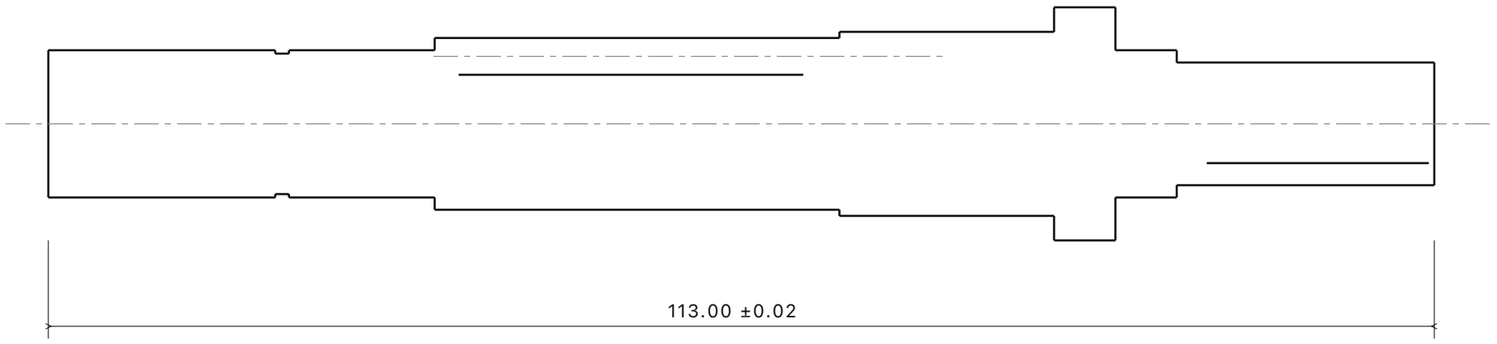

SIDE VIEW / 2:1 · S from rear end · nominal sharp roots not released

S interval	Diameter / thread
0–18.5	Ø12 h6
18.5–19.62	groove Ø11.45 ±0.02
19.62–31.5	Ø12 matched j5
31.5–64.5	Ø14 h6
64.5–73	M15×1-6g
73–82	Ø15 matched j5
82–87	Ø19 ±0.02
87–92	Ø12 −0.02/0
92–113	Ø10 h6

DATUM A: common bearing-seat axis. DATUM B: front bearing shoulder S82.

Bearing seats: j5 −0.003/+0.005 AND 0.003–0.006 actual interference to assigned SKF P6 bore.

12 h6 /14 h6: −0.011/0;10 h6: −0.009/0. Match-bearing table governs final seat diameters.

Bearing-seat cylindricity0.001,total radial runout0.002 to A;B perpendicularity0.004 to A.

Ø14/Ø10 total runout0.010 to A. Bearing seats Ra0.4µm;roller/coupling0.8µm;other surfaces3.2µm.

PULLEY KEY: S33.45–61.55,length28.10±0.02,width5.04±0.01,on+Z;floorZ4.00±0.02;endsR2.52.

ROLLER KEY: S94.45–112.55,length18.10±0.02,width3.04±0.01,on−Z;floorZ−3.20±0.02;endsR1.52.

MB2 SLOT: S31.40–73.00,width4.20±0.05,on+Z;floorZ5.50±0.05. Must open across the full pulley seat.

GROOVE: startS18.50±0.02,width1.12±0.02,Ø11.45±0.02;SEEGER A12. Root detail remains pending.

END TAP atS113: M5×0.8-6H,14mm full thread;minor drillØ4.2. Tapping/drill bottom clearance required.

Material42CrMo4+QT,certified yield≥650MPa;rough stockØ20×120;quantity8. General axial coordinates±0.02.

PROCESS: rough-turn;cut keys/slot/thread/groove;finish matched bearing journals together;deburr;inspect at20°C.

ASSEMBLY: fit MB2 BEFORE pulley key. Keep F112 removable;insert preassembled rotor from+S with locating dowels removed.

RELEASE HOLD: turning/key-root radii/reliefs,local stress/thermal-field validation and joint preload. Do not machine sharp roots.

PART F101 · FEED ROTOR · SHAFT

S1-B-FEED-R4-2026-09-12

SCALE2:1 / DIMENSION RECORD / NO RELEASE STAMP

Companion: feed cartridge assembly and bearing matching record