

SCARAB·WINGS

RECT

DIY Assembly & User Manual



Half-wave signal rectifier

0 HP Eurorack Format

Limited Warranty

Scarab ("the Company") warrants the components of this kit to be free from defects in materials and workmanship for a period of **two (2) years** from the original date of purchase by the end-user purchaser ("Warranty Period").

This warranty covers defects in materials or workmanship in the product as supplied by the Company. It does not cover damage resulting from accident, misuse, abuse, neglect, unauthorised modification, unsuitable physical or operating environment, improper maintenance, or use not in accordance with product instructions.

What Is Not Covered

- Consumable parts, such as knobs, faders, or jacks, unless damage has occurred due to a defect in materials or workmanship.
- Cosmetic damage including scratches, dents, or broken panels, unless damage has occurred due to a defect in materials or workmanship.
- Damage caused by operating the product outside the permitted or intended uses described in the documentation.
- Damage caused by service performed by anyone who is not a representative of the Company or an authorised service provider.
- Products with removed or altered serial numbers.

How to Obtain Warranty Service

Contact info@scarabextensions.com with proof of purchase, a description of the defect, and your return shipping address. The Company will issue a Return Merchandise Authorisation (RMA) number and shipping instructions. Products returned without an RMA number may be refused.

Limitation of Liability

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY AND THE REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL, WRITTEN, STATUTORY, EXPRESS OR IMPLIED. THE COMPANY IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION.

Warranty valid only in the country of original purchase. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Contents

Limited Warranty	2
1 Assembly Guide	4
1.1 Kit Contents	4
1.2 Required Tools	4
1.3 Assembly Steps	4
2 Module Usage	6
3 Creative Patching Ideas	6


Assembly Guide

This kit requires no electrical engineering knowledge minimal soldering. If this is your first DIY Eurorack project, please read this great article from our friends at Befaco before you start assembling the kit:

www.befaco.org/howto/

Kit Contents

Before beginning assembly, verify that all of the following items are present:

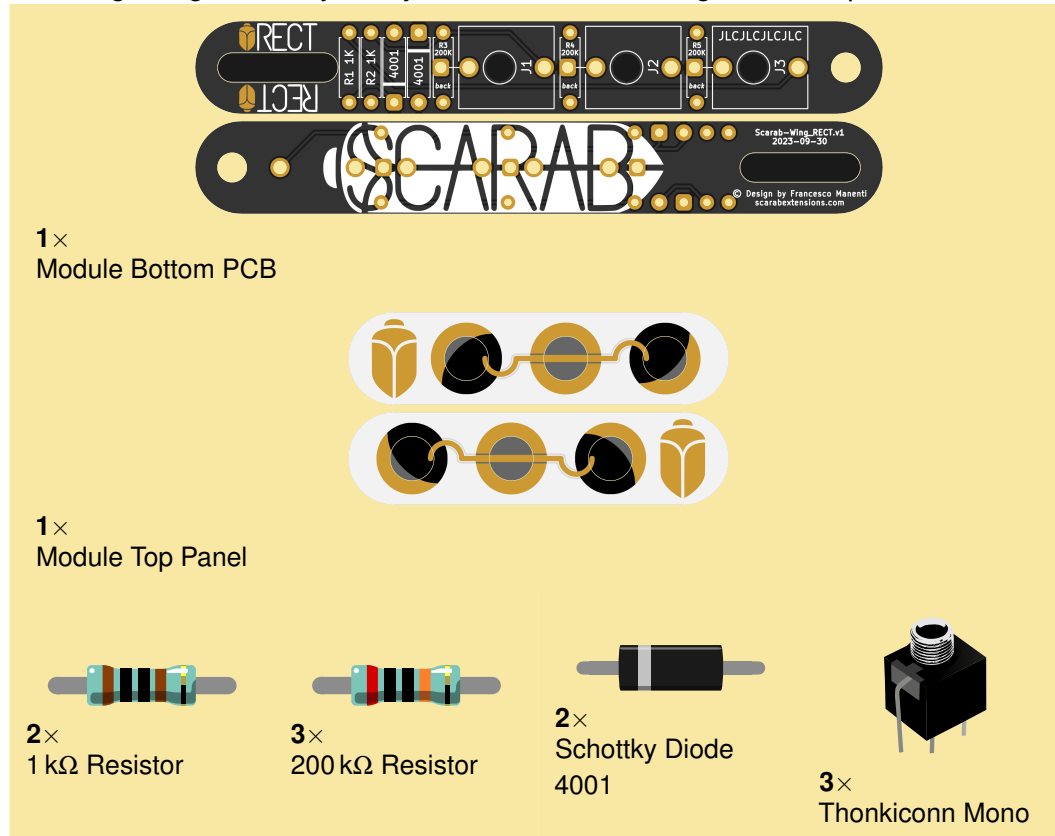

This image was created with [Fritzing](https://fritzing.org/).

Contact info@scarabextensions.com if anything is missing or damaged.

Required Tools

- Soldering Iron
- 8mm Wrench

Assembly Steps

1. Place the two Schottky diodes in the positions labeled "4001" of the circuit board (facing the label). Make sure to orient the diodes correctly, with the cathode (marked with a stripe) facing the stripe in the label.
2. Place the two 1k resistors on the circuit board facing the label.
3. Place the three Thonkiconn jacks (J1, J2, J3) WITHOUT SOLDERING.

4. Mount the front plate to the Thonkiconn jacks using the provided nuts.
5. Solder the Thonkiconn jacks.
6. Place the three 200k resistors on the back of the circuit board, laying them between the adjacent Thonkiconn terminals. Solder them in place (temporarily remove front plate if necessary).
7. (optional) Mount stand-offs to the two ends of the circuit board and secure above your eurorack modules, replacing existing screws with the stand-offs.

Module Usage

TODO

Creative Patching Ideas

This section presents a selection of starting-point patches to inspire exploration of the module's sonic possibilities.

This section presents a selection of starting-point patches to inspire exploration of the module's sonic possibilities.



RECT User Manual

Module Revision 1.0 | Manual Revision 1.0 | April 7, 2026

Copyright © 2026 Scarab. All rights reserved.

Trademarks. Scarab, the Scarab logo, and RECT are trademarks or registered trademarks of Scarab. Eurorack is a registered trademark of Doepfer Musikelektronik GmbH. All other product names, company names, and logos mentioned herein are the property of their respective owners.

Disclaimer. The information in this document is provided "as is" without warranty of any kind. Scarab reserves the right to make changes to this document and to the product described herein without notice.

Environmental. Scarab is committed to reducing environmental impact. This product complies with RoHS Directive 2011/65/EU and WEEE Directive 2012/19/EU. Please dispose of electronic waste at an authorised recycling facility.

Contact

Website www.scarabextensions.com
Support info@scarabextensions.com
Instagram [@scarabextensions_com](https://www.instagram.com/scarabextensions_com)
Facebook www.facebook.com/scarabextensions