More, better than usual
STC Corp.


EVK power consumption Test Setup

for ATM2202

2023.5.23

ATM2202 EVK Setup

- HW: ATM2202 EVK, 2.4GHz antennas, PPK II
- SW:
  - ✓ SDK5.4, Tera Term,
  - ✓ Example code: BLE_adv (power profile)

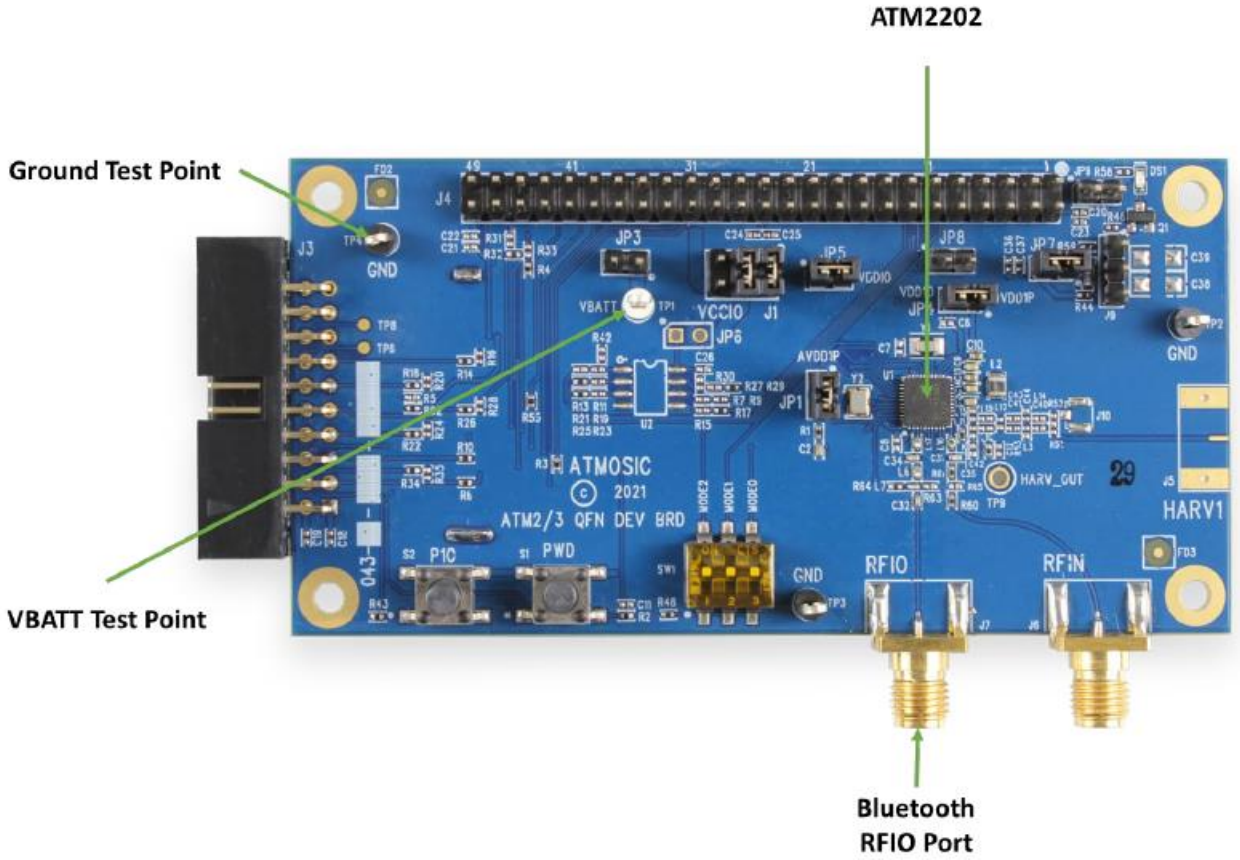

Confidential company information included. This information is only allowed to those who have been formally provided.

ATM2202 EVK Current Measurement

- SDK5.2 example:
  - Path: atmosic_sdk/platform/atm2/ATM22xx-x1x/examples/BLE_adv
  - make clean (just once)
  - make REF_BCN:=power_profile run_all

    $ make run_all BOARD=ATMEVK_M2202 DEBUG= PMU_CFG=VBAT_GT_1p8V_VDDIO_INT REF_BCN=power_profile


- Configuration:
  - Path: atmosic_sdk/platform/atm2/ATM22xx-x1x/README
  - Path: atmosic_sdk/platform/atm2/ATM22xx-x1x/examples/BLE_adv/README
  - Path: atmosic_sdk/platform/atm2/ATM22xx-x1x/examples/BLE_adv/reference_beacons.mk
  - Path: atmosic_sdk/platform/atm33/ATM22xx-x1x/examples/BLE_adv/tag_data
  - ATM2_ATM3 EVK Power Consumption Evaluation User Guide

Confidential company information included. This information is only allowed to those who have been formally provided.

ATM2202 EVK Current Measurement

- Current measurement:
  - Connect a dipole on the RFIO port
  - Connect EVB to the interface board and PC as described in the **SDK User Guide.**
  - Launch MSYS as described in the **SDK User's Guide.**
  - Make run_all
  - Install Jumper JP3
  - Disconnect EVB from the interface board.
  - Connect a 3V power supply to the VBATT Test point and Ground Test point.
  - Measure current of Tx (2.5mA) / Rx (1.0mA) / 1s interval (7.85uA) / Retention (2.3uA) / Hibernation (0.7uA).


ATM2202 EVK Current Measurement

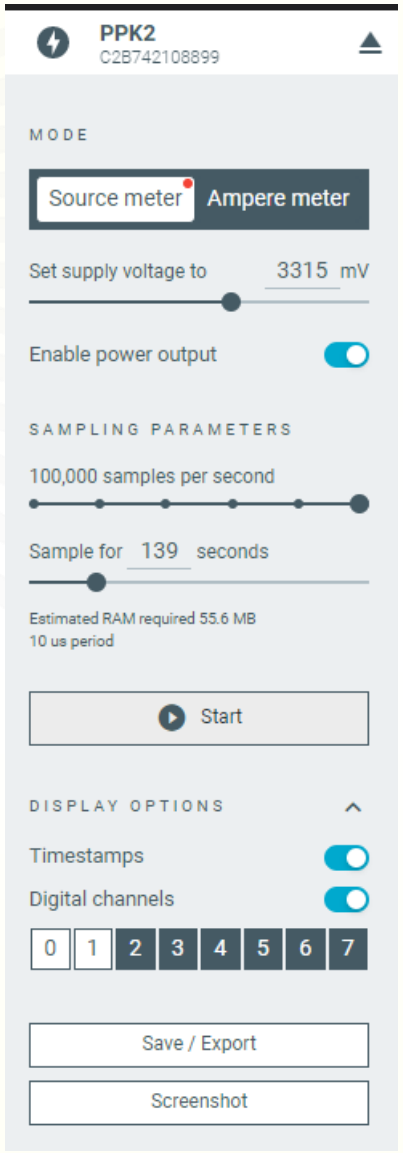

Confidential company information included. This information is only allowed to those who have been formally provided.

More, better than usual
STC Corp.

ATM2202 EVK Current Measurement

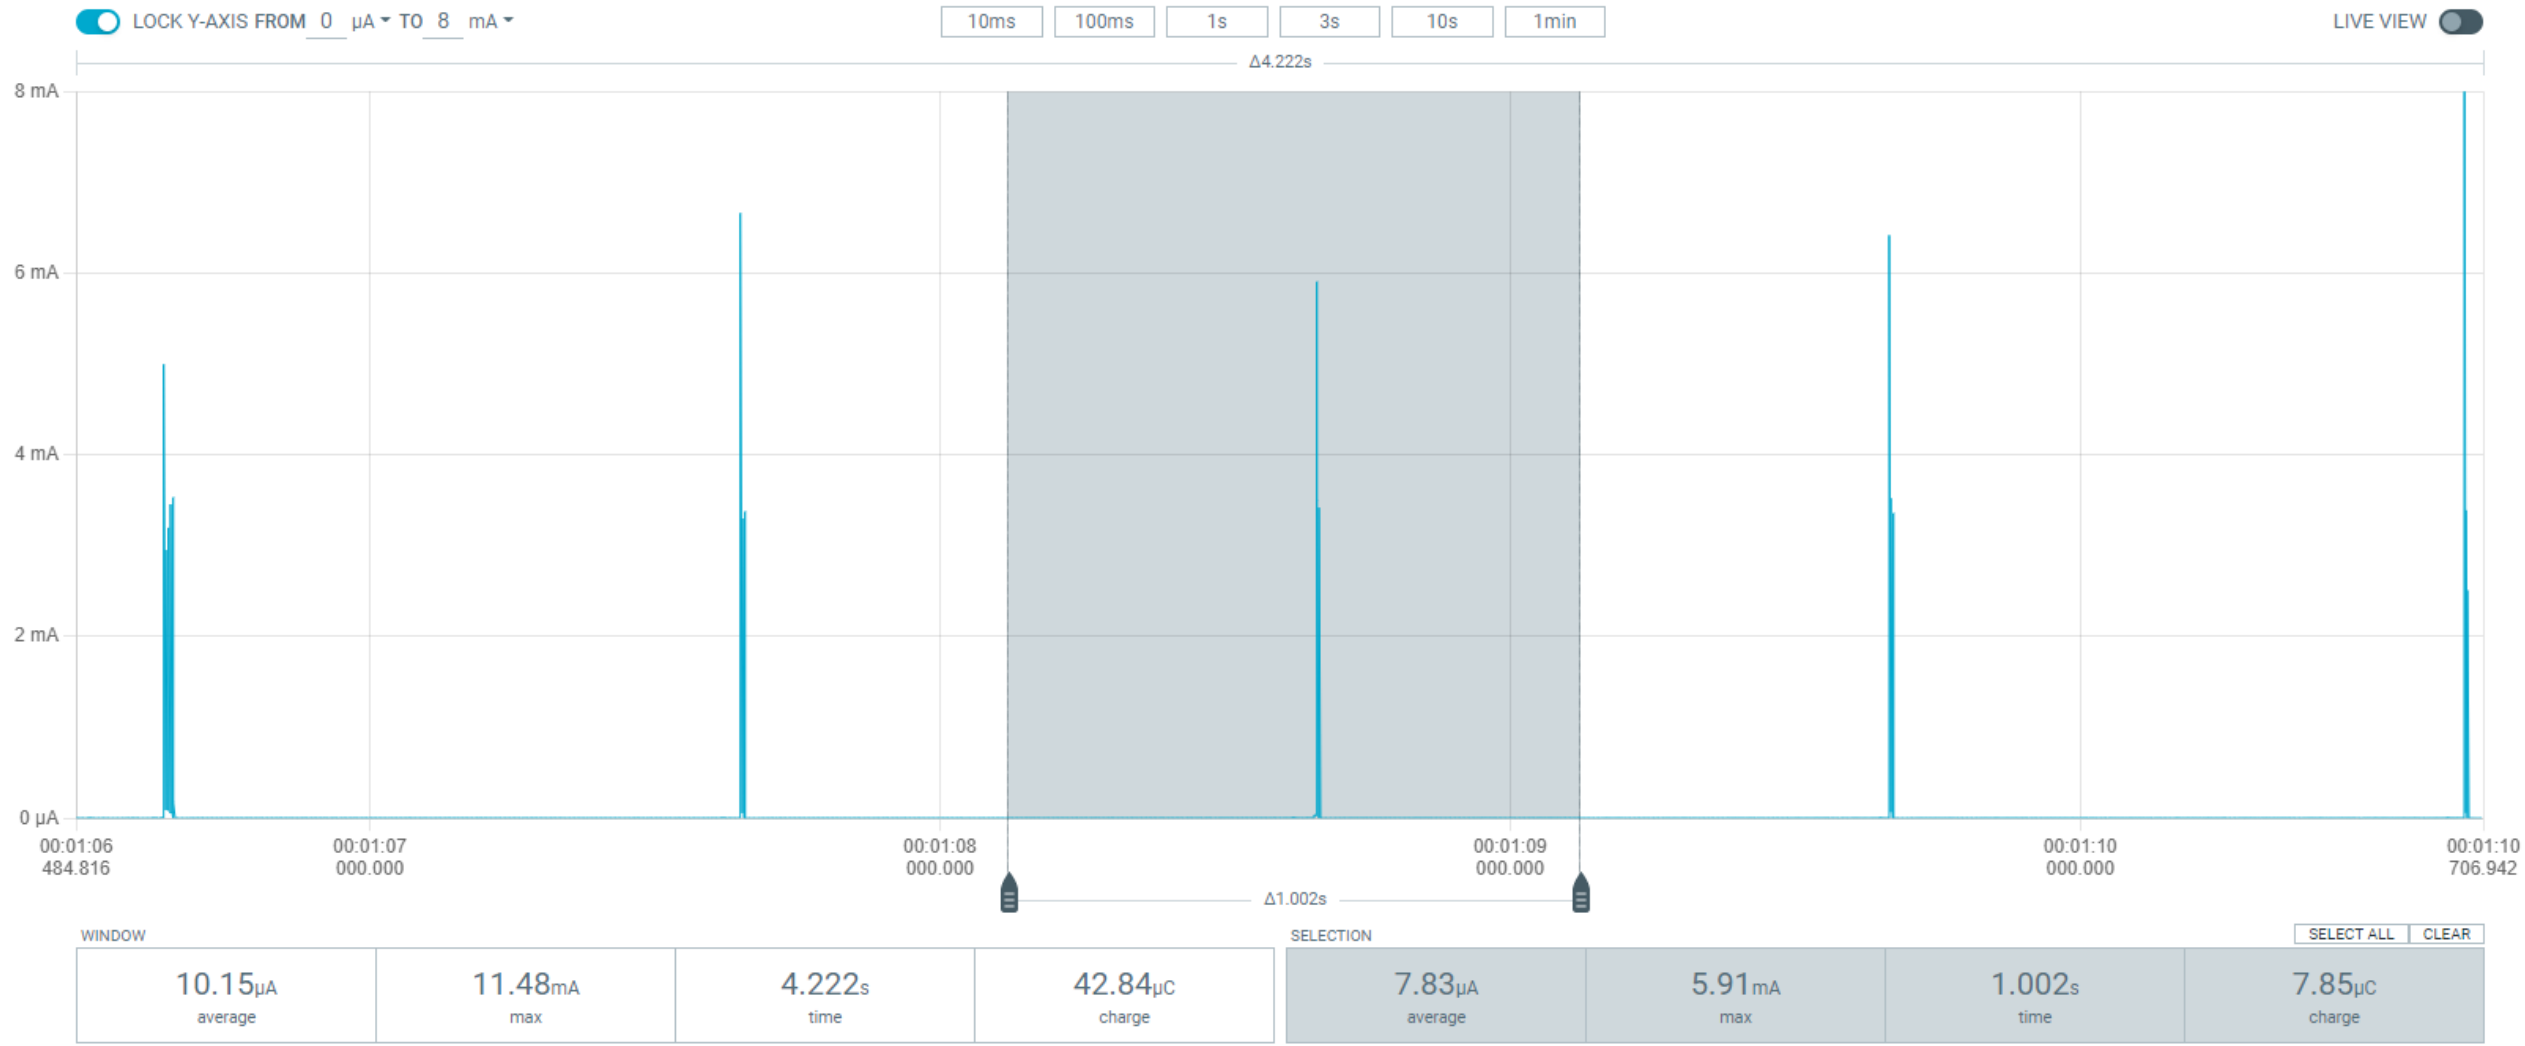

Confidential company information included. This information is only allowed to those who have been formally provided.

More, better than usual STC Corp.

Thanks