


3.2x2.5 SMD OSCILLATOR

FEATURE

- Tight frequency tolerance.
- CMOS compatible logic levels.
- Pin-compatible with standard 3.2×2.5mm packages.
- Designed for standard reflow and washing techniques.
- Low power standby mode.
- Available on tape & reel, 1000pcs per reel.
- Pb-free and RoHS/Green compliant.

APPLICATIONS

- Ideally suited designed for use in Ethernet, network adapter cards, hard disk devices, blue tooth, PCMCIA Cards, Palmtop Computer, Portable Applications.



Pb
Free


RoHS Compliant
Directive 2002/95/EC

Electrical Specifications 电气参数


型号	Holder Type	3.2x2.5mm SMD OSCILLATOR
频率范围	Frequency Range	32.768KHz, 1.000 Mhz to 125.000 Mhz
总频差	Frequency Stability	±20ppm to ±50ppm
输入电压	Supply Voltage	5.0V or 3.3V ±10%※(See Notes)
工作温度范围	Operating Temperature Range	-10℃ ~ +60℃ to -40℃ ~ +85℃
储存温度范围	Storage Temperature Range	-40℃ ~ +85℃/-55℃ ~ +125℃
占空比	Symmetry (Duty Cycle)	40/60 Standard
输出	Output Load	15pF Hcmos or 10 TTL
消耗电流	Current Consumption (15pf only)	1.000Mhz ~ 49.999Mhz=25mA max
		(5.0V)
	Current Consumption (15pf only)	50.000Mhz ~ 125.000Mhz=80mA max
		(1.8V 2.5V 2.85V 3.3V)
上升/下降时间	Rise/Fall Time	50.000Mhz ~ 125.000Mhz=60mA max
		5 nS max

※Notes:The supply voltage 1.8V, 2.5V, 2.85V also can be made by customer.

Mechanical Dimensions 外型尺寸



Test Circuit(测试电路)

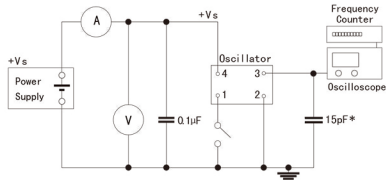

suggested solder pad layout

PIN	FUNCTION
1	N/C or Tri-state
2	Ground
3	Output
4	Vdd



深圳市尚臻泰科技有限公司
电话: 0755-86097691
传真: 0755-86097692
网址: www.szttech.com