



Argon Industria HMI 5C Enclosure for Official Raspberry Pi 5-Inch Screen

Product Datasheet

Product Name	Argon Industria HMI 5C Enclosure for Official Raspberry Pi 5-Inch Screen
Product Model	A25-012-AR-HMI-5C
EAN / UPC	5065019946270
Data Sheet Version	Rev 6 (build v7)
Date	18 August 2026
Argon 40 SKU	ARG-IND-HMI-5C

Overview

Industria enclosure designed to house the official Raspberry Pi 5-inch Touch Display 2. Integrates the RPi display into the Industria industrial form factor.

1. Application

- Raspberry Pi 5 / Raspberry Pi 5-inch Touch Display 2
- Raspberry Pi 5

Product Features

- Precision-machined aluminum construction
- Passive heatsink with optional active cooling module support
- Full USB, Ethernet, HDMI, and GPIO port access
- Supports Raspberry Pi HAT expansion via GPIO
- Compatible with M.2 NVMe expansion (optional accessory)
- VESA, panel, and desktop mounting compatible
- Cytron Industrial HAT compatible
- Supports Argon Industria Communication modules
- Rugged aluminum construction for demanding industrial environments
- Streamlined design for professional settings
- Expandable architecture supporting HATs and communication modules
- Compatible with official Raspberry Pi 5-inch Touch Display 2 (720 × 1280 MIPI)
- Optional M.2 NVMe expansion via PCIe M.2 Single NVMe Board accessory


2. Product Specifications

- **Weight (kg):** 0.539
- **Dimensions (cm):** 17.9 x 10.7 x 6.4 cm
- **active_cooling_included:** No
- **communication_modules:** Compatible with Argon Industria Communication modules
- **compatible_display:** Official Raspberry Pi 5-inch Touch Display 2
- **compatible_pi:** Raspberry Pi 5
- **compatible_sbc:** Raspberry Pi 5
- **cooling:** Passive heatsink (optional active cooling module supported)
- **cooling_type:** Passive heatsink with optional active cooling module support
- **corner_radius:** 5.00 mm
- **corner_radius_mm:** 5.00

- **cytron_industrial_hat_compatible:** Yes
- **depth:** 81.46 mm
- **depth_mm:** 81.46
- **desktop_mounting:** Yes
- **display_aperture_height_mm:** 94.00
- **display_aperture_width_mm:** 105.00
- **display_interface:** MIPI
- **display_mounting_center_to_center_height_mm:** 94.00
- **display_mounting_center_to_center_width_mm:** 105.00
- **display_mounting_height_center_to_center:** 94.00 mm
- **display_mounting_height_mm:** 94.00
- **display_mounting_width_center_to_center:** 105.00 mm
- **display_mounting_width_mm:** 105.00
- **display_resolution:** 720 × 1280
- **ethernet_access:** Yes
- **finish:** Deburr and break sharp edges
- **form_factor:** Industria industrial form factor
- **gpio:** 40-pin Raspberry Pi standard header (fully accessible)
- **gpio_access:** Yes
- **hat_compatibility:** Raspberry Pi HAT standard; Cytron Industrial HAT confirmed compatible
- **hat_compatible:** Yes, any Raspberry Pi HAT via GPIO
- **hdmi_access:** Yes
- **height:** 143.40 mm
- **height_mm:** 143.40
- **internal_cutout_depth:** 58.70 mm
- **internal_cutout_depth_mm:** 58.70
- **m2_nvme_compatible:** Yes, via optional PCIe M.2 Single NVMe Board
- **material:** Precision-machined aluminum
- **mounting_options:** VESA, panel mount, desktop
- **mounting_plate_offset_from_back_face:** 13.20 mm
- **mounting_plate_offset_from_back_face_mm:** 13.20
- **mounting_plate_offset_mm:** 13.20
- **nvme_expansion:** M.2 NVMe via optional Argon Industria PCIe M.2 Single NVMe Board
- **overall_depth_mm:** 81.46
- **overall_height_mm:** 143.40
- **overall_width_mm:** 155.50
- **panel_mounting:** Yes
- **pi5_bluetooth:** Bluetooth 5.0 / BLE
- **pi5_dimensions:** 85mm × 56mm
- **pi5_display_outputs:** 2× micro-HDMI (4Kp60 + 4Kp60 simultaneous), MIPI DSI, MIPI CSI
- **pi5_ethernet:** Gigabit Ethernet
- **pi5_gpio_header:** 40-pin Raspberry Pi standard GPIO header
- **pi5_gpu:** VideoCore VII, OpenGL ES 3.1, Vulkan 1.2
- **pi5_power_button:** Yes, onboard
- **pi5_power_input:** USB-C PD
- **pi5_power_minimum:** 5V 3A (15W)
- **pi5_power_recommended:** 5V 5A (27W)
- **pi5_processor:** Broadcom BCM2712, 2.4GHz quad-core 64-bit Arm Cortex-A76
- **pi5_ram_options:** 2GB, 4GB, 8GB, 16GB LPDDR4X-4267
- **pi5_real_time_clock:** Yes, battery connector onboard
- **pi5_storage_built-in:** microSD (UHS-I)
- **pi5_usb_ports:** 2× USB 3.0 (5Gbps), 2× USB 2.0
- **pi5_wifi:** Dual-band 802.11ac

- **port_access:** USB, Ethernet, HDMI, GPIO (all accessible)
- **product_category:** Industrial HMI enclosure
- **product_name:** Argon Industria HMI 5C Enclosure for Official Raspberry Pi 5-Inch Screen
- **recommended_power_supply:** Argon PWR GaN USB-C PD Power Supply 27W
- **sku:** ARG-IND-HMI-5C
- **usb_access:** Yes
- **vesa_mounting:** Yes
- **width:** 155.50 mm
- **width_mm:** 155.50

3. Mechanical Information and Functional Diagram

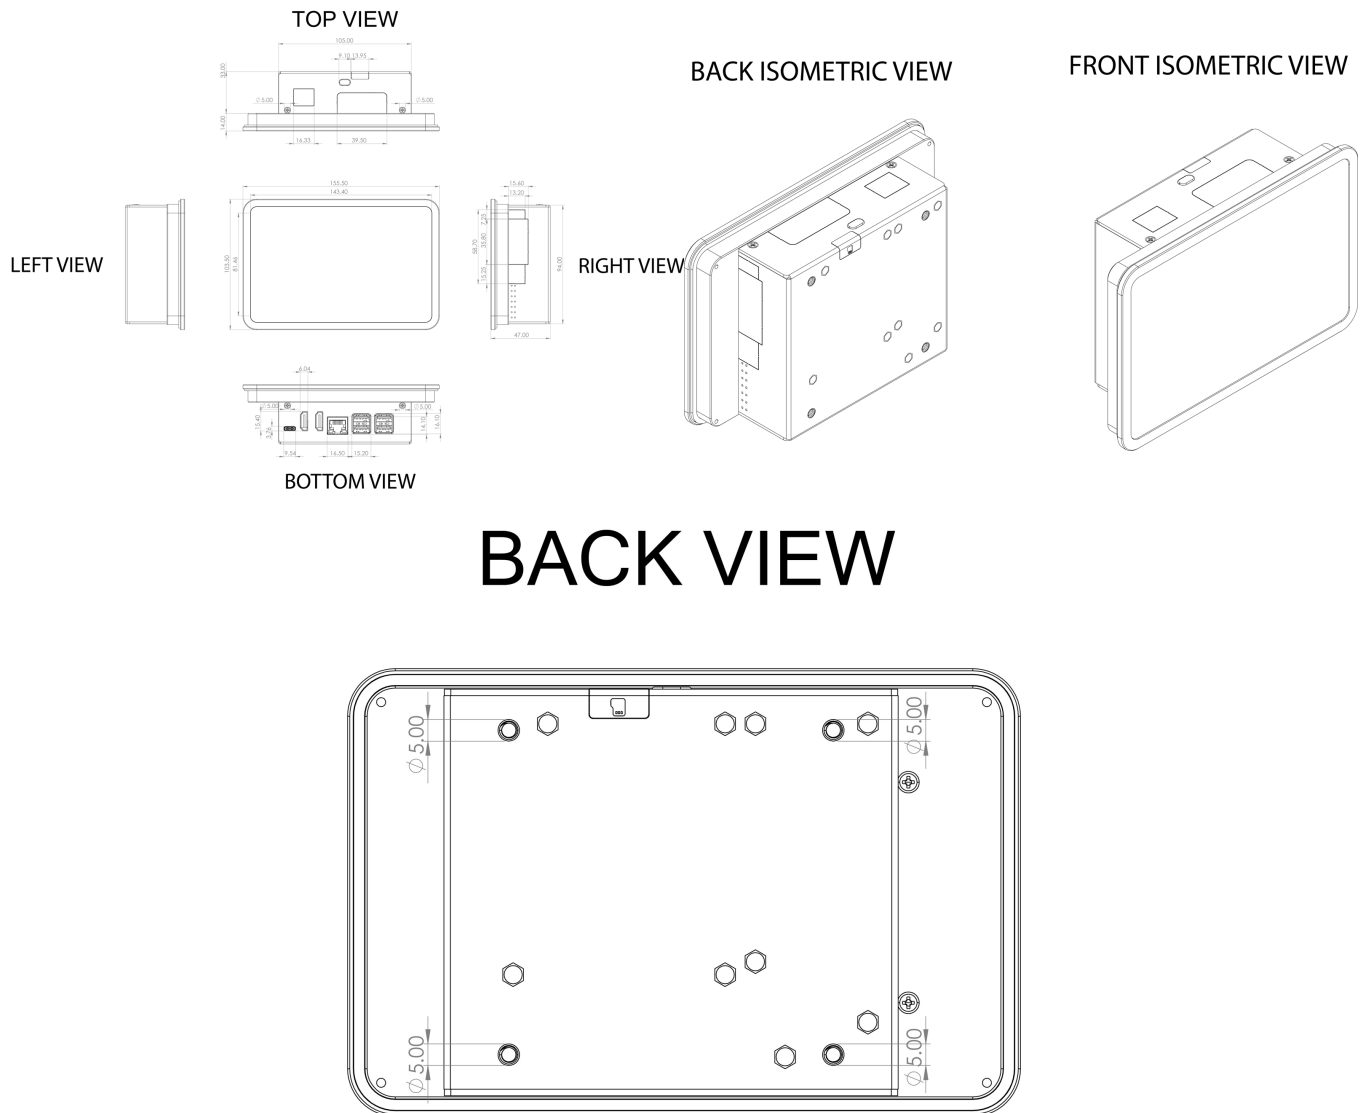

Illustration(s) reused from the existing marketing datasheet on file.

4. Reference Design

- (Electronics Schematics)

5. Product Compliance Information

- This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment)

6. Contact Information

Website: <https://www.argon40.com>
Email: support@argon40.com

Document Control

Document version	v7
Product revision	rev 6
Generated	2026-08-18 07:37 UTC
Content hash	09376d882f12
Revision record	datasheets/ARG-IND-HMI-5C/version-log.json (document_version = 7)

Full revision history for this datasheet is recorded in **[version-log.json](#)** — see the entry where *document_version* = 7.