

DS-PDP15P-EG2-WE Wireless PIR Detector

DS-PDP15P-EG2-WE is a fully supervised two-way wireless detector featuring motion detection, tamper protection, low battery and supervision. It can operate for up to 5 years from an in-built battery, and monitors the area within 15 m radius, ignores animals while recognizing human from the first step.




■ Detection Range: 15m / 85.9°

- Up to 30KG pet immunity
- SEC (Smart Environmental Control) Advanced digital signal processing and 3D optics
- Fully remote configurable through App
- Multiple enrollment method and easy installation design
- Easy replaceable battery with PCB protected
- Frequency hopping against jamming for reliable transmission





Lens Diagram

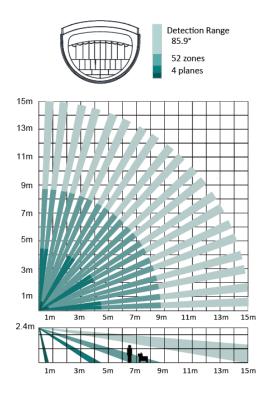

Specification

| Detection Performance | | | | |
|------------------------------|--------------------|--|--|--|
| Detection Method | Passive Infrared | | | |
| Sensor Model | SFG321-711 | | | |
| Detection Range | 15m | | | |
| Detection Angle | 85.9° | | | |
| Detection Zones | 52 | | | |
| Detectable Speed | 0.3 to 2m/s | | | |
| Sensitivity | Auto,High,Pet | | | |
| Pet Immunity | 30Kg | | | |
| White Light Filter | 6500lux | | | |
| Digital Temperature | Support | | | |
| Compensation | Support | | | |
| Creep Zone Protection | Support | | | |
| Feature | | | | |
| Digital Processing | Support | | | |
| Sealed Optics | Support | | | |
| Tamper Protection | Front, Rear | | | |
| Environment Temperature | Support | | | |
| Indicator | Support | | | |
| Signal Strength Indicator | Support | | | |
| Interface | | | | |
| Power Switch | Power Up Enrolling | | | |
| LED Indicator | Blue(Alarm) | | | |
| Transmission | | | | |
| Transmission Technology | Tri-X Wireless | | | |
| | | | | |



| Transmission Method | Two-Way RF Wireless | | | |
|-----------------------------------|---|--|--|--|
| Transmission Frequency | 868MHz | | | |
| Transmission Security | AES-128 Encryption | | | |
| Transmission Range(Free Space) | 1.6Km | | | |
| Frequency Hopping | Support | | | |
| Enrolling Method | Power up,Remote ID,QR Code | | | |
| Electrical Characteristics | | | | |
| Standard Battery Life | 5 years in work status (being triggered 20 times per day) | | | |
| Power Supply | Battery Powered | | | |
| Battery Type | CR123A × 1 | | | |
| Typical Voltage | 3V | | | |
| General | | | | |
| Operation Temperature | -10 °C to 55 °C (14 °F to 131 °F) | | | |
| Storage Temperature | -20 °C to 60 °C (-4 °F to 140 °F) | | | |
| Operation Humidity | 10% to 90% | | | |
| Dimension(WxHxD) | 65.5mm × 103mm × 48.5mm | | | |
| Weight | 128 g | | | |
| Mounting Height | 1.8 to 2.4m | | | |
| Mounting Method | Wall | | | |
| Application Scenario | Indoor | | | |
| Bracket | Optional Wall & Deciling Accessory | | | |

Available Model

DS-PDP15P-EG2-WE

Accessory

Optional

| DS-PWA96-Kit-WE AX PRO Kit (868MHz) | DS-PWA96-Kit2-WE | DS-PDP-IN-CR123A Indoor Detector Battery | DS-PWA96-Kit1-WE | DS-PDB-IN-Ceilingbracket Internal wall mounted bracket |
|--|--|---|------------------|--|
| | | Lithium Battery LiMno, + CR123A 3.0V — Do Not Re-Inargel | 00 - 1 | |
| DS-PDB-IN-Wallbracket Internal ceiling mounted bracket | DS-PWA96-Kit-WB AX PRO Kit (433MHz) | | | |
| 0 | | | | |



Distributed by

HIKVISION°

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T+662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com **Hikvision Russia** T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com