SKYBEES
AEROSPACE TESTING EQUIPMENT

COMPANY PROFILE 2026

Your Trusted Partner in Drone aviation and Aerospace Technology



SKYBEES

TESTING EQUIPMENT



AIRCRAFT ENGINE OIL PUMP TESTER
OPTSI-001

Aircraft Engine Oil Pump Tester is used for comprehensive testing of engine oil pump of ATAR engine. The testing involves monitoring of different parameters such as fluid temperature, pressure and flow at controlled conditions.





EASE OF OPERATION

User friendly instrumentation and control system, its is easy to operate and maintain.

SOFTWARE AND HARDWARE SUPPORT

OPTSI isindigenously designed with off the shelf components, ensuring quick local support and very short down time.

EXPANDABILITY

Designpded to be easily expandable for future modifications.

CALIBRATION AND MAINTENANCE

Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS

OPTSI is applicable to many aircraft engine oil pumps with minor change in adapter kits.Some of the engines include ATAR, T-56, PT-6, TFE



FEATURES

- Oval Gear flow meters for long and reliable operation.
- Low fuel flow and high flow fuel indication.
- Self-contained cabinet.
- Ergonomically arranged instrumentation and control systems.
- Capable of testing oil pumps of various aircraft.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Single phase 220VAC operation.
- One year support warranty.
- Proprietary electronic circuit boards for instrumentation and control.

PRODUCT SPECIFICATIONS

Instrumentation System	Instrumentation Parameters	Fluid Flow 0-3LPM, High Fluid Flow .13-75LPM
	Accuracy	+-0.5%(Full Scale)
	ADC Resolution	12 Bit
	Display Type	7-Segment BCD
Electrical Data	Power Supply	12VDC @ 2A
	Input Source	220VAC @1A
	Connectors	Quick Conn\Disconn Terminal Block Type
Operating and Storage Data	Operating Temperature	25°C-35°C
	Relative Humidity	50%
	Storage Temperature	65°C
Physical Data	Physical Dimensions	31"x36"x31"
	Weight	70Kg
	Surface Finishing	Epoxy Coated

AIRCRAFT MAGNETO TEST STAND
MTSSI-001

Magneto test stand consists of a variable RPM motor which drives aircraft magneto to simulate engine running. An adjustable spark gap indicator is installed on the tester to check the sparking characteristics of magneto at different rpms.


EASE OF OPERATION
User friendly instrumentation and controlpanel MTS SI-001 is easy to operate and maintain.

SOFTWARE AND HARDWARE SUPPORT
MTSSI is indigenously designed with off the shelf components, ensuring quick local support and very short down time.

EXPANDABILITY
Designed to be easily expandable for future modifications.

CALIBRATION AND MAINTENANCE
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS
MTSSI is applicable to various piston engine aircrafts using slick and bendix magnetos

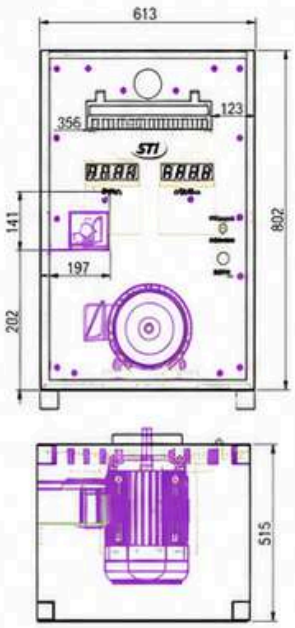



FEATURES

- Self-contained instrumentation and control cabinet.
- Ergonomically arranged instrumentation and control systems.
- Full compliance with OEMs technical order.
- Single phase 22VAC operation.
- One year support warranty.
- Proprietary electronic circuit boards for instrumentation and control.
- Variable acceleration and deceleration times for safety.
- Seven Segment based gap digital indicator 0-15mm.
- Multipurpose magneto attachment kit, works with bendix and slick magnetos.
- RPM Measurement range 0-6000 revs per minute.

PRODUCT SPECIFICATIONS

Instrumentation System	Instrumentation Parameters	RPM, Spark Gap Indicator
	ADC Resolution	10 Bit
	Instrumentation Display	7-Segment BCD Display
Electrical Data	Power Supply	5VDC @ 2A
	Input Source	Single Phase 220VAC
	Motor Type	3-Phase, 1 HP
	Motor Control Type	Variable Frequency Drive
Operating and Storage Data	Operating Temperature	25°C- 40°C
	Relative Humidity	50%
	Storage Temperature	65°C
Physical Data	Physical Dimensions	36"x18"x18"
	Weight	70Kg
	Surface Finishing	Matte Red, Epoxy Grey

UNIVERSAL FUEL NOZZLE TEST STAND
UFNSI-001

Universal fuel nozzle tester provides testing of fuel nozzles of aircraft engines. The testing involves measurement of different parameters such as pressure, temperature, flow and spray angles.

EASE OF OPERATION
User friendly instrumentation and spray angle screen, UFNSI-001 is easy to operate and maintain.

SOFTWARE AND HARDWARE SUPPORT
HDRPSI is indigenously designed with off the shelf components, ensuring quick local support and very short down time.

CALIBRATION & MAINTENANCE
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS
UNFSI has a modular design for future modifications, applicable platforms include t-56, PT-6 and TFE engines.



FEATURES

- Self-contained cabinet.
- Ergonomically arranged instrumentation and control systems.
- Capable of testing spray angles of T-56, CT-6 and TFE engine nozzles.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Single phase 220VAC operation.
- Adapter kits for testing all the nozzles on one test stand.
- One year support warranty.
- Proprietary electronic circuit boards for instrumentation and control.
- Fully automated operation.
- Software controlled fuel flow valves.
- Heavy duty casters with brakes for ease of transport.

PRODUCT SPECIFICATIONS:

Instrumentation System	Operating System	Microsoft Windows
	Instrumentation Software	National Instruments CVI
	Instrumentation Parameters	Pressure, Flow, Temperature, Spray Angle
	ADC Resolution	12 Bit
	Nozzle Types	T-56, CT-6, TFE
Electrical Data	Power Supply	24VDC @ 3A
	Input Source	220VAC @1A
	Connectors	SS316 cannon connectors
Operating and Storage Data	Operating Temperature	25°C-35°C
	Relative Humidity	50%
	Storage Temperature	65°C
Physical Data	Physical Dimensions	48"x36"x36"
	Weight	125Kg
	Surface Finishing	Epoxy Coated

SKYBEES

TAIL TRANSMISSION TEST STAND
TTSI-001

Tail transmission test stand provides comprehensive testing of tail transmission of MI-17 helicopter. The testing involves monitoring of different parameters such as torque, RPM, Temperatures and supply current and voltages.

EASE OF OPERATION

Withsingleuser friendly instrumentation and control screen, TTSI-001 is easy to operate and maintain.

SOFTWARE AND HARDWARE SUPPORT

TTSI is indigenously designed with off the shelf components, ensuring quick local support and very short down time.

EXPANDABILITY

TailTransmission Test Stand is designed to be easily expandable for future modifications.

CALIBRATION AND MAINTENANCE

Local supportand detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS

Applicable platforms include all rotary wing aircrafts such as MI-17, Puma SM, Lama, Cobra, Schweizer 300.




















FEATURES

- Self-contained cabinet.
- Ergonomically arranged instrumentation and control systems.
- Supports comprehensive testing of tail transmission of MI-17 helicopter.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Three phase 440 VAC operation.
- One year support warranty.
- Proprietary electronic circuit boards for instrumentation and control.
- Heavy Duty Swivel casters for ease of transport.

PRODUCT SPECIFICATIONS

Instrumentation System	Operating System	Microsoft Windows
	Instrumentation Software	National Instruments CVI
	Instrumentation Parameters	Strain,Temperature, RPM, Current & Voltage
	ADC Resolution	10 Bit
Electrical Data	Power Supply	24VDC @ 3A , 5VDC@2A,48VDC @ 15A
	Input Source	220VAC @1A
	Connectors	SS316 cannon connectors
Operating & Storage Data	Operating Temperature	25°C-35°C
	Relative Humidity	50%
	Storage Temperature	65°C
Physical Data	Physical Dimensions	60"x36"x36"
	Weight	120Kg
	Surface Finishing	Powder Coated

SKYBEES

HYDRAULIC BRAKE TESTER
HBTSI-0001

Hydraulic Brake and Bleed tester is used to check the braking pressures of aircraft tires .HBTSI is fitted with air bubble indicators for air free hydraulic lines.

CUSTOMIZED DESIGN

Highaccuracy,robust data acquisition system for measuring hydraulic brake pressure of C-130 aircraft.

PORTABLE

HBTSI comes with a cabinet with wheels ideal for outdoor use on sight operations

USER FRIENDLY DESIGN

Equipped with four 7-Segment displays for digital pressure readouts.HBTSI can simultaneously check braking pressures of all four tires.


CALIBRATION AND MAINTENANCE

Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS

Applicable platforms include hydraulic brakes of all fixed wing aircraft such as C-130, ATR-42-500, IL-78 etc



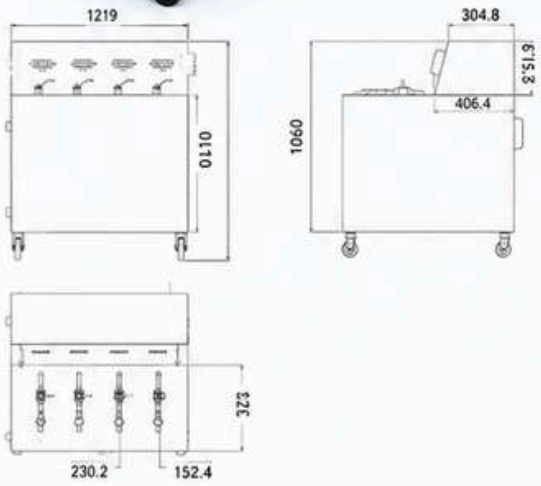

FEATURES

- User friendly instrumentation system.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Bleed system with air bubble indicator.
- 28VDC operation.
- Proprietary electronic circuit boards for instrumentation and control.
- Operating pressure range of 5000 PSI.
- Drawer for storage of technical orders and beck compartment for stowing away the hydraulic hoses
- Heavy duty ball valves for long and reliable operation.
- 9-Point software calibration for high accuracy.
- One year support warranty.

PRODUCT SPECIFICATIONS:

Instrumentation System	Display Technology	7-Segment
	HMI Display	Hydraulic Pressure
	ADC Resolution	12Bit
	Sensor Type	Pressure Transducer
	Measurement Range	5000 PSI (Absolute)
Electrical Data	Supply Voltage	28 VDC
	Current	5Amp
	Grounding	Earthing Stud
Operating and Storage Data	Operating Temperature	25-35 C
	Relative Humidity	60%
	Storage Temperature	80 C
Physical Data	Weight	85 Kgs
	Dimensions	1219 x 914 x 1219
	Surface Material	Mild Steel

SHUT OFF VALVE TEST STAND
SOVSI-0 001

Shut of valve test stand provides testing of anti-icing valves of T-56 engine. The testing involves measuring air flows at inlet and outlet of shutoff valve at different pressures and analysis of recorded values with OEMs T.O.

EASE OF OPERATION

Withasingleuserfriendly instrumentation screen, SOVSI-001 is easy to operate and maintain.

SOFTWAREAND HARDWARE SUPPORT

SOVSI is indigenously designed with off the shelf components,ensuring quick local support and very short down time.

EXPANDABILITY

Shut OffValve Test Stand is designed to be easily expandable for future modifications.

CALIBRATIONAND MAINTENANCE

Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.


APPLICABLE PLATFORMS


Applicable platforms include all turbo prop engines like T-56, PT-6 and CT- 7 engines.











FEATURES

- Self-contained cabinet.
- Ergonomically arranged instrumentation and control systems.
- Supports shut off valve of C-130 aircraft.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Single phase 220VAC operation.
- Adapter kits for connecting shut off valve with test stand.
- One year support warranty.
- Proprietary electronic circuit boards for instrumentation and control.
- Heavy Duty Swivel casters for ease of transport.

PRODUCT SPECIFICATIONS

Instrumentation System	Operating System	Microsoft Windows
	Instrumentation Software	National Instruments CVI
	Instrumentation Parameters	Pressure, Case/Port Leakage & Current
	ADC Resolution	12 Bit
Electrical Data	Power Supply	24VDC @ 3A
	Input Source	220VAC @1A
	Connectors	SS316 cannon connectors
Operating and Storage Data	Operating Temperature	25°C-35°C
	Relative Humidity	50%
	Storage Temperature	65°C
Physical Data	Physical Dimensions	60"x48"x22"
	Weight	120Kg
	Surface Finishing	Epoxy Coated

DIFFERENTIAL PRESSURE REGULATOR TEST STAND
DPRSI-0001

Differential pressure regulator test stand provides comprehensive testing of Differential pressure regulator of c-130 aircraft. The testing involves measurement of flow, pressure and leakages and comparison of these values with OEMs technical order.

EASE OF OPERATION
Withasingleuser friendly instrumentation screen, DPRSI-001 is easy to operate and maintain.

SOFTWAREAND HARDWARE SUPPORT
HDPRSI is indigenously designed with off the shelf components, ensuring quick local support and very short down time.

EXPANDABILITY
Differential Pressure Regulator Test Stand is designed to be easily expandable for future modifications.

CALIBRATIONAND MAINTENANCE
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS
Applicable platforms include all turbo prop engines like T-56, PT-6 and CT-7 engines.



FEATURES

- Self-contained cabinet.
- Ergonomically arranged instrumentation and control systems.
- Supports differential pressure regulator of C-130 aircraft.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Single phase 220VAC operation.
- Adapter kits for connecting pressure regulator with test stand.
- One year support warranty.
- Proprietary electronic circuit boards for instrumentation and control.


PRODUCT SPECIFICATIONS:

Instrumentation System	Operating System	Microsoft Windows
	Instrumentation Software	National Instruments CVI
	Instrumentation Parameters	Pressure, Flow, Temperature and Current
	ADC Resolution	12 Bit
Electrical Data	Power Supply	24VDC @ 3A
	Input Source	220VAC @1A
	Connectors	SS316 cannon connectors
Operating and Storage Data	Operating Temperature	25°C-35°C
	Relative Humidity	50%
	Storage Temperature	65°C
Physical Data	Physical Dimensions	96"x72"x36"
	Weight	220Kg
	Surface Finishing	Epoxy Coated

SHIMMY DAMPER TEST STAND
SDSI-001

Shimmy damper test stand provides testing of shimmy damper of MI-17 helicopter. Testing involves measurement of dampening force with respect to temperature and strokes per minute



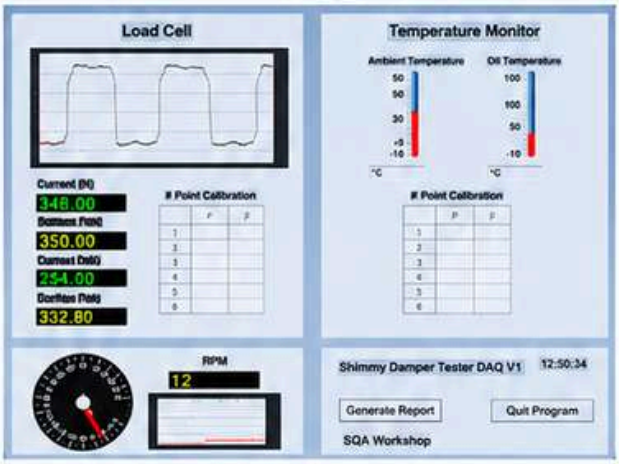

EASE OF OPERATION

Withasingleuser friendly instrumentation screen, SDSI-001 is easy to operate and maintain.

SOFTWARE AND HARDWARE SUPPORT

SDSI is indigenously designed with off the shelf components, ensuring quick local support and very short down time.

EXPANDABILITY

Differential Pressure Regulator Test Stand is designed to be easily expandable for future modifications.

CALIBRATION AND MAINTENANCE

Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS

Applicable platforms include all rotary wing aircrafts such as MI-17, Puma SM, Lama,Cobra, Schweizer 300.



FEATURES

- Self-contained cabinet.
- Ergonomically arranged instrumentation and control systems.
- Supports testing of shimmy damper of MI-17 aircraft.
- Full compliance with OEMs technical order.
- Single phase 220VAC operation.
- One year support warranty.
- Proprietary electronic circuit boards for instrumentation and control.
- Built-in 9 point calibration module.
- Data logging and printing ready.

PRODUCT SPECIFICATIONS

Instrumentation System	Operating System	Microsoft Windows
	Instrumentation Software	National Instruments CVI
	Instrumentation Parameters	Strain Ambient Temp Oil Temp,RPM
	ADC Resolution	10Bit
Electrical Data	Power Supply	5VDC @ 3A
	Input Source	220VAC @1A
	Connectors	SS316 cannon connectors
Operating and Storage Data	Operating Temperature	25°C-35°C
	Relative Humidity	50%
	Storage Temperature	65°C
Physical Data	Physical Dimensions	96"x72"x36"
	Weight	220Kg
	Surface Finishing	Epoxy Coated

FUEL HEATER & STRAINER ASSEMBLY TESTER
FHSSI-0001

Fuel heater and strainer assembly tester provides testing of heater and strainer of T-56 engine.
The testing involves measuring of different parameters such as temperature, pressure and flow at controlled conditions.

RELIABLE SOLUTIONS
Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY
High-performance electronic systems for modern aircraft applications.


CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT
Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY
Wide range of genuine and compatible parts for various aircraft platforms.





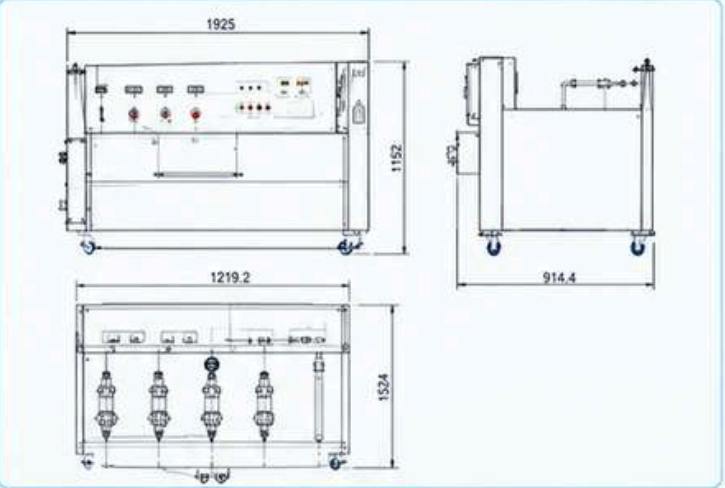

FEATURES:

- Wide range of temperature control settings.
- Rugged and reliable construction.
- Calibration certificates available.
- Bleed system with air bubble indicator.
- 28VDC operation.
- Proprietary electronic circuit boards for instrumentation and control.
- Operating pressune range of 5000 PSI.
- Drawer for storage of technical orders and beck compartment for stowing away the hydraulic hoses.
- Heavy duty ball valves for long and reliable operation.
- 9-Point software calibration for high accuracy.
- One year support warranty.

Product Specifications:

Instrumentation System	Display Technology	TouchscreenTFT LED
	Display Size	19"
	HMI Displays	Pressure, fluid flow, fluid temperature, calibration, diagnostic, & warning signals
Electrical Data	Supply Voltage	28 VDC
	Current	5 Amp
	Grounding	Earthing Stud
Operating & Storage Data	Operating Temperature	25°C - 40°C
	Relative Humidity	60%
	Storage Temperature	80°C
Physical Data	Weight	85 Kgs
	Dimensions	1219 × 914 × 1219
	Surface Material	Mild Steel

FUEL CONTROL UNIT TEST STAND
FCUSI-0001

Fuel control unit governs the flow of fuel inside the combustion chamber of gas turbine engines. Fuel control unit test stand provides comprehensive testing of fuel control units by performing all the necessary tests provided by the manufacturer of fuel control unit.

CUSTOMIZED DESIGN
Highaccuracy,robust computerized data acquisition system for testing multiple fuel control units on single test stand.

FLEXIBLE
Easily adaptable for testing other types of Fuel Control Units, simply by adding software module to its computer.


DATA LOGGING
Equipped withdata logging feature for Tests results, PASS/FAIL reporting,service history future referencing, for future referencing.

SUPERIOR FABRICATION
Made with SS-316 stainless steel, FCU test stand provides superior protection against oil spills, rust, corrosion and easily cleanable.

APPLICABLE PLATFORMS
Applicable platforms include all rotary wing aircrafts such as MI-17, Puma SM, Lama, Cobra, Schweizer 300.





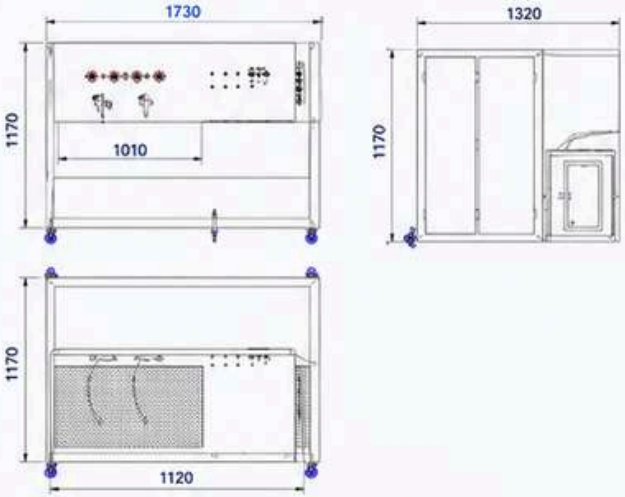

FEATURES:

- Self-contained cabinet.
- User friendly instrumentation and control system.
- Testing procedures and accessory setting up procedure displayed on instrumentation and control screen.
- Industrial grade central processing unit.
- Optional data transmission on serial or mod-bus interface.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Single phase 220VAC operation.
- Adapter kits for connecting fuel heater and strainer with test stand.
- One year support warranty.
- Proprietary electronic circuit boards for instrumentation and control.
- Heavy duty 100PSI booster pump for simulating fuel pressure of FCUs of small to mid sized aircrafts.
- Automatic, high accuracy temperature control for fuel test circuits.
- Touchscreen Display with multi-touch option for ease of use.
- Built in integrated color printer for one click report generation.

PRODUCT SPECIFICATIONS:

Manual Control Modes	Display Technology	Touchscreen TFT LED
	Display Size	19"
	HMI Displays	Pressure, fluid flow, drive speed, DC volts, DC ohms, AC volts, AC ohms, fluid temperature, calibration, diagnostic, & warning signals
Booster Pump Specification	Motor Wattage	5 Hp
	Rotational Speed	1400 RPM
	Flow Range	Upto 5 Gallons/Min
	Fluid Pressure	UPTO 100 PSI
Drive Motor Specification	Wattage	3-Phase 10Hp
	Rotational Speed	0 to 7000 RPM
	Voltage, Frequency	440VAC @ 60Hz
	Voltage Range	10VAC to 200VAC
APU Power Supply	Frequency	400Hz
	Output	Sine Wave
Electrical Data	Supply Voltage	440 VAC
	Current	25Amp
	Frequency	50 Hz
Physical Data	Physical Dimensions	60"x84"x78"
	Surface Material	SS-316
	Weight	500 Kgs

SCORSBY MOTION TEST TABLE
SMTSI-001

Designed to simulate the roll, pitch, and yaw motions of an aircraft in flight, scorsby motion test tables are primarily used for shop, production, and qualification testing of inertial sensors

VERSATILE
Test table designed to simulate the roll, pitch, and yaw motions ideal for shop, production, qualification testing, and exercising of gyroscopic instruments.

SOFTWARE AND HARDWARE SUPPORT
HDPRSI is indigenously designed with off the shelf components, ensuring quick local support and very short down time.


EXPANDABILITY
Scorsby motion table can be customized for different payload capacities and tilt angles for future modifications.

CALIBRATION AND MAINTENANCE
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS
Scorsby motion table is applicable to all the analog inertial sensors installed on any aircraft









FEATURES

- Heavy-duty table frame designed for heavy loads and stable platform.
- Epoxy coated finishing for durability and corrosion resistance.
- Precision top mounting flat surface.
- Engraved markings for easy adjustment.
- Clockwise 7 counter clockwise operation.
- Closed loop speed control from 3 to 100 revolution per minute.
- Adapter kits for mounting different gyrosoopic instruments with test stand.
- One year support warranty.
- Proprietary electronic circuit boards for instrumentation and control.

PRODUCT SPECIFICATIONS

Tilt Head Specifications	Tilt Angle Range	0 - 20 Degrees (Selectable upto 0.5 Degrees)
	Tilt Angle Markings	0 Degreess - 20 Degrees
	Payload Capacity	100Kgs
	Tilt Head Area	3.5 Sq Ft
Motor Specifications	Motor Type	3 Phase, 440VAC
	Gear Motor RPM	0-100 Revs/Min
	Motor Rating	1HP
Electrical Data	Input Source	220VAC @5A
	Frequency	50-60 Hz
	Connectors	SS316 cannon connectors
Operating and Storage Data	Operating Temperature	25°C-35°C
	Relative Humidity	50%
	Storage Temperature	75°C
Physical Data	Physical Dimensions	30"x24"x40"
	Weight	220Kg
	Surface Finishing	Epoxy Coated

HYDRAULIC LEAKAGE PRESSURE TESTER
HLPSI-0001

Hydraulic leakage pressure tester is used to test the hydraulic based accessories of C-130 aircraft. Testing involves supplying of pressure and then testing the accessory for spills and leaks at specific controlled conditions such as temperature and pressure.

CUSTOMIZED DESIGN
High accuracy,robust data acquisition system for measuring hydraulic leakage of various accessories.

PORTABLE
HLPSI comes with a cabinet with wheels ideal for outdoor use on sight operations.

USER FRIENDLY DESIGN
Equipped with four 7-Segment displays for digital pressure readouts. Leakage tester is fitted with three phase hydraulic motor for generating pressure upto 3000PSI.Ideal for testing various hydraulic accessories of aircraft

CALIBRATION AND MAINTENANCE
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

PORTABLE
HLPSIisapplicable to many platforms such as qasa, c130, ATR-42-500 etc





FEATURES

- User friendly instrumentation system.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Pressure port adapters for multiple units testing.
- Three phase 440VAC operation.
- Proprietary electronic circuit boards for instrumentation and control.
- Operating pressure range of 3000 PSI.
- Drawer for storage of technical orders and beck compartment for stowing away the hydraulic hoses.
- Heavy duty ball valves for long and reliable operation.
- 9-Point software calibration for high accuracy.
- One year support warranty.

PRODUCT SPECIFICATIONS:

Instrumentation System	Display Technology	7-Segment
	HMI Display	Hydraulic Pressure
	ADC Resolution	12Bit
	Sensor Type	Pressure Transducer
	Measurement Range	5000 PSI (Absolute)
Electrical Data	Supply Voltage	28 VDC
	Current	5Amp
	Grounding	Earthing Stud
Hydraulic Pump Data	Motor Type	3-Phase
	Hydraulic Pump Type	Axial Piston
	Operating Pressure	3000 PSI
Operating and Storage Data	Operating Temperature	25-35 Deg C
	RelativeHumidity	60%
	Storage Temperature	80 Deg C
Physical Data	Weight	85 Kgs
	Dimensions	14" x 14" x 40"
	Surface Material	Mild Steel

HP ROTOR ASSEMBLY TESTER
HRASI-0001

Aircraft Engine Oil Pump Tester is used for comprehensive testing of engine oil pump of ATAR engine. The testing involves monitoring of different parameters such as fluid temperature, pressure and flow at controlled conditions.

CUSTOMIZED DESIGN
High accuracy,robust data acquisition system for measuring leakage of hp rotor of TFE engine.


USER FRIENDLY DESIGN
Equippedwithfour 7-Segment displays for digital pressure readouts.HBTSI can simultaneously check braking pressures of all four tires.


CALIBRATION AND MAINTENANCE
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.


APPLICABLE PLATFORMS
Applicable to all mid sized turbine engines











FEATURES

- User friendly instrumentationsystem.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Differential Pressure measurementsystem
- Single phase 220VAC operation.
- Proprietary electronic circuit boards for instrumentation and control.
- Operating pressure range of 3000 PSI.
- Drawer for storage of technical orders and beck compartment for stowing away the hydraulic hoses.
- Heavy duty ball valves for long and reliable operation.
- 9-Point software calibration for high accuracy.
- One year support warranty.


PRODUCT SPECIFICATIONS:


Instrumentation System	Display Technology	7-Segment
	HMI Display	Inlet Pressure, Outlet Pressure, Differential Pressure, Air Temperature,RTD
	Sensor Type	Pressure Transducer
Electrical Data	Supply Voltage	220VAC
	Current	1Amp
	Frequency	50Hz
Operating and Storage Data	Operating Temperature	25-35 Deg C
	RelativeHumidity	60%
	Storage Temperature	80 Deg C
Physical Data	Weight	45Kg
	Dimensions	3' x 4' x 2-1/2'
	Surface Material	Mild Steel

ANTI SKID TESTER
ASTSI-0001

Anti-skid tester is used to check the performance of the anti-skid sensor of K-8 aircraft. The testing involves measuring the braking frequency at various rpms to simulate air craft landing.

Anti skid tester is used to check the performance of the anti skid sensor of K-8 aircraft. The testing involves measuring the braking frequency at various rpms to simulate air craft landing.

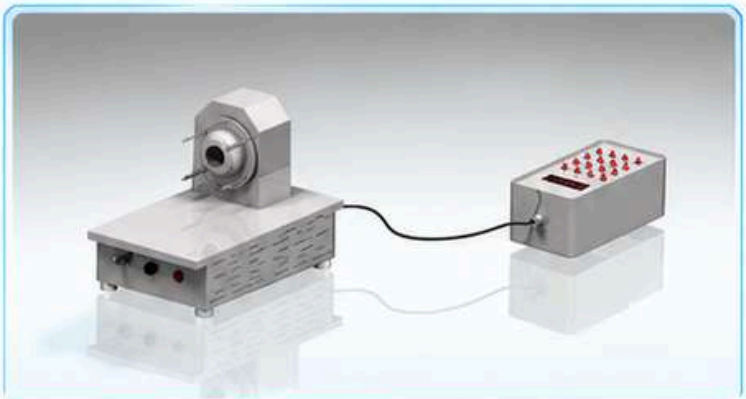

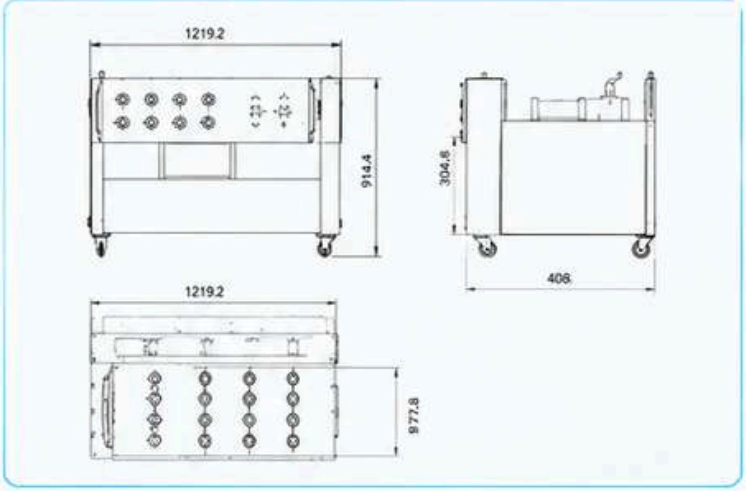

FEATURES:

- Wide range of temperature control settings.
- Rugged and reliable construction.
- Calibration certificates available.
- Bleed system with air bubble indicator.
- 28VDC operation.
- Proprietary electronic circuit boards for instrumentation and control.
- Operating pressure range of 5000 PSI.
- Drawer for storage of technical orders and beck compartment for stowing away the hydraulic hoses.
- Heavy duty ball valves for long and reliable operation.
- 9-Point software calibration for high accuracy.
- One year support warranty.

EASE OF OPERATION

User friendly instrumentation and control panel MTS SI-001 is easy to operate and maintain.

PORTABLE

Anti skid tester is highly compact system, enclosed in safety box it is very easy to transport to be used outside.

USER FRIENDLY DESIGN

With2Tonload bearing capacity, RPTSi is sturdy and highly mobile ideal for harsh environment.

CALIBRATION & MAINTENANCE

Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS

Applicable platforms include all rotary wing aircrafts such as C-130, ATR-42-500, IL-78 etc.

Product Specifications:

Instrumentation System	Display Technology	TouchscreenTFT LED
	Display Size	19"
	HMI Displays	Pressure, fluid flow, fluid temperature, calibration, diagnostic, & warning signals
Electrical Data	Supply Voltage	28 VDC
	Current	5 Amp
	Grounding	Earthing Stud
Operating & Storage Data	Operating Temperature	25°C - 40°C
	Relative Humidity	60%
	Storage Temperature	80°C
Physical Data	Weight	85 Kgs
	Dimensions	1219 × 914 × 1219
	Surface Material	Mild Steel

ENGINE TORQUE MEASURMENT SYSTEM
TMSSI-0001

Engine torque measurement system consists of a load cell and a signal conditioner which converts applied load by engine into respective torque values. These torque values are then displayed for user by means of 7-Segment Display or Alpha Numeric LCD.

Customized Design
Highaccuracy,robust computerized data acquisition system for measuring torque applied by engines.

Flexible
With an industry standard data acquisition system comprising of 2U size, TMSSI is easily adaptable for modification in older torque measuring systems.

Data Logging
Equipped with optional LCD touchscreen data logging feature for test results ,service history is also available for future referencing.

Calibration and Maintenance
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

Applicable Platforms
Engine Torque Measurement System applies to all gas turbine engines such as T-56, CT-7, PT-6, TFE, KILMOV TV-3





FEATURES

- User friendly instrumentation system.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Optional data transmission on serial or mod-bus interface.
- Single phase 220VAC operation.
- Proprietary electronic circuit boards for instrumentation and control.
- One year support warranty.


PRODUCT SPECIFICATIONS:

Instrumentation System	Display Technology	Touchscreen LED, 7 Segment Display
	Display Size	5"
	HMI Display	Torque (Upto 3 Decimal Places)
	ADC Resolution	12Bit
	Sensor Type	Load Cell
Electrical Data	Supply Voltage	220VAC
	Current	1Amp
	Frequency	50 Hz
Operating and Storage Data	Operating Temperature	25 Deg C
	Relative Humidity	60%
	Storage Temperature	80 Deg C
Physical Data	Weight	500 Kgs
	Dimensions	
	Surface Material	SS-316

TORQUE MULTIPLIER TEST STAND
TMSI-0001

Torque Multiplier test stand is used for calibration and checking of torque multiplier. Torque multiplier is a tool used to provide a mechanical advantage in applying torque to turn bolts, nuts or other items.



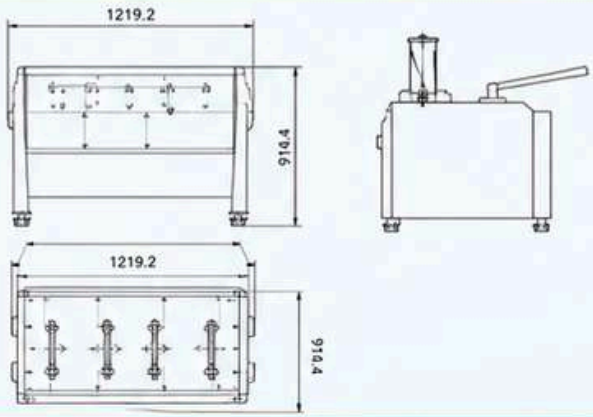

FEATURES:

- Fully Standalone operation.
- Sun readable four digit seven segment display.
- Multiple adapters for testing different torque wrenches.
- Single phase 22VAC operation.
- 28VDC operation.
- Proprietary electronic circuit boards for instrumentation and control.
- Programmable RPM set points for ease of operation.
- Adapter kits for left and right antiskid sensor.
- One year support warranty.

Product Specifications:

Instrumentation System	Display Technology	TouchscreenTFT LED
	Display Size	19"
	HMI Displays	Pressure, fluid flow, fluid temperature, calibration, diagnostic, & warning signals
Electrical Data	Supply Voltage	28 VDC
	Current	5 Amp
	Grounding	Earthing Stud
Operating & Storage Data	Operating Temperature	25°C - 40°C
	Relative Humidity	60%
	Storage Temperature	80°C
Physical Data	Weight	85 Kgs
	Dimensions	1219 x 914 x 1219
	Surface Material	Mild Steel

RELIABLE SOLUTIONS

Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY

High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY

All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT

Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY

Wide range of genuine and compatible parts for various aircraft platforms.



DETUNER

Detuner is a jet engine test cell exhaust system muffler. Construction material of Detuner is heat treated mild steel. Detuners are used as silencers for jet engines

Superior Fabrication

Coat of rust protection paint and high temperature resistant paint RAL-5007 provides superior protection against high temperature, rust and corrosion.

Heavy-duty

Detuner is designed with ASTM-A36 for added strength and sturdiness, ideal for high temperature conditions

Transport Ready

Detuners designed to be easily mobile for installation and removal by means of a transport trolley.


Maintenance

Local support and detailed technical manuals ensure quick,installation and maintenance procedures.

Applicable Platforms

Applicable platforms for Detuner are all types of jet engines such as ATAR, TFE , J-69 T-56, PT-7, CT-6 .



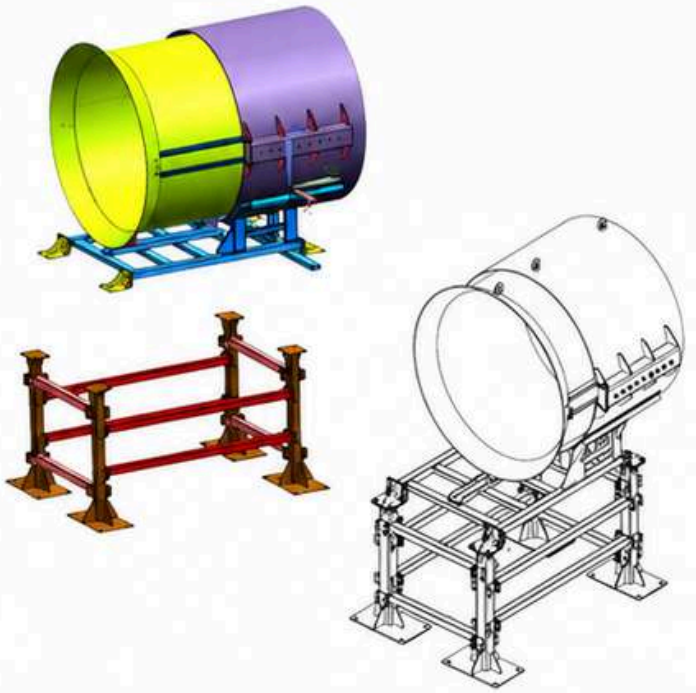

FEATURES

- Fulfilment of noise requirements
- Efficient removal of engine discharge gases from the engine test cell.
- Avoidance of hot gas re-ingestion.
- Good behavior during sustained operation at maximum thrust and maximum exhaust gas temperature.
- Axial extension/retraction capability to get the optimum detuner position during test cell commissioning.
- Vertical and lateral adjustment capability for alignment against test cell main detuner.
- Easy and quick installation/removal.

PRODUCT SPECIFICATIONS


Construction	Material	ASTM-A36
	Assembly Type	Standalone, Welded
	Surface Treatment Type	Heat Treatment
Paint Type	RAL-5007	
Operating Temperature	Up To 700 ° C	
Transport Mechanism	4 wheel Trolley	
Inner Duct Wheels	Rear Wheels	Right Wheel: Grooved For Guiding Purposes.
		Left Wheel: Free For Absorbing Thermal Expansions
	Front Wheel	Locking Device To Avoid Displacements During Operation And Transportation.
Dimensions	Supporting Frame	2420×1900×1307
	Outer Duct Diameter	1660mm
	Inner Duct Diameter	1790mm
	Wall Thickness	10mm
Weight	1300Kg	


SIMULATORS AND MOTION PLATFORMS



SMK SIMULATOR
SMSSI-0001

SMK flight simulator is used in the domain of trainer aircraft to train pilots on various aspects of a new cockpit system, handling of the aircraft and functionality of various aircraft equipment. The simulator is equipped with motion platform to simulate motions in actual flight.

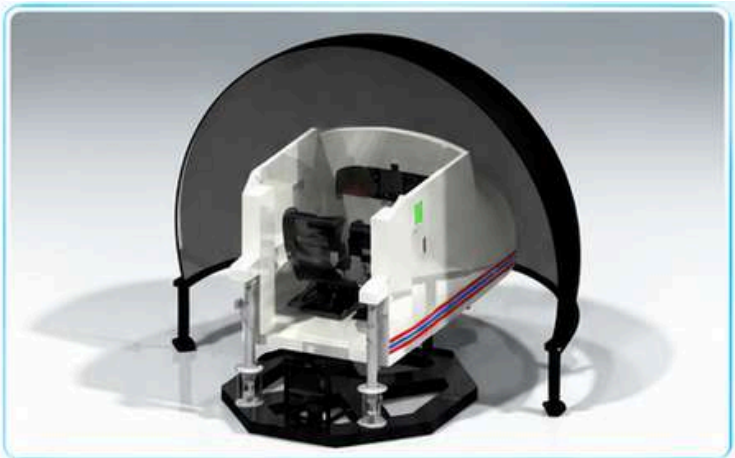

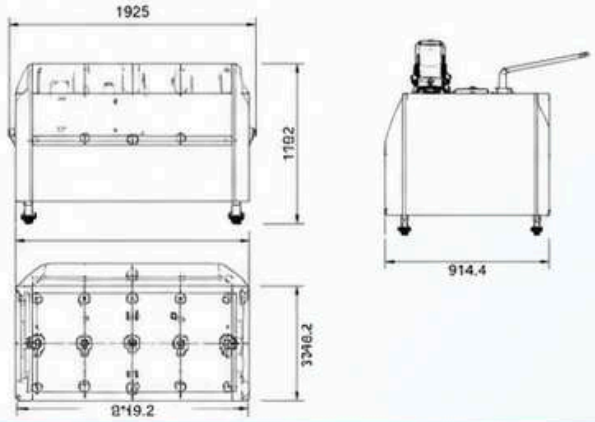

FEATURES:

- Wide range of temperature control settings.
- Rugged and reliable construction.
- Calibration certificates available.
- Bleed system with air bubble indicator.
- 28VDC operation.
- Proprietary electronic circuit boards for instrumentation and control.
- Operating pressure range of 5000 PSI.
- Drawer for storage of technical orders and beck compartment for stowing away the hydraulic hoses.
- Heavy duty ball valves for long and reliable operation.
- 9-Point software calibration for high accuracy.
- One year support warranty.

Product Specifications:

Instrumentation System	Display Technology	TouchscreenTFT LED
	Display Size	19"
	HMI Displays	Pressure, fluid flow, fluid temperature, calibration, diagnostic, & warning signals
Electrical Data	Supply Voltage	28 VDC
	Current	5 Amp
	Grounding	Earthing Stud
Operating & Storage Data	Operating Temperature	25°C - 40°C
	Relative Humidity	60%
	Storage Temperature	80°C
Physical Data	Weight	85 Kgs
	Dimensions	1219 × 914 × 1219
	Surface Material	Mild Steel

RELIABLE SOLUTIONS
Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY
High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT
Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY
Wide range of genuine and compatible parts for various aircraft platforms.

illumnairsupport
FAA and EASA Repair Station
e-mail : info@skybees.com.pk
Website : skybees.com.pk
SKYBEES

ATR 42-500 SIMULATOR
ATSSI-0001

ATSSI simulator is designed to train pilots of ATR-42-500 aircraft on ground. ATSSI is designed with replica cockpit and flight controls for realistic flight experience. Cockpit is fitted with high speed electrical actuator for motion simulation. ATSSI can be fitted with 2 degree of freedom or six degree of freedom motion platform according to user requirements.

RELIABLE SOLUTIONS
High-fidelity simulation system for safe and effective pilot training.


ADVANCED TECHNOLOGY
Realistic cockpit replica with high-performance motion platform.


CERTIFIED QUALITY
Built to meet aviation training standards and international regulations.

EXPERT SUPPORT
Comprehensive technical support and maintenance services.



ADAPTABLE PLATFORMS
Available with 2-DOF or 6-DOF motion platforms based on training needs.



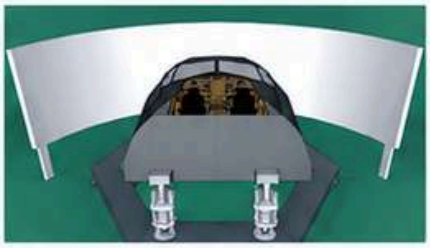



FEATURES

- SixScreen BasedMirror Collimated DisplaySystem with 180Degrees.
- Horizontal and 40 Degrees Vertical Field of View.
- SixDegree ofFreedomDOF, Electrically Actuated, Motion System.
- Electrically Actuated Flight Controls Artificial Loading.
- Instructor Operation's and Mission Recording & Analysis Station.
- ICAO, FAA Level D compliant.
- < 0.1m Satellite Imagery for a realistic imagery profile.
- Visual display configurable to allow for day, night and dusk scenarios.
- real time six equation of motion solver, **realistic**world modeling, high accuracy GIS models.

PRODUCT SPECIFICATIONS

Mechanical Specifications	Air Craft Type	ATR 42-500
	Control Loading Type	Electrically Actuated
	HMI Display	Instruments, Switches, Flight Controls Engine Controls, Avionics Equipment
Motion Platform Specs	Degree of Freedom	6 DOF
	Control Mode	0.3m (0.011")
	Linear Acceleration	Embedded Adaptive PID
	Feedback Type	Precision Absolute Encoder
Display Configuration	Display Resolution	5100 x 2000 Pixels
	FOV (Horizontal)	140 Degrees
	FOV (Vertical)	40 Degrees
	Projection Type	Mirror Collimated
Instrumentation/Software Configuration	Flight Simulation Software	Laminar Research X-Plane V 10
	Flight Parameters Provision	Flight controls, Flight Parameters, Weathers, Emergencies, Instructor and analysis station.
	Instrumentation Software	LAB Windows CVI with 12 Bit ADC
Electrical and Operating Data	Input	Single phase 220VAC 50Hz, 6000Watt
	Operating Temperature	35 Degrees C
	Relative Humidity	50%
Physical Data	Physical Dimensions	130" x58" x 53"
	Weight	600Kg
	Surface Finishing	Fire Resistant Paint

ADVANCED MAINTENANCE SIMULATOR
AMSSI - 1015

Advanced maintenance simulator is designed to train aviation personnel with A, B-1 and B-2 maintenance training of various aircraft. Maintenance simulator provides the end user with hands-on experience for different levels of maintenance thus improving learning process.


REALISTIC FEEL
Optimized A, B-1, B-2 maintenance training and improved learning process by means of ergonomically arranged realistic units.

AVIATION STANDARD MANUFACTURING
Aviation grade manufacturing techniques and military standard surface finishing for long and reliable operation, conforming to user requirements.


MAINTENANCE FRIENDLY
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS
A modular design for maintenance simulation of various aircraft such as ATR-42-500, Boeing 777, Airbus A320 A330 Etc.



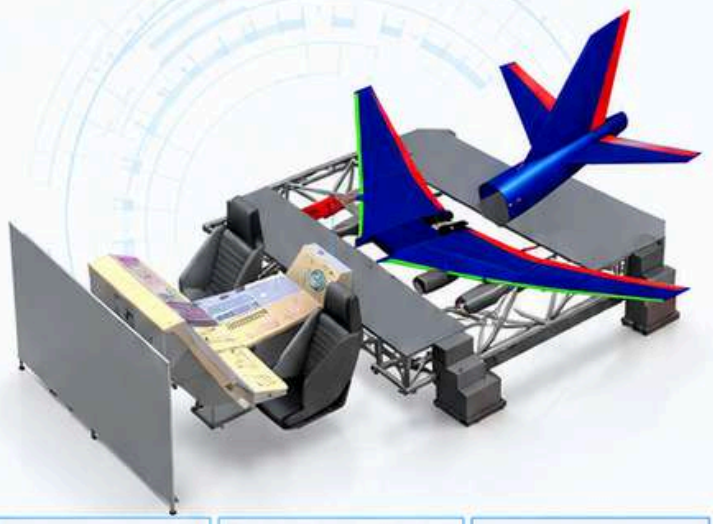







FEATURES

- Elevator and Rudder Simulation using Electro mechanical and hydraulic linkages.
- Power Plant equipped with full authority digital engine control (FADEC).
- 8' x 4' Projector based screen for better FOV.
- Realistic CB panels for training purposes.
- Electronically controlled and hydraulically operated retractable landing gears.
- Simulation modes for In-flight and Ground Emergencies.
- Realistic looking instrumentation and flight controls.
- One year support warranty.

PRODUCT SPECIFICATIONS:

Mechanical Specifications	Air Craft Type	Boeing 777, Airbus A320, A330, ATR 42-500
	Control Loading Type	Electrically Actuated
	HMI Display	EFIS, Instruments, Switches, Flight Controls Engine Controls, Avionics Equipment
	Simulation Parameters	Aircraft Instruments, Flightcontrols, Engine&engine controls, Integrated instrument displays, Annunciator panels, Fuel system, Fire protection system, Ice and rain control systems, Control surfaces, Electro-mechanical & hydraulic linkages, Hydraulic systems, Pneumatic Electrical & Avionics
Display Configuration	Display Resolution	5100 x 2000 Pixels
	FOV (Horizontal)	140 Degrees
	FOV (Vertical)	40 Degrees
	Projection Type	Flat Screen
Instrumentation/ Software Configuration	Flight Simulation Software	Laminar Research X-Plane V 10
	Flight Parameters Provision	Flight controls, Flight Parameters, Weathers, Emergencies, Analysis station.
	Instrumentation Software	LAB Windows CVI with 12 Bit ADC
Electrical and Operating Data	Input	Single phase 220VAC 50Hz, 6000Watt
	Operating Temperature	35 Degrees C
	Relative Humidity	50%
Physical Data	Physical Dimensions	100' x 50' x 20'
	Weight	2000Kg
	Surface Finishing	Fire Resistant Paint

DRIVINGVEHICLE SIMULATOR
VSSI-2210

Vehicle simulators are designed, developed and manufactured in Pakistan. Actuation system is being used in our commercial and military simulation devices. Real Time software for vehicle dynamics modelling is developed with interface to actual hardware devices using high speed data acquisition systems.

RELIABLE SOLUTIONS
Quality electronic components and services to keep your aircraft operational and safe.


ADVANCED TECHNOLOGY
High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT
Technicle assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY
Wide range of genuine and compatible parts for various aircraft platforms.



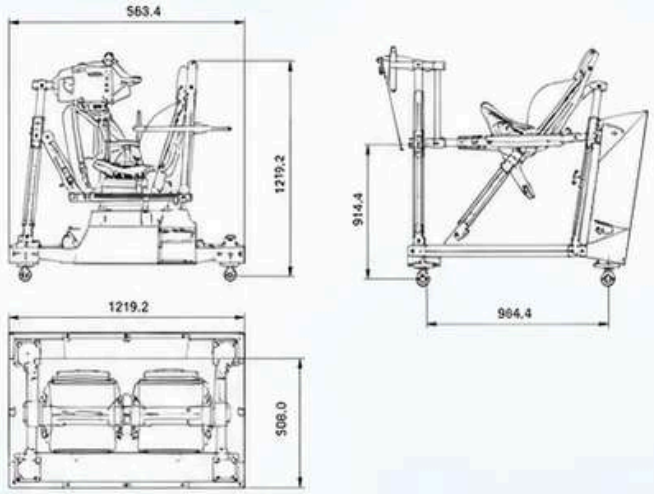

FEATURES:

- High accuracy and reliability in flight simulation.
- Realistic and immersive cockpit environment.
- Advanced motion platform with 6 DOF (as per configuration).
- Real-time data processing and simulation software.
- Compatible with various aircraft and training scenarios.
- High performance actuators and control systems.
- User-friendly interface and customizable scenarios.
- One year support warranty.

Clients & Products

- Vehicle Racing Simulator – ThrustFactor Bahria Town Islamabad
- Vehicle Racing Simulator – Thrust Factor mall Islamabad
- Vehicle Driving Simulator – College of Electrical and Mechanical Engineering

GUN SIMULATOR
GSSI-001

Gun Simulators can be used for either entertainment purposes or to train the armed forces personnel, without having to fire a single bullet. Realistic ballistics model and real firearm ensures maximum shooting realism.

IMMERSIVE EXPERIENCE
180-degrecimmersive training platform ensuring the simulator translates into real- world experience.


PORTABLE
HLPSI comes with a cabinet with wheels ideal for outdoor use on sight operations.

USER FRIENDLY DESIGN
Equipped with four 7-Segment displays for digital pressure readouts. Leakage tester is fitted with three phase hydraulic motor for generating pressure upto 3000PSI.Ideal for testing various hydraulic accessories of aircraft

CALIBRATION AND MAINTENANCE
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS
Applicable to all mid sized turbine engines



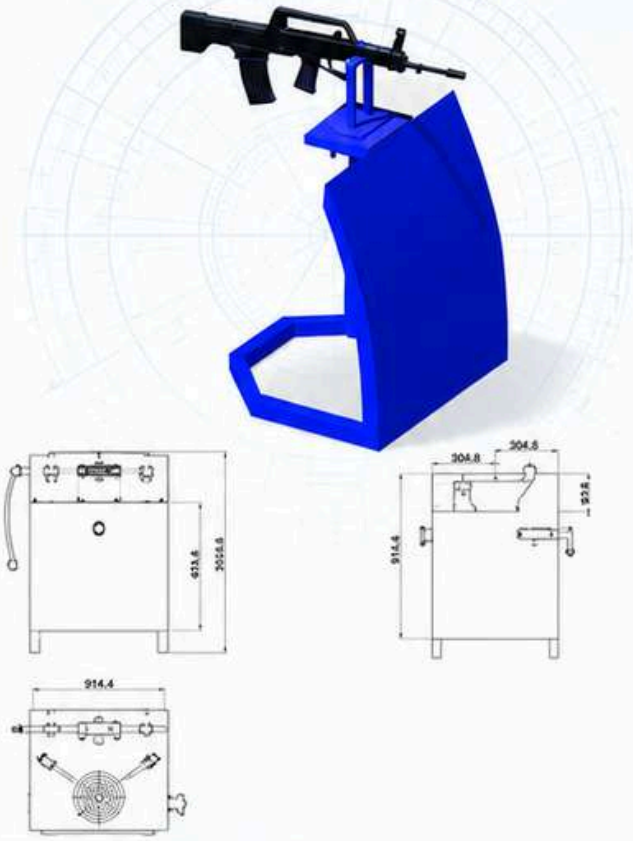

FEATURES

- User friendly instrumentationsystem.
- Full compliance with OEMs technical order.
- Calibration certificates available.
- Pressure port adapters for multiple units testing.
- Three phase 440VAC operation.
- Proprietary electronic circuit boards for instrumentation and control.
- Operating pressure range of 3000 PSI.
- Drawer for storage of technical orders and beck compartment for stowing away the hydraulic hoses.
- Heavy duty ball valves for long and reliable operation.
- 9-Point software calibration for high accuracy.
- One year support warranty.

PRODUCT SPECIFICATIONS:

Instrumentation System	Display Technology	7-Segment
	HMI Display	Inlet Pressure, Outlet Pressure, Differential Pressure, Air Temperature,RTD
	Sensor Type	Pressure Transducer
	Measurement Range	5000 PSI (Absolute)
Electrical Data	Supply Voltage	28 VDC
	Current	1Amp
	Grounding	Earthing Stud
Operating and Storage Data	Operating Temperature	25°C-35°C
	Relative Humidity	50%
	Storage Temperature	75°C
Physical Data	Physical Dimensions	30"x24"x40"
	Weight	45Kg
	Surface Finishing	Epoxy Coated

MOBILE TARGETING SYSTEM
MTSSI-0001

Mobile targeting system is used to remotely control up to 3 large targets simultaneously at distances up to 4 miles away. Built in functions include multiple scenarios for live-fire training, remotely detonating battle effects, motion detection devices and point scoring for target, miss and hit.


CUSTOMIZED DESIGN
High accuracy,robust data acquisition system for measuring hydraulic leakage of various accessories.

PORTABLE
HLPSI comes with a cabinet with wheels ideal for outdoor use on sight operations.


USER FRIENDLY DESIGN
Equipped with four 7-Segment displays for digital pressure readouts. Leakage tester is fitted with three phase hydraulic motor for generating pressure upto 3000PSI.Ideal for testing various hydraulic accessories of aircraft

CALIBRATION AND MAINTENANCE
Local support and detailed technical manuals ensure quick, easy and reliable on sight calibration and maintenance procedures.

APPLICABLE PLATFORMS
Applicable to all mid sized turbine engines

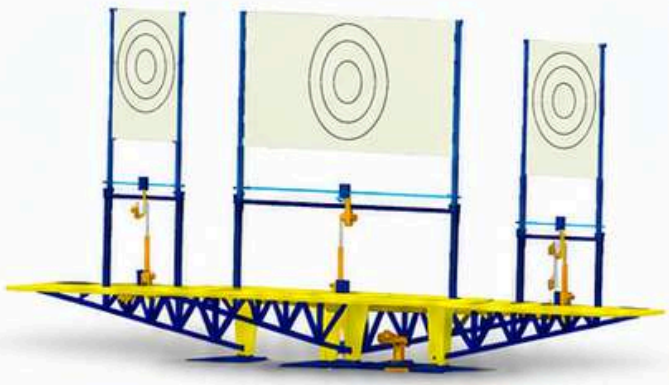





FEATURES

- Multiple number of targets for firearms of different caliber.
- Quick Pop-Up, Pop-Down capability incase of harsh weather.
- Separate control of all targets from one control room.
- Manual and pre programmed target position control.
- Pop Down initiation incase of target hit and target hit logger.
- Proprietary electronic circuit boards for instrumentation and control.
- Target Quick Connect and disconnect incase of damage.
- One year support warranty.

PRODUCT SPECIFICATIONS:

Target Assembly Specifications	Middle Target Assy Dimensions	96" x 144"
	Small Target Assy Dimensions	96" x 48"
	Central Rail	I-Beam 12 Gauge
	Payload Capacity	250Kgs
	Power Slip Rail	2" 12 SWG 10Ampers @ 220VAC
	Support Frame	Mild Steel
	Surface Finishing	Epoxy Coated
Control Computer/ Central Controller	Operating System	Microsoft Windows 7
	Instrumentation Software	LAB Windows CVI
	ADC Resolution	10 Bit
	Actuator Motor Type	3-Phase 440 VDC
	Motor Control	Closed Loop VFD
Electrical Data	Connectors	SS316 cannon connectors
	Input	Single Phase 220 VAC
	Current	10 A
	Frequency	50-60 Hz
Operating and Storage Data	Operating Temperature	25°C-35°C
	Relative Humidity	50%
	Storage Temperature	75°C
Physical Data	Physical Dimensions	30"×24"×40"
	Weight	220Kg
	Surface Finishing	Epoxy Coated

VEHICLE SIMULATOR
VSSI-0001

Vehicle simulator consists of original car cockpit with realistic controls. VSSI is incorporated with realistic driving simulation software for training purposes.





FEATURES:

- High accuracy and reliability in flight simulation.
- Realistic and immersive cockpit environment.
- Advanced motion platform with 6 DOF (as per configuration).
- Real-time data processing and simulation software.
- Compatible with various aircraft and training scenarios.
- High performance actuators and control systems.
- User-friendly interface and customizable scenarios.
- One year support warranty.

Product Specifications:

Motion Platform Specifications	Vehicle Type	LTV, HTV and SUV
	Motion Mechanism	Electrically Actuated
	Pitch Axis	+-30 Deg - 45 Deg
	Roll Axis	+-30 Deg - 45 Deg
	Linear Resolution	0.3mm(0.011")
	Control Mode	Embedded Adaptive PID
	Linear Acceleration	0.5g to 1.5g
Display Configuration	Display Resolution	4000 x 1200 Pixels
	FOV (Horizontal)	135 Degrees
	FOV (Vertical)	90 Degrees
	Projection Type	Curved Screen
	Lens Type	Short Throw
Instrumentation/ Software Configuration	Driving Simulation Software	Open DS Pro CE
	Driving Parameters Provision	Speed, Temp, Indicators, Lights, Brakes, Transmission, Steering, Clutch Paddles, Rear View Mirror
	Instrumentation Software	LAB Windows CVI with 12 Bit ADC
Electrical and Operating Data	Input	Single phase 220VAC 50Hz, 1000Watt
	Operating Temperature	35 Degrees C
	Relative Humidity	50%
Physical Data	Physical Dimensions	130"×58"×53"
	Weight	400Kg
	Surface Finishing	Metallic Blue

RELIABLE SOLUTIONS
Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY
High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT
Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY
Wide range of genuine and compatible parts for various aircraft platforms.

ADVANCED GAMING COCKPIT
SMTSI-001

REALISTIC SOLUTIONS
Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY
High-performance electronic systems for modern aircraft applications.


CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.


EXPERT SUPPORT
Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY
Wide range of genuine and compatible parts for various aircraft platforms.





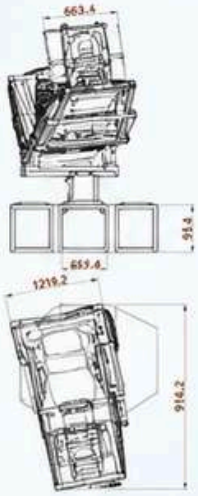



FEATURES:

- High accuracy and reliability in flight simulation.
- Realistic and immersive cockpit environment.
- Advanced motion platform with 6 DOF (as per configuration).
- Real-time data processing and simulation software.
- Compatible with various aircraft and training scenarios.
- User-friendly interface and customizable scenarios.
- One year support warranty.

Product Specifications:

Motion Platform Specifications	Motion Mechanism	LTV, HTV and SUV
	Pitch Axis	+-30 Deg - 45 Deg
	Roll Axis	+-30 Deg - 45 Deg
	Linear Resolution	0.3mm(0.011")
	Control Mode	Embedded Adaptive PID
	Linear Acceleration	0.5g to 1.5g
Display Configuration	Display Resolution	4000 x 1200 Pixels
	FOV (Horizontal)	135 Degrees
	FOV (Vertical)	90 Degrees
	Projection Type	Curved Screen
	Lens Type	Short Throw
Instrumentation/ Software Configuration	Driving Simulation Software	Open DS Pro CE
	Driving Parameters Provision	Speed, Temp, Indicators, Lights, Brakes, Transmission, Steering, Clutch Paddles, Rear View Mirror
	Instrumentation Software	LAB Windows CVI with 12 Bit ADC
Electrical and Operating Data	Input	Single phase 220VAC 50Hz, 1000Watt
	Operating Temperature	35 Degrees C
	Relative Humidity	50%
Physical Data	Physical Dimensions	130"×58"×53"
	Weight	400Kg
	Surface Finishing	Epoxy Coated

6 DEGREE OF FREEDOM MOTION PLATFORM

6DFSI-0001

Motion Platform is electrically actuated software controlled system designed to be incorporated with various systems that require motion feedback for operation. 6 degree of freedom motion platform provides motion feedback for pitch, roll, yaw, surge, sway and heave ideal for gyro platforms and flight simulators.

RELIABLE SOLUTIONS

Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY

High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY

All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT

Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY

Wide range of genuine and compatible parts for various aircraft platforms.









FEATURES:

- High payload capacity (6 DOF with 2 Ton).
- High speed response.
- Realistic flight motion simulation.
- Advanced control system with real-time feedback.
- Customizable platforms for various applications.
- Robust and durable construction.
- One year support warranty.

Product Specifications:

Motion Platform Specifications	Degrees of Freedom	6
	Actuator Type	+/-20 Deg - +/-30 Deg
	Rotations (Pitch, Roll, Yaw)	40 Deg/s - 120 Deg/s
	Rotational Rates (Pitch, Roll, Yaw)	300 Deg/s2 - 500 Deg/s2
	Rotational Acceleration	150mm - 300mm
	Translation (Surge, Sway, Heave)	300mm/s - 600mm/s
	Translation Rate (Surge, Sway, Heave)	
Display Configuration	Display Resolution	4000 x 1200 Pixels
	FOV (Horizontal)	135 Degrees
	FOV (Vertical)	90 Degrees
	Projection Type	Curved Screen
	Lens Type	Short Throw
Instrumentation/ Software Configuration	Driving Simulation Software	Open DS Pro CE
	Driving Parameters Provision	Speed, Temp, Indicators, Lights, Brakes, Transmission, Steering, Clutch Paddles, Rear View Mirror
	Instrumentation Software	LAB Windows CVI with 12 Bit ADC
Electrical and Operating Data	Input	Single phase 220VAC 50Hz, 1000Watt
	Operating Temperature	35 Degrees C
	Relative Humidity	50%
Physical Data	Physical Dimensions	130"×58"×53"
	Weight	400Kg
	Surface Finishing	Epoxy Coated

2 DEGREE OF FREEDOM MOTION PLATFORM

2DFSI-0001/30

Two degree of motion platform provides motion capability on two axis, pitch axis and roll axis. 2 degree of freedom platforms are widely used in automobile simulators. The following arrangement of motion platform.

HIGH PAYLOAD CAPACITY

2DFSI comes with 2Hp, heavy duty motors for load bearing capacity between ranges of 250Kg to 2000Kg.

HIGH SPEED RESPONSE

2DFSI comes with ball screw based electrical actuators, which result in higher acceleration and quick response time.

LOW MAINTENANCE


Ball screw based electrical actuators ensure low maintenance and operational costs.

AFTER SALES SUPPORT

Local support and detailed technical manuals ensure quick, easy and reliable on sight maintenance procedures and very short down time.

APPLICABLE PLATFORMS

Applicable platforms for 2 degree of freedom motion platforms include vehicle simulators, flight simulators.

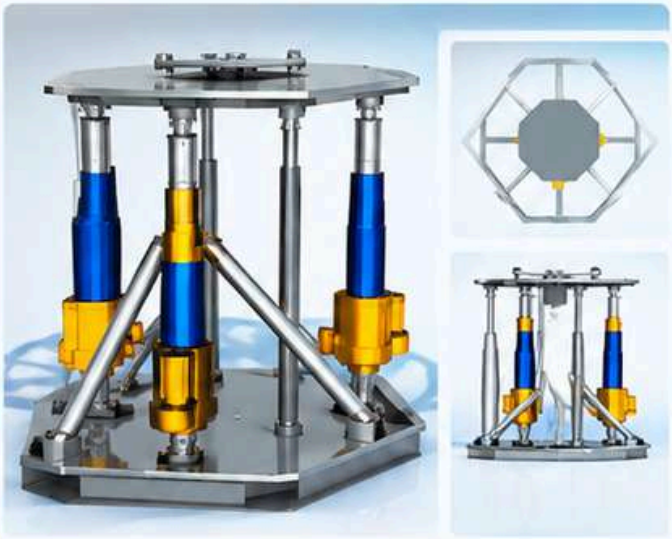

FEATURES

- Two degree of freedom motion by means of U-Joints
- Varying payload capacities and footprints
- Heavy duty all metal construction
- Closed loop automatic homing system
- Single phase or 3 phase operation
- Linear sling potmeters for long and reliable operation.
- Industry standard motion control cabinet
- One year support warranty.

PRODUCT SPECIFICATIONS

Motion Platform Specifications	Degrees of Freedom	2
	Actuator Type	AC Motor Ball Screw
	Rotations (Pitch, Roll)	+-20 Deg ~ +30 Deg
	Rotational Rates (Pitch, Roll, Yaw)	40 Deg/s – 120 Deg/s
	Linear Acceleration	0.5g - 1.5g
	Platform Height	760 mm (2-1/2') - 990mm(3-1/4')
Display Configuration	Base Platform	900mmx900mm (3'×3') - 1800mmx1800mm (6'×6')
	Configuration	U- Joint De-Coupled
	AC Motor Power	2.2kW 3HP – 4kW 5HP
	Motion Controller	Embedded Adaptive PID
	Update Rate	50 Hz
	Linear Resolution	0.15mm
Instrumentation/ Software Configuration	Flight Simulation Software	Laminar Research X-Plane V 10
	Flight Parameters Provision	Flight controls ,Flight Parameters, Weathers, Emergencies, Instructor and analysis station.
	Instrumentation Software	LAB Windows CVI with 12 Bit ADC
Electrical and Operating Data	Input	Single phase 220VAC 50Hz, 1000Watt
	Operating Temperature	35 Degrees C
	Relative Humidity	50%
Physical Data	Physical Dimensions	130"×58"×53"
	Weight	600Kg
	Surface Finishing	Fire Resistant Paint

2 DEGREE OF FREEDOM MOTION PLATFORM

2DFSI-0002/360

Applicable platforms for 2 degree of freedom motion platforms include vehicle simulators, flight simulators. Two degree of motion platform provides motion capability on two axis, pitch axis and roll axis. 2 degree of freedom platforms are widely used in automobile simulators. The following arrangement of motion platform provides rotations for upto 360 pitch and 180 degrees roll.

HIGH PAYLOAD CAPACITY

2DFSI comes with 2-HP heavy duty motors for load bearing capacity between ranges of 250Kg to 500Kg.

HIGH SPEED RESPONSE

Comes with direct drive gear motor rather than hydraulic actuators, which result in higher acceleration and quick response time.

LOW MAINTENANCE


Low maintenance and operational costs because of commercially available off the shelf components.


AFTER SALES SUPPORT

Local support and detailed technical manuals ensure quick, easy and reliable on sight maintenance procedures and very short down time.

APPLICABLE PLATFORMS

Applicable platforms for 2 degree of freedom motion platforms include vehicle simulators, flight simulators.

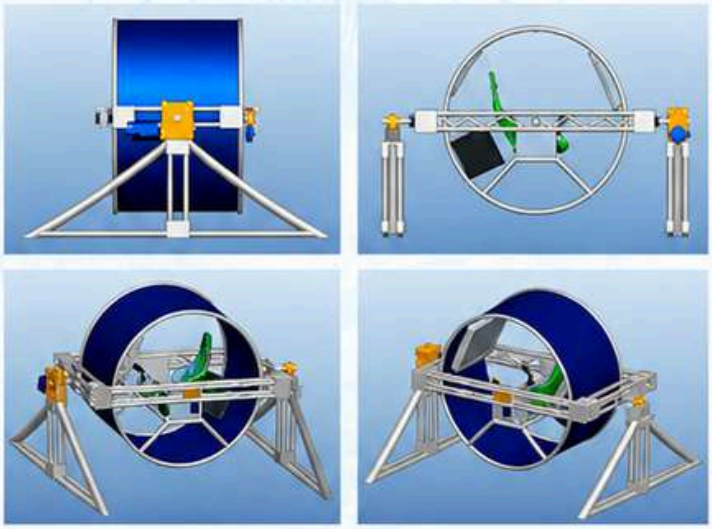



FEATURES

- 360 degrees pitch and 180 degrees roll, ideal for flight simulators.
- Varying payload capacities and footprints. Heavy duty all metal construction Closed loop automatic homing system.
- Single phase or 3 phase operation.
- Shaft encoders for long and reliable operation.
- Long term reliable operation by means of 3-pole shaft encoders
- Industry standard motion control cabinet.
- One year support warranty.

PRODUCT SPECIFICATIONS

Motion Platform Specifications	Degrees of Freedom	2
	Actuator Type	AC Motor Rotational Driver
	Rotations (Pitch, Roll,)	180 Deg – 360 Deg
	Rotational Rates (Pitch, Roll, Yaw)	30 Deg/s - 180 Deg/s
	Linear Acceleration	0.5g - 2.5g
	Platform Height	1500mm (5') – 2400mm (8')
	Base Platform	2400mmx2400mm (8'x8') – 3000mmx3000mm(10'x10')
	Configuration	Direct Drive
Electrical Data	AC Motor Power	2.2kW 3HP – 4kW 5HP
	Motion Controller	Embedded Adaptive PID
	Update Rate	50 Hz
	Linear Resolution	0.15mm
Operating & Storage Data	Operating Temperature	25°C - 40°C
	Relative Humidity	60%
	Storage Temperature	80° C
Physical Data	Weight	85 Kgs
	Dimensions	1219 x 914 x 1219
	Surface Finishing	Epoxy Coated

ELECTRO-MECHANICAL *SERVICES*

We provide specialized electro-mechanical services and support for aerospace testing equipment, ensuring reliable operation and optimal performance of critical aircraft systems and components.

QUALITY SERVICE
Expert support for electro-mechanical systems with precision and reliability.


EXPERIENCED TECHNICIANS
Skilled professionals with in-depth knowledge of aerospace equipment and systems.

FAST TURNAROUND
Minimizing downtime with efficient service and quick response.

CUSTOM SOLUTIONS
Tailored support for unique system requirements and specific aircraft models.

TRUSTED SUPPORT
Committed to safety, quality and long-term performance of your aircraft systems.

ACTUATORS

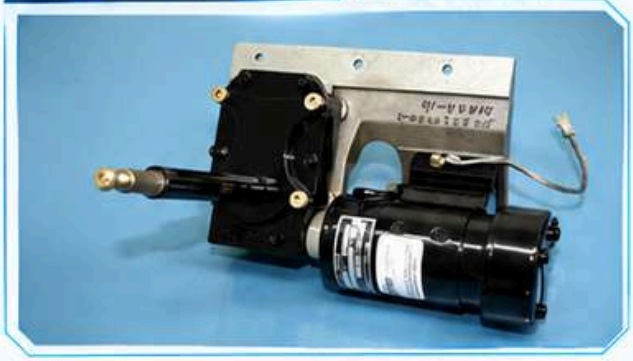

LINEAR ACTUATORS



ROTARY ACTUATORS



FEATURES

- High performance electro-mechanical units and components.
- Precision calibration and testing services.
- Comprehensive support for actuators, linear and rotary systems.
- Reliable operation and high efficiency.
- Expert troubleshooting and maintenance.
- Certified and industry compliant procedures.
- Designed for aerospace and defense applications.

KEEPING YOUR AIRCRAFT SYSTEMS IN PEAK CONDITION

ELECTRO-MECHANICAL SERVICES

RELIABLE SOLUTIONS

Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY

High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY

All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT

Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OUTFLOW VALVE

An outflow valve for a cabin pressure control system of an aircraft cabin includes an aft door that is modified to disrupt or increase speed of cabin air flowing past the aft door and out of the outflow valve. The aft door may be modified by notches formed in its leading edge. In the alternative, the aft door may be modified by through-holes formed behind the leading edge. The outflow valve also includes a forward door. Bolt heads or a baffle may protrude form an inner surface of the forward door to disrupt or slow down cabin air flowing over the inner surface of the forward door and out of the outflow valve. Example of Outflow Valve P/N 711003 consists of an aluminium gate that rotates within a rectangular aluminium frame. Rotary actuators (AC and DC) are mounted on each end of the frame.



Features

- Digital embedded inverse kinematic analysis motion solver system.
- Varying payload capacities and footprints
- Closed loop automatic homing system
- Heavy duty all metal construction
- Single phase or 3 phase operation
- Linear sling potmeters for long and reliable operation.
- Industry standard motion solver and control cabinet
- One year support warranty.

WHEEL SPEED SENSOR

The wheel speed transducer assembly consists primarily of a rotor and shaft assembly and a coil and bobbin assembly contained within a housing. The housing is comprised of a stator and a bearing in which the rotor shaft rotates. The shell of the housing is permanently formed into a one- piece assembly by brazing. An adapter is provided for mounting the transducer in the aircraft axle. Example P/N 40-817 Wheel Speed Transducer (WST) is part of the aircraft Brake Control System (BCS). The (WST) generates signal directly proportional to the aircraft wheel speed of use by the BCS Skid Control Unit (SCU) to prevent wheel skid or lockup. The WST transducer output is also used by the SCU to indirectly operate the aircraft ground spoilers.



SERVO ACTUATOR

The servo drive is the SP-50 aileron surface actuator unit. When the servo drive is coupled stop mechanism, the servo drive controls the deflection of the roll control surfaces. The Servo Drive consists of the following:

A. Split field DC series motor and tachometer.
B. Power gear train.
C. Synchro control transformer.
D. Electric engage power clutch.
E. Interlock switches.
F. Radio interference filter assembly.



ELECTRO-MECHANICAL SERVICES

RELIABLE SOLUTIONS
Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY
High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT
Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY
Wide range of genuine and compatible parts for various aircraft platforms.



PRESSURE SWITCH



A pressure switch is a mechanical device which converts a pressure change into an electrical function. The pressure change might be measured as pressure, vacuum, or differential between two pressure inputs. In every case, the pressure switch will employ a diaphragm, piston, or other pressure-responsive sensor, which has been coupled to the mechanical means of actuating a switch. Example of Pressure Switch P/N 42D185

FEATURES:
- Mechanical pressure sensing with high reliability.
- Accurate pressure set point adjustment.
- Rugged and durable construction.
- Compact design and easy installation.
- Suitable for various aircraft applications.

LANDING LIGHT



Example of Landing Light P/N 45-0123-1, the landing light is used during aircraft landing and takeoff operations. It provides high-intensity illumination of the flight path. The landing light is extended during operation and retracted during normal flight. The landing light consists of the lamp support ring assembly, gearbox assembly, motor assembly and drive gears. The landing light is factory preset to move to an extended position of 73 degrees. It can be adjusted to extend to any position between 70 and 100 degrees.

FEATURES:
- High-intensity illumination for safe operations.
- Factory preset movement (73° extended position).
- Adjustable extension range (70°–100°).
- Robust gearbox and motor assembly.
- Designed for aircraft landing and takeoff.

APU STARTER



The Auxiliary Power Unit or APU is a small turbine engine mounted between the main wheel wells. The primary purpose of an aircraft APU is to provide power to start the main engines. The APU is started by an electric motor, with power supplied by a battery or external power source (ground power unit), after the APU accelerates to full speed, it can provide a much larger amount of power to start the aircraft's main engines, either by turning an electrical generator or by providing compressed air to the air turbine of the starter motor. Example of APU Starter motor is P/N 519852-4 engine starter motor is a brush-type, direct-current, series-wound motor with four fields poles. It has a stator assembly, an armature assembly with commutator and four brush assemblies.

FEATURES:
- High starting torque and reliability.
- Brush-type DC motor with 4 field poles.
- Direct-current, series-wound design.
- Four brush assemblies for optimal performance.
- Suitable for aircraft APU systems.

TECHNICAL SPECIFICATIONS

Component	Parameter	Specification
Pressure Switch	Pressure Range	As per P/N 42D185
Landing Light	Luminous Angle	70° – 100° (adjustable)
APU Starter	Motor Type	Brush-type, DC, Series-wound
	Fields Poles	4

illumnairsupport
FAA and EASA Repair Station
e-mail : info@skybees.com.pk
Website : skybees.com.pk
SKYBEES

ELECTRO-MECHANICAL SERVICES

RELIABLE SOLUTIONS

Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY

High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY


All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT

Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

TACH GENERATOR

Tachometer generators and tachogenerators are small AC or DC generators that output a voltage in proportion to the rotational speed of a shaft. They are capable of measuring speed and direction of rotation, but not position. The frequency of the AC produced by the tachometer generator is proportional to the speed of the engine. The Tachometer Generator P/N 2CM9-Series consists of a driven permanent magnet rotor and a stator in which voltage is induced as the rotor turns.

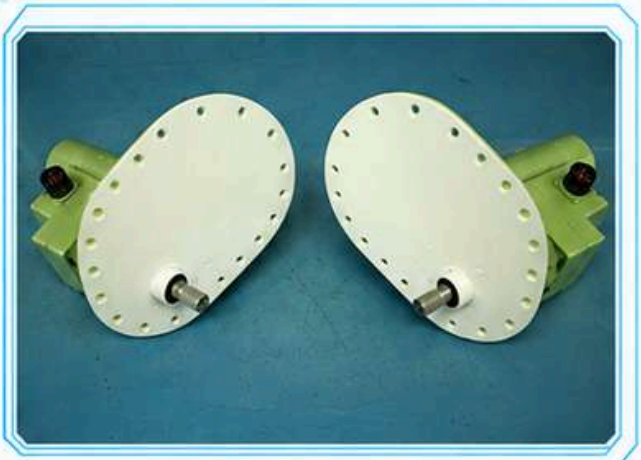

ELECTRONIC MROs



ELECTRO-MECHANICAL SERVICES

Electro-mechanical services cover a wide range of aircraft components including pressure switches, lighting systems and auxiliary power units. We provide quality parts and professional support to ensure reliable performance and safety in every operation.

RELIABLE SOLUTIONS
Quality electro-mechanical components and services to keep your aircraft operational and safe.

CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT
Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY
Wide range of genuine and compatible parts for various aircraft platforms.



PRESSURE SWITCH



Description
A pressure switch is a mechanical device which converts a pressure change into an electrical function. The pressure change might be measured as pressure, vacuum, or differential between two pressure inputs. In every case, the pressure switch will employ a diaphragm, piston, or other pressure-responsive sensor, which has been coupled to the mechanical means of actuating a switch. Example: Pressure Switch P/N 42D185.

FEATURES
- Wide range of pressure settings.
- Rugged and reliable construction.
- Accurate and consistent performance.
- Compatible with various aircraft systems.
- One year support warranty.

LANDING LIGHT



Description
Example of Landing Light P/N 45-0123-1, the landing light is used during aircraft landing and takeoff operations. It provides high-intensity illumination of the flight path. The landing light is extended during operation and retracted during normal flight. The landing light consists of the lamp support ring assembly, gearbox assembly, motor assembly and drive gears. The landing light is factory preset to move to an extended position of 73 degrees. It can be adjusted to extend to any position between 70 and 100 degrees.

FEATURES
- High-intensity illumination for safe operations.
- Factory preset extension of 73 degrees.
- Adjustable extension (70° – 100°).
- Robust gearbox and motor assembly.
- One year support warranty.

APU STARTER



Description
The Auxiliary Power Unit or APU is a small turbine engine mounted between the main wheel wells. The primary purpose of an aircraft APU is to provide power to start the main engines. The APU is started by an electric motor, with power supplied by a battery or external power source (ground power unit), after the APU accelerates to full speed, it can provide a much larger amount of power to start the aircraft's main engines, either by turning an electrical generator or by providing compressed air to the air turbine of the starter motor. Example of APU Starter motor is P/N 5198852-4 engine starter motor is a brush-type, direct-current, series-wound motor with four fields poles. It has a stator assembly, an armature assembly with commutator and four brush assemblies.

FEATURES
- Brush-type, DC series-wound motor.
- Four field poles for high torque.
- Stator, armature, commutator and brush assemblies.
- Reliable and durable performance.
- One year support warranty.

ELECTRONIC SERVICES

RELIABLE SOLUTIONS
Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY
High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT
Technical assistance and fast turnaround to minimize downtime and ensure efficiency.



BATTERY CHARGE

A pressure switch is a mechanical device which converts a pressure change into an electrical function. The pressure change might be measured as pressure, vacuum, or differential between two pressure inputs. In every case, the pressure switch will employ a diaphragm, piston, or other pressure-responsive sensor, which has been coupled to the mechanical means of actuating a switch. Example of Pressure Switch P/N 42D185



BUS POWER CONTROL

Example of Landing Light P/N 45-0123-1, the landing light is used during aircraft landing and takeoff operations. It provides high-intensity illumination of the flight path. The landing light is extended during operation and retracted during normal flight. The landing light consists of the lamp support ring assembly, gearbox assembly, motor assembly and drive gears. The landing light is factory preset to move to an extended position of 73 degrees. It can be adjusted to extend to any position between 70 and 100 degrees.

FEATURES

- Wide range of pressure settings.
- Rugged and reliable construction.
- Accurate and consistent performance.
- Compatible with various aircraft systems.
- One year support warranty.

GENERATOR CONTROL UNIT

The Auxiliary Power Unit or APU is a small turbine engine mounted between the main wheel wells. The primary purpose of an aircraft APU is to provide power to start the main engines. The APU is started by an electric motor, with power supplied by a battery or external power source (ground power unit), after the APU accelerates to full speed, it can provide a much larger amount of power to start the aircraft's main engines, either by turning an electrical generator or by providing compressed air to the air turbine of the starter motor. Example of APU Starter motor is P/N 5198852-4 engine starter motor is a brush-type, direct-current, series-wound motor with four fields poles. It has a stator assembly, an armature assembly with commutator and four brush assemblies.

FEATURES

- High reliability and durability.
- Precision engineered components.
- Compliant with aviation standards.
- Optimized for performance and safety.
- One year support warranty.

ELECTRONIC SERVICES

RELIABLE SOLUTIONS
Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY
High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT
Technical assistance and fast turnaround to minimize downtime and ensure efficiency.

OEM & AFTERMARKET COMPATIBILITY
Wide range of genuine and compatible parts for various aircraft platforms.



WINDOWS HEAT CONTROL

A Windows Heat Control is a vision apparatus that helps enhance a pilot's ability to fly an aircraft by providing increased visibility. The window heat control (Article) has capable of controlling window temperature, which consist of analog and digital circuit. The amount of power supplied to heating elements that are laminated into the window. The window temperature is detected by the resistance of sensor element embedded in the window. The unit is equipped with a overheat protection system that isolates power from the heating elements when overheating is sensed. Example of Window Heat Control Part Number 83000-05602



FEATURES

- Wide range of temperature control settings.
- Rugged and reliable construction.
- Accurate and consistent performance.
- Compatible with various aircraft systems.
- One year support warranty.

RELAY

A Relay is an electrical switch that opens and closes under the control of another electrical circuit. For example Power relays are designed to withstand the current of the electrical circuit into they are inserted and to cut off the electrical circuit under load. Power relays are usually constructed in the arc extinguishing equipment, are built separately, and the relay as a whole is subsequently assembled from such subassemblies. Electromechanical relays comprise one or more electrical contacts having a mechanical movement, these being coupled to a moveable element of the magnetic circuit of an electromagnet. Because a relay is able to control an output circuit of higher power than the input circuit, it can be considered to be, in a broad sense, a form of an electrical amplifier.



FEATURES

- High reliability and durability.
- Precision engineered components.
- Compliant with aviation standards.
- Optimized for performance and safety.
- One year support warranty.

STROBE LIGHT

Strobe lights are used on aircraft for collision avoidance measures. Due to the intensity of the brilliant white light source, the intended use for strobes is during daylight hours of operation. Strobes should really not be used in inclement weather, in the clouds or on the ground as this can cause flicker vertigo. We want to be seen and we want to be safe so use your strobes in a proper manner for those in the air and on the ground. Anti-Collision light system consists of two synchronized red flashing lights which are installed on top and the bottom of the fuselage, the associated power supplies and the connecting cables. The power supplies provide the layered electrical energy for the light output to a level of 15% of the nominal light intensity. The FAA has specific guidelines as it concerns strobe light location and area of coverage. Be sure to select the correct strobe(s) for the type of installation you are going to use.



FEATURES

- High-intensity illumination for maximum visibility.
- Factory preset extension for 73 degrees.
- Adjustable extension (70° – 100°).
- Robust gearbox and motor assembly.
- One year support warranty.


CRISIS CONTROL CONSOLE
CCSI-001/01

Customized Design
Fully customizable designs available fordifferent user space requirements

Versatile
Lightweight yet sturdy and highly mobile ideal for harsh environment.

Boltless Mounting
Square hole racks for easy installation and removal of electronic peripherals.



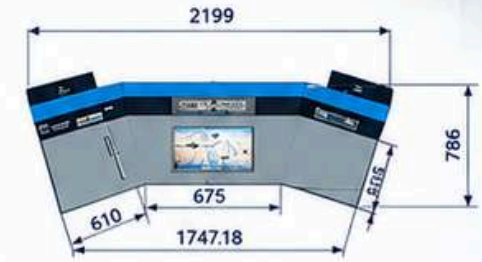



Features:

- Mild steel construction with stand-alone welded assembly for long lasting durable operation.
- Optional heavy duty solid casters wheels with brakes for superior protection against wear and tear and ease of maneuverability.
- Removable front panels for easy installation in electronic modules.
- Cooling fans located at the back side of console for adequate cooling of electronics.
- Reticulated electrical distribution panels.
- STI offers advice on customized designs of consoles.These products can offer substantial savings in space when compared to traditional solutions.

Product Specifications:

Construction	Mild Steel
Physical Dimensions	9' X 2 ½' X 3'
Net Weight	40 Kg
Table Top	Metal, Plywood, Glass, Wooden
Cooling Type	Active Cooling
Rack Size	18U
Number of LCDs	2
Assembly	Welded(Standalone)
Finishing	Epoxy, Powder Coated
Wheels, Levelers	Optional, Heavy Duty Castors with brakes

SWIVEL JIB CRANE
JCSI-0001


RELIABLE SOLUTIONS
Quality electronic components and services to keep your aircraft operational and safe.

ADVANCED TECHNOLOGY
High-performance electronic systems for modern aircraft applications.

CERTIFIED QUALITY
All components are tested, inspected and supplied in accordance with aviation standards.

EXPERT SUPPORT
Technical assistance and fast turnaround to minimize downtime and ensure efficiency.



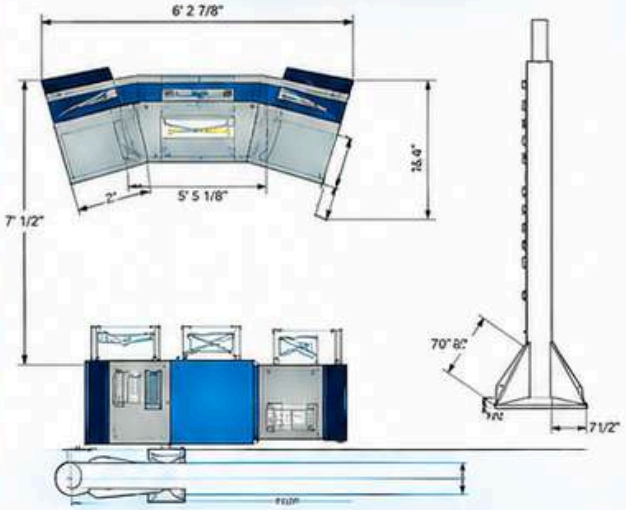

Features:

- Capacitor start motor with pendant remote control and 10ft cable.
- Explosion proof options available.
- 220 VAC Operation ideal for garages sheds and storage depots.
- Enamel coating on short blast structure.
- Custom surface finishing available.
- Fully standalone operation.
- Quick return on investment through increased productivity.
- Safe and reliable operation.
- Can be installed indoors and outdoors.
- No knee area braces, freeing lot of area foot of crane mast.

Product Specifications:


Construction	Type	Mild Steel
Motor Type	Power	2 Hp
	Rotation Speed	1380 rev/min
Lifting mechanism electric hoist	Lifting Speed	15 m/m/sec
	Lifting Height	Upto 25 Feet
	Hoist Type	EO1
General Data	Work Classification	Light Duty
	Power Source	220VAC @50-60Hz
	Wheel Diameter	Φ 64mm
	Rail Surface Thickness	9mm
	Rail Surface Width	110mm


FOUR CYLINDER OXYGEN TROLLEY
OTSI-0001

CUSTOMIZED DESIGN
Fully customizable portable oxygen supply systems.

LIGHT WEIGHT
Made with extruded mild steel structure, oxygen trolley is light weight yet sturdy, ideal for transportation.

RUST AND CORROSION FREE
Epoxy coated mild steel frame for superior protection against wear, rust and corrosion.

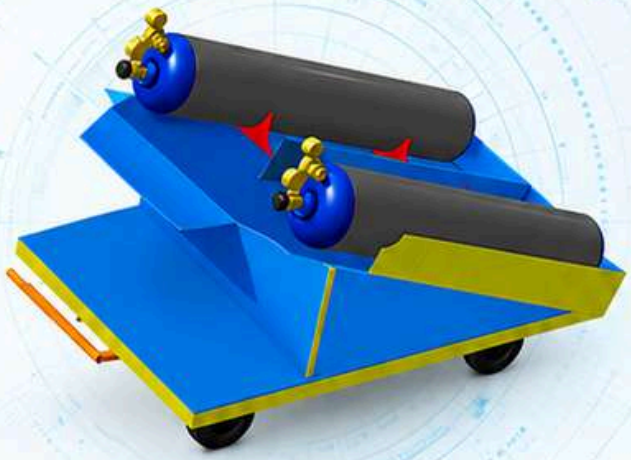

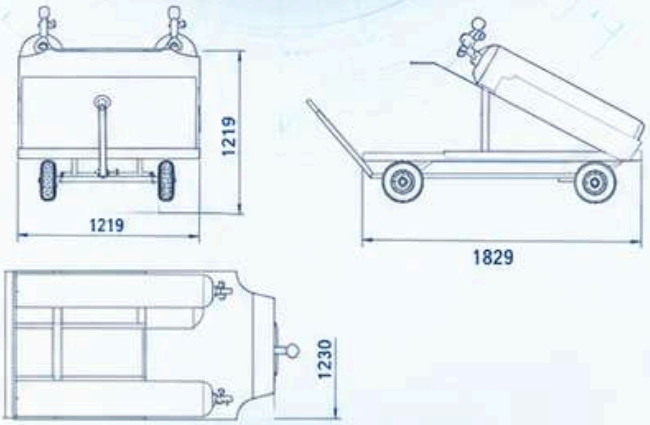

FEATURES

- Ackermann steering for ease of maneuverability.
- Air inflatable tires for rough surfaces.
- Toe bar and pintle hook for towing purposes.
- Double axel movement for steep turns and tight spaces.
- One year support warranty.

KEEPING YOUR AIRCRAFT SYSTEMS IN PEAK CONDITION

PRODUCT SPECIFICATIONS

1	Type	Trailer
2	Maximum Loading Capacity	500Kg
3	Height	48"
4	Width	48"
5	Support Frame Material	Mild Steel
6	Wheels Type	Air Inflated 2 with brakes and 2 w/o brakes
7	Surface Treatment	Epoxy Coated
8	Assembly Type	Double axel bogie steering
9	Steering Type	Ackermann steering
10	Weight	200 Kg
11	Cylinder holding fixture	Detachable
12	Number of Cylinders	4

OVERHEAD CRANE
OHCSI-001/01

The overhead crane is a versatile lifting solution designed for efficient and safe material handling in industrial and aerospace environments. Built for durability and precision, it ensures smooth operation, high load capacity and reliable performance in demanding conditions.

MECHANICAL BRAKE
Full load automatic mechanical brake. High efficiency low current draw motor.

CUSTOMIZED SOLUTIONS
Application-specific solutions according to user requirements.


SAFE & RELIABLE
Engineered for safety, with proven performance in demanding industrial applications.


HEAVY DUTY CONSTRUCTION
Robust design for long service life and stable operation.














FEATURES

- Drum switch with automatic return to off position.
- TEFC capacitor start motor.
- 12ft. pendant remote control.
- Differential planetary gear train.
- Self-braking transmission.
- Explosion proof options available.
- 220 VAC Operation ideal for garages, shops and storage depots.
- Custom surface finishing options also available.
- Chemically anchored ceiling bolts for superior fastening.

BUILT FOR SAFE AND EFFICIENT LIFTING OPERATIONS

PRODUCT SPECIFICATIONS

Motor Type	Type	Induction
	Power	2 Hp
	Rotation Speed	1380 rev/min
Lifting mechanism electric hoist) and hoist travel mechanism	Lifting Speed	15 **mm/sec**
	Lifting Height	Upto 25 Feet
	Travel Speed	Optional Upto 20 mm/sec
	Hoist Type	EOT
General Data	Work Classification	Light Duty
	Power Source	220VAC @50-60Hz
	Wheel Diameter	Φ 64mm
	Rail Surface Thickness	9mm
	Rail Surface Width	130mm

MOBILE SWIVEL JIB CRANE
MJCSI-0001

The mobile swivel jib crane is a versatile and portable lifting solution designed for efficient and safe material handling in aircraft maintenance, assembly and repair facilities. Built for durability and ease of operation, it provides reliable lifting support for various aerospace applications.

360° SWIVEL OPERATION
Maximum outreach due to 360 degree slewing operation.


PORTABLE DESIGN
Four heavy-duty swivel castors for easy transport and mobility.


RUGGED & DURABLE
Robust steel construction for long-term use in demanding industrial environments.


CUSTOM SOLUTIONS
Tailored designs available to meet specific user requirements.

LIGHTWEIGHT
Extendable base frame type for compact storage and easy handling.









FEATURES

- 360° swivel operation for extended reach and flexibility.
- Heavy-duty caster wheels for smooth and safe mobility.
- 220 VAC operation ideal for hangars and maintenance facilities.
- Enamel coated steel structure for corrosion resistance.
- Custom surface finishing options available.
- Fully standalone operation with independent power supply.

DESIGNED FOR AEROSPACE MAINTENANCE & SUPPORT OPERATIONS

PRODUCT SPECIFICATIONS

Motor Type	Type	Induction
	Power	2 Hp
	Rotation Speed	1380 rev/min
Lifting Mechanism (Electric Hoist) and Travel Mechanism	Lifting Speed	15 mm/sec
	Lifting Height	Up to 25 Feet
	Travel Speed	Optional Up to 20 mm/sec
	Hoist Type	EOT
General Data	Work Classification	Light Duty
	Power Source	220VAC @50-60Hz
	Wheel Diameter	Ø 64mm
	Rail Surface Thickness	9mm
	Rail Surface Width	130mm

MI-17 HELICOPTER GUNMOUNT
GMSI-001/01

A robust and reliable gun mount designed for the Mi-17 helicopter, providing a stable and secure platform for weapon systems during flight operations. Engineered for operational efficiency, safety and ease of installation.


RELIABLE OPERATIONS
All-metal SS 316 steel construction for superior rigidity and reliable operation.

QUICK CONNECT
Locking pin based connecting mechanism for quick installation and removal of arm.

RUGGED & DURABLE
Built for harsh environments and continuous operational use.

CUSTOM SOLUTIONS
Tailored design available to meet specific user requirements.



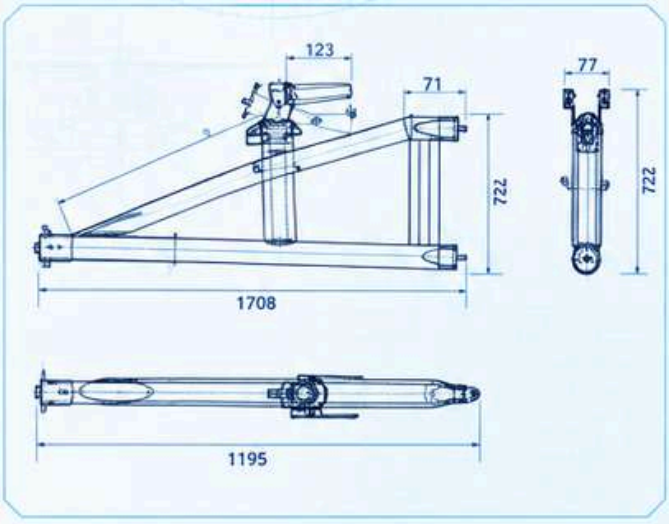

FEATURES

- Gun mount installation on factory hard points of helicopter doors without any modification.
- Quick removal and stowing in event of door is needed for egress or ingress.
- At 15Kgs, SS-316 based gun mounts are engineered for long and reliable operation.
- Rust and corrosion protection in all weather conditions.
- Quick gun connect and disconnect in case of jamming.
- Customized gun mounts for every type of gun and aircraft.

BUILT FOR MILITARY & CIVIL HELICOPTER OPERATIONS

PRODUCT SPECIFICATIONS

1	Type	Hard Point Attached
2	Weight carrying capacity	50 Kg
3	Height	190 mm
4	Width	860 mm
5	Support Frame Material	Stainless Steel SS316
6	Surface Treatment	Enamel Coated
7	Weight	35 Kg
8	Wall Support	Yes



FLOOD LIGHT-GENERATOR SET CART
FLGSI-001

CUSTOMIZED DESIGN
Fully customizable portable lighting system designs.


LIGHT WEIGHT
Made with extruded mild steel structure, flood light cart is light weight yet sturdy, ideal for transportation.

RUST AND CORROSION FREE
Epoxy coated mild steel frame for superior protection against wear, rust and corrosion.

2 WAY OPERATING MODE
FLGSI is supplied with 447 Straight Blade Plug and 50 feet of power chord for operating the flood light with the generator set or any commercial electrical outlet.





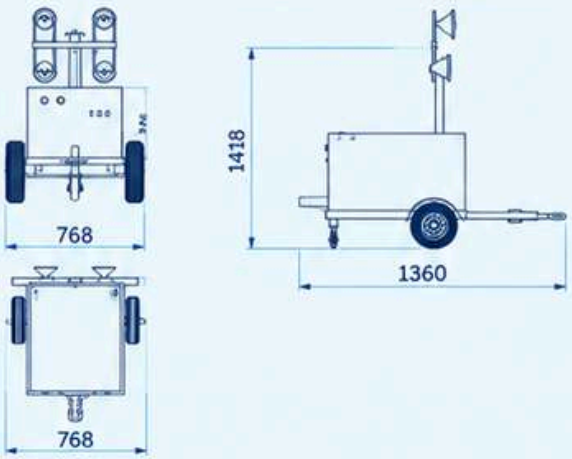

Features:

- 4-1000W metal halide lamps for adequate lighting.
- Telescopic fixture support frame.
- All four 180 degree reversible lights.
- Long life span metal halide lights.
- One year support warranty.
- Overcurrent and overvoltage protection.
- Toe bar and pintle hook for transport.
- Ultra Silent Diesel generator set.
- IP-65 light fixture geclosure for outdoors operation.
- Extendible telescopic arms for added stability.
- One toggle switch per lamp on the ballast box for energy saving.

Product Specifications:

		Feature	
Electrical Data	Generator Set	Wattage	5Kw
		Current	25 Amperes
		Voltage	220 VAC
		Frequency	50HZ
		Phase	Single
	Electrical Outlet	Supply Current	30A
		Voltage	220VAC
		Frequency	50HZ
		Phase	Single
Flood Light Specification		Type	Metal Halide
		Wattage	1000(Per Lamp)
		Lumens	11000 Per Lamp
		Color	White
Physical Data	Net Weight	Net Weigrt	120Kg
	Physical Dimensions	Physicat Outlit	30"x40"x36"
	Surface Finishing		Matte Red, Epoxy Grey

BLADE STAND
BSSI-001/01


Blade stand is used for safe storage, protection and easy movement of aircraft blades during maintenance, handling and transportation.

Customized Design
Fully customizable designs available for different user space requirements.

Versatile
Light weight yet sturdy and highly mobile ideal for harsh environment.

Transport Ready
Transportation attachments such as tow bar and pintle hook also available.



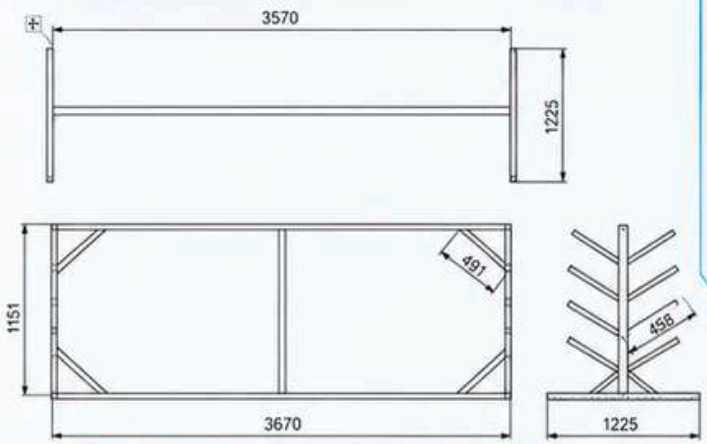

FEATURES

- Mild steel construction with stand-alone welded assembly for long lasting durable operation.
- Optional heavy duty solid casters wheels with brakes for superior protection against wear and tear and ease of maneuverability
- Synthetic rubber lining on the surface to protect blades from damage
- Multiple surface finishing options also available according to the user requirement.
- STI offers advice on customized designs of blade racking system. These products can offer substantial savings in space when compared to traditional racks.

PRODUCT SPECIFICATIONS

1	Type	Standalone Moveable
2	Maximum Loading Capacity(Per Shelf)	250 Kg
3	Height	12ft – 20ft
4	Width	4" – 24"
5	Support Frame Material	Mild Steel
6	Surface Treatment	Epoxy Coated
7	Number of Shelves	Any 2 – 8
8	Weight	35 Kg
9	Wall Support	Yes

B-1 MAINTENANCE PLATFORM
BMPSI-0001

The B-1 Maintenance Platform is designed to provide a safe, stable and efficient working platform for aircraft maintenance operations. It combines robust construction with user-friendly features, ensuring reliability and ease of use in demanding environments.


CUSTOMIZED DESIGN
Fully customizable designs available for different user space requirements.


IMPROVED EFFICIENCY
A practical and economic solution for high and overhead maintenance or production jobs upto 18 feet.


IMPROVED SAFETY
Efficient access to service aircraft, with critical fall protection to ensure a safe work environment.

VERSATILE
4ft by 4ft work platform can also be used as temporary access stairways for aircraft and construction work.







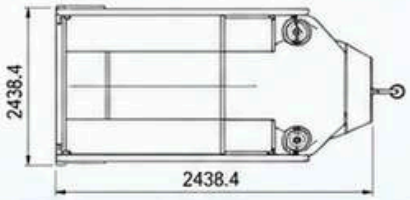

Features:

- Non-slip, self-cleaning steps and platform floor.
- 250Kg load bearing capacity.
- Double action hand operated hydraulic pump.
- Height adjustable from 3ft to 19ft.
- Easy to transport 10" solid casters with brakes.
- All-steel, welded construction.
- Hand adjustable screw jacks on each end for stability.
- Removable handrails for storage purposes.
- Aviation standard epoxy finishing.

Product Specifications:

1	Type	Standalone Moveable
2	Maximum Loading Capacity	250 Kg
3	Height	12ft – 20ft
4	Width	4" – 24"
5	Support Frame Material	Mild Steel
6	Surface Treatment	Epoxy Coated
7	Number of Shelves	Any 2 – 8
8	Weight	200 Kg
9	Wall Support	Yes

FUEL TANK STAND
FTSSI-0001

Customized Design
Fully customizable designs available for fuel tanks of different sizes.


Heavy-Duty
FTSS is designed with mild steel tubular structure for added strength and sturdiness, ideal for harsh environment.


Transport Ready
Heavy-duty 1000Kgswivel casters, ideal for transporting of fuel tanks upto 300 gallons.







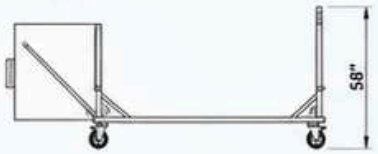

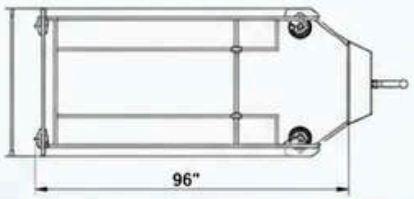

Features:


- Fully Standalone welded assembly.
- 1000Kg load bearing capacity. Static grounding reel. Easy to access construction.
- Tow bar or pintle hook for transportation purposes.
- Hand-operated screw jack assembly for resting the propeller at any angle from 40° to 95°.
- Aviation standard epoxy finishing.

PRODUCT SPECIFICATIONS :

Max Loading Capacity	1000Kg
Caster Size	4"
Caster Type	Swivel, Locking
Castor Loading Capacity	1000Kgs
Maximum Tank Size	300Gallons
Towing Mechanism	Pintle Hook, Toe Bar
Support Frame Material	Mild Steel
Support Frame Type	Welded Box Structure
Surface Finishing	Epoxy Coated
Physical Dimensions	96" x 45" x 58"
Weight	100Kg

ENGINE STAND
ESSI-0001



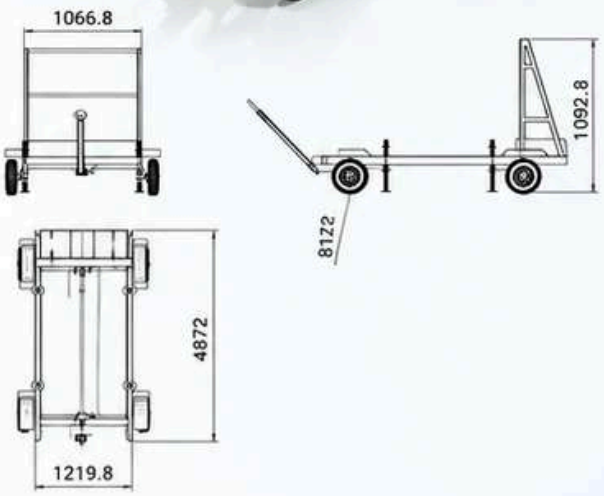

Customized Design
Fullycustomizable designs available for engine transportation of different aircrafts.

Heavy-Duty
FTSSI designed with heavy-duty mild steel structure for added strength and sturdiness, ideal for harsh environment.

Transport Ready
Air inflatable tires forbetter shock absorption and ease of transportation.

Fire Resistant
Militarystandard fire resistant paint for transportation safety.

Features:

- Fully Standalone welded assembly.
- 1000Kg load bearing capacity. Static grounding reel. Easy to access construction.
- Tow bar or pintle hook for transportation purposes.
- Narrow rack design for space conservation.
- Low turning radius due to Ackermann steering.
- Four separate levelers for long term storage of engine.
- Easy installation of engine on engine stand by means of only four bolts.
- Compliant with the design dynamic loads, and interfaces identified in Performance Specification.
- Aviation standard epoxy finishing.

PRODUCT SPECIFICATIONS:

Max Loading Capacity	2000Kg
Wheel Size Wheel	10"
Type	Air Inflatable, Fixed
Castor Loading Capacity	5000Kgs
Number of Levelers	4
Towing Mechanism	Pintle Hook, Toe Bar
Support Frame Material	Mild Steel
Support Frame Type	Welded Box Structure
Surface Finishing	Epoxy Coated
Physical Dimensions	15' x 4' x 8'
Weight	250Kg

ENGINE ROLLOVER STAND
ERSSI-0001

Engine rollover stand is designed for safe and convenient rolling and handling of aircraft engines for inspection and repair activities.

CUSTOMIZED DESIGN
Fully customizable designs available for rolling over engines of different aircrafts.

HEAVY-DUTY CONSTRUCTION
Robust and durable build for industrial use and long service life.


VERSATILE APPLICATIONS
Ideal for inspection, maintenance and repair operations.


TRANSPORT READY
Heavy-duty swivel casters for easy movement and positioning.


FIRE RESISTANT
Military standard fire resistant paint for safety and durability.







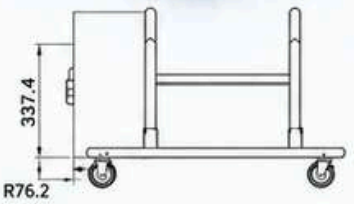



Features:

- Fully Standalone welded assembly.
- 2 Ton load bearing capacity.
- Static grounding reel.
- Easy to access construction.
- Tow bar or pintle hook for transportation purposes.
- Narrow rack design for space conservation.
- Compliant with the design loads, dynamic loads, and interfaces identified in Performance Specification.
- Aviation standard epoxy finishing.

Product Specifications:


Max Loading Capacity	2000Kg
Caster Size	6"
Caster Type	Solid, Swivel
Cast# Loading Capacity	5000Kgs
Engine Rotation	180 Degrees
Towing Mechanism	Pintle Hook, Tow Bar
Support Frame Material	Mild Steel
Support Frame Type	Welded Box Structure
Surface Finishing	Epoxy Coated
Physical Dimensions	15' x 4' x 8'
Weight	250Kg


VERTICAL RACKING SYSTEM
VRSI-001/01

Customized Design
Fullycustomizable designs available for different user space requirements.

Versatile
Lightweight yet sturdy and customizable ideal any storage space.

Quick Installation
Boltedandboltless options available for ease of installation.

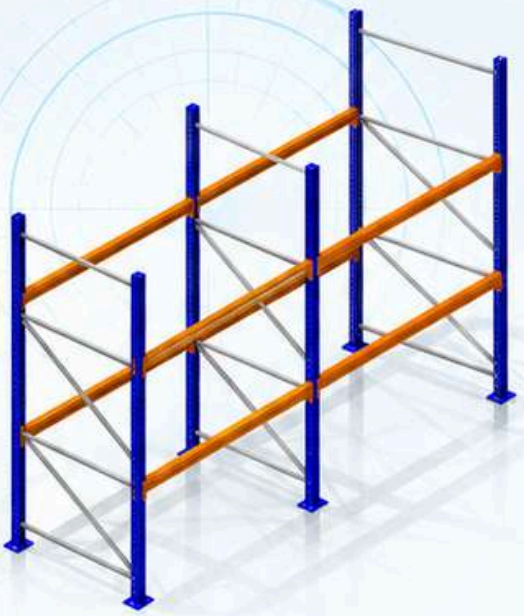

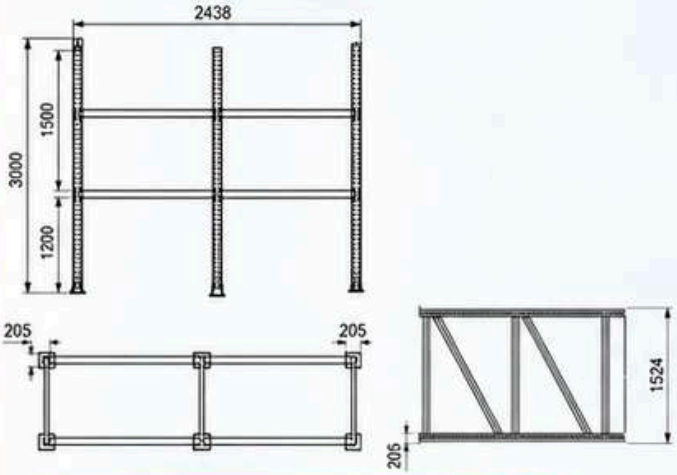

Features

- Cold rolled high density steel for greater life span.
- Flexible number of shelves according to requirement of end user.
- 2" rack shelving increment ideal for any size ofstorage item.
- Bolted brace attachment for extra rigidity.
- Multiple surface finishing powder coating, enamel and epoxy coating available.
- Onsite installation done by manufacturer.
- Bolted step beams with vertical pillars for extra load bearing capacity and accidental unhooking.
- Chemically anchored to work floor and walls for extra strength.
- Fully extendible, can be extended to any length and height.
- Can be tailored to single-sight andmulti-site operations.

Product Specifications

1	Type	Bolted Assy, Boltless Assy
2	Maximum Loading Capacity(Per Shelf)	250 - 2000 Kg
3	Height	8ft – 20ft
4	Width	4ft
5	Support Frame Material	Mild Steel
6	Surface Treatment	Epoxy Coated
7	Number of Shelves	Any 2 – 8
8	Weight	200 Kg(Per Unit)
9	Wall Support	Yes

UNIVERSAL ENGINE STAND
UESSI-0002


Customized Design
Fully customizable designs available for universal engine stands.


Heavy-Duty
FTSSI is designed with heavy-duty mild steel structure for added strength and sturdiness, ideal for harsh environment.


Transport Ready
Heavy-duty swivel casters for ease of transportation.

Fire Resistant
Military standard fire resistant paint for transportation safety.









Features:

- Fully Standalone welded assembly.
- load bearing capacity.
- 2T — 2 Ton
- Static grounding reel.
- Easy to access construction
- Tow bar or pintle hook for transportation purposes.
- Narrow rack design for space conservation.
- Easy Installation of engine on engine stand by means of only four bolts.
- Compliant with the design loads, dynamic loads, and interfaces identified in Performance Specification
- Aviation standard epoxy finishing.

Product Specifications

Max Loading Capacity	2000Kg
Wheel Size	10"
Wheel Type	Air Inflatable, Fixed
Castor Loading Capacity	5000Kgs
Number of Levelers	4
Towing Mechanism	Pintle Hook, Toe Bar
Support Frame Material	Mild Steel
Support Frame Type	Welded Box Structure
Surface Finishing	Epoxy Coated
Physical Dimensions	15' x 4' x 8'
Weight	250Kg



UNIVERSAL ENGINE STAND
UESSI-0001

Customized Design
Fully customizable designsavailable for universalengine stands.


Heavy-duty
FTSSI is designed with heavy-duty mild steel structure for added strength and sturdiness, ideal for harsh environment.


Transport Ready
Heavy-duty swivel casters for ease of transportation.


Fire Resistant
Militarystandard fire resistant paint for transportation safety.









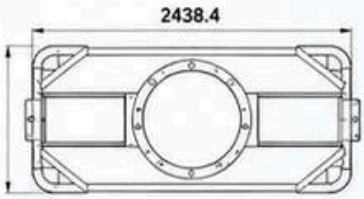

Features:

- Fully Standalone welded assembly.
- 2 Ton load bearing capacity.
- Static grounding reel.
- Easy to access construction.
- Tow bar or pintle hook for transportation purposes.
- Narrow rack design for space conservation.
- Easy Installation of engine on engine stand by means of only four bolts.
- Compliant with the design loads, dynamic loads, and interfaces identified in Performance Specification.
- Aviation standard epoxy finishing.

Product Specifications

Max Loading Capacity	2000Kg
Wheel Size	10"
Wheel Type	Air Inflatable, Fixed
Castor Loading Capacity	5000Kgs
Number of Levelers	4
Towing Mechanism	Pintle Hook, Toe Bar
Support Frame Material	Mild Steel
Support Frame Type	Welded Box Structure
Surface Finishing	Epoxy Coated
Physical Dimensions	15' x 4' x 8'
Weight	250Kg

ROLLERED PALLET TRAILER
RPTSI-0001


Customized Design
Fully customizable designs available for different user space requirements.

Versatile
With 2 Ton load bearing capacity, RPTSI is sturdy and highly mobile ideal for harsh environment.

Transport Ready
Double axel bogie steering for added strength and mobility.

Rust and Corrosion Free
Epoxy coated mild steel frame for superior protection against wear , rust and corrosion.



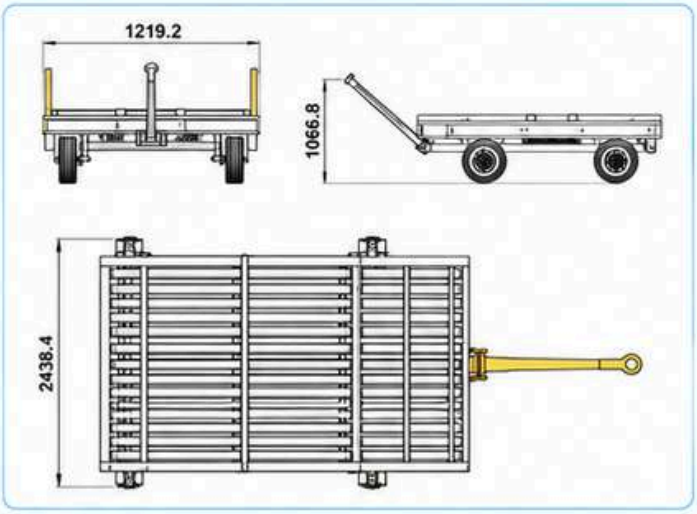

Features:

- Cold rolled high density steel for greater life span.
- Air inflatable tires for rough surfaces.
- Ackermann steering for ease of maneuverability.
- Toe bar actuated brakes.
- Grip strut walkways end-to-end.
- Manually actuated and spring loaded stops.
- Supports two fully loaded standard pallets.
- 3-rows of solid steel rollers with bearing for extra strength.

Product Specifications:

1	Type	Roller Bed
2	Maximum Loading Capacity	250 Kg - 2000 Kg
3	Height	8"
4	Width	50"
5	Support Frame Material	Mild Steel
6	Wheels Type	Air Inflated 2 with brakes and 2 w/o brakes
7	Surface Treatment	Epoxy Coated
8	Assembly Type	Double axel bogie steering
9	Steering	Ackermann steering
10	Weight	200 Kg
11	Side Supports	Fixed/Detachable


PYLON MOUNTING TROLLEY
PMTSI-0001


Customized Design
Fully customizable designs available for pylon mounting of different aircrafts.


Heavy-duty
PMDSI is designed with mild steel tubular structure for added strength and sturdiness, ideal for harsh environment.

Transport Ready
Heavy-duty 500Kg swivel casters with 15 degree locking increments, ideal for transport.









Features:

- Fully standalone welded assembly.
- 500Kg load bearing capacity.
- Tie down clamps for securing the pylons during transport.
- Storage box for components not being used.
- Tow bar or pintle hook option for transportation purposes.
- Two separate hand operated screw jack assemblies for placing the pylon at any desired position.

Product Specifications:

Max Loading Capacity	500Kg
Caster Size	4"
Caster Type	Swivel, Locking
Castor Loading Capacity	500Kgs
Missile Tilt range	0-45Degrees
Towing Mechanism	Pintle Hook, Toe Bar
Support Frame Material	Mild Steel
Support Frame Type	Welded Box Structure
Surface Finishing	Epoxy Coated
Physical Dimensions	8' x4' x 4'
Weight	50Kg


WING TIP MISSILE MOUNTING DOLLY
WMDSI-0001

Customized Design
Fully customizable designs available for wing tip missile mounting of different aircraft.

Heavy-duty
WMDSI is designed with mild steel square tubular structure for added strength and sturdiness, ideal for harsh environment.

Transport Ready
Heavy-duty 500Kg swivel casters with 15 degree locking increments, ideal for transport.



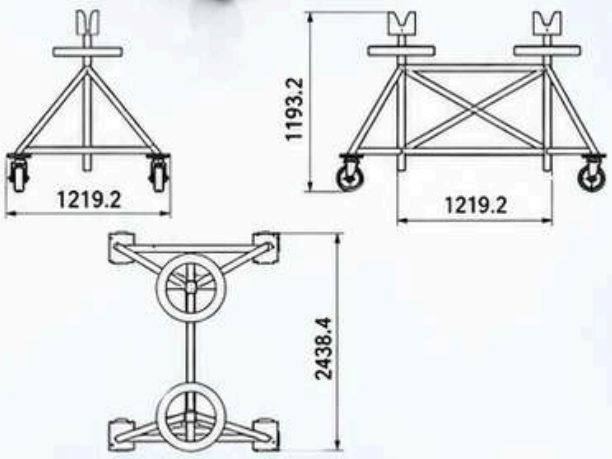

Features:

- Fully Standalone welded assembly.
- 500Kg load bearing capacity.
- Tie down rings for securing missile on dolly during transport
- Storage box for components not being used.
- Tow bar or pintle hook option for transportation purposes.
- Two separate h and operated screw jack assemblies for placing the missile at any desired position.

Product Specifications:

Max Loading Capacity	500Kg
Caster Size	4"
Caster Type	Swivel, Locking
Castor Loading Capacity	500Kgs
Missile Tilt range	0-45Degrees
Towing Mechanism	Pintle Hook, Toe Bar
Support Frame Material	Mild Steel
Support Frame Type	Welded Box Structure
Surface Finishing	Epoxy Coated
Physical Dimensions	8' x4' x 4'
Weight	50Kg




CARGO RAMP DOLLY CRD
SI-0001

Customized Design
Fullycustomizable designs available for cargo dollies.

Heavy-Duty
CRDSI is designed with mild steel tubular structure for added strength and sturdiness, ideal for harsh environment.

Transport Ready
Heavy-duty 10 00Kg swivel casters, ideal for transporting of cargo upto 1 ton.



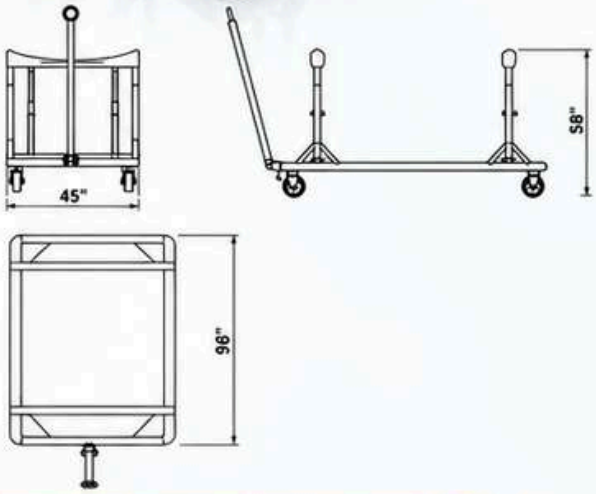

Features:

- Fully Standalone welded assembly.
- 1000Kg load bearing capacity.
- Toebar Actuated Parking Brakes.
- Easy to load and remove cargo.
- Main Frame Corners Radii used to Minimize Collision Damage.
- Works with hook-end, flat plate, and pin ramps.
- 35-40 Km/h transportation speed.
- Aviation standard epoxy finishing.

Product Specifications :

1	Max Loading Capacity	1000Kg
2	Caster Size	4"
3	Caster Type	Swivel, Locking
4	Castor Loading Capacity	1000Kgs
5	Maximum Pallet Size	80"
6	Towing Mechanism	Pintle Hook, Toe Bar
7	Support Frame Material	Mild Steel
8	Support Frame Type	Welded Box Structure
9	Surface Finishing	Epoxy Coated
10	Physical Dimensions	96" x 45" x 58"
11	Weight	60Kg




ADJUSTABLE FUSELAGE SUPPORT CART
FSCSI-0001


Customized Design
Fully customizable designs available for fuselage support of different aircrafts.


Heavy-Duty
WMDSI is designed with cold rolled mild steel structure for added strength and sturdiness, ideal for harsh environment.

Transport Ready
Heavy-duty 1 ton swivel casters with 15 degree locking increments, ideal for transport.







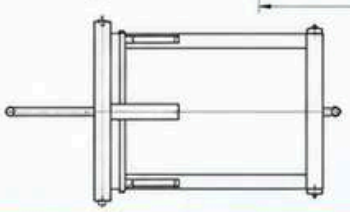

Features:

- Fully Standalone welded assembly.
- 1 Ton load bearing capacity.
- Synthetic rubber lining on top surface to avoid bumps and scratches.
- Aviation Standard epoxy finishing.
- Tow bar or pintle hook option for transportation purposes.
- Two separate hand operated screw jack assemblies for lifting up the support cart at any desired position.

Product Specifications:

1	Max Loading Capacity	500Kg
2	Caster Size	4"
3	Caster Type	Swivel, Locking
4	Castor Loading Capacity	500Kgs
5	CartLifting Range	24"
6	Towing Mechanism	Pintle Hook, Toe Bar
7	Support Frame Material	Mild Steel
8	Support Frame Type	Welded Box Structure
9	Surface Finishing	Epoxy Coated
10	Physical Dimensions	8' x4' x 4'
11	Weight	50Kg



1100L DROP TANK DOLLY

DTDSI-0001/1100I

Customized Design

Fullycustomizable designs available for drop tanks of different sizes.


Heavy-Duty

DTDSI isdesigned with mild steel tubular structure for added strength and sturdiness, ideal for harsh environment.

Transport Ready

Air inflatable tires, ideal for transporting of drop tanks upto 1100 liters.



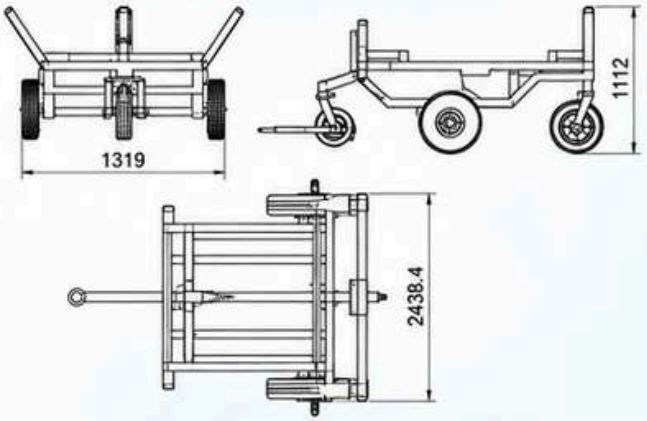

Features:

- Fully Standalone welded assembly.
- 2000Kg load bearing capacity.
- Static grounding reel.
- Easy to access construction
- Tow bar or pintle hook for transportation purposes.
- Synthetic rubber lining to avoid scratches and bumps.
- Aviation standard fire resistant epoxy finishing.

Product Specifications

1	Max Loading Capacity	1000Kg
2	Caster Size	4"
3	Caster Type	Swivel, Locking
4	Castor Loading Capacity	2000Kgs
5	Maximum Tank Size	1100 liters
6	Towing Mechanism	Pintle Hook, Toe Bar
7	Support Frame Material	Mild Steel
8	Support Frame Type	Welded Box Structure
9	Surface Finishing	Epoxy Coated
10	Physical Dimensions	96" x 45" x 58"
11	Weight	100Kg

GAS TURBINE COMPRESSOR STAND
TCSSI-0001

Customized Design

Fullycustomizable gas turbinecompressorstand designs available for transportation of different aircrafts.


Heavy-duty


TCSSI is designed with heavy-duty mild steel structure for added strength and sturdiness, ideal for harsh environment.


Fire Resistant

Militarystandard fire resistant paint for transportation safety.





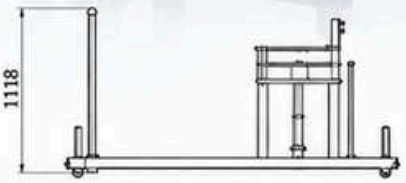

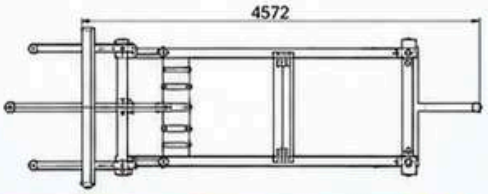

Features:

- Fully Standalone welded assembly.
- 2 Ton load bearing capacity.
- Static grounding reel.
- Easy to access construction
- Tow bar or pintle hook for transportation purposes.
- Narrow rack design for space conservation.
- Low turning radius due to Ackermann steering.
- Four separate levelers for long term storage of engine.
- Easy Installation of engine on engine stand by means of only four bolts.
- Compliant with the design loads, dynamic loads, and interfaces identified in Performance Specification.
- Aviation standard epoxy finishing.

Product Specifications

1	Max Loading Capacity	2000Kg
2	Wheel Size	10"
3	Wheel Type	Air Inflatable, Fixed
4	Castor Loading Capacity	5000Kgs
5	Number of Levelers	4
6	Towing Mechanism	Pintle Hook, Toe Bar
7	Support Frame Material	Mild Steel
8	Support Frame Type	Welded Box Structure
9	Surface Finishing	Epoxy Coated
10	Physical Dimensions	15' x 4' x 8'
11	Weight	250Kg




SKYBEES


TOW BAR
TBSI-0001

Customized Design
Fully customizable towbar designs available for towingdifferent aircraft.

Heavy-duty
Designed with mild steel square tubular structure for added strength and sturdiness, ideal for harsh environment.

Transport Ready
Heavy-duty wheels, ideal for transport.

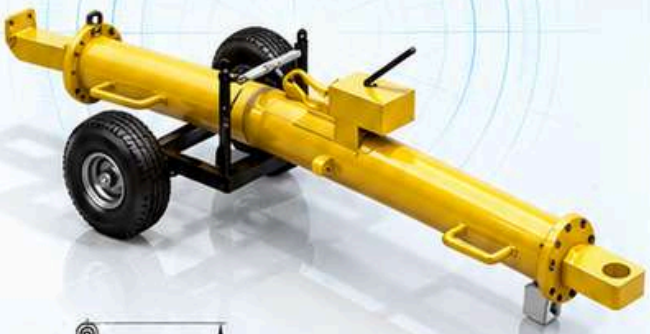

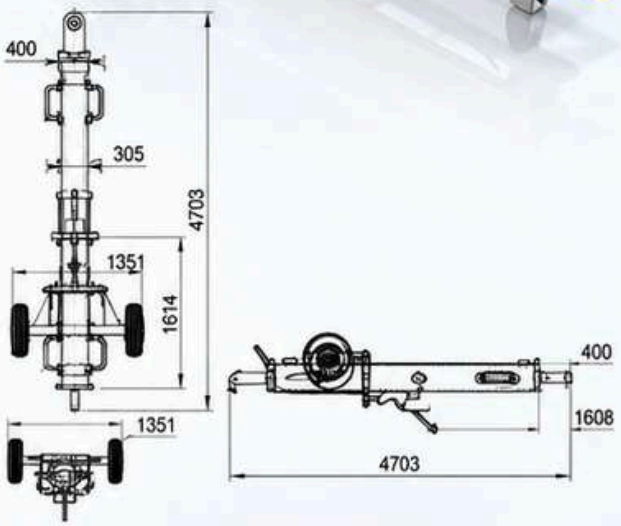

Features:

- Fully retractable hydraulic under carriage.
- Durable powder coat finish.
- Aircraft Weight Capacity 30,000 Kgs.
- Steel tube with NATO towing eye and welded handles.
- Overload protection by means of shear pins.
- 2 sets of extra shear pins also supplied with tow bar.
- Rigid axle for long term reliable use.
- Shock absorber also available for added safety.

Product Specifications

1	Max Loading Capacity	2 Ton
2	Wheel Size	10"
3	Wheel Type Loading	Air Inflated
4	Capacity	2 Ton
5	Tow Bar Type	Wide Body
6	Towing Mechanism	Pintle Hook,ToeBar
7	Support Frame Material	Mild Steel
8	Support Frame Type	WeldedRoundStructure
9	Surface Finishing	Epoxy Coated
10	Physical Dimensions	4' (Dia) x8'
11	Weight	50Kg

PROPELLER DOLLY
PDSI-0001


Fully customizable propeller dolly designs available for propellers of different aircraft.

Customized Design
Fullycustomizable designs available for propellers of different aircraft.

Heavy-duty
PDSI is designed with mild steel square tubular structure for added strength and sturdiness, ideal for harsh environment.

Transport Ready
Heavy-duty 500Kg swivel casters with 15 degree locking increments, ideal for transport.



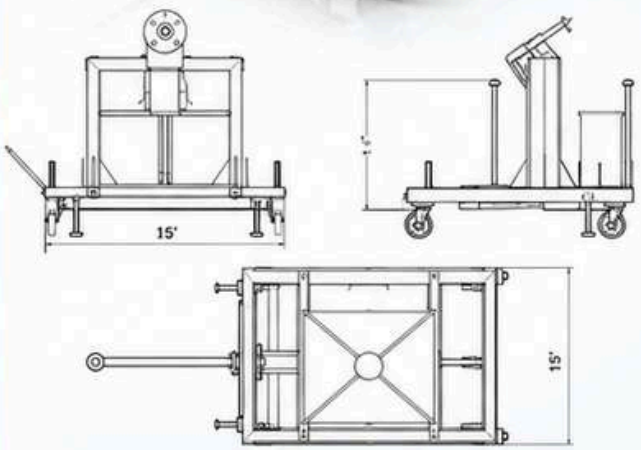

Features:

- Fully Standalone welded assembly.
- 500Kg load bearing capacity.
- Tie down rings for securing propeller on dolly.
- Storage box for components not being used.
- Tow bar or pintle hook for transportation purposes.
- Hand operated screw jack assembly for resting propeller at any angle from 40 degrees to 95 degrees.

Product Specifications

1	Max Loading Capacity	500Kg
2	Caster Size	4"
3	Caster Type	Swivel, Locking
4	Castor Loading Capacity	500Kgs
5	Prop Resting Angle	40-95Degrees
6	Towing Mechanism	Pintle Hook, Toe Bar
7	Support Frame Material	Mild Steel
8	Support Frame Type	Welded Box Structure
9	Surface Finishing	Epoxy Coated
10	Physical Dimensions	15' x 8' x 15'
11	Weight	100Kg

VERTICAL RACKING SYSTEM
VRSI-001/01

Fully customizable designs available for different user space requirements.


Customized Design
Fully customizable designs available for different user space requirements.

Versatile
Fully automatedsystem for large quantity material handeling with data logging option.

Easy Operation
Electrically actuated jacks and two way forklift for hassle free, long term reliable operation.

Technical Support
Local support and detailed technical manuals for long term reliable operation



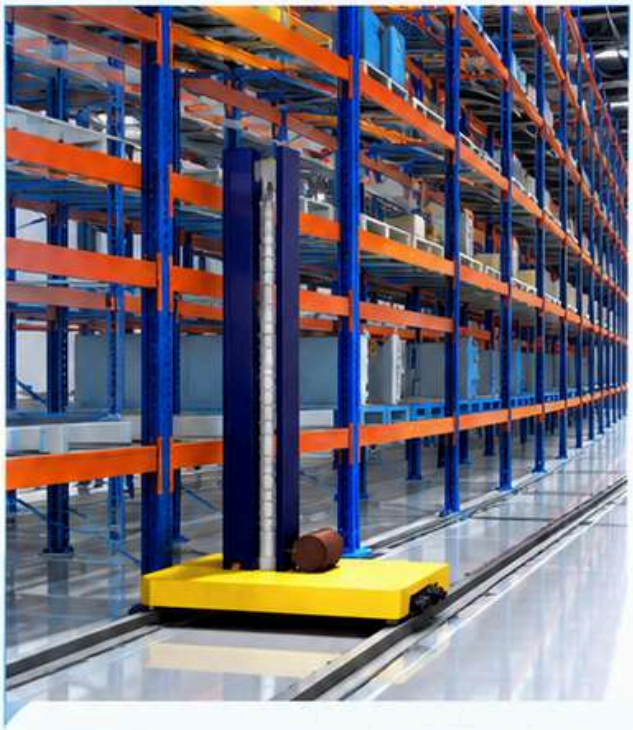





Features:

- Emergency stop and automatic braking option for safety during power failure.
- Rail mounted base frame, no requirement for counterbalancing
- High efficiency 3 phase electric motors for energy conservation
- Cold rolled high density steel for greater life span
- Flexible number of shelves according to requirement of end user.
- Chemically anchored to work floor and walls for extra strength
- Fully extendible, can be extended toany length and height
- Can be tailored to single-sight andmulti-site operations.

Product Specifications:

1	Type	Bolted Assy, Botlless Assy
2	Maximum Loading Capacity(Per Shelf)	250 - 2000 Kg
3	Height	8ft – 20ft
4	Width	4ft
5	Support Frame Material	Mild Steel
6	Surface Treatment	Epoxy Coated
7	Number of Shelves	Any 2 – 8
8	Weight	200 Kg(Per Unit)
9	Wall Support	Yes


AIR CHARGING DOLLY
ACDSI-0001





Customized Design
Fully customizable designs available for propellers of different aircraft.

Heavy-duty
ACDSI is designed with mild steel square tubular structure for added strength and sturdiness, ideal for harsh environment.

Transport Ready
Heavy-duty 500Kg swivel casters with 15 degree locking increments, ideal for transport.



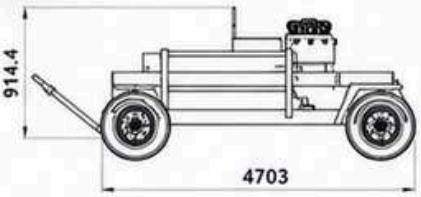

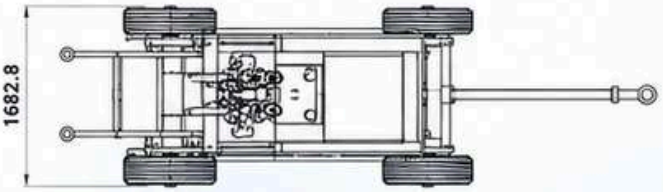

Features:

- Fully Standalone welded assembly.
- 500Kg load bearing capacity.
- Tie down rings for securing the propeller on dolly.
- Storage box for components not being used.
- Tow bar or pintle hook for transportation purposes.
- Hand operated screw jack assembly for resting propeller at any angle from 40 degrees to 95 degrees.

Product Specifications:

1	Max Loading Capacity	500Kg
2	Caster Size	4"
3	Caster Type	Swivel, Locking
4	Castor Loading Capacity	500Kgs
5	Prop Resting Angle	40-95Degrees
6	Towing Mechanism	Pintle Hook, Toe Bar
7	Support Frame Material	Mild Steel
8	Support Frame Type	Welded Box Structure
9	Surface Finishing	Epoxy Coated
10	Physical Dimensions	15' x 8' x 15'
10	Weight	100Kg

SKYBEES

HYDRAULIC JACK 5TON
HJSI-0001




User Friendly Design
HJSI is extremely quick, comfortable, and user-friendly.

Heavy-duty
Designed with mild steel tripod structure foreadded strength and sturdiness, ideal for harsh environment.

Portable
HJSI is highlycompact and can be sent to any location in emergency situations where full service facilities are not available. Heavy- duty swivel casters, make HJSI transport ready.

Maintenance
Local support and detailed technical manuals ensure quick, easy and reliable on sight maintenance procedures thus reducing down time.



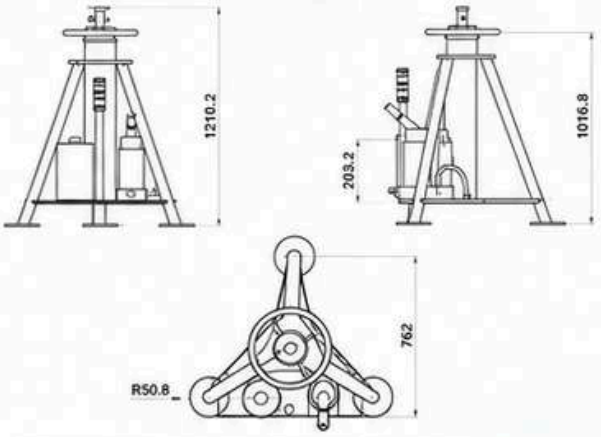

Features:

- Hand Pump with built-in pressure relief valve. Threaded rams with improved hand wheel style safety nut.
- Quick rising center extension. Easy access filler/breather cap.
- Heavy duty wheels on all jacks where spring loaded casters are not standard.
- Fast rising air pump only requires 100PSI pressure to lift maximum load capacity.
- Extremely quick, comfortable, and user-friendly. Extremely low maintenance.
- New compact design. Universally applicable for many aircraft types. Easily maneuverable due to optimized undercarriage.

Product Specifications:

1	Capacity	5 ton	
2	Hydraulic Fluid	MIL-PRF-5606	
3	Fluid Pressure	100 PSI	
4	Support Frame Material	Mild Steel	
5	Surface Finishing	Durable Powder Coat Blue, Epoxy Coated	
6	Single (S) or Multi (M) Stage	M	
7	Fully Extended Height	46 In	
8	Hydraulic Extension	22 In	
9	Mechanical Extension	7 In	
10	Cup Jack Pad	¾ in spherical radius	
11	Caster Type	Swivel, Locking	
12	Castor Loading Capacity	5ton	
13	Caster Size	4 In	
14	Weight	105 lb.	
15	Shipping Information	Pkg. Weight	160 Lbs. 34 In. X 32
		Pkg. Dimensions	In. X 25 In