SKYBEES

System scheme

01 Integrated Accusation System

02 Detection and early warning system

03 Interfere with countermeasure systems



Drone Command System

Introduction to the system

The whole system comprehensively uses a variety of technical means, including passive spectrum detection, radar detection, optical detection, radio interference, navigation deception, etc., to
realize the detection, positioning and tracking, and effective disposal of invading illegal UAV targets, and build a three-dimensional multi-tech

Drone Command System




Acoustic sounding



Photoelectric identification



Radar detection



Suppressed radio interference



Protocol Cracking & Takeover



Navigation signal spoofing



Microwave suppression



SKYBEES

UAVs jam interception equipment

Portable unmanned countermeasure equipment
is rigorously designed according to military standards. By jamming the data link of the unmanned system, cutting off communication and navigation signals between the unmanned system and the controller through the data link and navigation link, the unmanned system is forced to descend or be driven away to carry out control tasks and ensure the safety of low-altitude airspace.



- Multi-band interference
- Switch modes at will
- Multiple targets
- Ultra-long-range in terception
- Ultra-long standby
- Simple to operate

Transmission frequency

860 MHz~930 MHz、1550 MHz~1620 MHz
2400 MHz~2500MHz、5700 MHz~5850MHz

Effective distance

≧1500m (210:1)Yu2 Dry Pass ≧1000m Ratio 10:132.5：1)Yu3 Dry Pass Ratio 2.5:1

Continuous working hours

≧1 hour

Standby Time

≧10 hour

IP protection level

≧IP55

Interference response time

≥5

SKYBEES

Individual intelligent detection equipment

Aerial Vehicle (UAV) detection and positioning device, Wscan-DW, is a new type of UAV detection equipment developed mainly to address public safety hazards caused by unauthorized UAV flights. The main target user groups are the police, public security, and military. This device can analyze the communication link signals between the UAV and the remote controller to obtain various data information such as the UAV's unique serial number, model, location, altitude, speed, altitude above sea level, heading, takeoff point, return point, and pilot's position. It can also be combined with our company's platform software to plot the UAV's location, pilot's position, heading, and trajectory on a map, facilitating rapid positioning and tracking of UAVs and pilots.



- Blocklist and Allow list
- Identify all models
- Multiple targets
- Ultra-long-range in terception
- Ultra-long standby
- Simple to operate

Detection frequency

signal reception from 70 MHz to 6 GHz, with preset Suppokey rts detection frequencies 433MHz、900MHz、1.2GHz、1.4GHz、2.4GHz、5.1~5.9GHz

Detection distance

1.5~3km

Continuous working hours

4 hours

Positioning accuracy

≤5 meters

IP protection level

Ip65

SKYBEES

UAV detection direction finding device

The unmanned aerial vehicle (UAV) detection and orientation device
Wscan-Y is a new type of UAV detection equipment mainly developed for public safety hidden dangers caused by UAV black flights. Its main customer groups are public security and military departments. This device can analyze communication link signals between UAVs and remote controllers to obtain various data information such as the UAV's unique serial number, model, location, altitude, speed, altitude above sea level, heading, takeoff point, return point, pilot position, etc. It also has various radio surveillance functions such as wireless signal search, interception, signal recognition, spectrum analysis, and signal direction finding. It can conduct signal analysis, detection, and early warning for non-standard UAVs such as FPV and DIY drones. At the same time, it can also be combined with

Detection range	Detection range	Continuous working hours
Omnidirectional detection	5km~10km	70MHz~6GHz

Number of probes	Focus on scan bands	Ingress protection
≥50	≥10个	≥IP66



- Blocklist and AllowList
- Strong locking capability
- Long detection range
- High positioning ac curacy
- Strong scalability
- Output frequency ac curacy

SKYBEES

UAV detection direction finding device

The RID-type unmanned aerial vehicle (UAV) detection device is a general-purpose equipme nt designed according to the 'Safety Requirements for Civil Unmanned Aerial Vehicle Systems GB6748' standard. This device mainly obtains various data such as the unique serial number, model, locatio n, altitude, speed, elevation, heading, departure point, return point, and pilot position of UAVs by accurately decoding the broadcast information of UAVs. It can also plot trajectories on a map to facilitate the rapid positioning and tracking of UAVs and pilots. This device can serve as a basic facility to meet the needs of urban airspace grid management construction and provide escorting for the development of low-altitude economy.While meeting all the public document broadcasting methods and protocol types specified in national standards, it also supports multiple international standards such as US and European standards. It adopts solar power supply and wireless data transmission methods, fully meeting the needs of independent permanent low-altitude surveillance work areas without mains power supply and with wired network coverage. It is suitable for urban area-level low-altitude surveillance networks, government agencies, public security forces, airports, and important event protection scenarios. N

Detection range

Omnidirectional detection

Detection range

1~4km Differences may exist depending on the del.）electromagnetic environment and m

Detection frequency

2.4GHz、5.8GHz

Number of probes

≥70 (at the same time)

Positioning accuracy

≤1M

Detection height

0~1500M



- Passive detection
- Precise identification
- Multi-target monitoring
- High positioning accuracy
- Dual-band detection
- Flexible deployment

SKYBEES

UAVs jam interception equipment

The fixed-form unmanned aerial vehicle jamming interception device, Jam-EG, is a high-tech equipment designed strictly according to military standards for dealing with non-stateless aerial threats. The device cuts off communication and navigation signals between unmanned aerial vehicles or those attempting to cross the airspace and controllers through jamming of unattended aerial vehicles, as well as through data links, telematics links, or navigation links. This forces unmanned aerial vehicles to land automatically or be driven away. The device can integrate into the command control platforms of various overall units via network interfaces, achieving comprehensive, all-weather, long-range automatic defense capabilities against unmanned aerial vehicles.

Detection range

≧1500m (210:1)Yu2 Dry Pass Ratio ≧1500m (32：1)Yu3 Dry Pass ≧100 Ratio 0m Digital/Analog Cross-PlatformTransfer

Detection range

≤5s

Positioning accuracy

IP66

Detection frequency

900MHz（840 MHz~940 MHz），1.2GHZ (1080MHz~1360MHz)
1.6GHz（1550 MHz~1620 MHz），2.4GHz（2400 MHz~2500MHz)
5.8GHz（5700 MHz~5850MHz），5.1GHz (5100MHz~5400MHz)
5.4GHz（5400MHz~6000MHz)

Probe height

-40℃~70℃

Number of probes

50W



- All interfering models
- Strong scalability
- Status indicates fast
- Wide range of applications
- Interference frequency band width
- Full guidance mode

SKYBEES

UAVs jam interception equipment

The A-bu drone de tection and interference interception device is designed strictly according to military standards. It mainly has two fu nctions. The detection function can analyze the communication link signals between drones and remote controls, obtainin g various data such as the unique serial number, model, location, altitude, speed, altitude above sea level, heading, takeoff point, return point, and pilot position of the drone, and displaying them on the device's display screen. It can also be combined with our company's software to plot the unmanned aerial vehicle's position, pilot position, heading, and trajectory on a map, facilitating the rapid positioning and tracking of unmanned aerial vehicles and pilots. The jamming function operates through the data link of the jamming unmanned aerial vehicle, the map transmission link, and the navigation link, cutting off the communication and navigation signals between the unmanned aerial vehicle and the remote control, thereby forcing the unmanned aerial vehicle to automatically descend or be driven away,performing control tasks to ensure low-altitude airspace safety.



- Identify all models
- High positioning ac curacy
- Long detection rang e
- Strong locking capability
- Coverage signal width
- Switch modes at will

Detection Type

Passive detection

Detection frequency

70MHz-6GHz：433MHz、900MHz、1.2GHz、1.4GHz、2.4GHz、5.1~5.9GHz

Positioning accuracy

≤5

Detection range

1.5~3km

Transmission frequency

860 MHz~930 MHz、1550 MHz~1620 MHz
2400 MHz~2500MHz、5700 MHz~5850MHz

Effective range

≧1500m (10:1) 、≧1000m 2.5：1)

SKYBEES

Fixed navigation deceives devices

The fixed navigation deception device Jam-SCAR is developed specifically to deal with various security threats posed by 'black flying' drones. It infiltrates the navigation system of 'black flying' drones by radiating low-power regenerated navigation satellite signals, the reby intercepting and controlling drones that require satellite navigation for flight cont rol. This prevents them from entering protected areas and ensures low-altitude safety in t hose areas. By regenerating satellite navigation signals at at least four frequencies, it deceives the receiving satellite navigation coordinate information of drones using satelli te navigation positioning, achieving tactical functions such as no-fly zone projection, ac tive defense, directed expulsion, and fixed-point deception.

Operating frequency band	Signal transmit power	Number of decoy drones
1573.8~1576.1MHz、1559.6~1562.3MHz、1599.7~1600.5MHz	≤15W	≥ 50 batches

Deception distance	Interference response time	Radius of error
5km(30km) Not less than 5 km (customizable to 30 km)	≤2	≤50m



- Coverage of l models
- Strong user scalability
- Fast response time
- Multiple ng modes
- Multiple output frequency bands
- Adjustable dynamic rang

SKYBEES

Pull box drone detection and countermeasure equipment

The suitcase-style unm anned aerial vehicle (UAV) anti-countermeasure device is a new type of UAV anti-countermeasure deve loped mainly for security hidden threats caused by unmanned aerial vehicle black flights. The main customer groups are public security and military departments. The device mainly consists of an UAV positioning module and an UAV interference interception module. The UAV positioning module can obtain various data information such as the unique serial number, model, position, altitude, speed, elevation, heading, takeoff point, return point, pilot's position of the UAV by analyzing the communication link signals between the UAV and the remote controller. Combined with our company's platform software, it can plot the UAV position, pilot's position, heading, and trajectory on a map for quick positioning and tracking.

Detection frequency bands

70MHz~6GHz 2400-2500MHz、5100-5950MHz
Support 70MHz~6GHz signal reception, focusing on

Detection distance

≥3km（Depending on the aircraft type and the electro magnetic environment, it can detect up t

Interfering emission frequency

900MHz（840 MHz~940 MHz）
1.6GHz（1550 MHz~1620 MHz）
2.4GHz（2400 MHz~2500MHz）
5.8GHz（5720 MHz~5850MHz）

Interference distance

≧1000m (210:1)

Number of probes

≥50

Interception response time

≤5S




- Flyer positioning
- UAV positioning
- Unique serial number
- Blocklist and Allow List
- Trajectory tracking
- Communication networking

SKYBEES

UAV jamming interceptor shield

The unmanned aerial vehicle interference jammer is a specialized device designed strictly
according to military standards, specifically for dealing with unauthorized unmanned aerial vehicle threats. It mainly has two functions. The detection function can analyze the communication link signals between the unmanned aerial vehicle and the remote control to obtain various data such as the unique serial number, model, location, altitude, speed, bearing, heading, takeoff point, return point, and pilot position of the unmanned aerial vehicle. This information is displayed on the display screen carried by the device. Additionally, it can be combined with our company's software to plot the unmanned aerial vehicle's position, pilot position, heading, and trajectory on a map.This facilitates the rapid positioning and tracking of drones and pilots. The jamming function operates through data links between manned aircraft, satellite communication links, and navigation links. It cuts off communication and navigation signals between manned aircraft and remote controllers, forcing drones to land automatically or be driven away to perform control tasks and ensure the safety of low-altitude airspace.Blocklist and

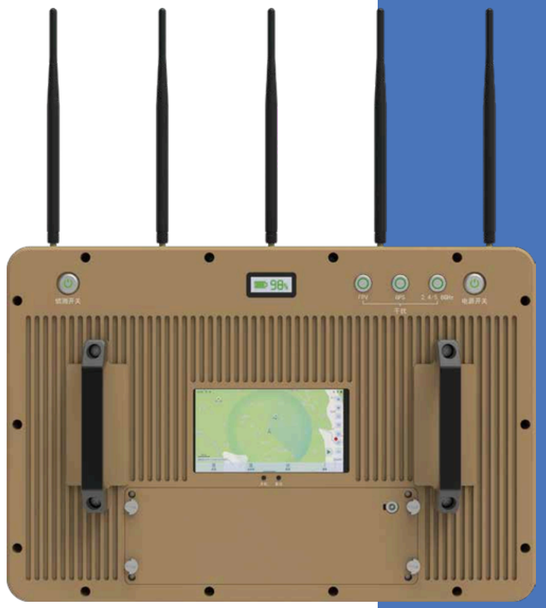

- Blocklist an d AllowList
- RID Monitoring
- Long detectio n range
- High positioning accuracy
- Strong locking ability
- All interfering models

Regulated frequency bands

860 MHz~930 MHz,1080MHz~1360MHz
1550 MHz~1620 MHz,2400 MHz~2500MHz
5700 MHz~5850MHz,5100MHz~6000MHz
(70MHz~6GHz)(The
frequency band supports expansion and

Device control distance

≧1500m (210:1),
≧1000m（32.5：1)
≧1000m

Effective distance

70MHz-6GHz Suppo rts signal reception from 70 MHz to 6 GHz, with preset key detection frequencies：433MHz、900MHz、1.2GH

Continuous working hours

1.5km~3km Differences may exist depending on the electromagnetic environment and model.)


Standby time

≤20W

SKYBEES

Fixed jamming interception equipment

The fixed-type unmanned aerial
vehicle (UAV) jamming and interception device Jam-GE is a high-tech equipment rigorously designed according to military standards, specifically for dealing with the threat of illegal drones. This device operates by jamming the data link, video transmission link, or navigation link of drones and cross-country aircraft, cutting off communication and navigation signals between the drone or cross-country aircraft and the remote control, thereby forcing the drone to land automatically or drive it away. The device can be integrated into the command and control platforms of various overall units through network interfaces and receive direction guidance from radio detection or radar equipment, thereby achieving precise interception of drones.

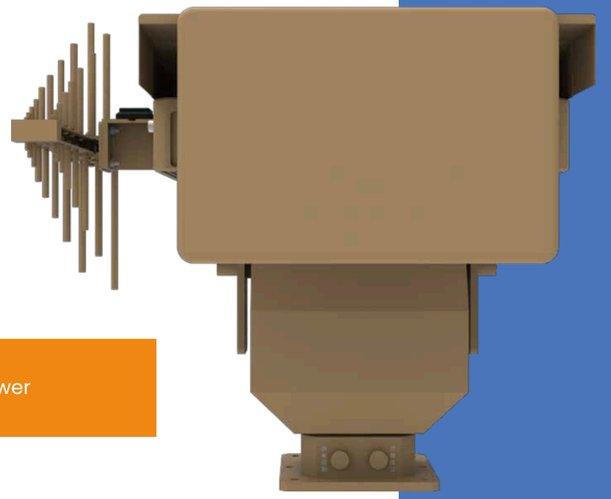

- All interfering models
- Strong scalability
- Interference direction accuracy
- Status indicates fast
- Interference distance is far
- Full guidance mode

Device control distance

≧5000m (210:1)
≧5000m（34：1)
≧3000m

Interference mode

Oriented gimbal

Interference power

50W

Regulated frequency bands

290 MHz~1600 MHz,1550 MHz~1640 MHz
2400 MHz~2500MHz,5700 MHz~5850MHz
5100MHz~5400MHz,5400MHz~6000MHz

Operating temperature

-40℃~70℃

Interference response time

≤5s

SKYBEES

UAV detection positioning equipment

The unmanned aerial vehicle (UAV)
detection and positioning system is a new type of UAV detection equipment developed mainly for public safety hidden dangers caused by UAV black flights. The main target user groups include special police, public security, and military personnel. This equipment can obtain various data information such as the unique serial number, model, location, altitude, speed, elevation, heading, takeoff point, return point, and pilot's position of the UAV by analyzing the communication link signals between the UAV and the remote control. By connecting with our company's platform software, the UAV's position, pilot's position, heading, and trajectory can be plotted on a map for quick positioning and tracking of UAVs and pilots.



- UAV surveillance
- UAV positioning
- Blocklist and AllowList
- Status indicates fast
- Trajectory tracking
- Communication networking

Detection range

3~5kmDifferences may exist de pending on the electromagnetic ironment and model. env

Detection frequency

70MHz~6GHz

Detection range

Omni-directional detection

Probe height

0~1500m

Positioning accuracy

≤0.5°

Number of probes

≥50

SKYBEES

Knapsack drone detection and countermeasure equipment

The manned-unmanned integrated detection and countermeasure equipment is a new type of unmanned detection and countermeasure device mainly developed for security threats caused by unmanned aerial vehicles (UAVs), targeting mainly public security and military personnel. The equipment consists of three parts: the unmanned detection positioning module, the unmanned interference interception module, and the unmanned navigation decoy module. The unmanned detection positioning module can analyze communication link signals between the UAV and the remote controller to obtain various data information such as the UAV's unique serial number, model, position, altitude, speed, elevation, heading, departure point, return point, pilot position, and more.Combined with our company's platform software, the location of drones, pilots, flight direction, and trajectories can be plotted on a map for quick positioning and tracking of unmanned aerial vehicles (UAVs) and pilots. At the same time, a drone disturbance block can be activated to cut off communication links between UAVs or cross-planes and remote controllers, rendering UAV pilots unable to control their UAVs. The drone navigation spoofing block can also be combined with UAV guidance to implement tactical functions such as forced landing, directed expulsion, and targeted deception in no-fly zones.

Detection frequency bands

Supports signal reception from 70 MHz to 6 GHz, with preset key detection frequencies 900MHz、1.2GHz、2.4GHz、5.2GHz、5.8GHz

Interfering emission frequency

860 MHz~930 MHz，1080MHz~1360MHz
1550 MHz~1620 MHz，2400 MHz~2500MHz
5700 MHz~5850MHz，5100MHz~6000MHz

Frequency of deception

1573.8~1576.1MHz、1559.6~1562.3MHz
1599.7~1600.5MHz

Detection distance

≥5 Differences may exist depending on theelectromagnetic environment andmodel.

Interference distance

≧1000m (210:1) (Yu2 Dry Pass Ratio 10:1)
≧1000m（32.5：1) (Yu3 Dry Pass Ratio 2.5:1)
≧1000m Digital/Analog Cross-PlatformTransfer Machines)

Deception distance

≥3000m Tongshi Environment



- Flyer positioning
- UAV positi oning
- Trajectorytracking
- surveillance
- Flexible deployment
- Compound Strike

SKYBEES

Fixed navigation tricks interfering devices

Unmanned aerial vehicle navigation spoofing equipment is a standardized product that meets the requirements of the 'Electric Power System Safety Anti-terrorism Prevention Regulations' and the 'Petroleum and Petrochemical System Safety Anti-terrorism Prevention Regulations'. By transmitting low-power retransmitted satellite signals into the 'black aircraft' unmanned aerial vehicle navigation system, it intercepts and controls drones that require satellite navigation systems for flight control, preventing them from entering protected areas and ensuring low-altitude safety in those areas. The product is rigorously designed and produced according to the standards for civilian wireless radio products. In [year], the product was inspected by the National Wireless Radio Testing Center and obtained the corresponding test report.

Operating frequency band

GPS:1575.42+1.023MHz
GLONASS:1602.0MHz+Nx562.5kHz+511kHz
(N-7~6)

Active defense distance

500 1000 500

Total power consumption

≤21W

Multi-target eviction function


≥ 10

Signal transmit power

≤10mW

Continuous working hours

24h

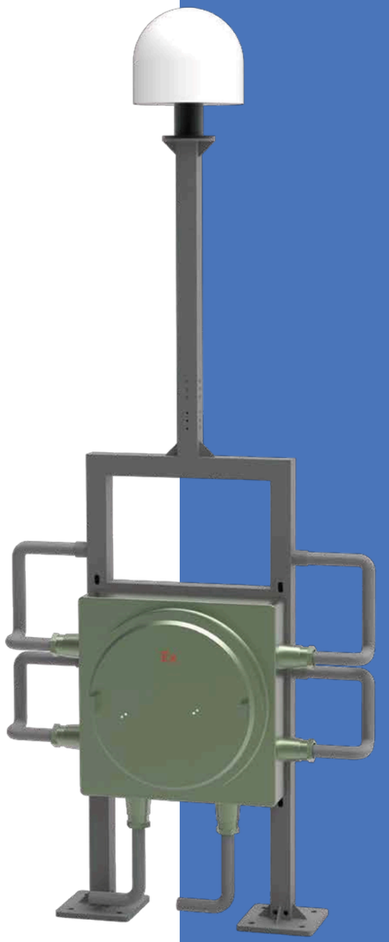

- Explosion-pro of isolation is good
- Multiple working modes
- Wide range of ap plications
- Fast response time
- Adjustable dynamic range
- Strong nterference ability anti-i

SKYBEES

Drone navigation decoy device

Unmanned aerial vehicle navigation spoofing equipment is a standardized product that meets the Electric Power System Safety Anti-terrorism Protection Requirements' and the Petroleum and Petrochemical System Safety Anti-terrorism Protection Requirements'. By transmitting low-power retransmitted satellite signals, it intrudes into the black flight' unmanned aerial vehicle navigation system, thereby achieving interception control of drones that require satellite navigation systems for flight control, preventing them from flying into protected areas and ensuringlow-altitude safety in those areas. The product is rigorously designed and produced according to civilian radio frequency products. In [year], it was inspected by the National Radio Frequency Testing Center and obtained the corresponding test report, and in [year], it obtained the first batch of model approval codes from the Ministry of Industry and Information Technology for this type of product.

Operating frequency band

GPS:1575.42+1.023MHz
GLONASS:1602.0MHz+Nx562.5kHz+511kHz
(N-7~6)

Active defense distance

500 1000 500

Total power consumption

≤19W

Multi-target eviction function

≥ 10

Signal transmit power

≤10mW

Continuous working hours

24h



- Flexible yment deplo
- Multiple working modes
- Wide range of applications
- Fast response time
- Adjustable dynamic range
- Strong nterference ability anti-i

SKYBEES

UAV detection radar

Drone d monitoring of 'low, slow, and small' targets. It adopts C+Ku dual-band composite detection technology, with a false alarm rate of less than 0.2% in complex urban environments. The system is equipped with an AI intelligent decision-making center that analyzes trajectory behavior in real-time through a built-in library of more than 100 drone spectrum feature sets. It automatically identifies attack modes such as 'serpentine maneuvers' and 'approaching spirals' and triggers graded alarms; its extreme environmental adaptability is particularly outstanding, capable of operating stably in environments ranging from -40°C to 50°C. It has an IP65 protection level against sandstorms and rain, and its detection accuracy remains above 90% even in strong winds of level 6. As a multi-source tactical coordination hub, the radar can synchronize target coordinates with laser interceptors or electromagnetic jamming equipment within 0.2 seconds, achieving " closed loop interception.

Detection range

≥5km@（RCS=0.01m²）
≥4km@（RCS=0.01m²）
≥3.5km@（RCS=0.01m²）

Distance error

≤10m

Azimuth error

≤0.3°

Device weight

≤50kg



- Ultra-long-r nge precise detection
- Intelligent nti-interference recognitiona
- combat capability All-domain
- Multi-objeve collaborative pursuit
- Integrated etection and response
- Low-power, rapid deployment

SKYBEES

UAV optoelectronic tracking equipment

Unmanned aerial vehicle optoelectronic tracking devices are cutting-edge equipment designed to address the 'low, slow, and small' targets in complex electromagnetic environments. They integrate infrared thermal imaging (8×8@100μm) with ultra-high-definition visible light (K/second) dual-spectrum detection technology, enabling precise tracking day and night all weather conditions. The system can effectively identify targets up to 6 kilometers away, clearly capturing 0.3 square meters of micro-targets under harsh conditions such as strong light, backlighting, smog, and dust. The thermal sensitivity (NETD) is ≤3 mK, capable of identifying subtle features suchas a temperature difference of 0.6°C between the motor of an unmanned aerial vehicle;Its AI intelligent discrimination engine compares the features of UAVs in real time through convolutionalneuralnetworks,distinguishing model aircraft, birds, and unmanned armed vehicles (accuracy > 99.6%) within seconds, and simultaneously generates a three-dimensional trajectory prediction model. The device integrates a laser scanning integrated block with positioning accuracy reaching 0.6 milliradians, providing millimeter-level coordinate guidance for countermeasures; it has a protection level IP6K, can operate continuously stably in extreme cold environments from -40°C to +40°C, and withstands wind vibration disturbances of grade six.

HD Image resolution

(visible light) 1920*1080 (Hot) 640*512

Target detection range

(daytime) ≥5KM (nighttime) ≥2KM

Target tracking distance

(daytime) ≥4.5KM
(nighttime) ≥1.5KM

Target recognition distance

(daytime) ≥4KM
(nighttime) ≥1.2KM



- Dual-spectrum fusion detection
- AI intelligent anti-counterfeiting
- Millimeter-level positioning guidance
- extreme environmental adaptability
- Multi-source data fusion
- Concealed countermeasures



SKYBEES



Compatible Vehicles



Pickup Truck



Iveco Van



Tank



Warrior Military Vehicle



SUV



Warrior Assault Vehicle

Optional module

Mainly used in non-fixed area sites for engineering systems, it can flexibly defend against targets. It enables precise detection and identification, tracking, and surveillance of threats without human intervention, providing favorable support for subsequent tactical decision-making. After tracking and locking in, it interferes with targets through electronic countermeasures to ensure low-altitude airspace safety

Radar detection range	Radio detection range	photoelectric detection range	Number of decoy drones
5Km	7Km	3Km	≤50m

Suppress interference frequency	Suppress interference range	Navigation spoofing range	Distance error
300Mhz-6Ghz	5Km	5Km	≤10m

SKYBEES

Unmanned aerial vehicle defense system



Platform introduction

The UAV low-altitude defense system adopts a C/S structure design, supporting multi-level monitoring at the central, provincial, municipal, district/county, and site levels; it can load multiple types of high-resolution maps and support offline or online map switching; it has functions such as multi-target intrusion alarm, precise target positioning, displaying target movement trajectories, and pilot positions; it supports servos control for wireless jamming devices, achieving precise strikes and decoys; it supports different user permission management, and statistics are generated based on event types, unmanned aerial vehicle categories, intrusion counts, monthly reports, etc.

Typical configuration

