skkmigas PERTAMINA EP	**PERTAMINA EP REGIONAL 1 ZONA 4**	POG

UPS SYSTEM SIZING CALCULATION	No. Dok. : TMBP-SP001-EL-SPE-D102 Rev. : A Halaman : 1 dari 11

NAMA PEMILIK PROYEK : **PT PERTAMINA EP**

NAMA PROYEK : **JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR**

LOKASI : **SP TANJUNG MIRING BARAT & KARANGAN TIMUR - FIELD LIMAU**

NO. KONTRAK : **4710002197**

REV.	TGL.	DESKRIPSI	DISIAPKAN	DIPERIKSA	DISETUJUI	DIPERIKSA	DISETUJUI
A	14/01/2026	Issued For Review	FN	AS	MR		
			PT. PROSYMPAC OIL & GAS			PT. PERTAMINA EP	

TABEL REVISI

Rev.	Tanggal	Deskripsi

COMMENT RESPONSE SHEET

No.	Page	Company's Comment	Contractor's Response	Remarks

DAFTAR ISI

TABEL REVISI 2
COMMENT RESPONSE SHEET 3
DAFTAR ISI 4
DAFTAR GAMBAR 5
DAFTAR TABEL 6
1. *GENERAL* 7
1.1 Latar Belakang 7
1.2 Tujuan 8
1.3 Ruang Lingkup 9
1.4 Istilah 9
2. KODE, STANDAR, DAN REFERENSI 9
3. DAFTAR SINGKATAN 10

DAFTAR GAMBAR

Gambar 1. Lokasi Rencana SP Tanjung Miring Barat – Karangan Timur 7
Gambar 2. Rencana Pola Operasi Fase..... 8
Gambar 3. Rencana Pola Operasi Fase..... 8

DAFTAR TABEL

Tabel 1.1. Daftar Istilah 9
Tabel 2.1. Kode, Standar dan Referensi 9
Tabel 2.2. Dokumen Proyek 10
Tabel 3.1. Daftar Singkatan 10

1. *GENERAL*

1.1 Latar Belakang

Struktur Tanjung Miring Barat (TMB) terletak di Kabupaten Muara Enim dan Kota Prabumulih, sekitar 20 kilometer di sebelah tenggara Kota Prabumulih, dengan luas daerah sekitar 8 km². Struktur Karangan (KRG) terletak di Kabupaten Muara Enim dan Kota Prabumulih, sekitar 15 kilometer di sebelah selatan Kota Prabumulih, dengan luas daerah sekitar 45 km².

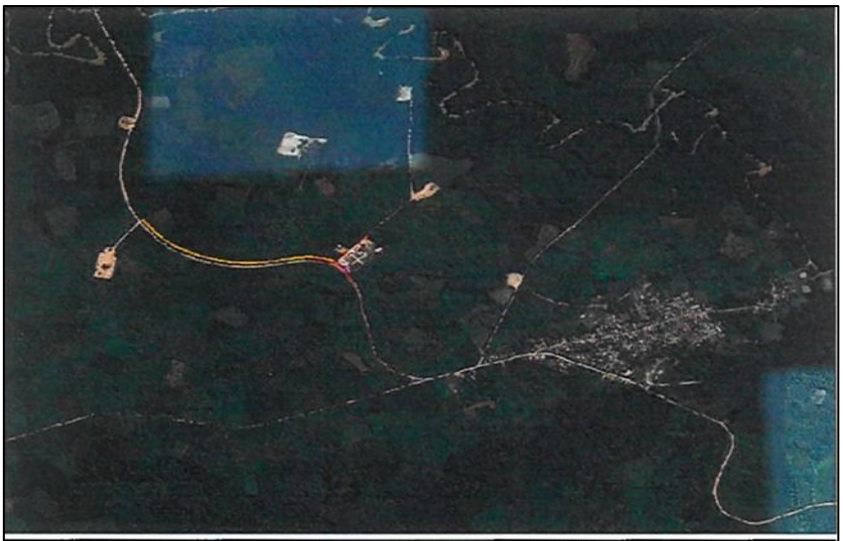

ID	Easting (Meter)	Northing (Meter)	Elevation (Meter)	Feature Code
PN-1531	424962,745	96 7376,210	10,414	
PM-8593	425000,093	907528.777	19,046	

Gambar 1. Lokasi Rencana SP Tanjung Miring Barat – Karangan Timur

Lapangan Tanjung Miring Barat telah diproduksi sejak tahun 1938 dan terus beroperasi hingga tahun 2003 dengan produksi terakhir dari sumur TMB-11. Sejak dinonaktifkannya lapangan ini, fasilitas produksi yang terdiri dari flowline, stasiun pengumpul, serta jalur pengiriman pipa minyak ke custody transfer (PPP Prabumulih) sudah tidak layak operasi. Apabila akan dilakukan pengembangan lapangan, diperlukan pembangunan fasilitas produksi baru yang dapat menampung produksi hidrokarbon dari lapangan Tanjung Miring Baral serta memprosesnya agar sesuai dengan spesifikasi yang dipersyaratkan di titik serah. Saat ini status SP TMB adalah idle atau tidak beroperasi, sehingga produksi sumuran menggunakan Tank On-Site (TOS) dan dikirim secara gross ke SP-II TMT menggunakan trucking. Dikarenakan tidak adanya line gas ke sumur-sumur struktur TMB, supply Listrik untuk pumping unit menggunakan solar (diesel engine). Lapangan Karangan Timur hanya diproduksikan dari 2 sumur yaitu KRG-9 dan KRG-10 beroperasi mulai tahun 1984, dimana kondisi eksisting jalur pengiriman minyak dari sumur menggunakan trucking. Apabila akan dilakukan pengembangan lapangan, diperlukan pembangunan fasilitas produksi baru yang dapat menampung produksi hidrokarbon dari lapangan Tanjung Miring Barat serta memprosesnya agar sesuai dengan spesifikasi yang dipersyaratkan di titik serah.

Dalam rencana jangka panjang sebagai upaya peningkatan produksi, PT Pertamina EP berencana akan mengembangkan Lapangan Tanjung Miring Barat dan Karangan Timur melalui

pengembangan fasilitas produksi dimana rencana kerja pengembangan fasilitas akan dibagi ke dalam dua fase.

Pada fase pertama, produksi dari pengembangan awal TMB -KRG Timur akan dikirimkan menuju fasilitas sewa Early Production Facility (EPF) untuk selanjutnya dikirimkan menuju SP- 1 TLJ melalui trunkline baru. Pada fase ini lingkup fasilitas produksi yang akan dibangun adalah flow/ine dari sumuran, sewa EPF dan trunkline dari EPF sampai dengan SP-1 TLJ.

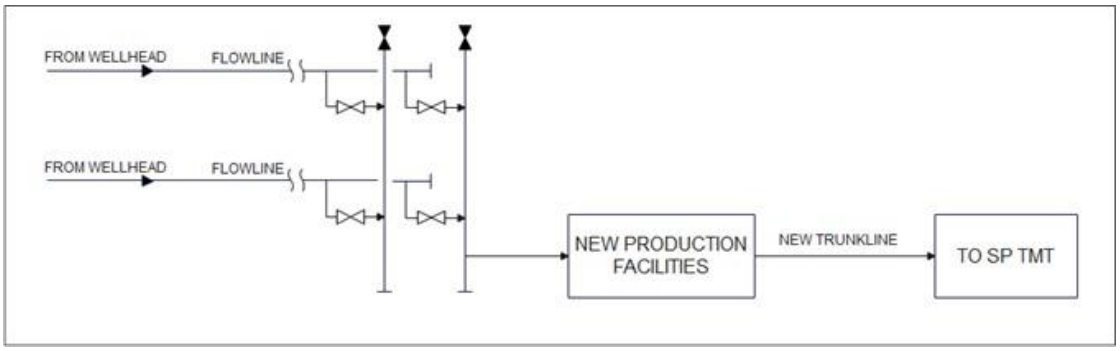

Gambar 2. Rencana Pola Operasi Fase

Pada fase kedua, akan dilakukan pengembangan tambahan dari sumur-sumur TMB-KRG Timur. Pada fase ini, lingkup fasilitas produksi yang akan dibangun meliputi pembangunan flowline dari sumuran pengembangan lanjutan serta peningkatan fasilitas SP TMB untuk menggantikan sewa EPF.

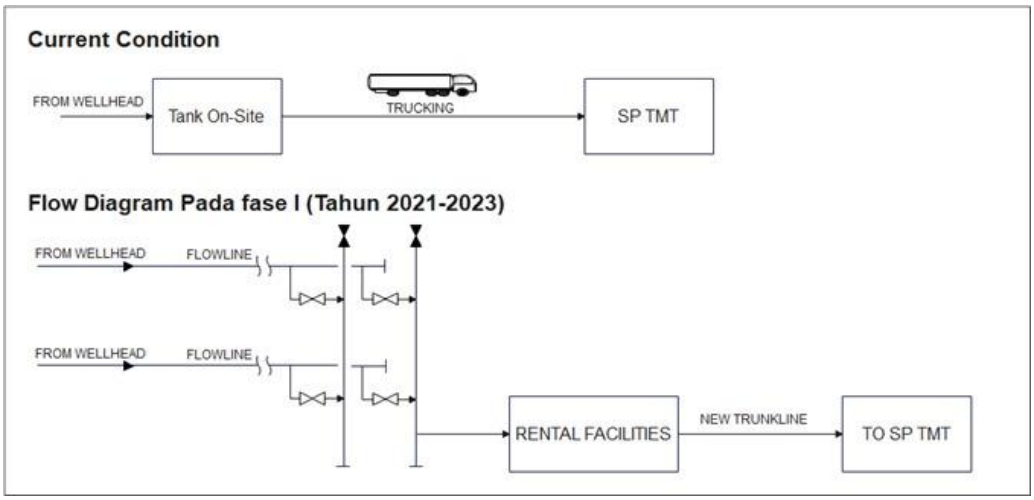

Gambar 3. Rencana Pola Operasi Fase

1.2 Tujuan

Dokumen ini bertujuan untuk memberikan informasi terkait Key Personil (Personil inti) lengkap dengan Jabatan dan Nama Personil mulai dari Project Manager sampai dengan level Engineer

1.3 Ruang Lingkup

Ruang lingkup pada dokumen ini meliputi lokasi Tie in, lokasi pondasi equpment, lokasi terminasi elektikal dan akses ke lokasi fasilitas compresor.

1.4 Istilah

Dokumen ini berisi istilah-istilah yang memiliki definisi tercantum sebagai berikut:

Tabel 1.1. Daftar Istilah

Perusahaan	Perusahaan yang dimaksud adalah PT PERTAMINA HULU ROKAN selaku Pemilik dan Pengguna Fasilitas akhir.
Kontraktor	Pihak yang dipilih oleh PERUSAHAAN sebagai pelaksana pekerjaan pengadaan dan konstruksi yang akan bertanggung jawab kepada PERUSAHAAN.
Vendor	Pihak lain yang akan menyediakan sesuatu untuk kebutuhan proyek, selain yang disediakan oleh PERUSAHAAN dan KONTRAKTOR, disebut VENDOR. Tanggung jawabnya langsung kepada KONTRAKTOR baik terhadap PO maupun bentuk perjanjian lain antara VENDOR dan KONTRAKTOR.
SKK MIGAS	Suatu badan dari Pemerintah Indonesia yang bertanggung jawab terhadap proses persetujuan dan izin untuk semua fasilitas di lingkungan minyak dan gas.
Perencana	Pihak yang dipilih oleh PERUSAHAAN sebagai pelaksana pekerjaan Jasa DED Engineering Services. Dalam hal ini disebut PERENCANA, yang akan bertanggung jawab kepada PERUSAHAAN sebagaimana dirinci dalam kontrak, scope of work, atau work order.
Inspektor	Perwakilan dari PERUSAHAAN dan/atau seseorang yang ditunjuk oleh PERUSAHAAN, yang bertanggung jawab sebagai INSPEKTOR atas pekerjaan yang dilakukan oleh KONTRAKTOR.SINGKATAN

2. KODE, STANDAR, DAN REFERENSI

Tabel 2.1. Kode, Standar dan Referensi

IEC 60529	Classification of Degrees of Protection Provided by Enclosures
IEC 60950	Safety of Information Technology Equipment
IEC 62040-1-1	General and Safety Requirements for UPS Used in Operator Access Area
IEC 60896	Stationary Lead Acid Battery
IEC 62040	Uninterruptible Power System (UPS)
IEEE 446	IEEE Recommended Practice for Emergency and Standby Power Systems for Industrial and Commercial Applications

IEEE 450	IEEE Recommended Practice for Maintenance, Testing and Replacement of Vented Lead Acid Batteries for Stationary Applications
IEEE 485	IEEE Recommended Practice for Sizing Lead Acid Batteries for Stationary Applications
IEEE 944	Recommended Practice for the Application and Testing UPS
IEEE 946	Recommended Practice for the Design of DC Auxiliary Power Systems for Generating Stations.
IEEE 1184	IEEE Guide for Batteries for Uninterruptible Power Supply Systems
NFPA 70	National Electrical Code

DOKUMEN PROYEK

Tabel 2.2. Dokumen Proyek

No	No Dokumen	Nama Dokumen
1	TMBP-01-EL-DBS-101	Electrical Design Criteria
2	TMBP-SP001-EL-SPE-D105	Specification For Ups System
3	TMBP-SP001-EL-SPE-D103	Specification For Electrical Installation & Testing

3. DAFTAR SINGKATAN

Beberapa singkatan yang paling umum digunakan tercantum dalam daftar berikut:

Tabel 3.1. Daftar Singkatan

Singkatan	Keterangan
AC	*Alternating Current*
W	*Watt*
DC	*Direct Current*
DED	*Detail Engineering Design*
VA	*Volt-Ampere*
Ah	*Ampere per hours*
Cs	*Load Current*
PCS	*Process Control System*
FGS	*Fire Gas System*
ESD	*Emergency Shutdown System*
UPS	*Uninterruptible Power Supply*

LAMPIRAN
UPS SYSTEM SIZING CALCULATION

DED PENGEMBANGAN FASILITAS PRODUKSI
TANJUNG MIRING BARAT & KARANGAN TIMUR

UPS SYSEM SIZING CALCULATION

DOC NO : TMBP-SP001-EL-CAL-D102
DATE : 14/01/2026
REV : A

No.	Tag No.	Description	Service	Qty.	Unit Load [Watt]	Utilisation Factor	Power Supply Consumption [Watt] [AxBxC] Duration in Minutes			Load Status	Remarks
				A	B	C	0-1.0	1.0-120	120-180		
		UPS AC									
A.	**Instrument Load**										
1	TMBP-PCS-001	Process Control System (PCS)	C	1	1130	1	1130	1130		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
2	TMBP-ESS-002	Emergency Shutdown System (ESD) / Fire Gas System (FGS)	C	1	1130	1	1130	1130		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
3	TMBP-CCTV-003	CCTV System	C	1	1130	1	1130	1130	1130	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
4	TMBP-NVR-004	Network Video Recorder	C	3	300	1	900	900	900	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
5	TMBP-PABX-005	Private Automatic Branch Exchange	C	1	150	1	150	150		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
6	TMBP-PAGA-006	Public Address & General Alarm	C	1	200	1	200	200		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
7	TMBP-FACP-007	Fire Alarm Control Panel	C	1	300	1	300	300	300	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
8	TMBP-SHN-001	Server / Historian / Network Panel	C	1	500	1	500	500		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
9	TMBP-AUX-001	Auxiliary Console	C	1	300	1	300	300		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
10	TMBP-EWS-001	Engineering Work Station (PC)	C	1	600	1	600	600		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
11	TMBP-OWS-001	PCS Operator Work Station (PC)	C	3	600	1	1800	1800		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
12	TMBP-OWS-002	ESD/FGS Operator Work Station (PC)	C	1	600	1	600	600		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
13	TMBP-OWS-003	Wall mounted Display Operator work stations	C	2	300	1	600	600		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
14	TMBP-PRT-001	Color Printer	I	1	20	0.5	10	10		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
15	TMBP-PRT-002	Dot Matrik Printer	I	1	50	0.5	25	25		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
16	TMBP-PC-CCTV-001	PC for CCTV Workstation	C	1	700	1	700	700	700	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
		PC for CCTV Security	C	1	700	1	700	700	700	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
		CCTV Monitor 24"	C	1	300	1	300	300	300	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
17	TMBP-PTZ-C-001	PTZ Controller	C	1	50	1	50	50	50	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
18	TMBP-LCP-008	IRP Panel	C	1	500	1	500	500		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
19	TMBP-LCP-009	Distribution Panel	C	1	500	1	500	500		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
20	TMBP-FT-002	Ultrasonic Flow meter	C	1	20	1	20	20		L1	Refer to doc. TMBP-SP001-IN-CAL-D103
21	TMBP-PTZ-001	PTZ Camera (1,26)	C	1	60	1	60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
22	TMBP-PTZ-002	PTZ Camera	C	1	60	1	60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
23	TMBP-PTZ-003	PTZ Camera	C	1	60	1	60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
24	TMBP-PTZ-004	PTZ Camera	C	1	60	1	60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
25	TMBP-PTZ-010	PTZ Camera	C	1	60	1	60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
26	TMB-FIX-005	Fix Camera	C	1	60		60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
27	TMB-FIX-006	Fix Camera	C	1	60	1	60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
28	TMB-FIX-007	Fix Camera	C	1	60	1	60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
29	TMB-FIX-008	Fix Camera	C	1	60	1	60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
30	TMB-FIX-009	Fix Camera	C	1	60	1	60	60	60	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
31	TLP 101~106	Telephone	C	6	45	1	27	27	27	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
32	PABX-101	Telephone system	C	1	45	1	45	45	45	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
33	JT-BS-001	Radio Base Station	C	1	20	1	20	20	20	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
34	SPK-001~2	Speaker Indoor	C	5	15	1	75	75	75	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
35	SPK-003~6	Speaker Outdoor	C	3	8	1	32	32	32	L1	Refer to doc. TMBP-SP001-IN-CAL-D103
		Sub Total Instrument Load (Watt)					**12944**	**12944**	**4879**		
B.	**Electrical Load**										
6	VSD-P-004A/B	VSD for Feed Water Pump A/B	C	1	200	1				L2	
7	VSD-P-005A	VSD for Water Injection Pump A	C	1	200	1				L2	
8	VSD-P-005B	VSD for Water Injection Pump B	C	1	200	1				L2	
9	VSD-P-001A	Soft Starter for Gross Transfer Pump A	C	1	200	1				L2	
10	VSD-P-001B	Soft Starter for Gross Transfer Pump B	C	1	200	1				L2	
6	TMBP-LCP-001	Local Control Panel for Air Compressor	C	1	200	1	200	200		L2	
7	TMBP-LCP-003	Local Control Panel for Gas Engine Generator - 001	C	1	200	1	200	200		L2	
9	TMBP-LCP-004	Local Control Panel for Gas Engine Generator - 002	C	1	200	1	200	200		L2	
10	TMBP-LCP-005	Local Control Panel for Diesel Engine Generator - 001	C	1	200	1	200			L2	
11	TMBP-LCP-008	Local Control Panel for Air Dryer package	C	1	200	1	200	200		L2	
		Sub Total Electrical Load (Watt)					**3000**	**1400**	**0**		
		TOTAL FOR AC UPS LOADS (Watt)					**15627**	**14027**	**4562**		
		20 % MARGIN FOR FUTURE LOADS (Watt)					**3125**	**2805**	**912**		
		TOTAL FOR AC UPS LOADS WITH MARGIN FOR FUTURE LOADS 20 % (Watt)					**18752**	**16832**	**5474**		
		TOTAL FOR AC UPS LOADS WITH MARGIN FOR FUTURE LOADS 20 % (in kVA)					**23.441**	**kVA at 0.8 PF**			

Note 1. During Detail Engineering, EPC contractor shall verify and recalculate based on actual data.
2. Load status: L1 = FEED Data, L2 = Estimated Data, L3 = Prelimenary Vendor Data, L4 = Final Data
3. For instrument loads, refer to doc. no. TMBP-SP001-IN-CAL-D103

UPS SYSEM SIZING CALCULATION

A. 230V AC UPS SIZING

Loads at	0-1.0 min	=	15944	W	(As per AC UPS Load List)
	1.0-120 min	=	14344	W	(As per AC UPS Load List)
	120-180 min	=	4879	W	(As per AC UPS Load List)

A.1 INVERTER SIZING

UPS Power Factor, PF		=	0.80		(Reference doc:TMBP-SP001-EL-SPE-D101)
Design Load		=	18752	W	
Min. UPS output from calculation		=	23441	VA	
Inverter Capacity Output		=	26943.10	VA	(Consider eff. Inverter 87%)
Selected Inverter Capacity		=	**30.00**	**kVA**	
Nominal output voltage		=	230	VAC	(Reference doc:TMBP-SP001-EL-SPE-D101)
UPS Configuration	% Cap	=	2 x 100 %		(Number x Capacity)

A.2 BATTERY SIZING

Efficiency, with isolation transformer		=	87%		(Assumed, Vendor Data As attached)
Inverter efficiency, eff		=	87%		(Assumed, Vendor Data As attached)
Backup Time		=	180.0	minutes	(Reference doc:TMBP-SP001-EL-SPE-D101, TMBP-SP001-EL-DBS-D101)
Battery Nominal Voltage		=	220	VDC	
Inverter Input Variation Voltage ((Max)(Min))		=	(+10%)(-10%)		
Maximum allowable Voltage, Vmax		=	242	VDC	
Minimum allowable voltage, V_{min}		=	198	VDC	
Allowable cable voltage drop, Vd (1%)		=	2.2	VDC	(Reference doc:TMBP-SP001-EL-SPE-D101)
Floating charge voltage		=	2.25	VDC	
Temp. derating factor, K_c		=	1		(Substation ambient temperature 25°C as per datasheet)
Design margin, K		=	1.2		
Ageing factor, K_a		=	1.1		(Reference doc:TMBP-SP001-EL-SPE-D101)

No of Cells Required

End of Discharge Voltage	N_{oc}	=	$(V_{Bmax}x)/V_{rch}$			V_{edv}	=	$(V_{Bmin})/N_{oc}$	
		=	(242)/2.25				=	(198)/ 107,6	
		=	**107.6**	**cells**			=	**1.84**	
	Use	=	**108**	**Cells**		Use	=	**1.85**	**Volt/Cells**

Load Profile

Current (DC Ampere)	=	(W Load) / (Vb_{min} x INV_{eff})			
Input DC amps into inverter (0.-1.0 min)	=	(15944)/ 198 x 0,87	=	92.56	A DC
Input DC amps into inverter (1,0-120 min)	=	(14344)/ 198 x 0,87	=	83.27	A DC
Input DC amps into inverter (120-180 min)	=	(4879)/ 198 x 0,87	=	28.32	A DC

Duty Cycle Diagram

Period	Duration			Total Load		Load Capacity per Battery Bank 2 x 50%		
	Minutes Interval	Minutes (M)	Hours	Watt	Ampere	Watt	Ampere	Capacity Removed Ah
1	0.0 - 1.0	1	0.02	15944	92.56	7972	46.28	0.77
2	1.0 - 120	119	1.98	14344	83.27	7172	41.63	82.56
3	120 - 180	60	1.00	4879	28.32	2440	14.16	14.16
Total Duration	180			Total Ah Capacity Removed				97.50



Battery Sizing (as per IEEE 485)

Total Ah Capacity is removed	=	94.75	Ah
The next largest cell sized proposed	=	100	Ah

(Based on vendor reference - FIAM Monoliste SLA)

$$K_T = K_{T2} - \frac{(K_{T2} - K_{T1})\ x\ (t_2 - t)}{(t_2 - t_1)}$$

(1)		(2)	(3)	(4)	(5)	(6)	(7)	(8)
Discharge Time or Time to End of Section t		Time T1	Time T2	Ampere for Time T1	Ampere for Time T2	Factor Kt1 for Time T1 125Ah	Factor Kt2 for Time T2 125Ah	Factor Kt for Time T
	Minutes	Minutes	Minutes	Ampere	Ampere			
M1	1	1	-	242	-	0.27	-	0.27
M2	119	90	120	41.6	33.5	1.201	1.493	1.48
M1+M2	120	120	-	33.5	-	1.493	-	1.49
M3	60	120	180	33.5	24.6	1.493	2.033	0.95
M2+M3	179	120	180	33.5	24.6	1.493	2.033	2.02
M1+M2+M3	180	180	-	24.6	-	2.033	-	2.03

*) Data in coloumn (2), (3), (4), and (5) are taken from Battery VENDOR Reference FIAMM Monolite SLA with End of Discharge Voltage 1.85 V/Cell.

Battery Sizing Worksheet

Period	Load (Amperes)			Changes in Load (Amperes)			Duration of Period (Minutes)			End of Section (Minutes)			Kt Factor	Required Section Size (A x Kt) = Rated Ah
Section1														
1	A1 =		45.36	A1 - 0 =		45.36	M1 =		1.00	t = M1		1.00	0.27	12.25
													Total Section 1	12.25
Section2														
1	A1 =		45.36	A1 - 0 =		45.36	M1 =		1.00	t = M1+M2		120.00	1.49	67.72
2	A2 =		40.71	A2 - A1=		-4.64	M2 =		119.00	t = M2		119.00	1.48	-6.89
													Total Section 2	60.83
Section3														
1	A1 =		45.36	A1 - 0 =		45.36	M1 =		1.00	t = M1+M2+M3		180.00	2.03	92.21
2	A2 =		40.71	A2 - A1=		-4.64	M2 =		119.00	t = M2+M3		179.00	2.02	-9.40
3	A3 =		13.24	A3 - A2=		-27.47	M2 =		60.00	t = M3		60.00	0.95	-26.18
													Total Section 3	56.63

Battery Sizing Capacity

The highest Ah Required Section Size of All Total Section: Cu = 60.83 Ah

$$C_u = \mathrm{Max}_{s=1}^{s=n} \sum_{p=1}^{p=s} [A_p - A_{p-1}] K_T$$

Temp. derating factor, K_o	=	**1**	
Design margin, K	=	**1.2**	
Ageing factor, K_a	=	**1.1**	
Total Ah capacity	=	Cu x K x K_a x K_o	
Total Ah capacity	=	**80.30**	
Total Ah capacity selected	=	**100.00**	**Ah**

Selected Based on Vendor ref (FIAMM 6 SLA 100)

Oleh karena itu dipilih "**FIAMM 6 SLA 100**" karena Ah capacity mendekati 80.64 Ah

Battery Rack Sizing

No of cells :	108	cells	

Cell dimension and weight

Length :	271	mm		No of Tier :	4
Width :	173	mm		No of Step :	3
Height :	202	mm		No of Battery per tier :	27
Weight :	21	kg		No of Battery per step :	9

Battery bank dimensions and weight (per bank)

Length :	**2550**	mm	
Width :	**650**	mm	
Height :	**1300**	mm	
Weight :	**2268**	kg	**(excluding rack weight)**

A.3 CHARGER SIZING

Load Current (Cs)	=	45.36	A	
Battery charging current	=	100.0%	of battery capacity in charging time 10 hours	
	=	0.2 x Cs	(Cs : Capacity in charging time 10 hours considering battery inefficiency factor of 1.1)	
	=	9.98	A	
Rectifier output current size required	=	Total Load Current + Battery charging current		
	=	55.34	**A**	
Selected Rectifier Rating	=	**100**	**A**	
Isolation transformer for Rectifier Incoming	=	(Charger size x Max voltage) / (Charger eff x Charger pf)		
	=	18.20	**kVA**	(Assumed, charger efficiency 92% and charger Power Factor 0,8)
Selected Capacity	=	**30**	**kVA**	
Isolation transformer Bypass Stabilizer	=	30.00	**kVA**	
Selected Capacity	=	**30.0**	**kVA**	