

SenNet IoT PC NB-IoT

Pulse Counter / Contador de pulsos

General description

SenNet PC NB IoT is a wireless probe designed to count pulses from two inputs and transmit the recorded data periodically. It uses NB-IoT Cat NB2 Rel-14 worldwide technology, with low-power management, as the communication module for connecting to the SenNet Energy BI platform.


Wiring

The device can be powered either by a battery or by an external power supply. Two hardware versions of the product are available, depending on the required power supply type.

Reference	Power supply type	Certification	Antenna type
PC NB IoT bat ++	3.6v@15400mAh battery (only supported with external antenna)	ATEX * Section 10.5 of EN 60079-11:2012	External (IP 60)** / Internal (433MHz@2.15dBi) (IP65)
PC NB IoT ac	External power supply 100-265Vac	-	External (IP 60)** / Internal (433MHz@2.15dBi) (IP65)

* For the ER26500H-2 Li-SOCL2 battery model.

** The use of self-amalgamating tape is recommended to insulate and seal the antenna connection to the device.

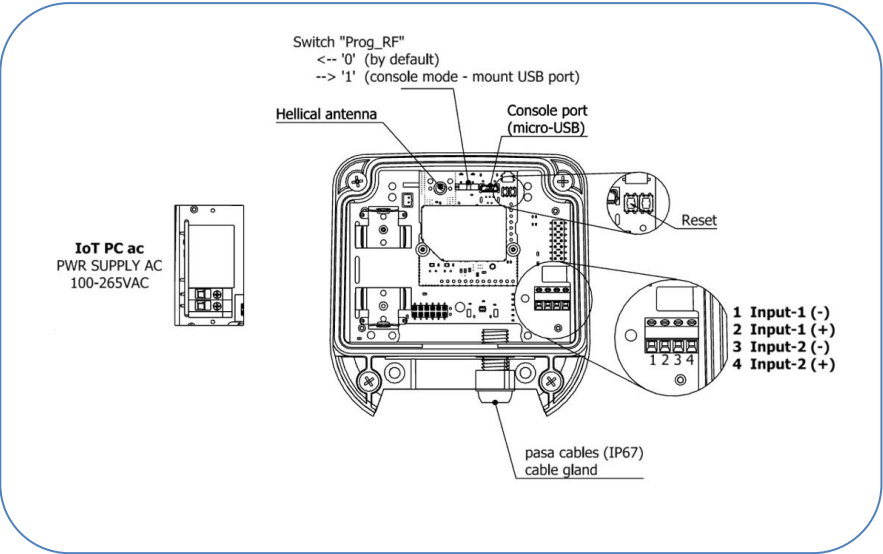

x2 Low-frequency pulse inputs, potential free contact or transistor output


The pulse inputs support Reed-switch pulse emitters and transistorized outputs. For transistorized outputs, the correct polarity must be observed. The use of mechanical relay outputs or push-buttons is not recommended, as contact bounce may cause pulse counting errors.

Tipo de entrada Pulsos	
Max. Pulse frequency	10Hz
Type	Reed switch/ transistorized
Extra consumption for each pulse	40uA *

*In industrial environments, a higher current draw per pulse is recommended to prevent false readings. Please consult the manufacturer regarding configuration for this type of environment.

ENCLOSURE

Environmental characteristics	
Operating temperature	-20°C...+60°C
Storage temperature	-20°C...+75°C
Housing	
Dimensions	119 x 111 x 53 mm
Ingress protection rating	IP60 (external antenna) IP65 (Internal antenna)
Mounting	Wall mounting DIN-rail mounting using an accessory
Material	Self-extinguishing ABS – V0
Standards	
	EN300-683
	EN300-220-1

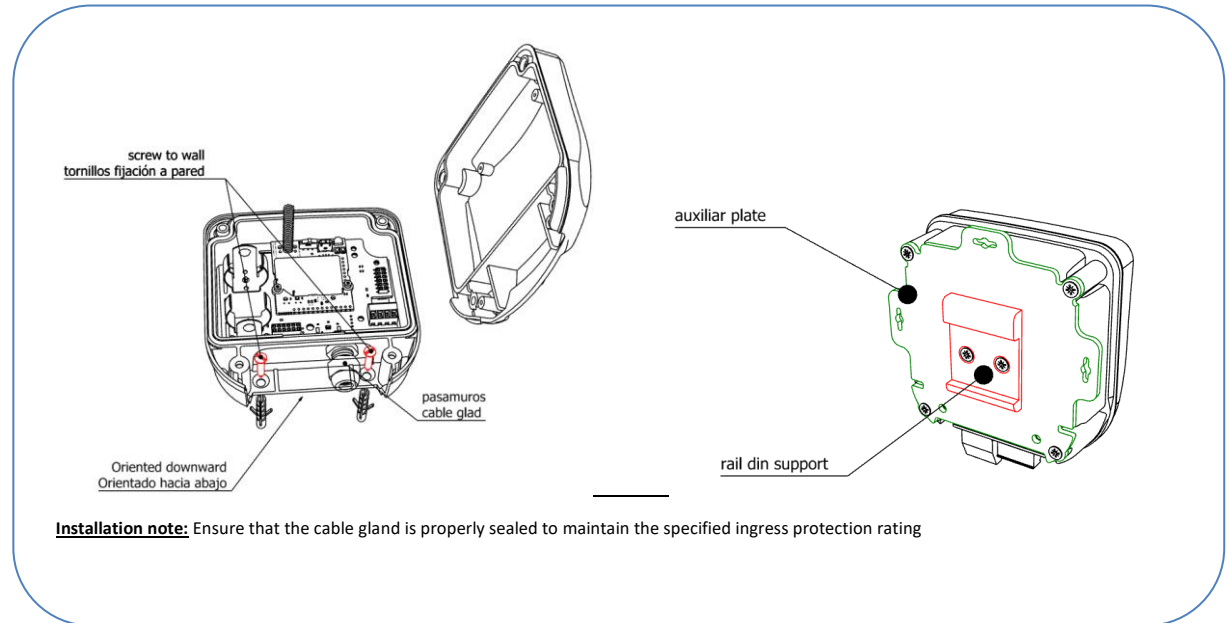

WARRANTY

Satel Spain warrants its products against manufacturing defects for a period of one year.



No returned material will be accepted, nor will any equipment be repaired, unless it is accompanied by an RMA report stating the observed defect or the reason for return.

The warranty shall become void if the equipment has been subjected to misuse or if the storage, installation, or maintenance instructions contained in this manual have not been followed. "Misuse" is defined as any operating or storage condition that is contrary to the applicable National Electrical Code or that exceeds the limits specified in this manual.

Satel Spain accepts no liability for any damage to the equipment or to any other part of the installation. Nor shall it be liable for any penalties arising from equipment failure, improper installation, or misuse of the equipment.

Accordingly, the warranty shall not apply to failures caused by:

- Overvoltages and/or electrical disturbances in the power supply.
- Water ingress where the product does not have the appropriate IP rating.
- Exposure of the equipment to extreme temperatures exceeding the specified operating or storage temperature limits.
- Modification of the product by the customer without prior notice to Satel Spain.
-

To account for any possible errors or omissions in this technical datasheet, please ensure that you are using the latest available version.