tinyPLC A0 / PRINT COUPON AND ASSEMBLY STACK

ENGINEERING DRAFT - mm - scale 1:1 at actual-size A4 printing - NOT A PCB FABRICATION RELEASE

50 x 24 x 5 test coupon

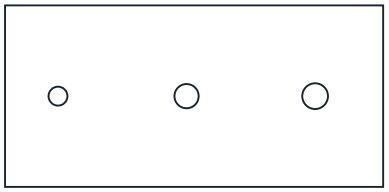

2.5 pilot 3.2 3.4

Tap pilot and try actual screws before the full print.

Measure hole size, elephant foot, layer bonding and flatness.

PRINT ORIENTATION

base-print.stl: floor down, open side up

lid-print.stl: outside face down, lip up

display-blank-print.stl: flat

fit-coupon-print.stl: flat

Import STL units as mm; do not rescale.

0.4 nozzle / 0.2 layer is a starting proposal.

Check bridges/supports in the slicer first.

Material and settings are not physically qualified.

STACK / assembled Z coordinates:

0.0 outside base bottom

2.4 inside floor

8.0 PCB underside

9.6 PCB component side

23.4 terminal top (nominal envelope)

28.2 underside of lid locating lip

30.0 lid underside / tower top

32.4 lid outside face

34.4 blank outside face

Screw heads may project further.

Check the scale bar. Print at 100%; disable fit-to-page. Native FreeCAD and parameters govern geometry.

100 mm