



ETISALAT NOTES

1. Contractor has to approach Etisalat Utility Services office before the commencement of work to confirm the necessary and latest telecom requirements and obtain the approval of the FTTH material
2. The contractor has to install, test and commission latest telecom accessories before applying for Etisalat Completion Certificate
3. All FTTH materials and accessories must be purchased from approved brands and to be installed according to manufacturer's specification
4. As per Etisalat and TRA guideline, maintenance of telecom network within the plot limit is the sole responsibility of building owner and contracto
5. If the project already identified as Mega/ Al Taawun project, contractor has to approach Etisalat Mega project Department to confirm the necessary requirement before the commencement of telecom work.
6. All fiber cable in the main telephone room are to be arranged and dressed in floor wise and to be labeled with 'plastic or metal number tags'. (Flat#, Shop#, Office#).
7. Detailed information on Structure Identification Plate is to be collected from Etisalat Utility Service section at least 3 months before completion
8. Building contractor should furnish FTTH (Fiber to home) and SCS (Structured Cabling System) within the plot / buildings as per the approved drawing and latest TRA requirements, such as: Entry Ducts (Lead-in): are to be laid at 60 cm below road level and to be provided with 6mm diameter nylon rope inside Entry box (JRC/normal manhole): JRC (size & Construction details as per Etisalat standard)/ normal manhole (to be reinforced concrete structure, minimum size should be 60X60X90, with a heavy duty cover of rating grade 'A' and "Telephone" mark graved on it. Fiber Distribution Hub (FDH) at main telephone room: Either patch free FDH or as advised by Etisalat at building completion stage. It should be equipped with FO Patch panel for feeder cable, Optical splitters and FO Patch panels for multicore/drop fiber. Labeling: Proper labeling should be done as per Etisalat standard and copy of Block Wiring Schedule to be placed on cabinet door. Multicore riser cable with 30% spare fiber to be laid from main telephone room to mini ODF location with an extra loop of 3Meter and must be terminated at both ends using SC/APC connector. Risers to each tenant: Install minimum (4) core, Single mode Fiber cable, ITU standard G 652 (Low smoke zero halogen type) from each tenant continuously up to mini ODF or FDH in FTR or MTR room with an extra loop of 3M at both ends. ONT boxes: Minimum sizes (residential: 60x60x15cm and commercial: 60x60x30cm) or as specified in the drawing. It should be equipped with twin 13A power sockets, RJ45 patch panel, CAT-6 cables, CAT-6 Patch cords and Micro ODF (rosette). It is to be positioned in a secure and easy accessible location at a height of 40 to 120cm above FFL. CAT-6 (4pair - 8core) unshielded twisted pair (UTP/STP) cables to be provided in star topology, individually and continuously from each twin RJ45 socket up to the ONT box, with an extra length of 0.5metre at the sockets and 2 meter at the ONT box. Twin RJ45 sockets with CAT-6 cable termination are to be installed for all telephone/data/E-vision outlets, proper labeling as per Etisalat requirement to be done on both sockets and patch panel
9. Main telephone room, contractor should coordinate with Etisalat for the final position of lead-in ducts (Entry pipes), Power sockets, isolators, earth bar, Lights, AC ducts/units and other Equipment of Etisalat
10. Cable trays, channels (trunking), ladder for telephone cables and wires are to be provided and installed as per Etisalat & TRA specifications
11. All Telephone rooms, joint boxes, manholes and ducts are for the sole use of Etisalat and do not pass or run any other services inside them
12. Provide separate Earthing to telephone rooms and the resistance should be less than One Ohm
13. As and until it is not specified in drawing, all the internal conduits are to be 25mm diamete
14. GSM: Contractor must coordinate and submit the relevant documents to mobile Access-Planning Section at least 6 months before closing the false ceiling.
15. "TEL" is to be written visibly on the compound wall/tiles where the lead-in ducts laid out to the road.
16. Building contractor should link the lead-in ducts with Etisalat plant under Etisalat supervision.
17. Interlocking: Contractor must coordinate with Etisalat Utility Service Section at least three months before starting any interlocking work.
18. Refer and follow revised manual at www.tra.gov.ae/resources for latest telecom specifications and requirements.

LEGEND	
SYMBOL	DESCRIPTION
	RJ45 TWIN POINT TELEPHONE SOCKET
	TELEVISION POINT
	TELEPHONE POOLING BOX 300X30x15 & 15x15x15
	TELEVISION PLANT 300X30x15 & 15x15x15
	60x60X15 Optical Network Termination Cabinet

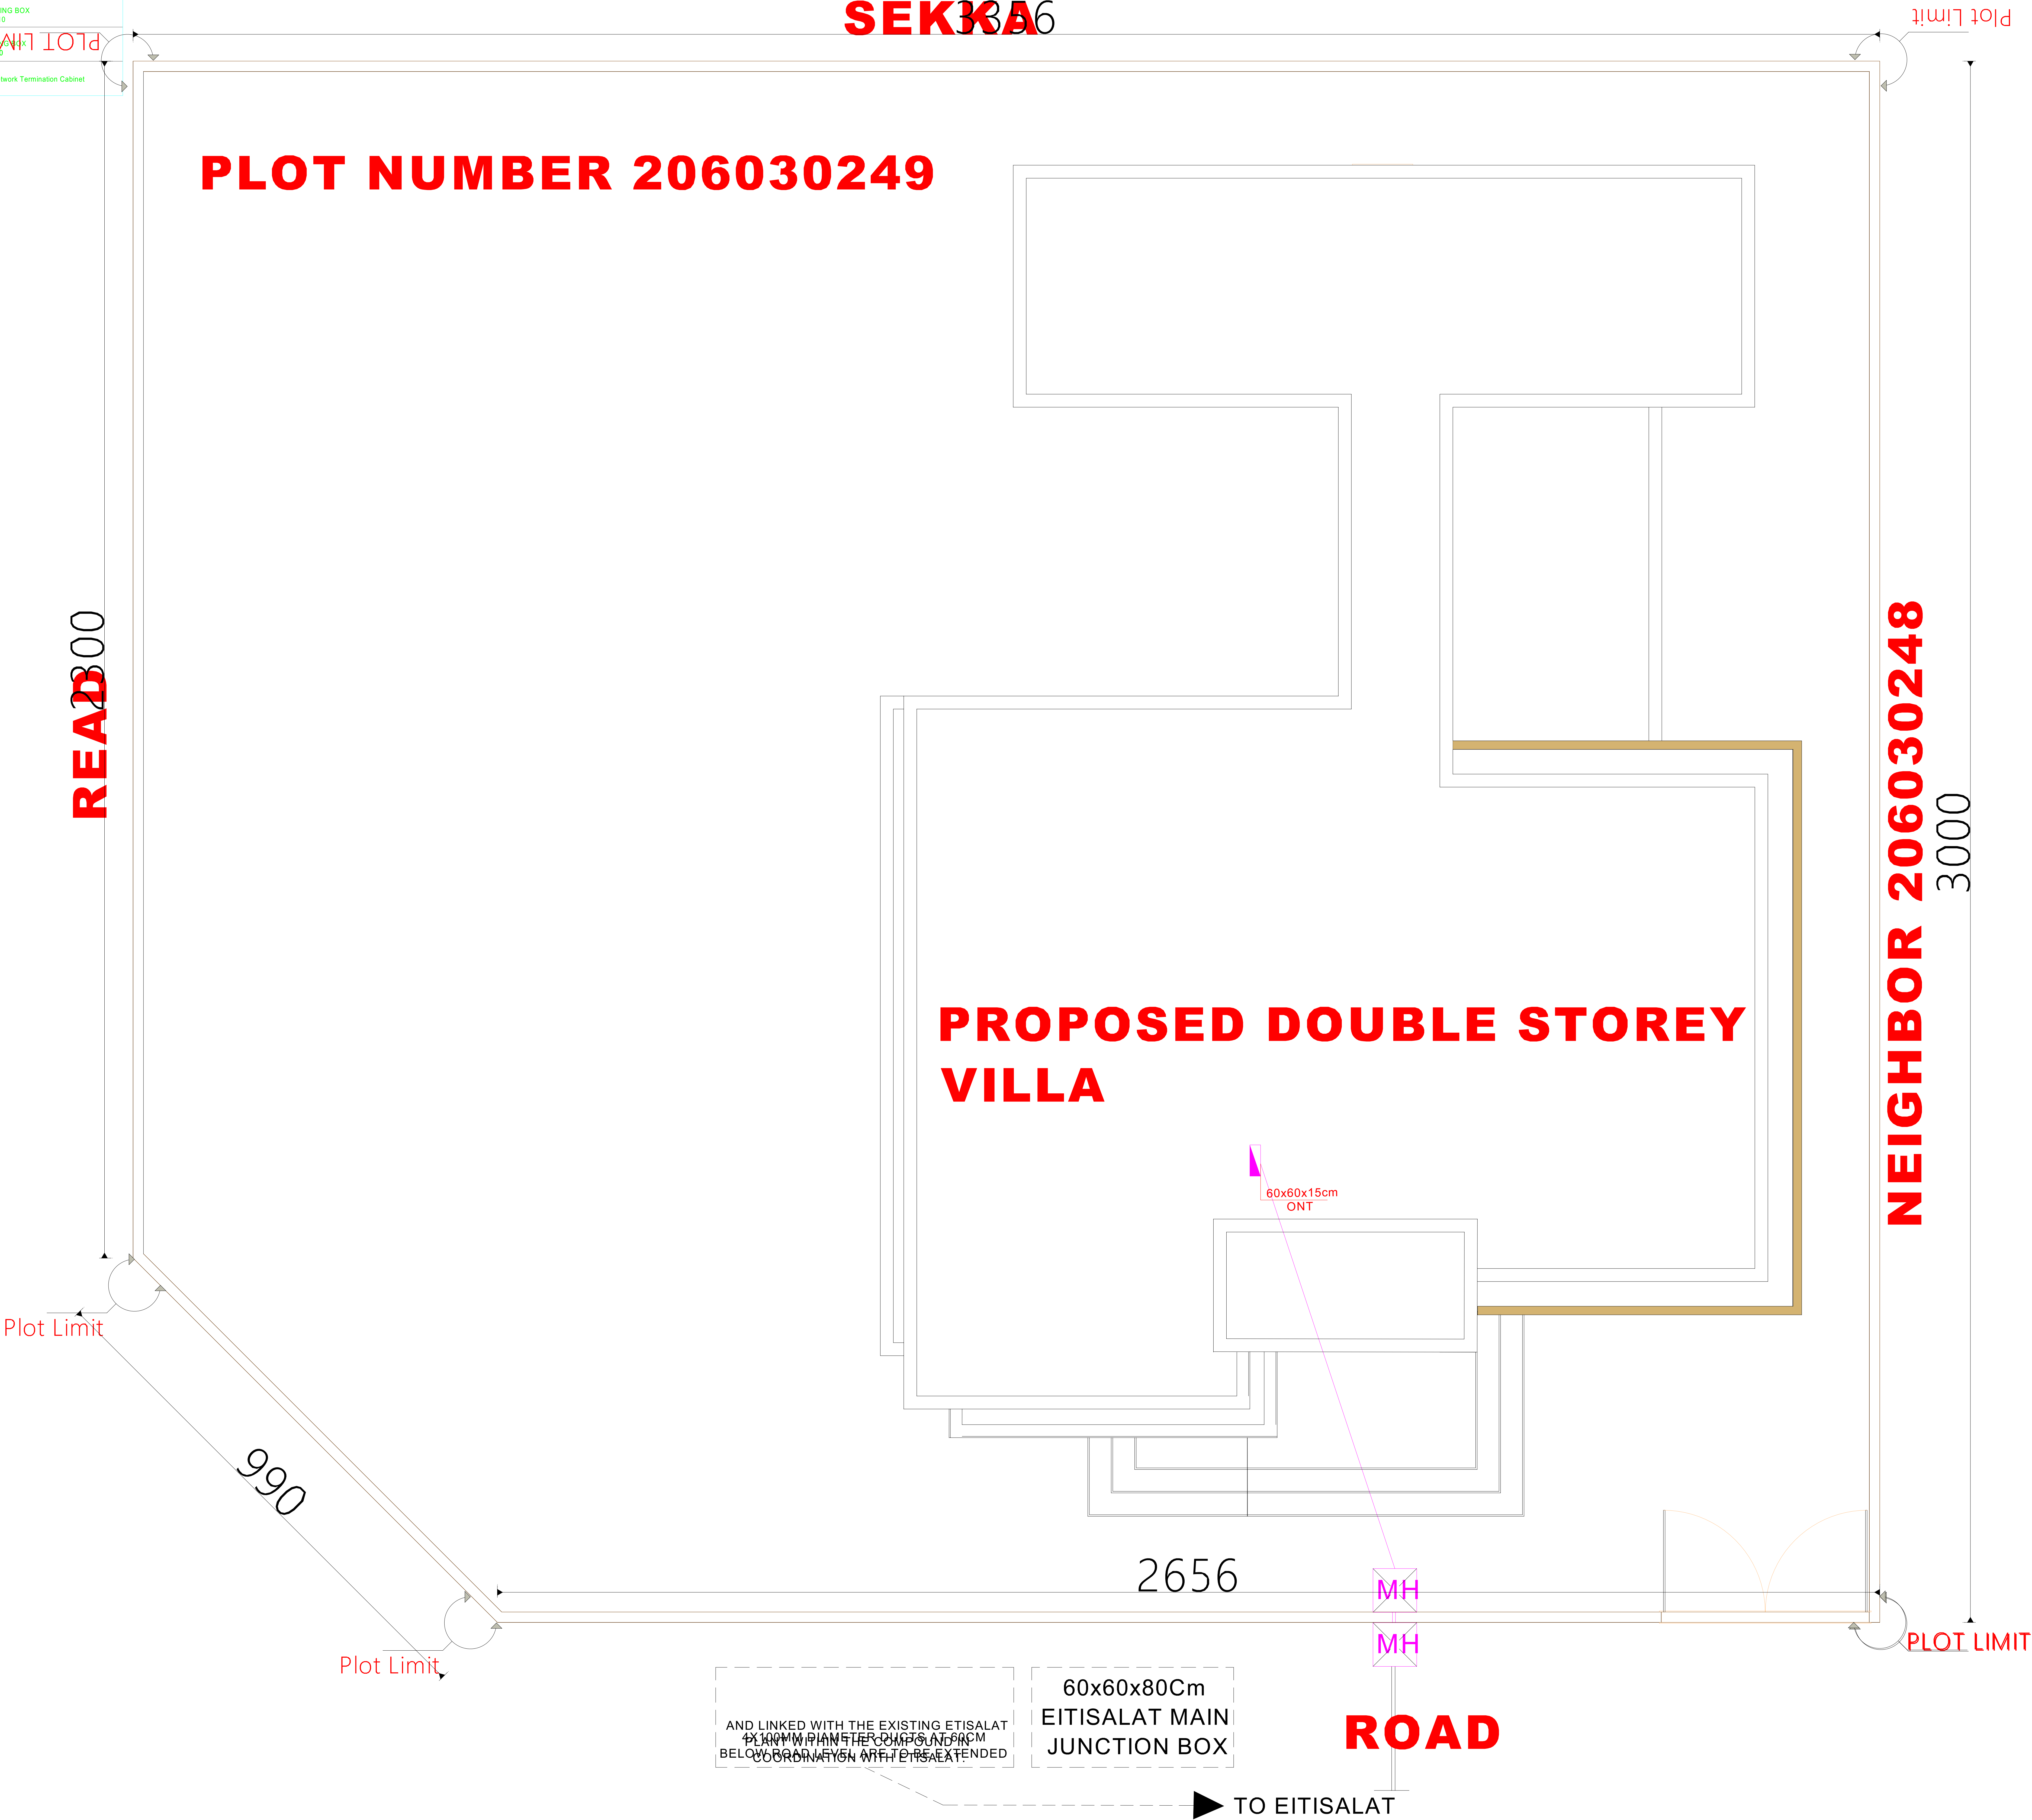

SITE SETTING PLAN


اتصالات
etisalat

Approved On
اعتمد في

19 January 2026

Building Permit #:
PRMT-26-0000880

Approved by:


Savana
Engineering Consultancy & Interior Design

Client	MAYED MEERZA BASHEER MOHAMMED		
Project	DOUBLE STORY VILAA +ROOF		
Drg.Title	Site Development Layout Plan		
Area	AWAFI	Floortype	
Case ID.	3136005	Draw. Type.	ETIS
Sec No.	2	Com. No.	
Block No.		Plot No.	406132098
Bldg. No.	BLD-26-00570	Floor No.	
Date	JAN2026	Sht. No.	E01
Scale	1/100	Job No.	
G.Manager	Architect	Drawn by	
ENG AYMEN	ENG IMEN	ENG IMEN	

ETISALAT NOTES

1. Contractor has to approach Etsalat Utility Services office before the commencement of work to confirm the necessary and latest telecom requirements and obtain the approval of the FTTH material
2. The contractor has to install, test and commission latest telecom accessories before applying for Etsalat Completion Certificate
3. All FTTH materials and accessories must be purchased from approved brands and to be installed according to manufacturer's specification
4. As per Etsalat and TRA guideline, maintenance of telecom network within the plot limit is the sole responsibility of building owner and contractor
5. If the project already identified as Mega/ Al Taawun project, contractor has to approach Etsalat Mega project Department to confirm the necessary requirement before the commencement of telecom work.
6. All fiber cable in the main telephone room are to be arranged and dressed in floor wise and to be labeled with 'plastic or metal number tags'. (Flat#, Shop#, Office#).
7. Detailed information on Structure Identification Plate is to be collected from Etsalat Utility Service section at least 3 months before completion
8. Building contractor should furnish FTTH (Fiber to home) and SCS (Structured Cabling System) within the plot / buildings as per the approved drawing and latest TRA requirements, such as:
 - Entry Ducts (Lead-in): are to be laid at 60 cm below road level and to be provided with 6mm diameter nylon rope inside
 - Entry box (JRC/normal manhole): JRC (size & Construction details as per Etsalat standard)/ normal manhole (to be reinforced concrete structure, minimum size should be 60X60X90, with a heavy duty cover of rating grade 'A' and "Telephone" mark graved on it)
 - Fiber Distribution Hub (FDH) at main telephone room: Either patch free FDH or as advised by Etsalat at building completion stage. It should be equipped with FO Patch panel for feeder cable, Optical splitters and FO Patch panels for multicore/drop fiber.Labeling: Proper labeling should be done as per Etsalat standard and copy of Block Wiring Schedule to be placed on cabinet door. Multicore riser cable with 30% spare fiber to be laid from main telephone room to mini ODF location with an extra loop of 3Meter and must be terminated at both ends using SC/APC connector. Risers to each tenant: Install minimum (4) core, Single mode Fiber cable, ITU standard G 652 (Low smoke zero halogen type) from each tenant continuously up to mini ODF or FDH in FTR or MTR room with an extra loop of 3M at both ends. ONT boxes: Minimum sizes (residential): 60x60x15cm and commercial: (60x60x30cm) or as specified in the drawing. It should be equipped with twin 13A power sockets, RJ45 patch panel, CAT-6 cables, CAT-6 Patch cords and Micro ODF (rosette). It is to be positioned in a secure and easy accessible location at a height of 40 to 120cm above FFL. CAT-6 (4pair - 8core) unshielded twisted pair (UTP/STP) cables to be provided in star topology, individually and continuously from each twin RJ45 socket up to the ONT box, with an extra length of 0.5metre at the sockets and 2 meter at the ONT box. Twin RJ45 sockets with CAT-6 cable termination are to be installed for all telephone/data/E-vision outlets, proper labeling as per Etsalat requirement to be done on both sockets and patch panel
9. Main telephone room, contractor should coordinate with Etsalat for the final position of lead-in ducts (Entry Pipes), Power sockets, isolators, earth Bar, Light, AC ducts/units and other Equipment of Etsalat
10. Cable trays, channels (trunking), ladder for telephone cables and wires are to be provided and installed as per Etsalat & TRA specifications
11. All Telephone rooms, joint boxes, manholes and ducts are for the sole use of Etsalat and do not pass or run any other services inside them
12. Provide separate Earthing to telephone rooms and the resistance should be less than One Ohm
13. As and until it is not specified in drawing, all the internal conduits are to be 25mm diameter
14. GSM: Contractor must coordinate and submit the relevant documents to mobile Access-Planning Section at least 6 months before closing the false ceiling.
15. "TEL" is to be written visibly on the compound wall/fences where the lead-in ducts laid out to the road.
16. Building contractor should link the lead-in ducts with Etsalat plant under Etsalat supervision.
17. Interlocking: Contractor must coordinate with Etsalat Utility Service Section at least three months before starting any interlocking work.
18. Refer and follow revised manual at www.tra.gov.ae/resources for latest telecom specifications and requirements.

LEGEND	
SYMBOL	DESCRIPTION
	RJ45 TWIN POINT TELEPHONE SOCKET
	TELEVISION POINT
	TELEPHONE POOLING BOX 30x30x15 & 15x15x10
	TELEVISION POOLING BOX 30x30x15 & 15x15x10
	60x60x15 Optical Network Termination Cabinet



GROUND FLOOR PLAN

 اتصالات etisalat	
Approved On	اعتمد في
19 January 2026	
Building Permit #:	Approved by:
PRMT-26-0000880	


Savana
Engineering Consultancy & Interior design

Client	MAYED MEERZA BASHEER MOHAMMED		
Project	DOUBLE STORY VILAA +ROOF		
Drg.Title	GROUND Floor Etisalat Layout Plan		
Area	AWAFI	Floortype	G
Case ID.	3136005	Draw. Type.	ETIS
Sec No.	2	Com. No.	
Block No.		Plot No.	406132098
Bldg. No.	BLD-26-00570	Floor No.	01
Date	JAN2026	Sht. No.	E02
Scale	1/100	Job No.	
G.Manager		Architect	Drawn by
ENG AYMEN		ENG IMEN	ENG IMEN

ETISALAT NOTES

1. Contractor has to approach Etisalat Utility Services office before the commencement of work to confirm the necessary and latest telecom requirements and obtain the approval of the FTTH material
2. The contractor has to install, test and commission latest telecom accessories before applying for Etisalat Completion Certificate
3. All FTTH materials and accessories must be purchased from approved brands and to be installed according to manufacturer's specification
4. As per Etisalat and TRA guideline, maintenance of telecom network within the plot limit is the sole responsibility of building owner and contracto
5. If the project already identified as Mega/ Al Taawun project, contractor has to approach Etisalat Mega project Department to confirm the necessary requirement before the commencement of telecom work.
6. All fiber cable in the main telephone room are to be arranged and dressed in floor wise and to be labeled with 'plastic or metal number tags'. (Flat#, Shop#, Office#).
7. Detailed information on Structure Identification Plate is to be collected from Etisalat Utility Service section at least 3 months before completion
8. Building contractor should furnish FTTH (Fiber to home) and SCS (Structured Cabling System) within the plot / buildings as per the approved drawing and latest TRA requirements, such as:
- Entry Ducts (Lead-in): are to be laid at 60 cm below road level and to be provided with 6mm diameter nylon rope inside
 - Entry box (JRC/normal manhole): JRC (size & Construction details as per Etisalat standard)/ normal manhole (to be reinforced concrete structure, minimum size should be 60X60X90, with a heavy duty cover of rating grade 'A' and "Telephone" mark graved on it.
 - Fiber Distribution Hub (FDH) at main telephone room: Either patch free FDH or as advised by Etisalat at building completion stage. It should be equipped with FO Patch panel for feeder cable, Optical splitters and FO Patch panels for multicore/drop fiber.
 - Labeling: Proper labeling should be done as per Etisalat standard and copy of Block Wiring Schedule to be placed on cabinet door.
 - Multicore riser cable with 30% spare fiber to be laid from main telephone room to mini ODF location with an extra loop of 3Meter and must be terminated at both ends using SC/APC connector.
 - Risers to each tenant: Install minimum (4) core, Single mode Fiber cable, ITU standard G 652 (Low smoke zero halogen type) from each tenant continuously up to mini ODF or FDH in FTR or MTR room with an extra loop of 3M at both ends.
 - ONT boxes: Minimum sizes (residential: 60x60x15cm and commercial: 60x60x30cm) or as specified in the drawing. It should be equipped with twin 13A power sockets, RJ45 patch panel, CAT-6 cables, CAT-6 Patch cords and Micro ODF (rosette). It is to be positioned in a secure and easy accessible location at a height of 40 to 120cm above FFL.
 - CAT-6 (4pair - 8core) unshielded twisted pair (UTP/STP) cables to be provided in star topology, Individually and continuously from each twin RJ45 socket up to the ONT box, with an extra length of 0.5metre at the sockets and 2 meter at the ONT box.
 - Twin RJ45 sockets with CAT-6 cable termination are to be installed for all telephone/data/E-vision outlets, proper labeling as per Etisalat requirement to be done on both sockets and patch panel
9. Main telephone room, contractor should coordinate with Etisalat for the final position of lead-in ducts (Entry pipes), Power sockets, isolators, earth bar, Lights, AC ducts/units and other Equipment of Etisalat
10. Cable trays, channels (trunking), ladder for telephone cables and wires are to be provided and installed as per Etisalat & TRA specifications
11. All Telephone rooms, joint boxes, manholes and ducts are for the sole use of Etisalat and do not pass or run any other services inside them
12. Provide separate Earthing to telephone rooms and the resistance should be less than One Ohm
13. As and until it is not specified in drawing, all the internal conduits are to be 25mm diamete
14. GSM: Contractor must coordinate and submit the relevant documents to mobile Access-Planning Section at least 6 months before closing the false ceiling.
15. "TEL" is to be written visibly on the compound wall/tiles where the lead-in ducts laid out to the road.
16. Building contractor should link the lead-in ducts with Etisalat plant under Etisalat supervision.
17. Interlocking: Contractor must coordinate with Etisalat Utility Service Section at least three months before starting any interlocking work.
18. Refer and follow revised manual at www.tra.gov.ae/resources for latest telecom specifications and requirements.

LEGEND	
SYMBOL	DESCRIPTION
	RJ45 TWIN POINT TELEPHONE SOCKET
	TELEVISION POINT
	TELEPHONE POOLING BOX 30x30x15 & 15x15x15
	TELEVISION POOLING BOX 30x30x15 & 15x15x15
	60x60X15 Optical Network Termination Cabinet

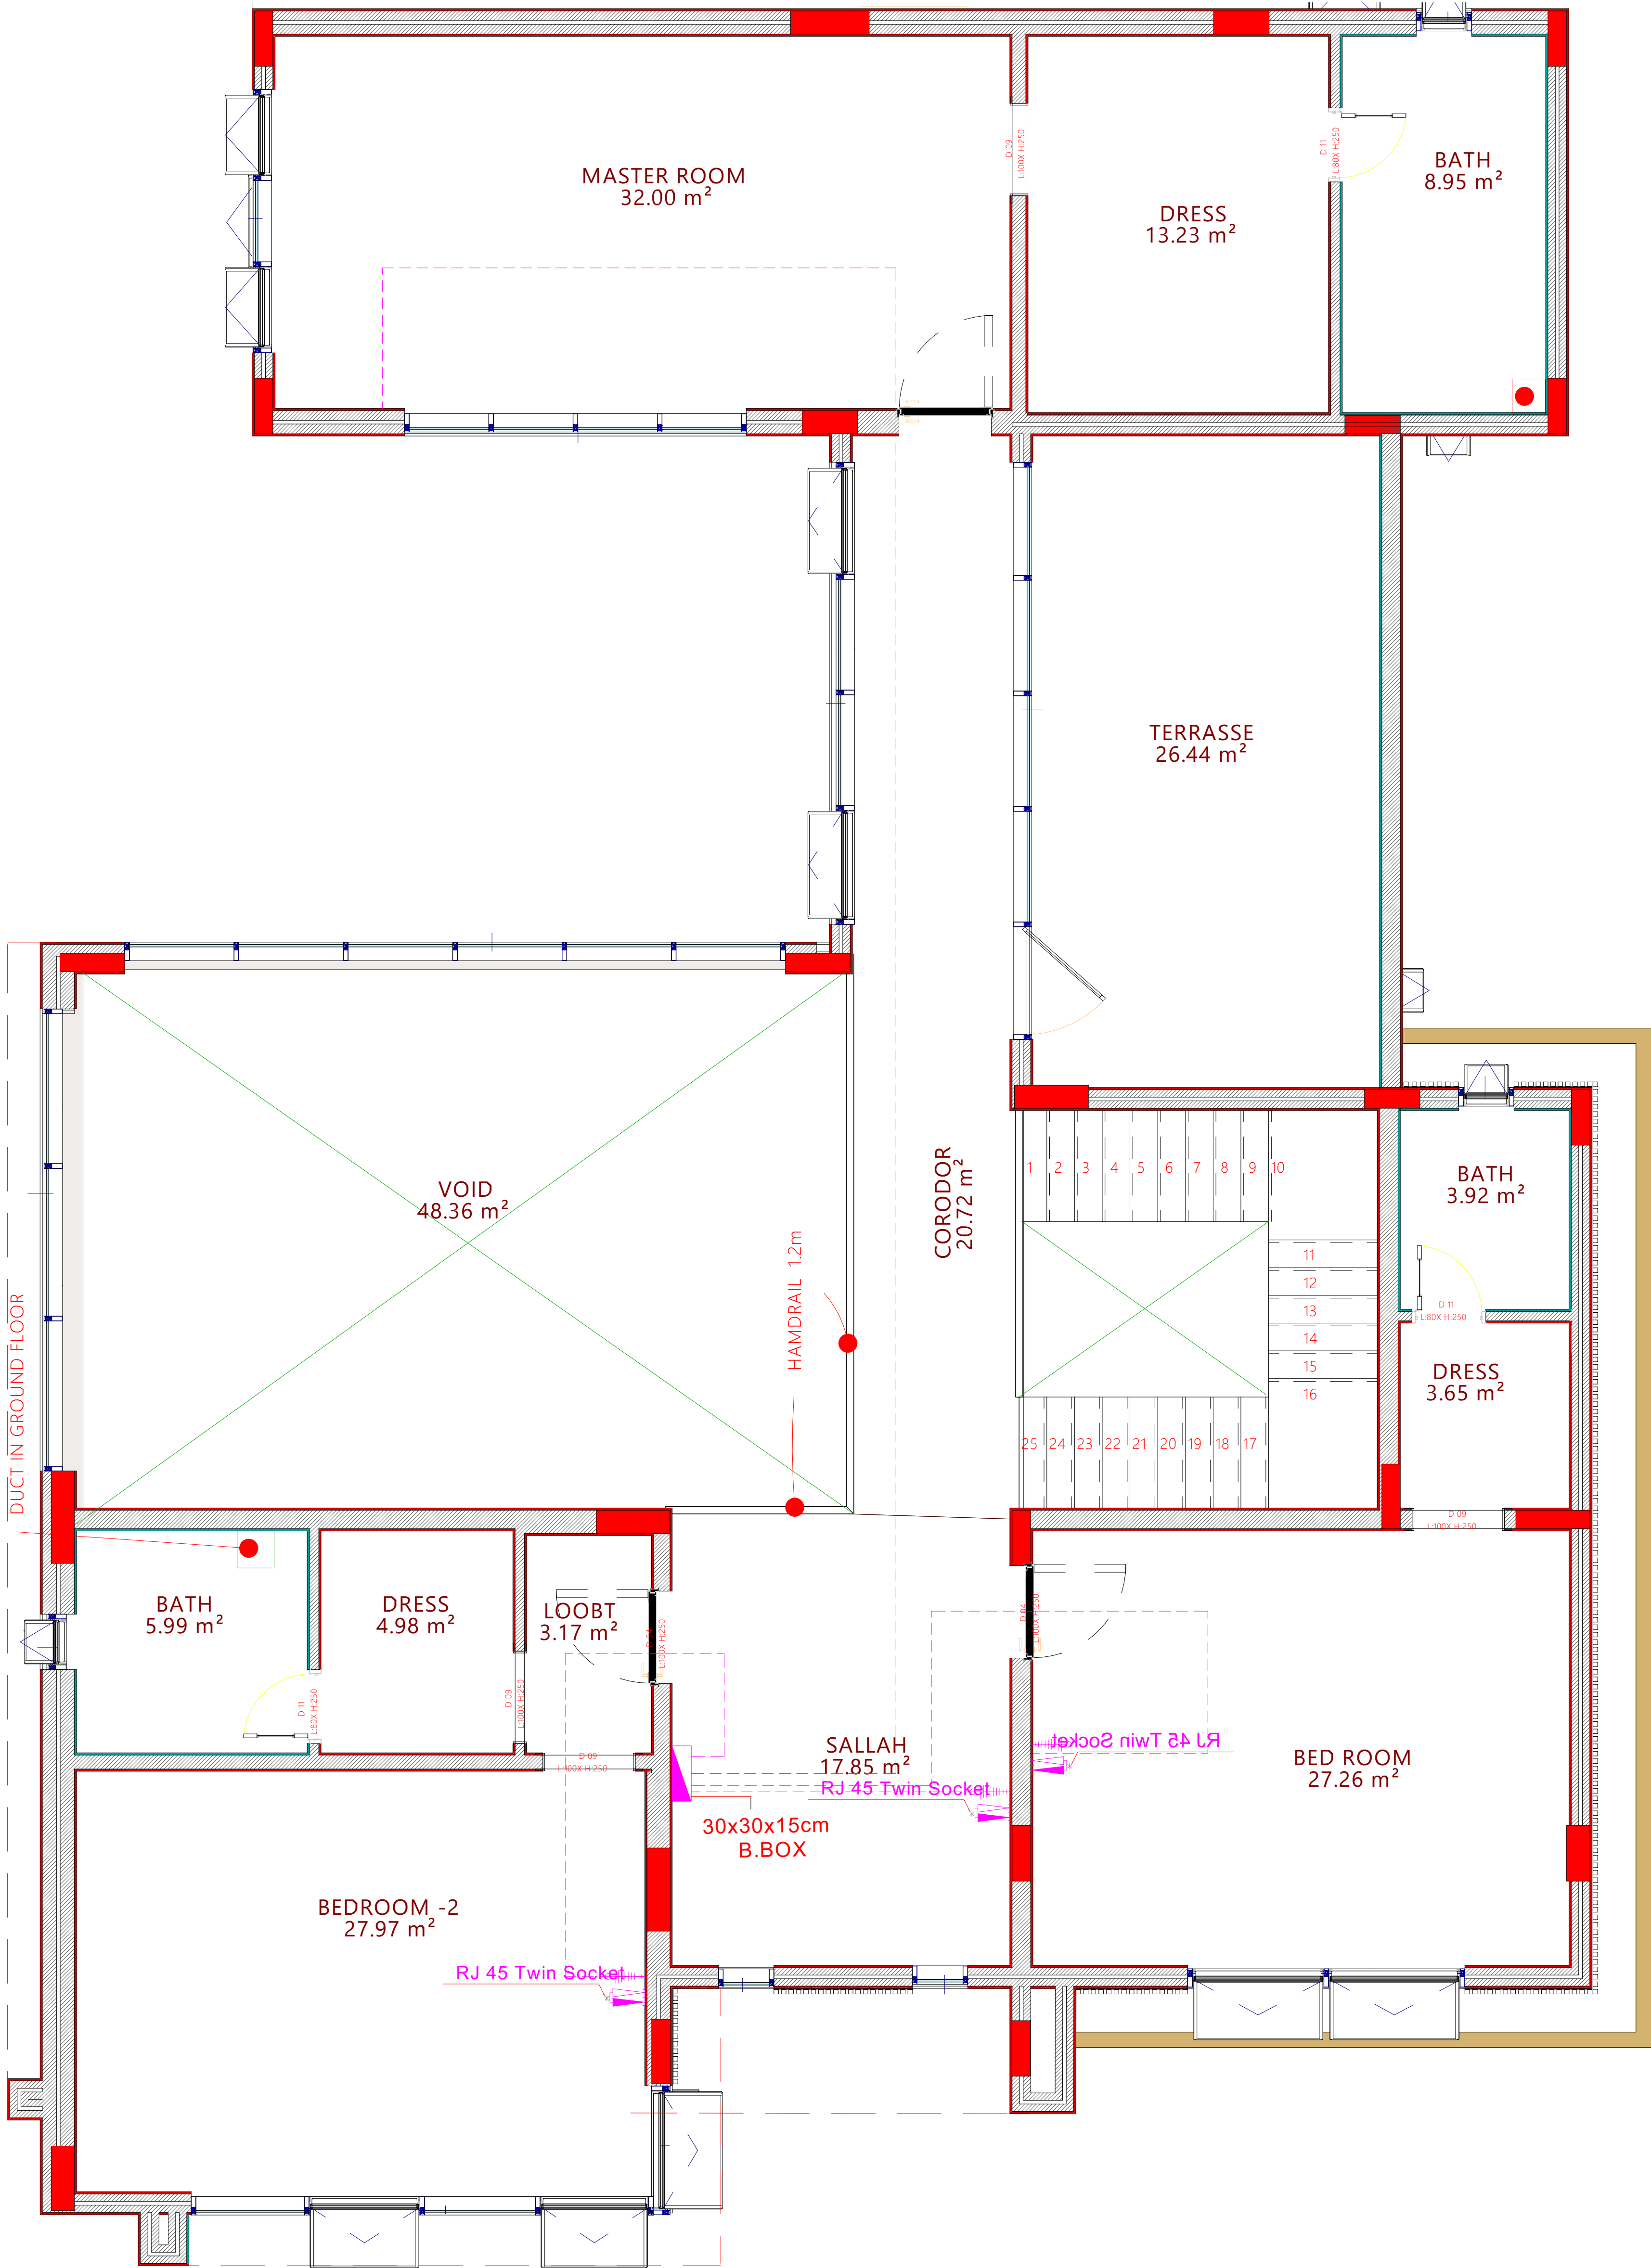

FIRST FLOOR PLAN



Approved On

اعتمد في

19 January 2026

Building Permit #:

PRMT-26-0000880

Approved by:



Savana
Engineering Consultancy & Interior Design

Client	MAYED MEERZA BASHEER MOHAMMED		
Project	DOUBLE STORY VILAA +ROOF		
Drg.Title	FIRST Floor plan		
Area	AWAFI	Floortype	F
Case ID.	3136005	Draw. Type.	ETIS
Sec No.	2	Com. No.	
Block No.		Plot No.	406132098
Bldg. No.	BLD-26-00570	Floor No.	01
Date	JAN2026	Sht. No.	E03
Scale	1/100	Job No.	
G.Manager		Architect	Drawn by
ENG AYMEN		ENG IMEN	ENG IMEN