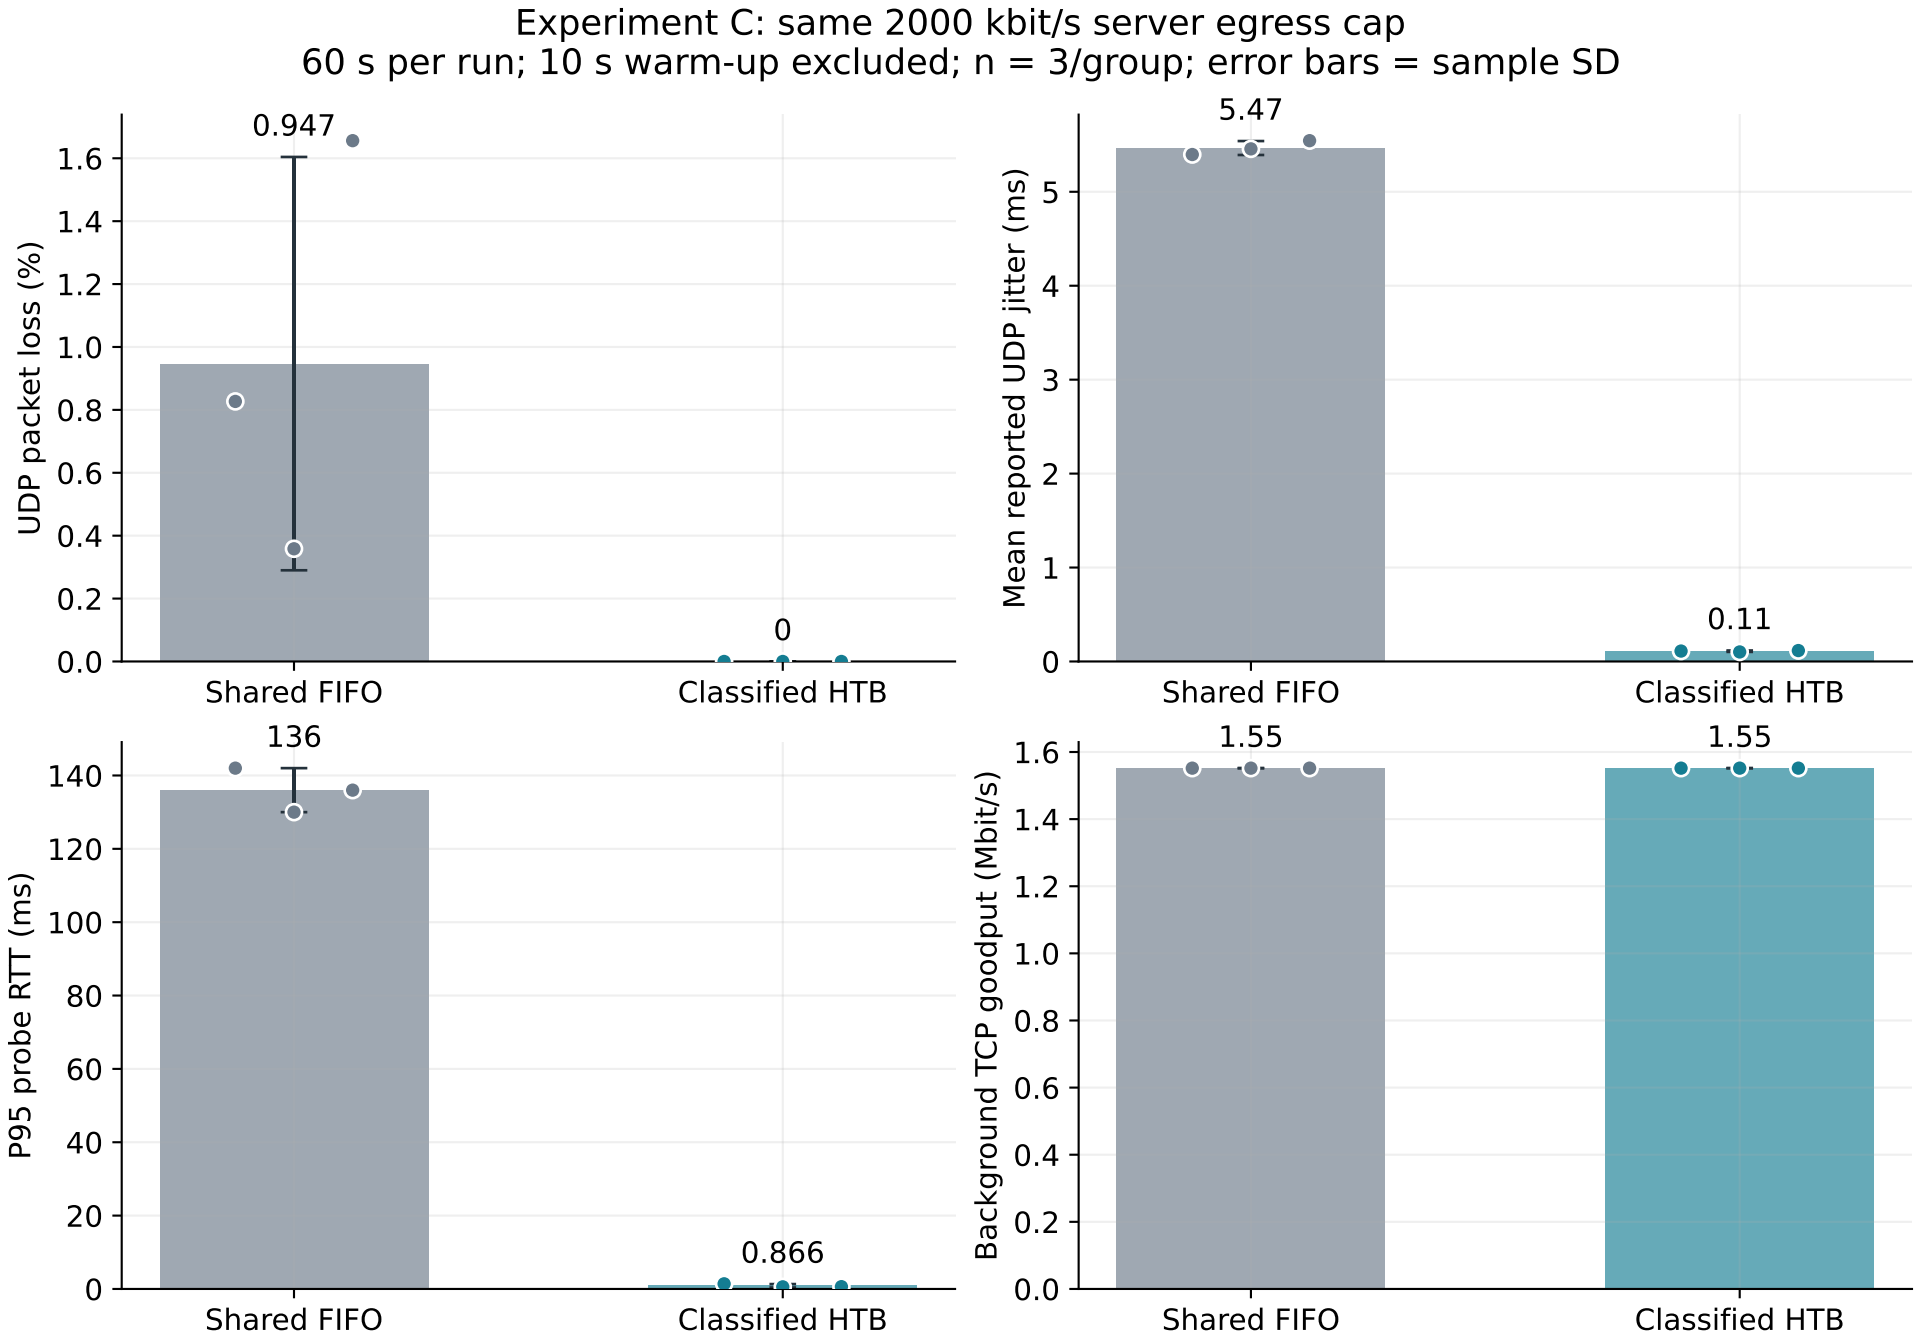
Experiment C: same 2000 kbit/s server egress cap
60 s per run; 10 s warm-up excluded; n = 3/group; error bars = sample SD
UDP packet loss (%)
0.947
0
Shared FIFO
Classified HTB
Mean reported UDP jitter (ms)
5.47
0.11
P95 probe RTT (ms)
136
0.866
Background TCP goodput (Mbit/s)
1.55
1.55