

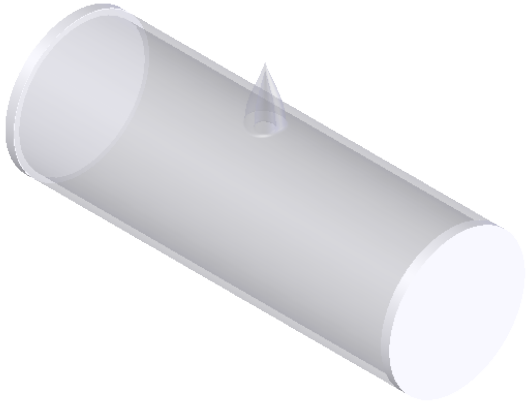


ISOMETRIC VIEW
SCALE 1:1

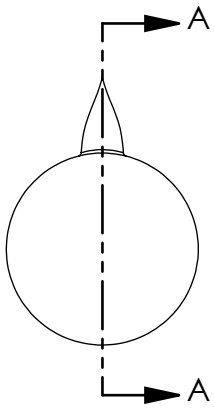

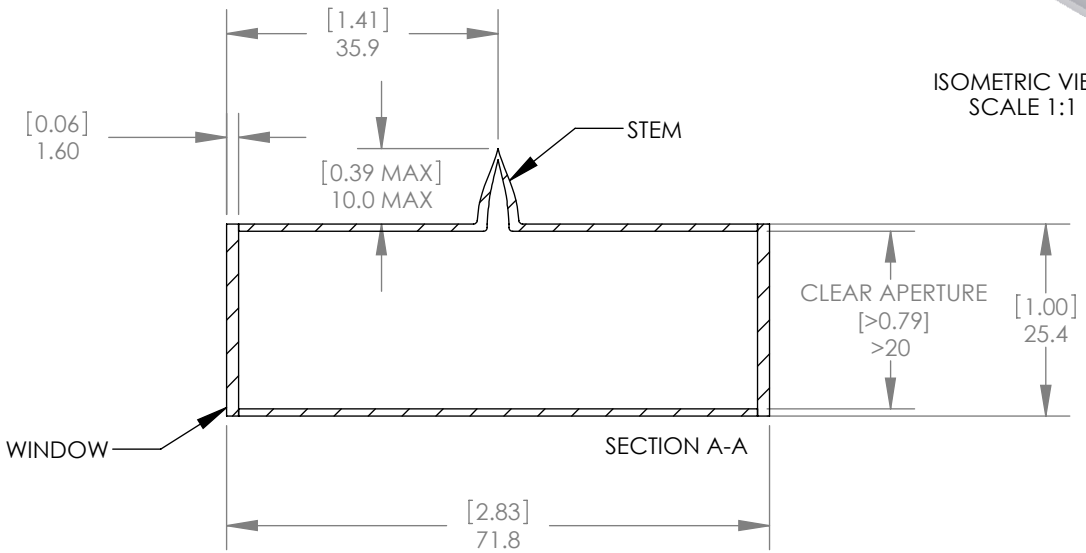

NOTES/SPECIFICATIONS:

1. BODY THICKNESS: 1.5 mm
2. DIAMETER TOLERANCE: ±0.3 mm
3. DIMENSIONAL TOLERANCE: ±0.8 mm
4. PRESSURE @ 25°C: >10^{-7} torr
5. STEM HEIGHT: <10 mm
6. WINDOW ANGLE: 0°
7. WINDOW TYPE: FLAT
8. WINDOW THICKNESS: 1.6 mm
9. WINDOW SURFACE QUALITY: 60-40 SCRATCH-DIG
10. MINIMUM TRANSMISSION: >84%
11. GAS: RUBIDIUM Rb
12. WAVELENGTH: 780 nm
13. ALL DIMENSIONS ARE IN [in] / mm

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JW	01/JUL/19
APPROVAL	JE	01/JUL/19

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

PYREX REF. CELL
Ø25 mm x 71.8 mm, RUBIDIUM [Rb]

MATERIAL	REV
PYREX/SCHOTT BOROFLOAT	B

ITEM #	APPROX WEIGHT
GC25075-RB	0.06 kg