



Classic Chain Kit Instructions

SKU - PSCCK120BRABRA, PSCCK120BRABNZ,
PSCCK120BRAANS, PSCCK120BRACHR

Bulb type - 1x B22

Maximum Wattage - 8W LED

Input voltage - 220-240V/50Hz

Weight - 0.5kg


Maximum hanging weight - 5kg

WARNINGS - Please read carefully before installation

- Installation must be completed by a qualified electrician.
- This product must be tested prior to installation.
- This product must be installed in accordance with local Building Regulations, further information is available through your local authority.
- If using a ladder, read all advice and guidelines outlined by the Health and Safety Executive via www.hse.gov.uk.
- The ceiling must have the load-bearing capacity of at least five times the weight of the luminaire. Heavy pendants are not always suitable for plasterboard ceilings and must be drilled into a secure joist. Fixings used must be appropriate to support the weight of this product. (The installer must determine if the standard fixings supplied are appropriate for the surface type).
- Always disconnect the mains electrical supply before installing or maintaining this product, and test that it is isolated. Turning power off using the light switch is not sufficient. Ensure no one else can restore the mains electrical supply without your knowledge.
- This is a Class 1 product and must be earthed.
- It is the installer's responsibility to consider the fire risk and take appropriate precautions.
- To reduce the risk of fire, electrical shock, or personal injury, always turn off the luminaire and allow it to cool prior to replacing the light bulbs. Do not look directly at lit bulbs or touch the bulbs when the luminaire is turned on.
- The luminaire must not, under any circumstances, be covered with any insulation materials.
- To avoid the risk of fire, do not exceed the recommended wattage.
- Ensure that all electrical connections are tight with no loose strands, including factory-made connections.
- The manufacturer and distributor accept no liability for incorrect installation.




Step 1

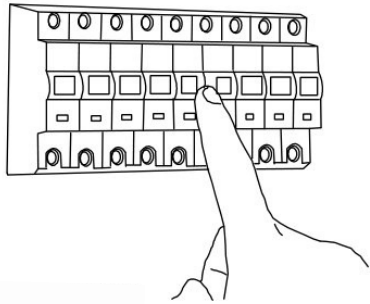

Disconnect the mains electrical supply before installing or maintaining this product and test that it is isolated. Turning the power off using the light switch is not sufficient. Ensure no one else can restore the mains electrical supply without your knowledge.

Decide the positioning of your pendant. Before drilling, ensure there are no hidden cables or pipes behind the surface area.



Step 2

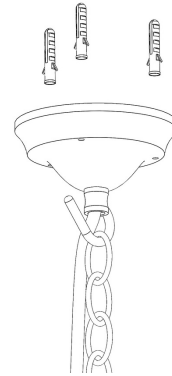

Mark out the location of your fitting.

Secure the provided plugs or suitable fixings for your surface type (These must support the weight of your chosen pendant shade).


Step 3



The weight of the fitting must be supported whilst making the electrical connections.

Connect the mains supply to the terminal block, as referenced above. Ensure that there are no exposed conductors, loose strands or trapped insulation. Replace the ceiling rose and secure with your chosen screws.

Step 4



Attach your chosen shade and insert the correct bulb type, as indicated on the bulb holder or as listen in this instruction. The maximum wattage indicated must not be exceeded. The main electrical supply can be returned.

Turn off and allow the fitting to cool down before cleaning. We recommend cleaning with a soft, dry cloth. Do not use abrasive materials as these will damage the finish.