

Exp 20: PIR SENSOR IN PROTEUS USING ARDUINO

AIM:

To write an Embedded C program for interfacing PIR Sensor using Arduino Uno and Proteus


PROGRAM:

```
intStatus=13;//DigitalpinD6
intsensor=12;//DigitalpinD7
void setup() {Serial.begin(9600);

  pinMode(sensor, INPUT);// declare sensor as input
  pinMode(Status,OUTPUT);//declareLEDasoutput
}

void loop(){
  longstate=digitalRead(sensor);
  Serial.println(state);
  if(state == HIGH) {
    digitalWrite(Status,HIGH);
    Serial.println("Motiondetected!");
    delay(1000);
  }
  else{
    digitalWrite (Status, LOW);
    Serial.println("Motionabsent!");
    delay(1000);
  }
}
```

SIMULATION:

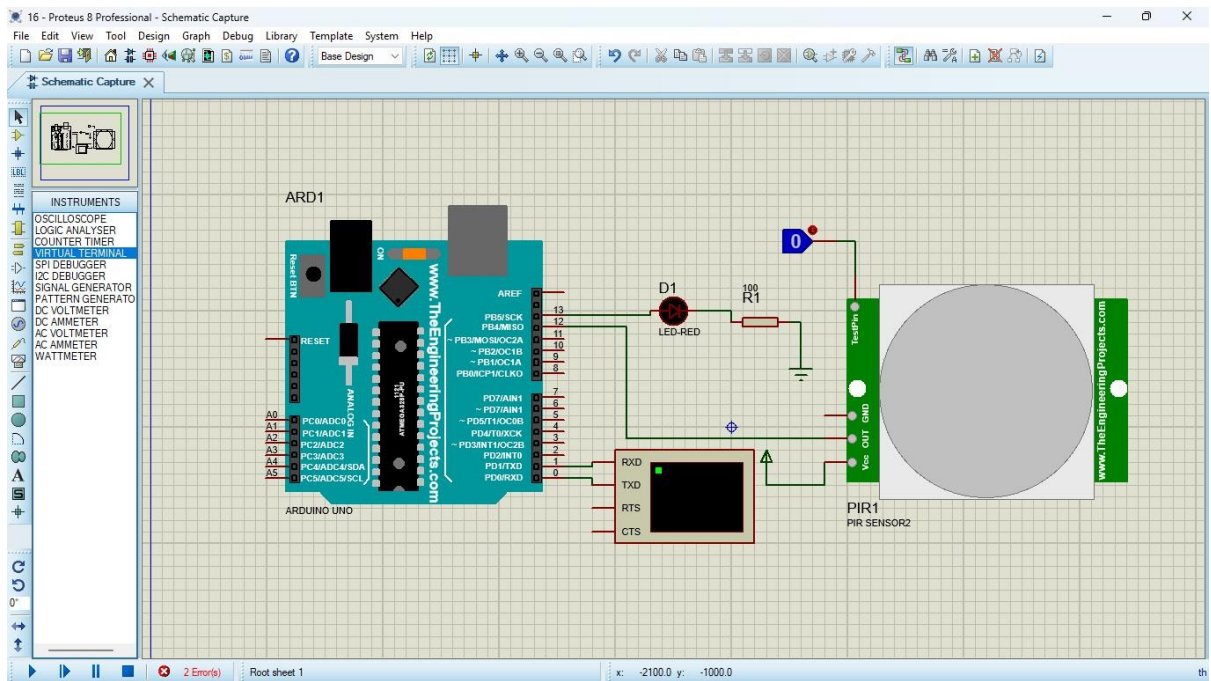

OUTPUT:

