

DPL ELECTRICAL GLOVES

DPL CLASS 00



- Special grade Natural Rubber gloves for Electrical Insulation LINE PRO CLASS 00 (Test Voltage 2.5Kv ,Working Voltage 500Volt)
- EN 60903:2003
- ASTM D120-08

DPL CLASS 0



- Special grade Natural Rubber gloves for Electrical Insulation LINE PRO CLASS 0 (Test Voltage 5Kv ,Working Voltage 1000Volt)
- EN 60903:2003
- ASTM D120-08

DPL CLASS 1



- Special grade Natural Rubber gloves for Electrical Insulation LINE PRO CLASS 1 (Test Voltage 10 Kv ,Working Voltage 7500Volt)
- EN 60903:2003

- ASTM D120-08

DPL CLASS 2



- Special grade Natural Rubber gloves for Electrical Insulation LINE PRO CLASS 2 (Test Voltage 20Kv, Working Voltage 17000V)
- EN 60903:2003
- ASTM D120-08

DPL CLASS 3



- Special grade Natural Rubber gloves for Electrical Insulation LINE PRO CLASS 3 (Test Voltage 30Kv ,Working Voltage 26500Volt)
- EN 60903:2003
- ASTM D120-08

DPL CLASS 4



- Special grade Natural Rubber gloves for Electrical Insulation LINE PRO CLASS 4 (Test Voltage 40Kv ,Working Voltage 36000Volt)
- EN 60903:2003

- ASTM D120-08

ARC FLASH SUIT

Salisbury By Honeywell SKCA8



- Salisbury By Honeywell : SKCA8 Arc Flash Protection Coverall Kit - 8 Cal/cm2
- 8 cal/cm2 ATPV ratings
- Made from arc flash resistant material
- Sewn with Nomex® thread
- Full cut with set in sleeves
- FR hook and pile front closure
- 30" inseam
- Expansion back
- 2-ply Nomex® wristlets
- Hook and pile cuff opening

- Meet current ASTM F1506 and NFPA 70E 2012 Standards.
- All are CE 0120 certified.
- Sizes S, M, L, XL.
- Kit Contains : 8 Cal/cm2 Coverall , AS1000HAT, AFHOOD, storage bags and safety glasses.

Salisbury By Honeywell SK40



- Salisbury By Honeywell : SK40 Arc Flash Protection kit 40 Cal/cm2
- Bib Overall and Coat : 40 cal/cm2 ATPV ratings
- Made from arc flash resistant Material
- Sewn with Nomex® thread
- Meet current ASTM F1506 and NFPA 70E 2012 standards.
- All are CE 0120 certified.
- Sizes S, M, L, XL
- Arc Flash Protection Hood : 40 cal/cm2 ATPV ratings
- Made from arc flash resistant, Indura Ultra Soft®
- Sewn with Nomex® thread
- Arc rated 10" x 20" anti-fogging replaceable lens
- Meet current ASTM F1506 and NFPA 70E 2012 standards
- Meets flammability requirements for ASTM F1506
- All are CE 0120 certified.
- One size fits all

- Kit Includes : Coat, bib overalls, Pro-Hood, hard hat, Storage Bag , and safety glasses.


Salisbury By Honeywell : 24401 Rescue Hook



Salisbury's insulated rescue hook is an invaluable tool for any workplace. It is used to release a victim from contact. Confined spaces, in vaults, or just near electrical cabinets and switch Gear are some of the places where this tool is a must. Insulated rescue hooks feature a foam-filled fiberglass reinforced handle for superior electrical insulation and a coated, heat treated body hook with an 18" opening and are made in accordance with ASTM Standard F711. The stick is available in the standard lengths of 6 Feet Rescue Hook Fiber Glass Stick production is 100% electrically proof tested. Rescue Hook Fiber Glass Stick blanks pass a test of 100 kV/12" (305mm) for 5 minutes without detectable heating prior to being accepted. Hot Stick blanks conform to ASTM F711 requirements.

- Length : 6 Feet – 1.8 Meter

DISCHARGE ROD

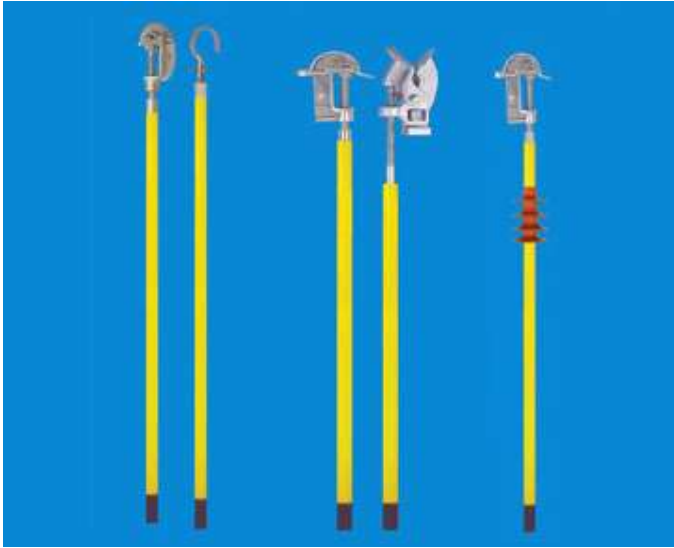

- Material - FRP pultruded
- process - Automatic pultrusion plant
- Surface: - Smooth and Glossy
- Locking: Push button type
- Design: push button Type
- Standard: IEC 60060
- H.V.Test: 22 KV ERDA, Vadodara
- Glass Content: 60%
- Top Section Dia: 38 mm
- Length of each : 6 Feet
- Assembled Length: 18 Feet
- Cover: Canvas Cover
- Earthing: Die cast alu earthing for 50 mm conductor
- Grip Rubber grip.
- MAKE- Honeywell

Non Sparking Tool Kit



Rubber Mat

Rubber Mat 2 Meter



- Rubber Mat ISI For Electrical Purpose- The Mats Are Made From Vulcanised Rubber Compound Free From Fabric Insertions And Fibrous Material. The Lower Surface Shall Be Finished In Cloth Imprints. The Outside Edges Of The Mat Consists Of Two Or More Sections- May Be Beveled. Class C Rubber Mat.

- Thickness : 2 Mm- 65 Kv Dielectric Strength- 33Kv Ac Rms Voltage.
- Is: 15652-2006 - ISI Marked.

Rubber Mat 2.5 Meter



- Rubber Mat ISI For Electrical Purpose- The Mats Are Made From Vulcanised Rubber Compound Free From Fabric Insertions And Fibrous Material. The Lower Surface Shall Be Finished In Cloth Imprints. The Outside Edges Of The Mat Consists Of Two Or More Sections- May Be Beveled. Class C Rubber Mat.
- Thickness : 2.5 Mm- 65 Kv Dielectric Strength- 33Kv Ac Rms Voltage.
- Is: 15652-2006 - ISI Marked.

Rubber Mat 3 Meter



- Rubber Mat ISI For Electrical Purpose- The Mats Are Made From Vulcanised Rubber Compound Free From Fabric Insertions And Fibrous Material. The Lower Surface Shall Be Finished In Cloth Imprints. The Outside Edges Of The Mat Consists Of Two Or More Sections- May Be Beveled. Class C Rubber Mat.
- Thickness : 3 Mm- 65 Kv Dielectric Strength- 33Kv Ac Rms Voltage.
- Is: 15652-2006 - ISI Marked.