




12V/20A Digital Solar Charge Controller With BASIC

Electrical Parameters:


- Rated charge current: 20Amps
- Maximum Load current: 20Amps
- Nominal Battery voltage: 12V
- Battery Floating Voltage: 13.8 V
- Battery Voltage Range: 10.8V – 14.5V
- Battery Low Voltage Cut-Off: $10.8V \pm 0.3V$
- Reconnecting at: $12V \pm 0.3V$
- Battery over Voltage Cut-off: 14.5V
- Maximum PV open circuit Voltage: 21V
- Maximum PV Panel Input : 240W (maximum short-circuit current 20A)
- Self Consumption (Loss of Empty Load): <10mA

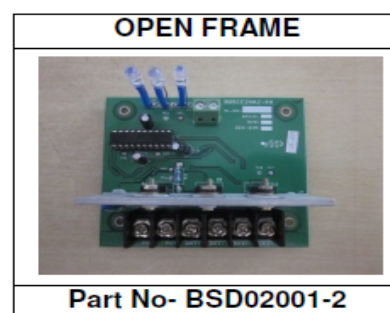

General:

- Efficiency : > 95% at full load
- Construction : Open Frame
- Size (L X B X H) : 90X870X35mm (Open frame)
- Terminations : Connectors
- Operating Temperature: 0 to 50 °C
- Storage Temperature: 0 to 70 °C

Solar Charge Controller-BASIC

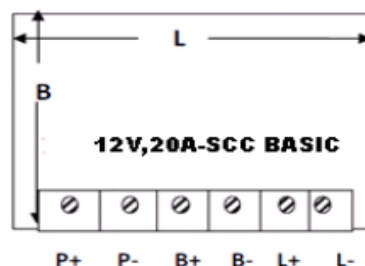

Protections:

- Reverse current protection from battery to PV is available.
- PV reverse & PV short circuit protection available.
- Load short circuit protection available. (only if battery is present and properly connected)
- Battery reverse & over load protection available

Indications:

- Load off : Red
- Battery Fully Charged : Yellow
- Battery Charging : Green

Cautions:


- Battery connections are to be made before making any other connections.
- No output reverse polarity protection diode provided hence LED driver should have input reverse polarity protection.
- Rated battery & Rated PV Panel should be used.

12V/20A Digital Solar Charge Controller With D2D

Electrical Parameters:

- Rated charge current: 20Amps
- Maximum Load current: 20Amps
- Nominal Battery voltage: 12V
- Battery Floating Voltage: 13.8 V
- Battery Voltage Range: 10.8V – 14.5V
- Battery Low Voltage Cut-Off: 10.8V $\pm$ 0.3V
- Reconnecting at: 12.3V $\pm$ 0.3V
- Battery over Voltage Cut-off: 14.5V
- Maximum PV open circuit Voltage: 21V
- Maximum PV Panel Input : 240W (maximum short-circuit current 20A)
- Self Consumption (Loss of Empty Load): <10mA

OPEN FRAME

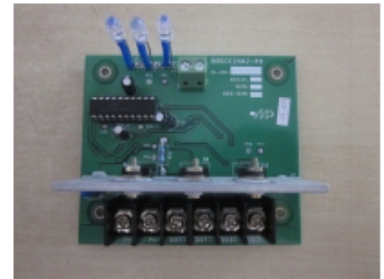


Part No- BSD02003-0

General:

- Efficiency : > 95% at full load
- Construction : Open Frame
- Size (L X B X H) : 90X80X35mm(Open frame)
- Terminations : Connectors
- Operating Temperature: 0 to 50 °C
- Storage Temperature: 0 to 70 °C

Solar Charge Controller-D2D

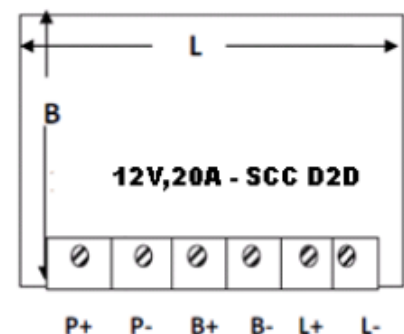

Protections:

- Reverse current protection from battery to PV is available.
- PV reverse & PV short circuit protection available.
- Load short circuit protection available. (only if battery is present and properly connected)
- Battery reverse & over load protection available

Indications:

- Load off : Red
- Battery Fully Charged : Yellow
- Battery Charging : Green

Cautions:


- Battery connections are to be made before making any other connections.
- No output reverse polarity protection diode provided hence LED driver should have input reverse polarity protection.
- Rated battery & Rated PV Panel should be used.

12V/20A Digital Solar Charge Controller With D2D WITH DIMMING

Electrical Parameters:

- Rated charge current: 20Amps
- Maximum Load current: 20Amps
- Nominal Battery voltage: 12V
- Battery Floating Voltage: 13.8 V
- Battery Voltage Range: 10.8V – 14.5V
- Battery Low Voltage Cut-Off: 10.8V $\pm$ 0.3V
- Reconnecting at: 12.3V $\pm$ 0.3V
- Battery over Voltage Cut-off: 14.5V
- Maximum PV open circuit Voltage: 21V
- Maximum PV Panel Input : 240W (maximum short-circuit current 20A)
- Self Consumption (Loss of Empty Load): <10mA

OPEN FRAME

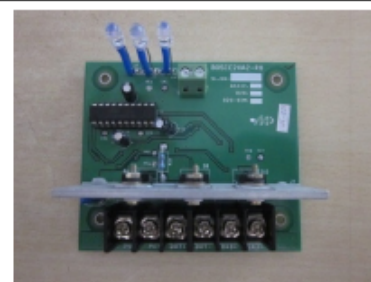


Part No- BSD02002-1

Solar Charge Controller-D2D with Dimming

General:

- Efficiency : > 95% at full load
- Construction : Open Frame
- Size (L X B X H) : 90X80X35mm(Open frame)
- Terminations : Connectors
- Operating Temperature: 0 to 50 °C
- Storage Temperature: 0 to 70 °C

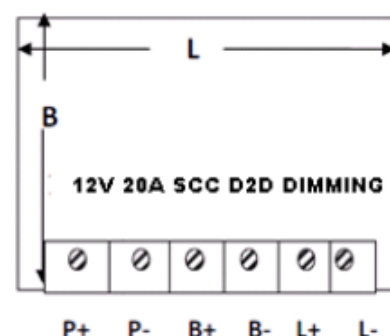

Protections:

- Reverse current protection from battery to PV is available.
- PV reverse & PV short circuit protection available.
- Load short circuit protection available. (only if battery is present and properly connected)
- Battery reverse & over load protection available

Optional feature:

- Available with dimming option
- After 5 hours (from load ON) Dimming takes place

Indications:

- Load off : Red
- Battery Fully Charged : Yellow
- Battery Charging : Green

Cautions:

- Battery connections are to be made before making any other connections.
- No output reverse polarity protection diode provided hence LED driver should have input reverse polarity protection.
- Rated battery & Rated PV Panel should be used.

12V/20A Digital Solar Charge Controller With D2D WITH DIMMING

DIMMING CONNECTION FROM SCC TO LOAD (DC LED DRIVER):

