
// generative instrument

Ping_OS

diceFriend / quick start

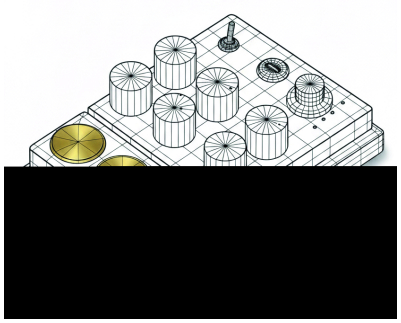

Coupled resonators turn clocked impacts into pings, melodic fragments and feedback gestures.

START: USB-C power + 3.5 mm stereo audio out. Connect to a mixer or speakers; begin with the listening level low.

AS: coupled autonomous pings. **TS:** three resonators, each with its own attack and decay.

TS: T1 plays A, T2 plays C, T3 plays B. Pitch, decay, colour and attack are individually mapped.

// KNOBS / AS

P	NORMAL	SHIFT
1	Tempo / master pitch*	A > B coupling
2	A pitch / interval*	B > A coupling
3	B pitch / interval*	Cross-FM / steps
4	Chaos / step depth	Threshold
5	Coupling / decay	Feedback
6	Event density	Drive

// KNOBS / TS

P	NORMAL	SHIFT
1	T1 / A pitch	A colour
2	T2 / C pitch	C colour
3	T3 / B pitch	B colour
4	A decay	A attack
5	C decay	C attack
6	B decay	B attack

SHIFT: up = second layer; down = normal. **Pickup:** After changing layers or using DICE, move a knob to take control of its stored value.

// DICE / SHIFT

Tap DICE: randomize the normal layer and audition. **SHIFT + tap:** randomize SHIFT. **DICE 3 s:** AS / TS. **SHIFT + DICE 10 s:** bootloader.

// CV IN

CV1: trigger / clock. **CV2:** modulation; repeated pulses can become clock / triggers. CV takes timing priority.
Banana: 0-9 V; common GND.

// USB MIDI

IN: notes trigger AS or the TS group (root / +7 / +12); CC74 = CV2. No CC20-31 panel receiver.
OUT: local ping notes and internal / CV Clock.

*With external clock, normal P1 becomes master pitch and P2/P3 set intervals from it. Note Off releases pitch override; MIDI Stop does not silence the instrument.