
// generative instrument

Pull_OS

diceFriend / quick start

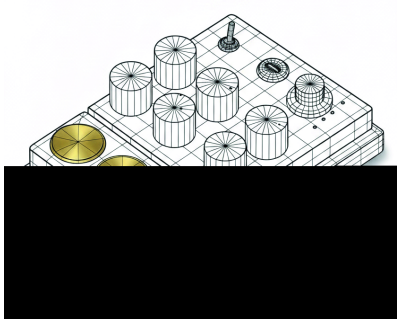

Granulated pulse trains, formants, rungler motion and a torn stereo memory.

START: USB-C power + 3.5 mm stereo audio out. Connect to a mixer or speakers; begin with the listening level low.

AS: autonomous granular pulse organism. **TS:** three independent voices with separate pitch and decay.

AS: T1 Freeze / T2 Rupture / T3 Phase Space. **TS:** T1-T3 gate voices; SHIFT + held pad adds rupture.

// KNOBS / AS

P	NORMAL	SHIFT
1	Grain emission rate	Grain overlap
2	Grain duration	Memory
3	Formant frequency	Phaser
4	Pulse shape	Wavefold
5	Chaos	Mutation
6	Tempo / release	Stereo space

// KNOBS / TS

P	NORMAL	SHIFT
1	T1 pitch	Duration / overlap
2	T2 pitch	Formant
3	T3 pitch	Shape / fold
4	T1 decay	Memory / phaser
5	T2 decay	Chaos / mutation
6	T3 decay	Space / clock rate

SHIFT: up = second layer; down = normal. **Pickup:** After changing layers or using DICE, move a knob to take control of its stored value.

// DICE / SHIFT

Tap DICE: mutate the current layer. **DICE 3 s:** AS / TS. **SHIFT + DICE 10 s:** bootloader.

// CV IN

CV1: priority step / trigger. **CV2:** smoothed continuous modulation across pulse, formant and effects; sends CC74.
Banana: 0-9 V; common GND.

// USB MIDI

IN: channel 1 notes, transport, 24 PPQN Clock.
OUT: local / CV / pad notes, panel CC and internal / CV Clock. **Panel:** CC20-25 = normal P1-P6; CC26-31 = SHIFT P1-P6.

CV has clock priority; MIDI may take over after 20 s without CV, internal after 30 s without external timing. Increase Memory and Fold gradually.