ZHEJIANG GREENPOWER ELECTRIC CO., LTD
A: NO.827 WENZHOU AVENUE, WENZHOU, ZHEJIANG, 325011, CHINA
T: +86-189 8978 2765 F: +86-577-8550 0968
W: www.sinogp.com E: gp@sinogp.com

ZW43A/ZW32-12 Outdoor AC Vacuum Circuit Breaker

Summary

ZW43A-12/ZW32-12 model outdoor AC vacuum circuit breaker is used to make and break load current, overload current and short-circuit current in12kV, 50/60Hz power system. It is applicable for substations, industry and mining, urban and rural electricity power networks, especial applicable in occasions with frequent operation and automatic power distribution network. It accords with the standard of IEC62271-100 & GB1984 AC high voltage circuit breaker, GB/T 11022 HV General technical requirement of switch and control apparatus.




Spring motor mechanism

Ambient condition

1. Altitude: ≤1000mm;
2. Ambient temperature: -45℃~+40℃; daily temperature difference: 25℃;
3. Wind speed: ≤34m/s;
4. Earthquake intensity: 8 degree;
5. Relative humidity: monthly average ≤90%, daily average ≤95%;
6. Ice thickness: 20mm;
7. Applicable occasions should free from inflammables, explosives, corrosives and severe vibrations.

Model

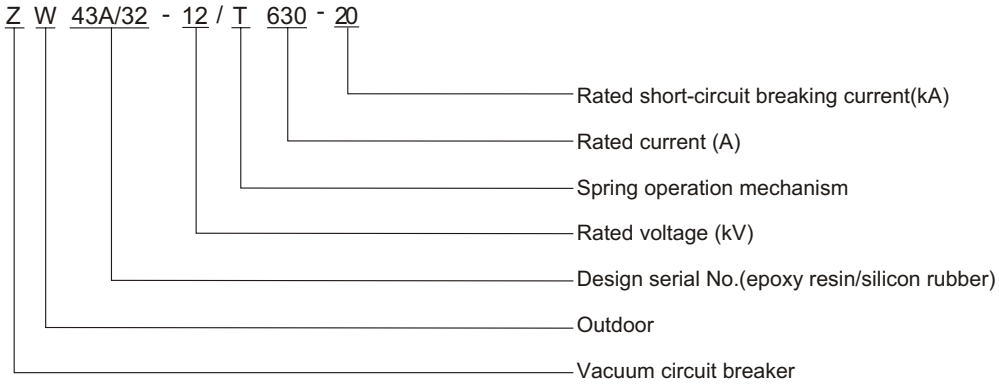

Product feature

1. Mini vacuum arc extinguish
   High reliability; small volume; long life time; fixed inside the epoxy resin.
2. Epoxy resin sealing
   Anti-ozone, anti-ultraviolet; It is firm, light and convenience for transportation.
3. Spring mechanism
   Small volume, reliable performance, maintenance free.
4. Manual and motor Closing & Opening
   It can be operated by manual and motor, a signal of C/O and storage in outside.
5. Switch case
   Aluminium-alloy material, stainless steel and armor plate.

ZHEJIANG GREENPOWER ELECTRIC CO., LTD
A: NO.827 WENZHOU AVENUE, WENZHOU, ZHEJIANG, 325011, CHINA
T: +86-189 8978 2765 F: +86-577-8550 0968
W: www.sinogp.com E: gp@sinogp.com


绿力电气 Green Power

Technical specification

No.	Item	Unit	Data	
1	Rated voltage	kV	12	24
2	1min. PF withstand voltage(dry/wet)		42(across open contacts:49)/34	50
3	Lightning impulse withstand voltage(peak)		75(across open contacts:85)	125
4	Rated current	A	630	
5	Rated short-circuit breaking current	kA	20	
6	Rated short-circuit making current (peak)		50	
7	4s rated short-time withstand current		20	
8	Rated peak withstand current		50	
9	Rated operating sequence		O -0.3s-CO-180s-CO	
10	Breaking times of rated short-circuit breaking current	Times	30	
11	Mechanical duration		10000	
12	Rated operation voltage	V	220(DC, Ac)	
13	Rated voltage of auxiliary loop		220(DC, Ac)	
14	Rated current of over-current release	A	5	
15	Current transformer ratio	A	200/5, 400/5, 600/5 (Protection degree: 3 class, measurement degree: 0.5 class)	
16	Operating method		Spring operation mechanism (manual /motor)	
17	Outline dimension	mm	782×222×642	As actual
18	Weight	kg	50	As actual

Item	Closing coil	Opening coil	Over-current tripping coil
Rated voltage(kV)	220	220	
Rated working current(A)	AC:<5 DC:<3.2	AC:<1.5 DC:<0.8	5
Voltage and current range under normal working	action on 65%~110% of rated voltage	action on 65%~120% of rated voltage, avoid tripping under less than 30% of rated voltage	action on 100%~110% of rated current, avoid tripping under less than 90% of rated current

Product structure

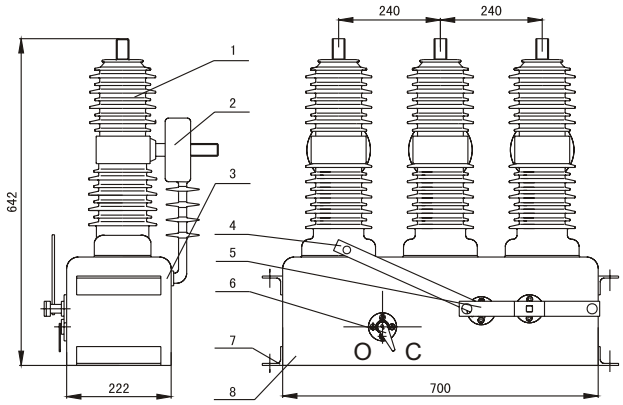

Outline diagram

1. Solidified sealed pole
2. Current transformer
3. Aluminium alloy base
4. Manual storage handle
5. Manual CO handle
6. CO indication
7. Mounting board
8. Spring mechanism(inside)

Basic equipments:

1. Current transformer protection poles 2 pieces.
2. Spring mechanism AC220V.

Optional equipments:

1. Current transformer, metering and protection poles 2 pieces for each,75/5 or higher.
2. Outside voltage transformer 2pieces (for control power supply and metering).
3. Motor spring mechanism AC/DC220/110/48/24V.
4. Reclosing controller and series FTU and RTU.
5. Disconnect blade.