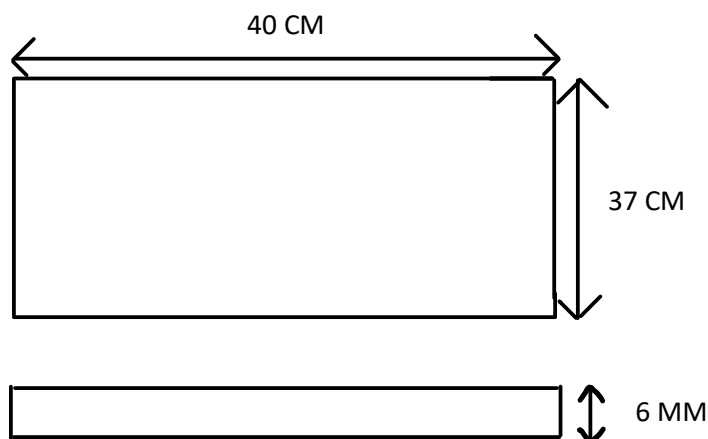# GRASS CUTTER MACHINE COMPONENTS

1. Wooden Sheet
2. L298N Motor Driver Controller
3. 12v DC Gear Motor
4. 12v 7Ah Lead Acid Battery
5. ESP8266
6. ESP32 Cam Module
7. 2200kv BLDC Motor and Controller

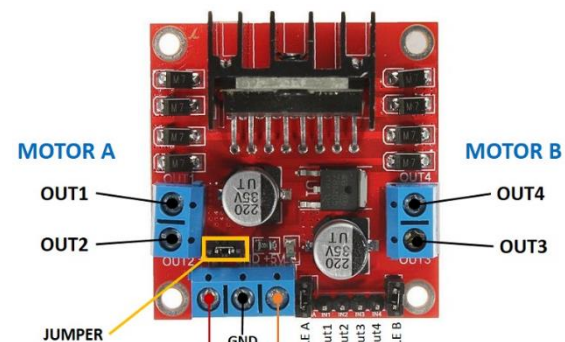## Wooden Sheet: -

The dimensions of sheet are as follows,

We have used Plywood for base because to reduce weight and increase the holding capacity.

L298N Motor driver: -

Technical Specifications

|	
Motor output voltage	5V – 35V
Motor output voltage (Recommended)	7V – 12V
Logic input voltage	5V – 7V
Continuous current per channel	2A
Max Power Dissipation	25W

Input1	Input2	Spinning Direction
Low(0)	Low(0)	Motor OFF
High(1)	Low(0)	Forward
Low(0)	High(1)	Backward
High(1)	High(1)	Motor OFF

Instead of this L298N motor driver we can use individual PWM controller for each motor if motor current rating is more that 3A. We have chosen this driver because of its rating and easy to controller using external microcontroller.

DC Gear Motor: -

Specifications and Features: -

- RPM: 100.
- Operating Voltage: 12V DC
- Gearbox: Attached Plastic (spur)Gearbox
- Shaft diameter: 6mm with internal hole
- Torque: 2 kg-cm
- No-load current = 60mA (Max)
- Load current = 300mA (Max).
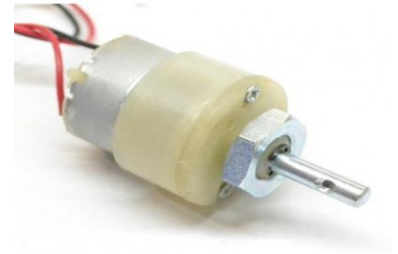
We have chosen this Metal gear motor instead of BO gear motor because the weight of this grass cutter robot is high due to the battery and some other components. If the weight is less, you can use BO gear motors for cost reduction and less weight.

Gear motors characteristics:

Voltage	Speed	Current
5 V	42 RPM	0.2 A
6 V	54 RPM	0.2 A
7 V	66 RPM	0.2 A
8 V	75 RPM	0.2 A
9 V	85 RPM	0.2 A
10 V	96 RPM	0.2 A
11 V	105 RPM	0.3 A
12 V	115 RPM	0.3 A

Battery: -

Specifications

Voltage: - 12v

Charge Current: - 2.16A

Discharge Current: - 100A

Dimensions: -   151*65*95 cm

Weight: - 2500g

We have chosen this lead acid battery
due to its voltage and current specifications. We can use Li-ion Batteries
instead of Lead acid battery but the cost is more and we need to give
external protection compared to lead acid battery. The main reason of
choosing this lead acid battery is to reduce cost and complexity.

ESP8266 NodeMCU: -

ESP8266 Specifications & Features

- Microcontroller: Tensilica 32-bit RISC CPU Xtensa LX106
- Operating Voltage: 3.3V
- Input Voltage: 7-12V
- Digital I/O Pins (DIO): 16
- Analog Input Pins (ADC): 1
- UARTs: 1
- SPIs: 1
- I2Cs: 1
- Flash Memory: 4 MB
- SRAM: 64 KB
- Clock Speed: 80 MHz
- USB-TTL based on CP2102 is included onboard, Enabling Plug n Play
- PCB Antenna
- Small Sized module to fit smartly inside your IoT projects
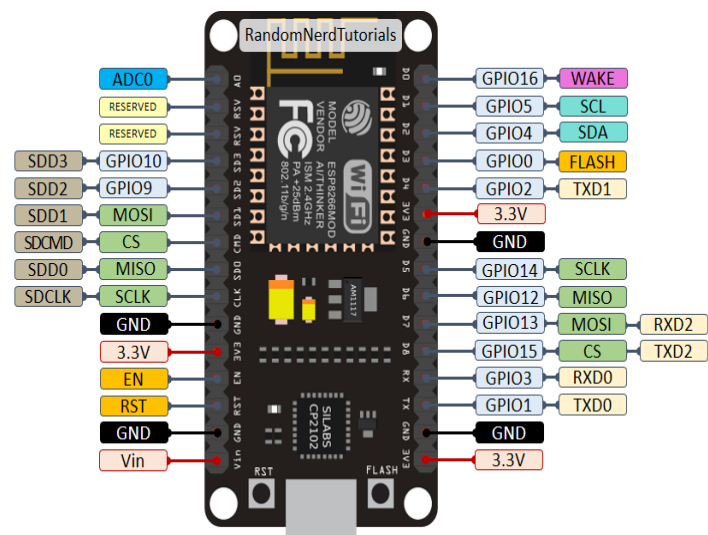
The reason that we chose this NodeMCU instead of Arduino UNO or ESP32 NodeMCU is to reduce cost and complexity. As per our calculations, this ESP8266 is enough to control the grass cutter. If you are designing any kind of robot with more features, you may go with ESP32 or Arduino Mega.

ESP32 Cam Module

Specifications

- WIFI module: ESP-32S
  - Processor: ESP32-D0WD
- Built-in Flash: 32Mbit
- RAM: Internal 512KB + External 4M PSRAM
- Antenna: Onboard PCB antenna
- WiFi protocol: IEEE 802.11 b/g/n/e/i
- Bluetooth: Bluetooth 4.2 BR/EDR and BLE
- WIFI mode: Station / SoftAP / SoftAP+Station
- Security: WPA/WPA2/WPA2-Enterprise/WPS
- Output image format: JPEG (OV2640 support only), BMP, GRAYSCALE
- Supported TF card: up to 4G
- Peripheral interface: UART/SPI/I2C/PWM
- IO port: 9
- UART baud rate: default 115200bps
- Power supply: 5V
- Transmitting power:
  - 802.11b: 17 ±2dBm (@11Mbps)
  - 802.11g: 14 ±2dBm (@54Mbps)
  - 802.11n: 13 ±2dBm (@HT20, MCS7)
- Reception sensitivity:
  - CCK,1Mbps: -90 dBm
  - CCK,11Mbps: -85 dBm
  - 6 Mbps (1/2 BPSK): -88 dBm
  - 54Mbps (3/4 64-QAM): -70 dBm
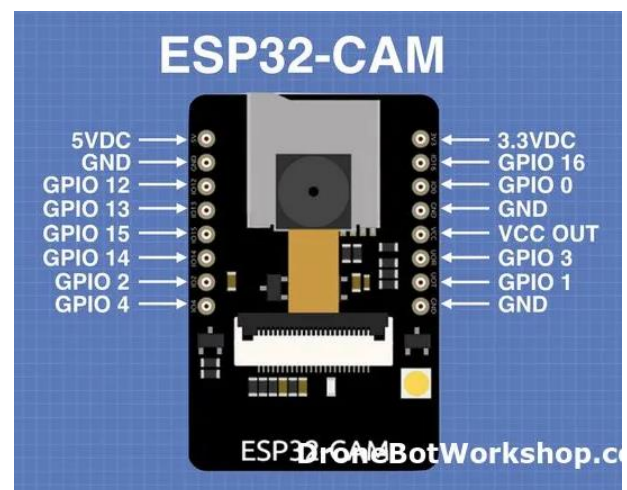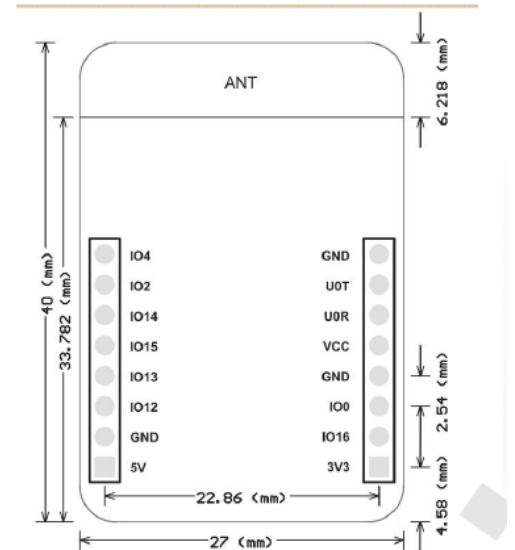
- o   HT20,MCS7(65Mbps, 72.2Mbps): -67 dBm
- Power consumption:
- o   Flash off: 180mA@5V
- o   Flash on and brightness max: 310mA@5V
- o   Deep-Sleep: as low as 6mA@5V
- o   Modern-Sleep: as low as 20mA@5V
- o   Light-Sleep: as low as 6.7mA@5V
- Operating temperature: -20 ℃ ~ 85 ℃
- Storage environment: -40 ℃ ~ 90 ℃, <90%RH
- Dimensions: 40.5mm x 27mm x 4.5mm

The reason why we are using ESP32 cap module is to see the view of the grass cutting robot and when we are operating from long distance, we can't go to near the robot to see weather it is cutting grass or not. That's why we included this camera to see what's happening there.

BLDC Motor and Controller

Specifications of BLDC Motor: -

- KV: 2200 kV
- No load Current: 10 V: 0.5 A.
- Current Capacity: 12A/60s
- No Load Current @ 10V: 0.5A
- No. Of Cells: 2-3 Li-Poly
- Motor Dimensions: 27.5 x 30mm
- Shaft Diameter: 934;3.17mm
- Shaft diameter: 3.175mm.
- Minimum ESC Specification: 18A (30A Suggested)
- Thrust @ 3S with 1045 propeller: 1200 gms approx.
- Thrust @ 3S with 0945 propeller: 750 gms approx.
- Thrust @ 3S with 0845 propeller: 650 gms approx.

Specifications and Features of ECS Controller: -

- MODEL: STANDARD 30A BLDC ESC ELECTRONIC SPEED CONTROLLER

- WEIGHT: 23g
- DIMENSIONS: 45 x 24 x 9 mm (LxWxH)
- Colour: Yellow/Red (Depends on Availability)
- CURRENT (A): 30A
- BEC: 3A
- Li-Poly: 2-3
- Ni-Mh/Ni-CD: 4-10 Ni-Mh
- CONSTANT CURRENT: 30A Max 40A<10s
- Li-Poly 2-3 CELLS; Ni-MH 4-10 CELLS Auto Detect
- Break On/Off
- Auto Low BATTERY Slow down at 3.0V/cell Lipo, cut-off at 2.9V/cell lipo
- APPLICATION: Multirotor, RC Airplanes, etc.