

U75 Colour Socket

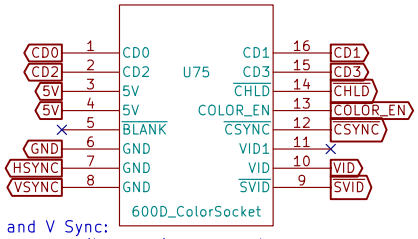


H and V Sync:
If your monitor requires separate sync (H/V) then cut the traces to pin 7 and 8 (normally GND) on the 600D board and connect H & V sync from U70 pin 13 & 12.


Colour Latch

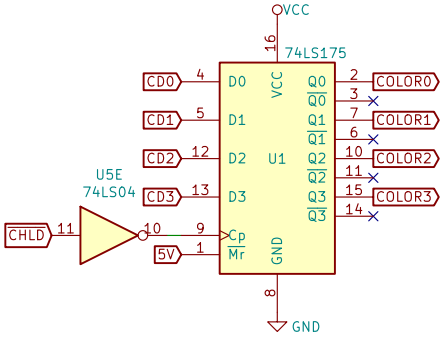

SYNC Inverters




Multiplexers

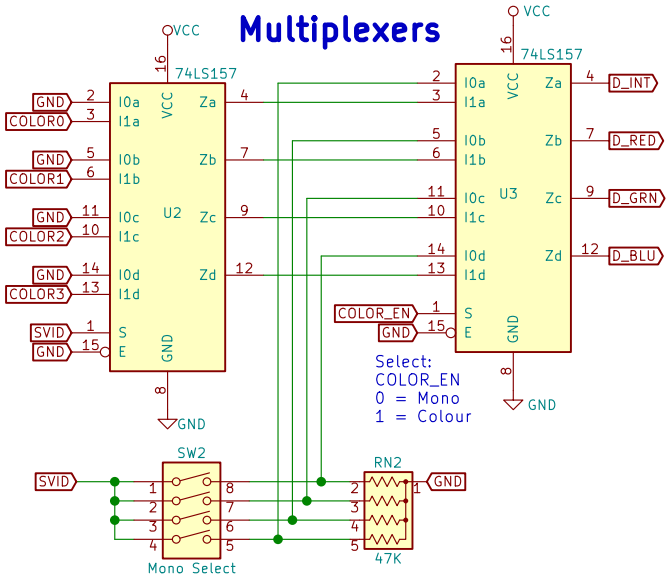


Select:
COLOR_EN
0 = Mono
1 = Colour

RGBI to RGB

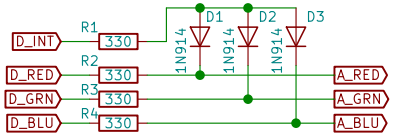


RGB Analog Out

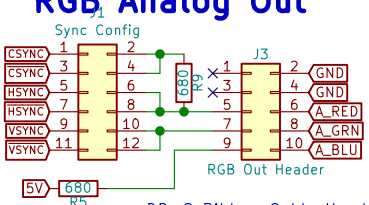


R5: Optional for SCART.

Gonbes GBS Out






Video Invert



$\overline{\text{SVID}}$ has the proper blanking in 48-column mode!

Spares



Description


This circuit adds colour output to Superboard 600D or C1P Series II Boards. It has two colour modes:
1. Normal RGB (16 colours on black)
2. O.S.I.-like (8 Bright colours on 8 darker coloured background, or inverted)

It uses Composite SYNC from the U75 header, or Separate H/V from the 600D board.

The output can be configured for:
1. RGBI Digital (usually separate sync)
2. RGB Analog (usually composite sync)

When COLOR_EN is 0 it is in MONO MODE and the DIP SWITCHES determine which colour appears (ie: G=Green, RGBI=white, GR=Amber) for the ON pixels.





Superboard 600D Colour

Analog Only Version

Steve J. Gray

Sheet: /
File: OSI-600D-colour-min.sch

Title: Superboard 600D Colour

Size: A4	Date: 2019-06-06	Rev: 1.0
KiCad E.D.A. kicad (5.1.0)-1		Id: 1/1