



PRIMARY KEYS

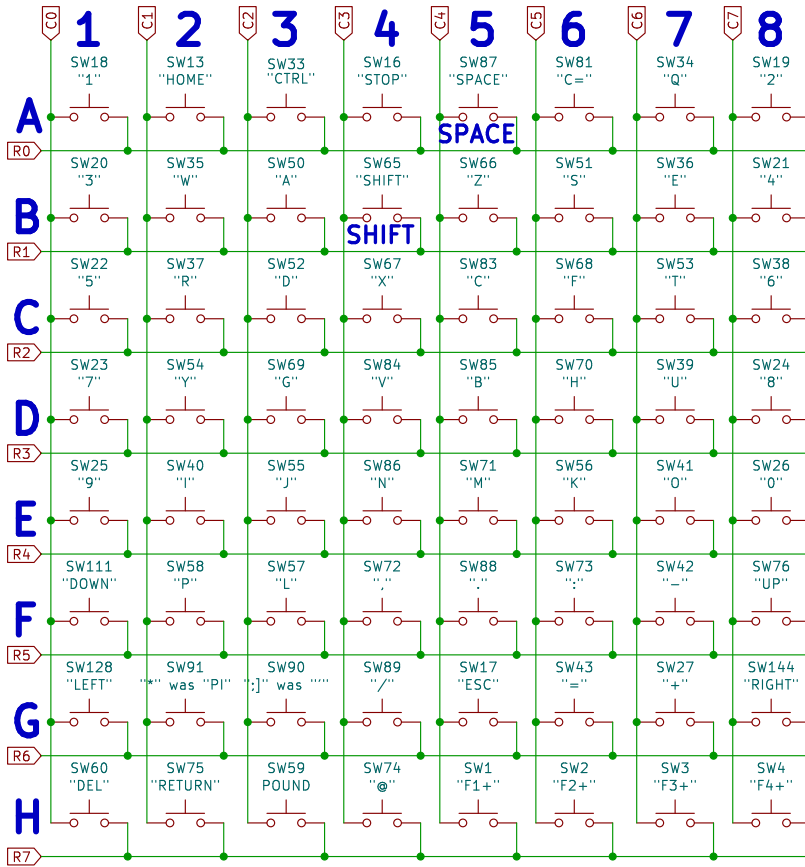

SHIFT-LOCK

Locking MX switches are hard to get, but If you have one it can be used. If not the key can be re-assigned



V364 KEYBOARD


Standard Plus/4 layout with the following changes:

- Added Numeric Keypad (can be removed)
- SPACEBAR now 6.0U. Two keys added beside it.
- SHIFLOCK is configurable as ???????
- Inverted T Cursor instead of normal 4-way arrows
- Jumpers to make extra keys work as SPACEBAR or Alternate
- Added second set of F-Keys (they appear to be 2.25U wide)

2021-06-21

NOTES:
- 81 MX switches required.


DUPLICATED KEYS

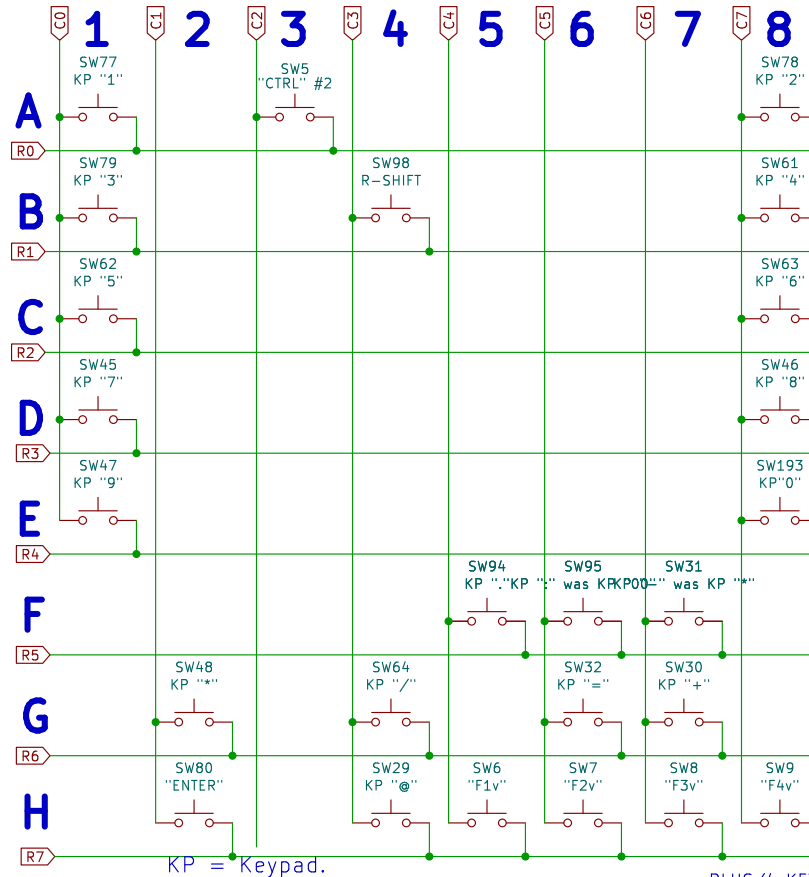

KP = Keypad.


PRG KEY 1

This switch is not on the keyboard. We put it LEFT of the SPACEBAR.




PRG KEY 2

This switch is not on the keyboard. We put it to the RIGHT of the 6.25U SPACEBAR. This KEY can be SPACE or C=




ARROW KEYS

The 4-way arrow keys.

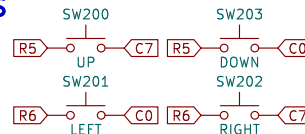

CONNECTORS

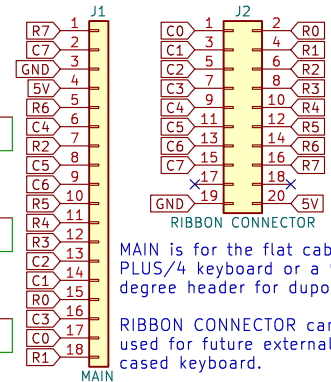


MAIN is for the flat cable like PLUS/4 keyboard or a 90 degree header for dupont cables.

RIBBON CONNECTOR can be used for future external cased keyboard.

These connectors are for the keypad, which could be separated from the main section. They really only serve the purpose of holding the traces down if the pcb is cut between them.

POWER LEDS

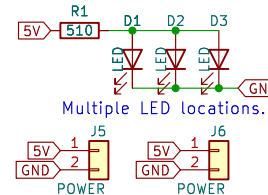

PLUS/4 KEYBOARD DETAILS:

- Metal Frame: 318 x 141 mm
- Mounting Holes:
 - 8 holes: 4 top, 4 bottom
 - 2 larger bottom holes for case screw passthru
 - 4.5mm from top/bottom edge
 - 26mm from left edge
 - 60mm spacing between hole centres
 - 20mm from right edge
 - 130 mm between top/bottom hole centres
- Plastic Frame: 308 x 115 mm
- PCB: 315 x 115 mm

V364 KEYBOARD

V364-V1-R1

Steve J. Gray

Sheet: /
File: v364mx.sch

Title: TED V364 Keyboard

Size: A4 Date: 2021-05-30

KiCad E.D.A. 9.0.7

Rev: V364-V1-R1

Id: 1/1